


Murata Global Part No.	Size(mm/inch)	Temp.Chara.	Cap.Value	Cap.Tol	Volt.	Durability (%Rated Volt.)
GRM188R61A106ME69	1608M/0603	X5R	10uF	+/-20%	10V	100.0%

1. Dimension

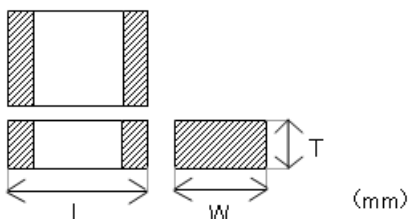


L	W	T
1.6+0.15/-0.15	0.8+0.15/-0.15	0.8+0.15/-0.15

2. Capacitance, D.F. and I.R.

	Specifications	Measuring condition
Capacitance	8uF to 12uF	1kHz / 0.5Vrms
D.F.	0.1(max.)	1kHz / 0.5Vrms
I.R.	5.0 (min.) MΩ	10.0V, 60s


3. Impedance/ESR-Frequency

Equipment: Impedance/Network Analyzer

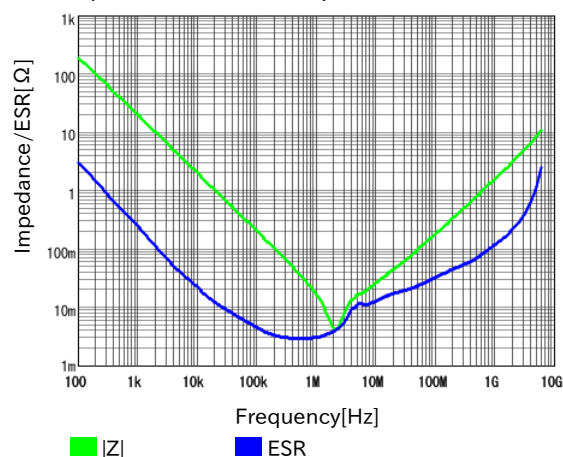


4. Capacitance-DC Bias Characteristics

1kHz / 0.5Vrms Equipment: LCR Meter

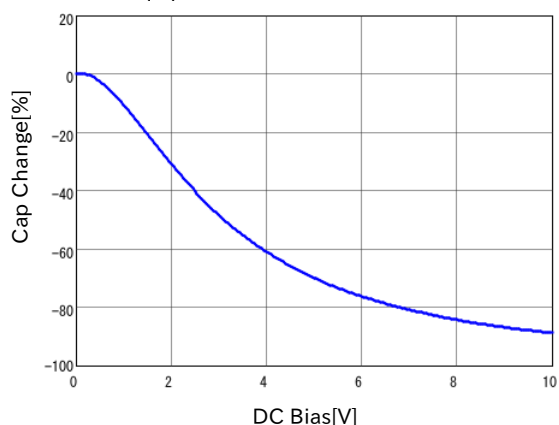


5. Capacitance-AC Voltage Characteristics

1kHz Equipment: LCR Meter

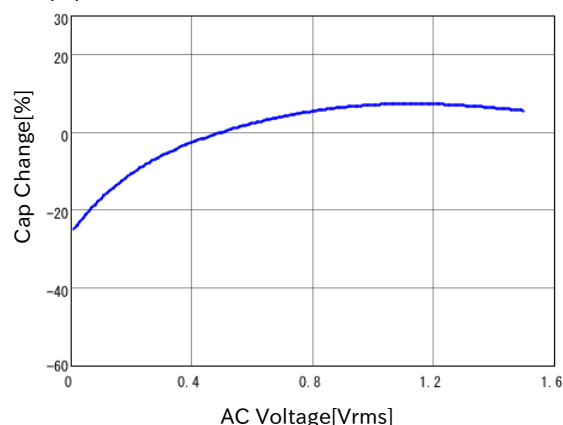

6. Capacitance-Temp. Characteristics

1kHz / 0.5Vrms Equipment: LCR Meter

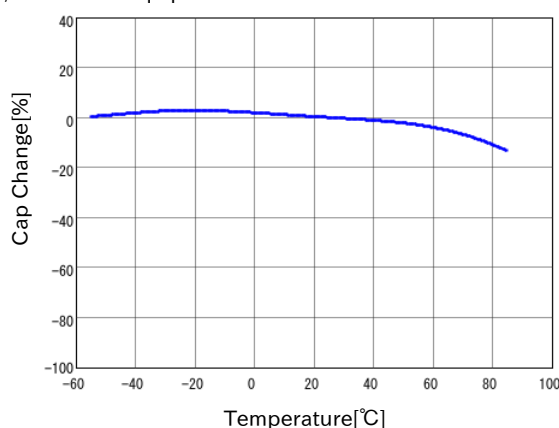

7. Temperature Rise-Ripple Current

