


KE Series


- 85°C Standard Product, for general purposes.
- RoHS Compliant

■ 规格表 SPECIFICATIONS



项目Items	特性参数Characteristics												
使用温度范围 Category Temperture Range	-40 ~ +85℃(6.3 ~ 400V) -25 ~ +85℃(450V)												
额定工作电压范围 Rated Voltage Range	6.3 ~ 450V												
电容量允许偏差 Capacitance tolerance	±20%(M) (at 20℃,120Hz)												
漏电流 Leakage Current	6.3 ~ 100V							160 ~ 450V					
	≡ Φ18	I≤0.03CV or 4uA, which is greater after application of rated Voltage for 1 minute . 施加额定工作电压1分钟后读数, 二者取大值 (at 20℃)							Time CV	After 1 minutes 1分钟读数		After 5 minutes 5分钟读数	
									CV≤1000	I≤0.1CV+40		I≤0.03CV+15	
									CV>1000	I≤0.04CV+100		I≤0.02CV+25	
	≡ Φ20	I=0.03CV After 3 minutes 施加额定工作电压3分钟后读数.											
Note: I=Max,leakage current (uA), C=Nominal capacitance(uF), V=Rated voltage(V) (at 20℃)													
损耗角正切值tan δ Dissipation Factor	Rated voltage (V)		6.3	10	16	25	35	50	63	100	160 ~ 250	315 ~ 400	450
	tan δ (Max.)	≡ Φ18	0.34	0.24	0.20	0.16	0.14	0.12	0.09	0.08	0.20	0.24	0.24
		≡ Φ20	0.28	0.24	0.20	0.16	0.14	0.12	0.09	0.08	0.15	0.15	0.20
	当标称容量超过1000μ F,每增加1000 μ F,损耗角正切值增加0.02 When nominal capacitance Exceeds 1000μF, add 0.02 to the value above for each 1000μF Increase. (at 20℃,120Hz)												
低温特性 Low Temperature Characteristics	电容器在120Hz下的阻抗比值不应超过下表所列出的值												
(Max.Impedance Ratio)	Rated voltage (V)		6.3	10	16	25	35	50	63	100	160 ~ 250	315 ~ 400	450
	Z(-25℃)/Z(+20℃)	≡ Φ18	5	4	3	2	2	2	2	2	3	6	6
		≡ Φ20	5	4	3	2	2	2	2	2	4	6	6
Z(-40℃)/Z(+20℃)	≡ Φ18	12	10	5	5	4	3	3	3	4	6	-	
耐久性 Endurance	85℃施加额定工作电压2000小时, 经恢复到20℃后, 测试性能应满足以下要求 The following specifications shall be satisfied when the capacitors are restored at 20℃ after the rated voltage is applied for2000 hours at 85℃ .												
	Capacitance change		≡ ±20% of the initial value										
	D.F.(tan δ)		≡200% of the specified value										
	Leakage current		≡The specified value										
高温储存特性 Shelf Life	85℃存放1000小时, 经恢复到20℃后, 测试性能应满足以下要求 The following sepcifications shall be satisfied when the capacitors are restored at 20℃ after exposing then for 1000 hours at 85℃ without voltage applied.												
	Rated voltage		6.3 ~ 100V							160 ~ 450V			
	Capacitance change		≡ ±20% of the initial value							≡ ±20% of the initial value			
	D.F.(tan δ)		≡200% of the specified value							≡200% of the specified value			
	Leakage current		≡The specified value							≡500% of the specified value			

■ 外形图 DIMENSIONS (mm)

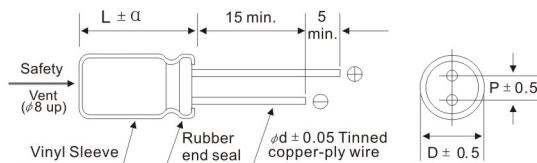

ΦD	5	6.3	8	10	12.5	16	18	20	22	25
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10	10	12.5
Φd	0.5	0.5	0.5	0.6	0.6	0.8	0.8	1.0	1.0	1.0

α	(L < 20) 1.5
	(L ≥ 20) 2.0

■ 纹波电流补正系数 RATED RIPPLE CURRENT COEFFICIENT

- 频率系数 Frequency Coefficient

Frequency(Hz) Coefficient	50	120	300	1k	10k	100k
Capacitance(µF)						
0.1 ~ 4.7	0.65	1.00	1.35	1.75	2.30	2.50
10 ~ 47	0.75	1.00	1.25	1.50	1.75	1.80
100 ~ 1,000	0.80	1.00	1.15	1.30	1.40	1.50
2,200 ~ 39,000	0.85	1.00	1.03	1.05	1.08	1.08

KE Series

■ 尺寸与最大纹波电流一览表 STANDARD RATINGS

WV(V) Cap(μF)	6.3(0J)		10(1A)		16(1C)		25(1E)		35(1V)		50(1H)		63(1J)		100(2A)	
0.1	Case size ΦD*L(mm) Rated ripple current(mArms at 85℃,120Hz)										5×11	1.6			5×11	2.5
0.22											5×11	3.2			5×11	4.8
0.33											5×11	4.5			5×11	7.1
0.47											5×11	6.4			5×11	12
1.0											5×11	18			5×11	23
2.2											5×11	29			5×11	33
3.3											5×11	36			5×11	42
4.7											5×11	42			5×11	78
10											5×11	64	5×11	69	6.3×11	78
22											5×11	98	5×11	112	8×12	132
33							5×11	118	5×11	134	6.3×11	158	6.3×11	178	10×13	234
47							5×11	118	5×11	134	6.3×11	158	6.3×11	178	10×13	234
100					5×11	164	6.3×11	190	6.3×11	192	8×12	264	10×13	305	10×20	372
220	5×11	205	5×11	242	6.3×11	265	8×12	332	8×12	388	10×13	431	10×16	498	13×25	625
330	6.3×11	274	6.3×11	293	8×12	372	8×12	442	10×13	492	10×16	585	10×20	710	13×25	765
470	6.3×11	323	6.3×11	352	8×12	444	10×13	546	10×16	646	10×20	758	13×20	904	16×26	1,002
680															20×30	1,362
820													20×20	1,378	22×30	1,542
1000	8×12	542	10×13	353	10×16	786	10×20	958	13×20	1,148	13×25	1,342	16×26	1,308	18×40	1,382
1200													20×25	1,604	20×35	1,725
1500											20×20	1,578	20×30	1,850	22×40	1,982
1800															25×40	2,493
2200	10×20	1,020	10×20	1,073	13×20	1,299	13×25	1,542	16×26	1,786	16×35	2,078	20×35	2,304		
2700									20×20	1,672	20×25	1,885	22×30	2,198		
3300	10×20	1,195	13×20	1,425	13×25	1,659	16×26	1,978	16×35	2,278	18×36	2,504				
3900											22×30	2,425	22×40	2,812		
4700	13×21	1,550	13×25	1,782	16×25	2,092	16×32	2,424	18×36	2,705						
5600									20×30	2,434	20×40	2,694				
6800	13×25	1,920	16×26	2,222	16×315	2,525	18×36	2,882								
8200			20×20	2,083	20×25	2,335	20×35	2,682								
10000							22×30	2,512	22×40	3,094	25×40	3,364				
12000							22×40	2,812								
15000	16×26	2,334	16×35	2,675	18×36	2,928										
18000	20×25	2,315	20×25	2,416	20×35	2,726										
22000					22×30	2,668	22×40	3,245	25×40	3,482						
27000			20×30	2,624	20×40	2,904	22×35	2,904								
33000																
39000	16×35	2,850	18×36	3,082												
	20×30	2,665	20×35	2,875												
			22×30	2,664	22×40	3,382										
	20×35	2,894														
	22×30	2,865	22×35	3,054												
	18×40	3,326														
	20×40	3,135														
	22×35	3,136	22×40	3,483	25×40	3,728										
	22×40	3,282														
			25×40	3,561												
	25×40	3,565														

KE Series

■ 尺寸与最大纹波电流一览表 STANDARD RATINGS

WV(V) Cap(μ F)	160(2C)		200(2D)		250(2E)		315(2F)		350(2V)		400(2G)		450(2W)	
0.47	Case size ΦD*L(mm) Rated ripple current(mArms at 85°C, 120Hz)								6.3×11	16			10×13	15
1									6.3×11	23	6.3×11	23	10×13	22
2.2					6.3×11	34			8×12	39	8×12	39	10×13	34
3.3	6.3×11	42	6.3×11	43	8×12	48			8×12	48	10×13	56	10×16	46
4.7	6.3×11	50	8×12	56	8×12	58			10×13	66	10×16	75	10×20	58
10	10×13	95	10×13	96	10×16	106			10×20	116	10×20	116	13×20	92
22	10×20	175	10×20	173	10×20	172			13×20	188	13×25	206	16×25	168
													20×20	182
33	10×20	278	10×20	206	13×20	234			16×26	278	16×26	278	16×32	216
											20×20	265	20×25	245
47	13×21	278	13×21	278	13×25	298	20×20	312	16×25	300	16×32	352	16×35	268
									20×20	312			20×25	292
56											20×25	352	20×30	325
68							20×25	404	20×25	405	20×30	423	20×35	372
													22×30	372
82					20×20	423	20×25	440					20×40	425
													22×35	425
100	13×25	432	16×26	476	16×32	518			18×32	532				
			20×20	468	20×25	492	20×30	502	20×30	504	20×35	523	22×40	475
											22×30	523		
120					20×25	532	20×30	556	20×35	564	20×40	584	25×40	524
											22×35	584		
180			20×25	663	20×30	682	20×40	724			25×40	792		
							22×35	724						
220					18×40	328								
	16×32	765	20×30	753	20×35	782	22×40	812	25×40	892				
	20×25	732	18×36	815	22×30	825								
270			20×30	832	20×40	883	25×40	921						
					22×35	883								
330	18×36	998	20×35	1,075	22×40	1,065								
	20×30	998	22×30	1,075										
390	20×35	1,162	20×40	1,192	25×40	1,205								
	22×30	1,162	22×30	1,162										
470	20×40	1,342	22×40	1,352										
	22×35	1,342												
560	22×40	1,470	22×40	1,530										
680	25×40	1,572	25×40	1,625										