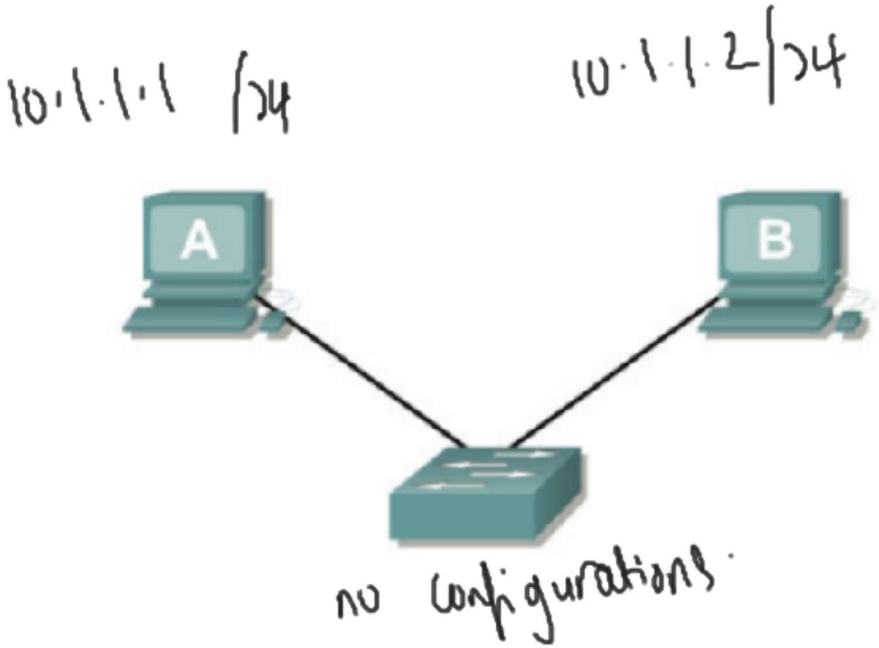

Assume • no other configurations
• all Cable connections are good.
• all devices are ON & not faulty

Give reasons if answer is NO.

Can A ping B?

PC-A can ping PC-B. Ping Successfully

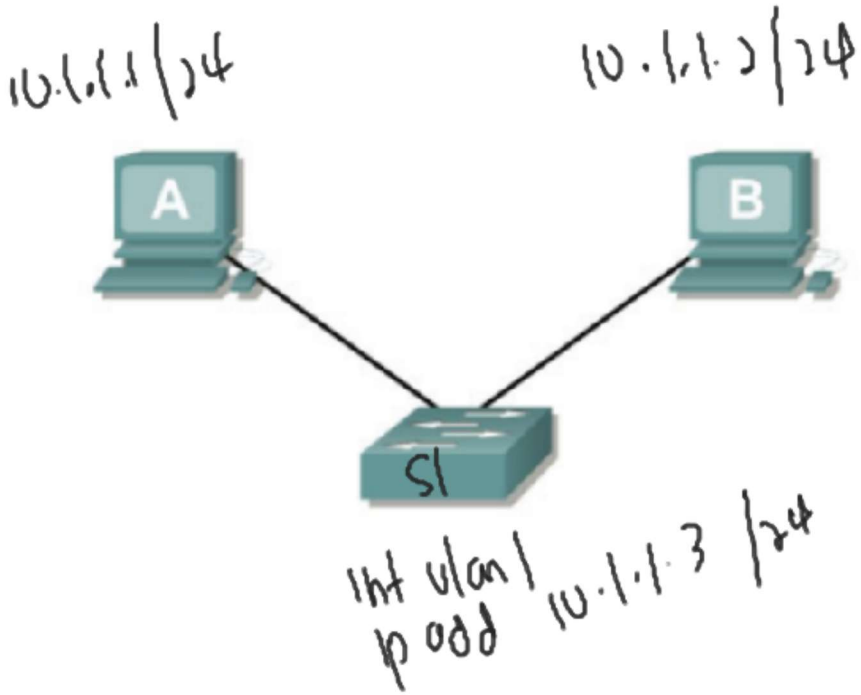

Can A ping B ?

Can A ping S1 ?

PC-A can ping PC-B. Ping Successfully

PC-A can ping S1. Ping Successfully

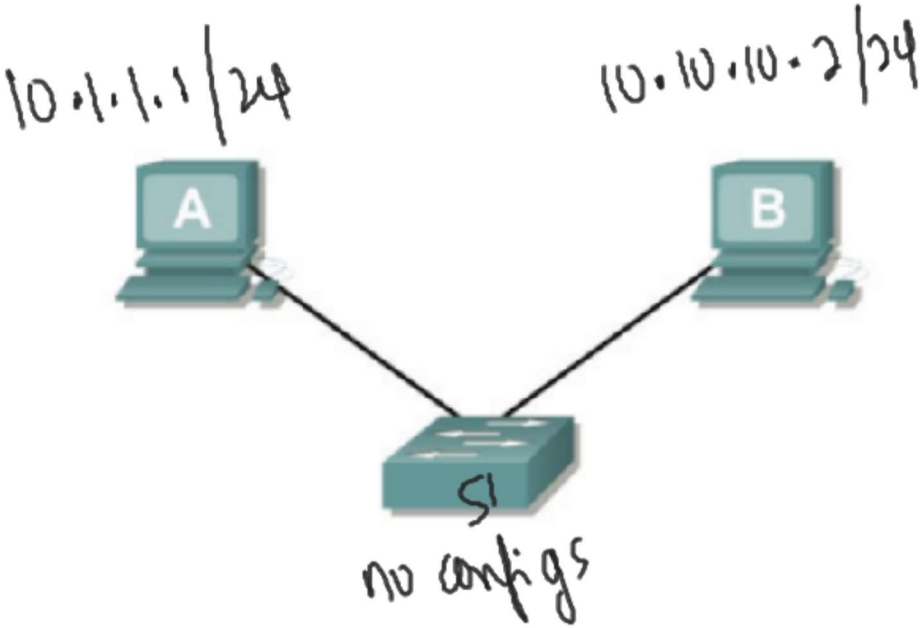

Can A ping B?

PC-A can ping PC-B. Ping Successfully

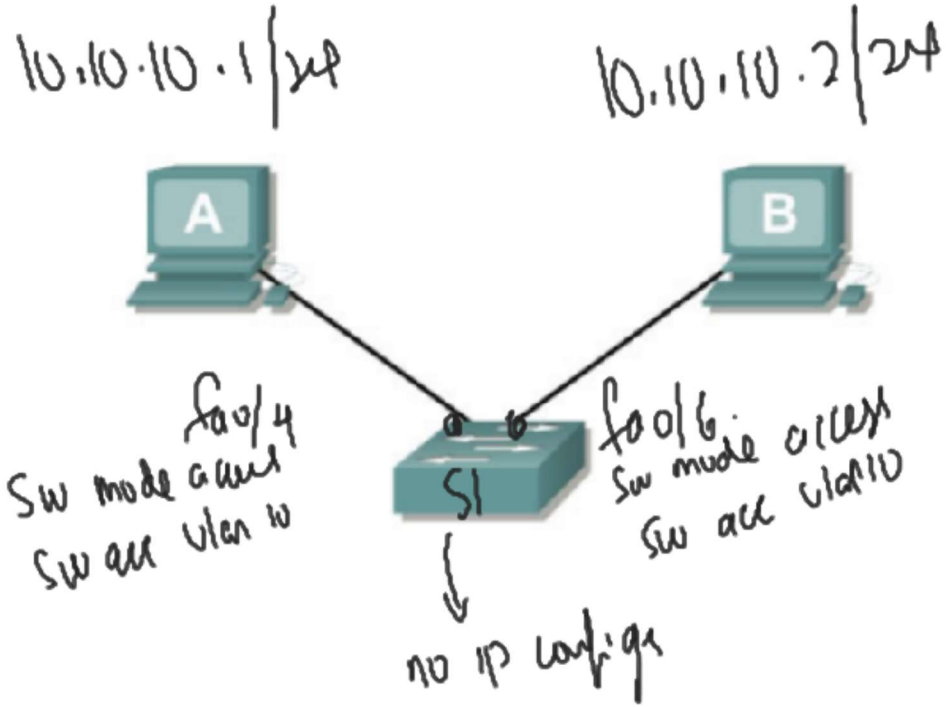

Can A ping B?

PC-A can ping PC-B. Ping Successfully

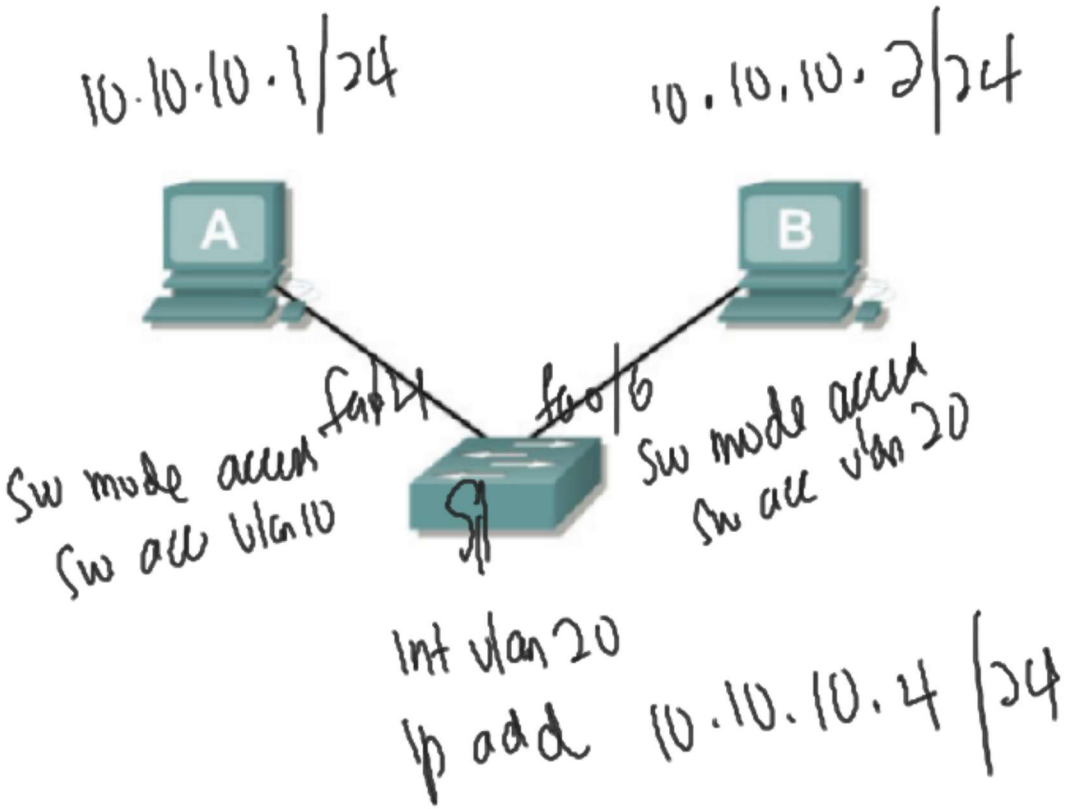

Can A ping B ?

Can A ping S1 ?

Can S1 ping B ?

PC-A cant ping PC-B. Ping Fail, because PC-A in VLAN 10 and PC-B in VLAN 20, different VLAN cant communication with each other

PC-A cant ping S1. Ping Fail, because different VLAN

S1 can ping PC-B. Ping Successfully

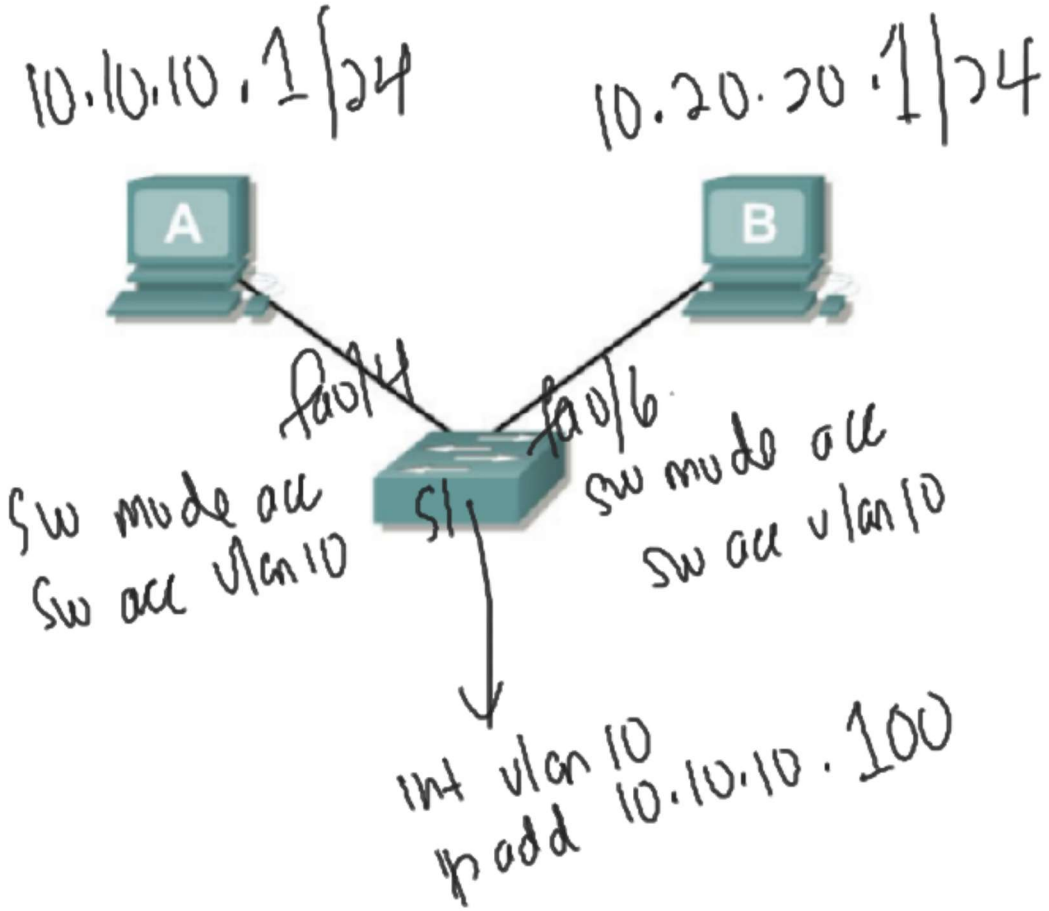

Can A ping B

Can A ping S1

PC-A can ping PC-B. Ping Successfully

PC-A can ping S1. Ping Successfully

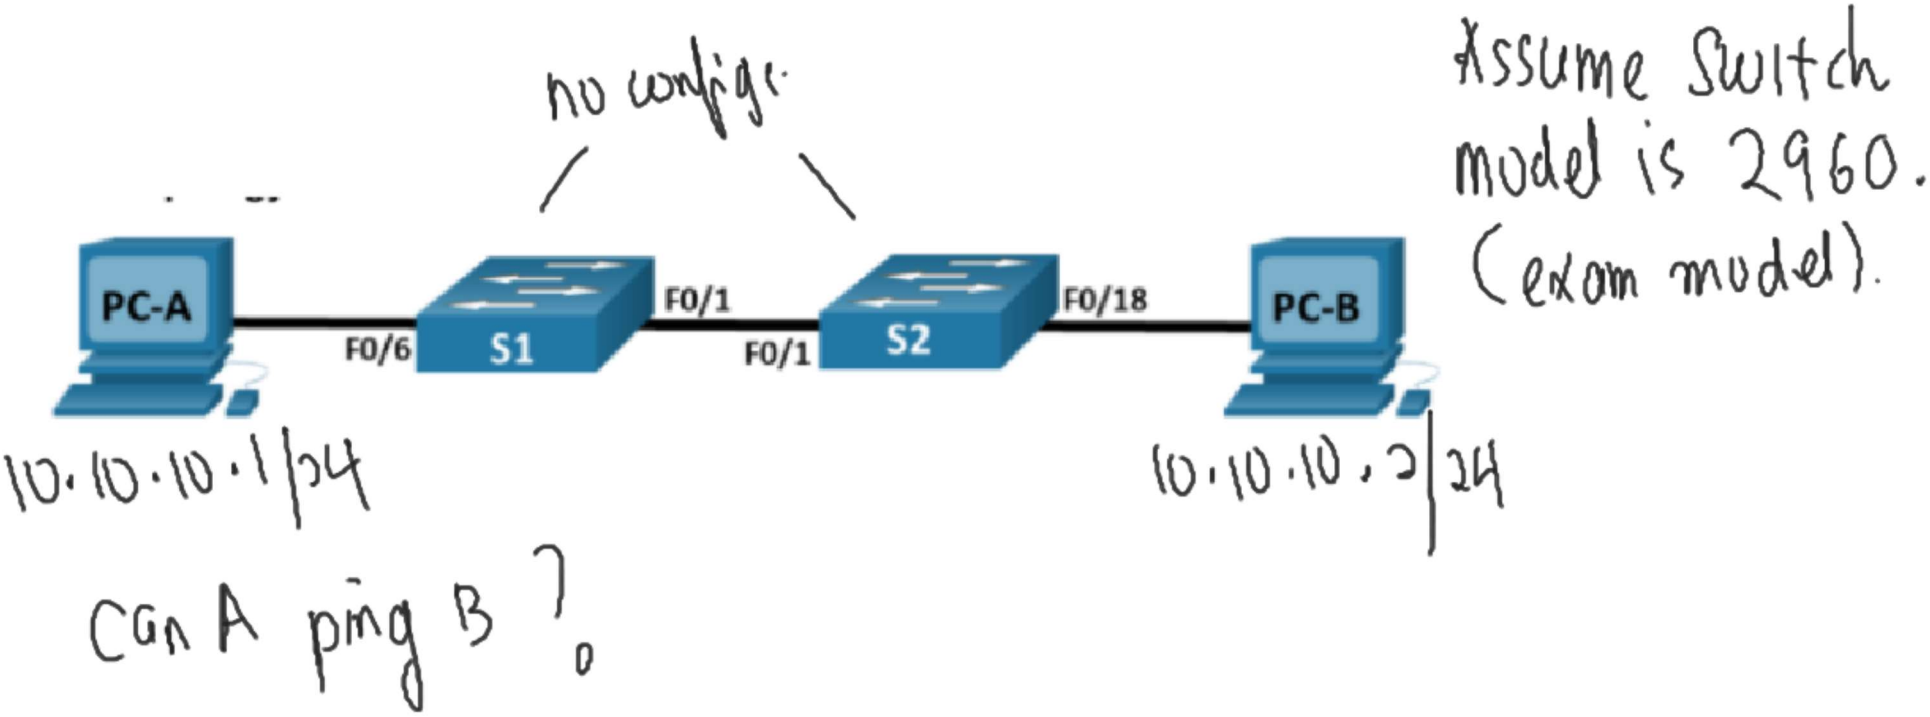

PC-A can ping PC-B. Ping Successfully

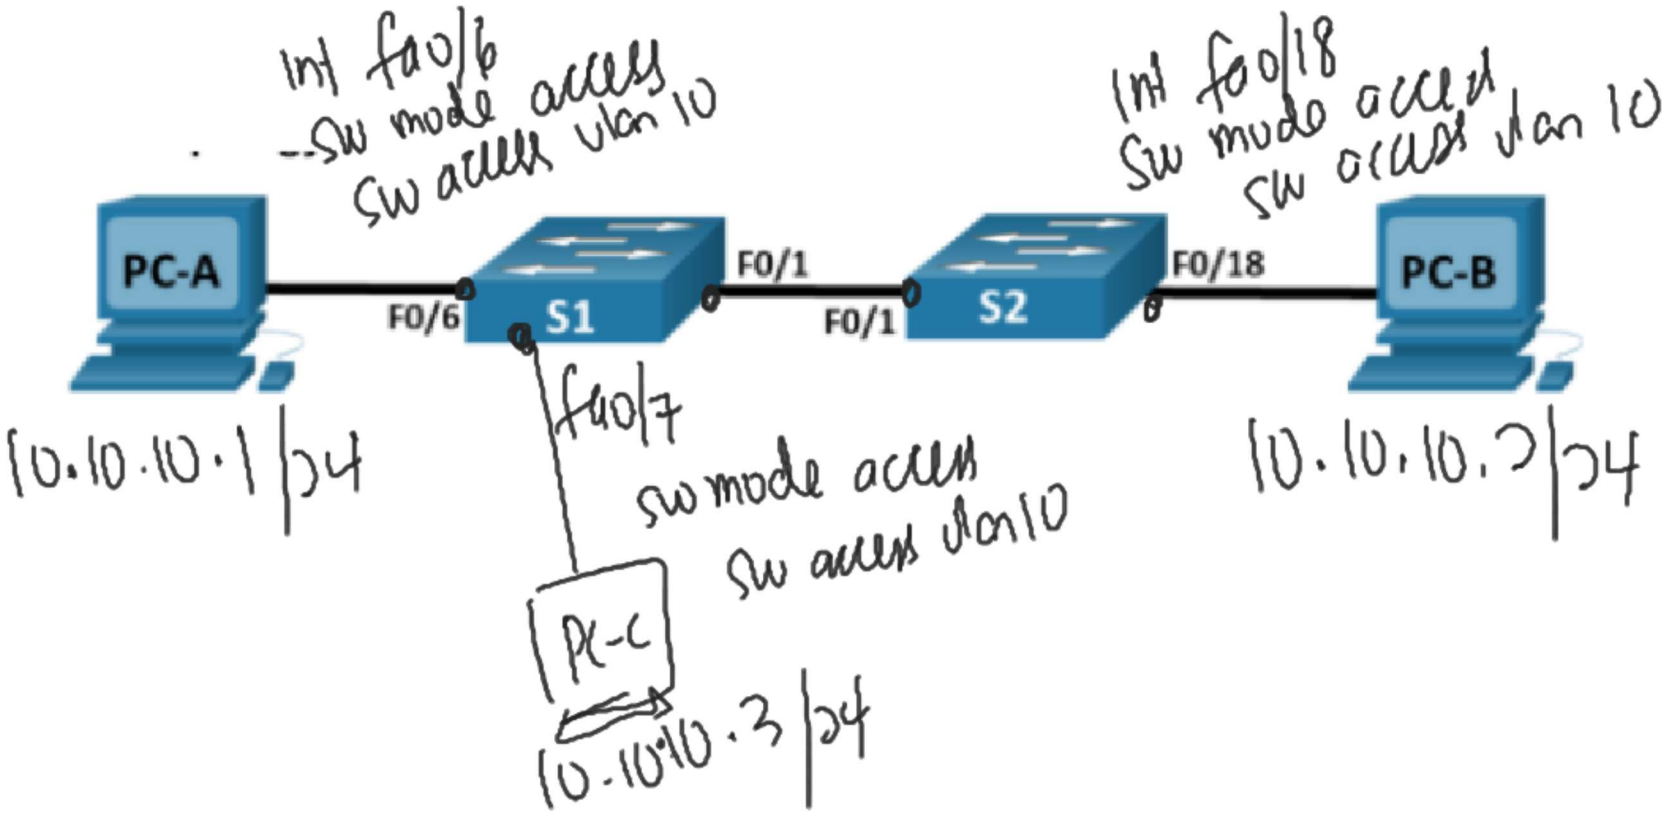

Can A ping B ?
Can A ping C ?

PC-A cant ping PC-B. Ping Fail. Because F0/1 need the trunk mode

PC-A can ping PC-C. Ping Successfully

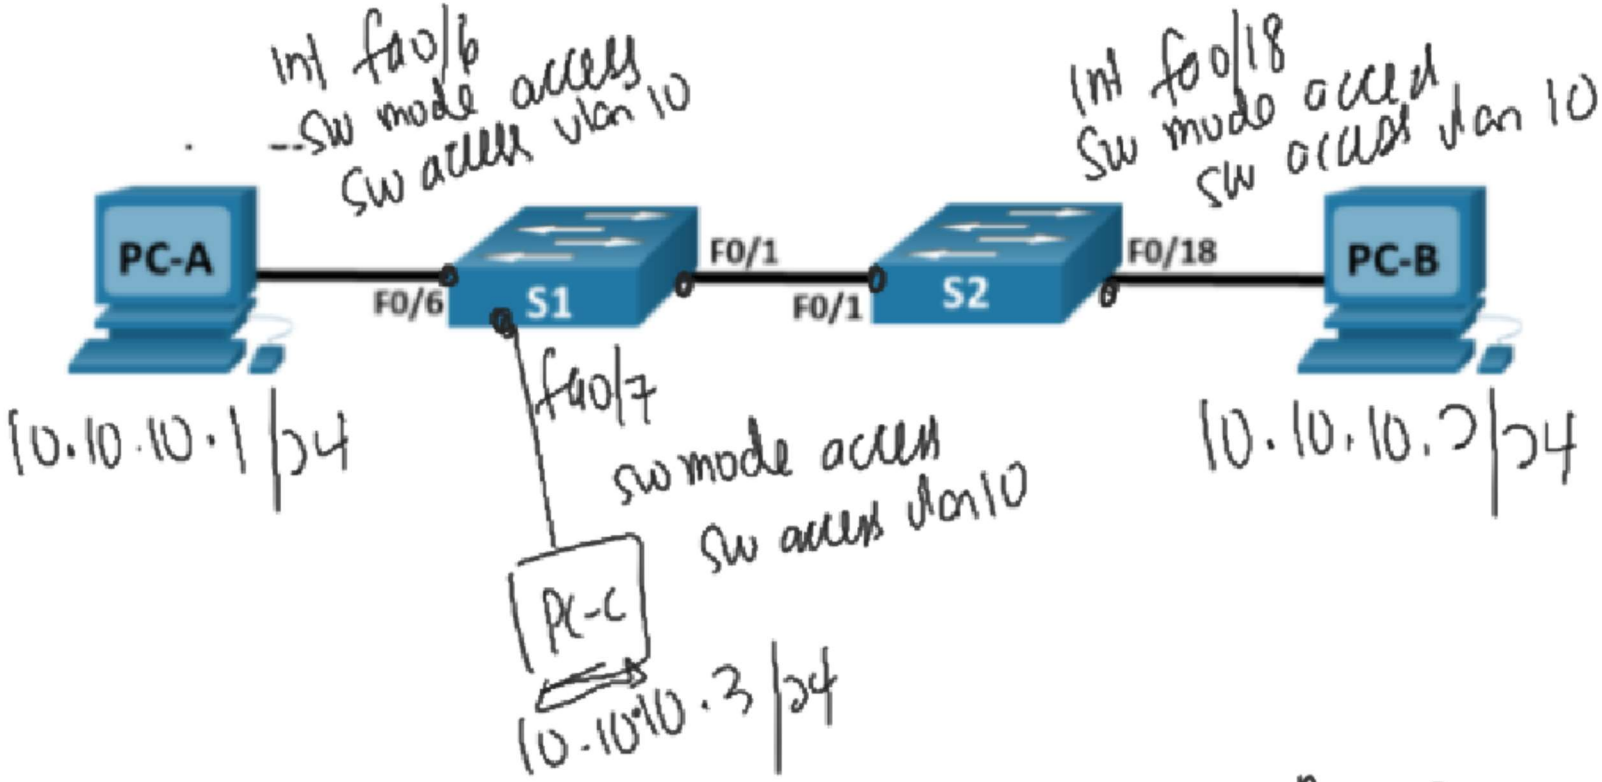

1. Can all PCs ping each other?

A → B Cant
A → C Can
B → C Cant

2. How / what config needed to make all able to ping?

Because F0/1 on S1 and S2 need a trunk

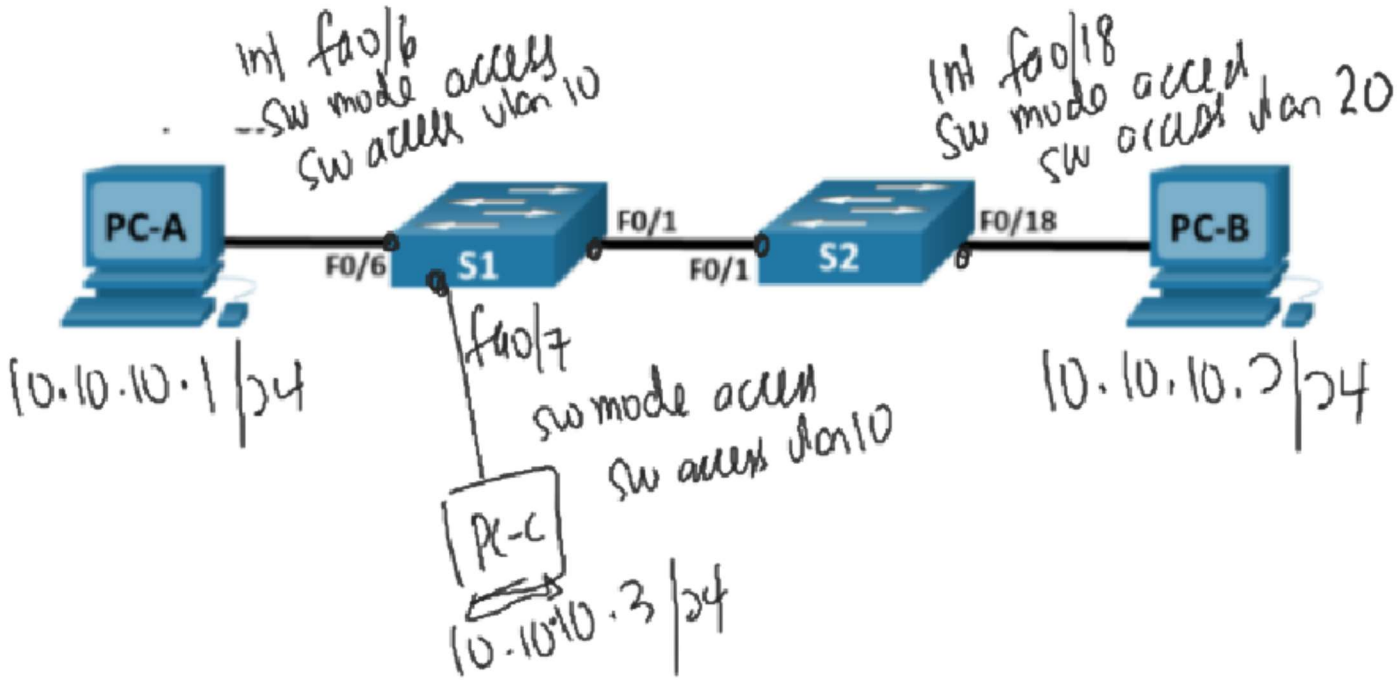

What configs / or additional device to make A ping B?

F0/1 on S1 and S2 need a trunk