



The Diamond Valve adjusts the flow linearly. Compared to other valves, it calculates the valve opening directly from an accurate model. Combined with minor PID adjustments, the Diamond Valve can better support precision aeration control systems.

Face-to-Face Length	DIN 3202/K1
Flange Standard	DIN 2532/1.0 MPa
Connection Type	Wafer type connection
Applicable Medium	Air
Rated Pressure (absolute)	0.17 MPa
Medium Temperature	≤150°C
Ambient Temperature	-30 to 70°C
Intelligent Multi-turn Actuator	380V/50HZ/4-20mA DC



Control Characteristics

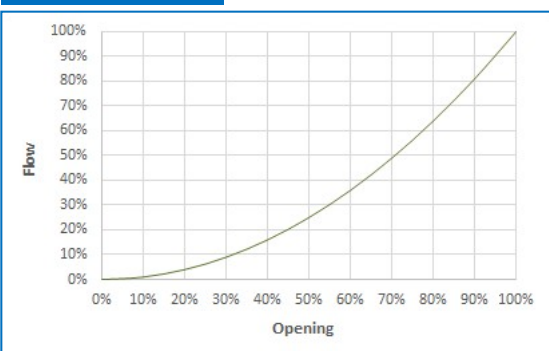


Pressure Loss

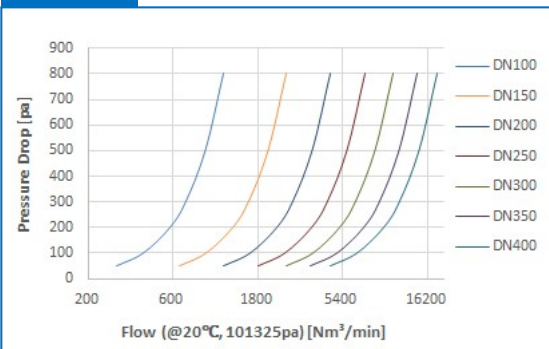


Loss Coefficient

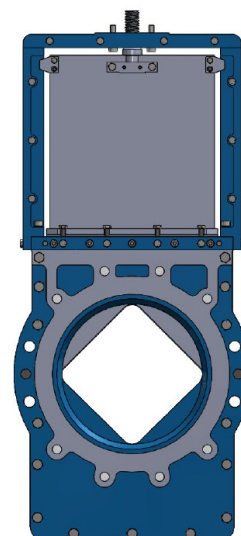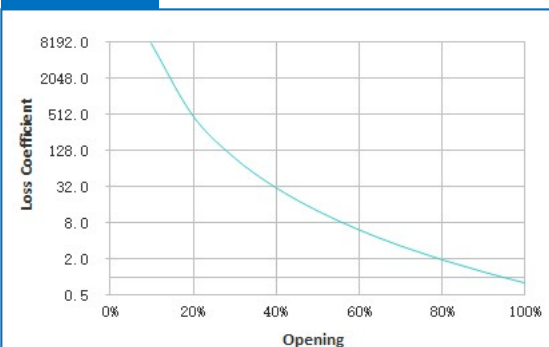

100% Opening

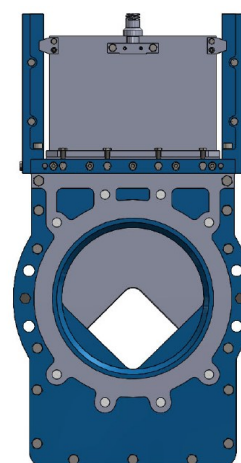



50% Opening

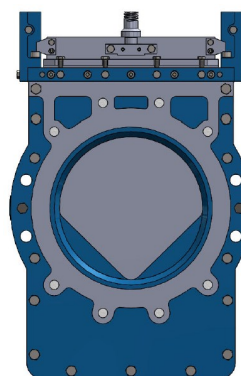

0% Opening

Diamond Valve • Aeration Control Simplified

DN	L	D1	W	H	n-M	Sectional area [mm ²]	Kv [m ³ /h]
100	52	180	125	455	8-M16	5,000	446
150	56	240	177	578	8-M20	11,250	1,003
200	60	295	217	700	8-M20	20,000	1,784
250	68	350	263	833	12-M20	31,250	2,787
300	78	400	314	954	12-M20	45,000	4,014
350	78	460	349	1069	16-M20	61,250	5,463
400	102	515	392	1190	16-M24	80,000	7,136

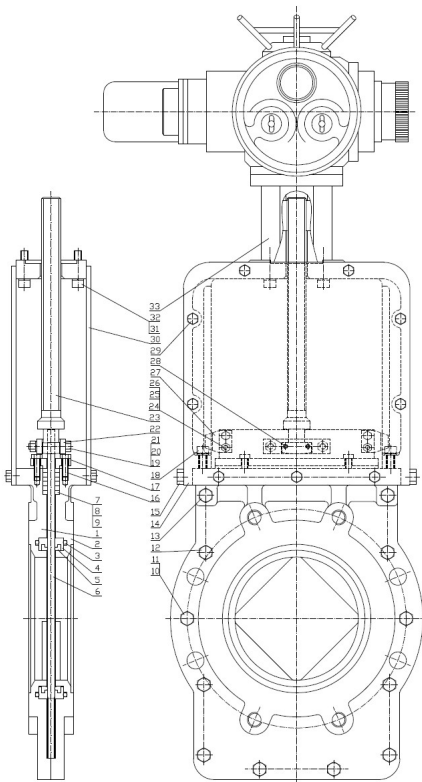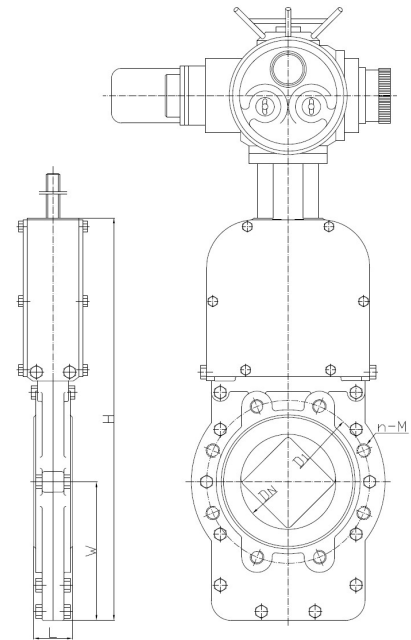

NO.	Part name	Material
1	Left valve body	CF8
2	Right valve body	CF8
3	O-ring seal	VITON
4	Valve seat	Copper alloy
5	Sealing ring	VITON
6	Valve plate	Stainless steel
7	Filler seat cushion	Copper alloy
8	Square packing	Stainless steel wire reinforced graphite packing
9	Filling pad	Copper alloy
10	Positioning bolt	Stainless steel
11	Hex nut	Stainless steel
12	Hexagon headed bolt	Stainless steel
13	Hexagon headed bolt	Stainless steel
14	Support	CF8
15	Hexagon headed bolt	Stainless steel
16	Hexagon headed bolt	Stainless steel
17	Gland	Stainless steel
18	Hexagon socket head cap screw	Stainless steel
19	Hexagon headed bolt	Stainless steel
20	Washer	65Mn
21	Hex nut	Stainless steel
22	Anti rotation plate	Stainless steel
23	Valve stem	Stainless steel
24	Hexagon headed bolt	Stainless steel
25	Washer	65Mn
26	Hex nut	Stainless steel
27	Guide plate	Copper alloy
28	Hexagon socket set screws with flat point	Stainless steel
29	Hexagon headed bolt	Stainless steel
30	Support sealing plate	Stainless steel
31	Hexagon headed bolt	Stainless steel
32	Washer	65Mn
33	Intelligent adjustable multi turn actuator 380V/50HZ/4-20mA DC	

info@glturbo.com
www.glturbo.com



USA • China • Denmark • Germany • India