


GL Series Geared Turbo Blower

The GL Series Geared Turbo Blower is designed and built to disrupt the convention, whether by its technology, quality, efficiency, reliability or price.

Product Features

- Energy Efficient - Best overall efficiency through entire flow range.
- Wide Turndown Range - Capable of turndown between 100% and 35% of design flow.
- Control - Variable inlet and discharge guide vanes, speed control.
- Tilt Pad Force Lubricated Bearings for proven 30+ year life.
- Quality - API 617 / 672, ASME PTC13 / ISO 5389.
- Oil-Free Process Air or Gas.

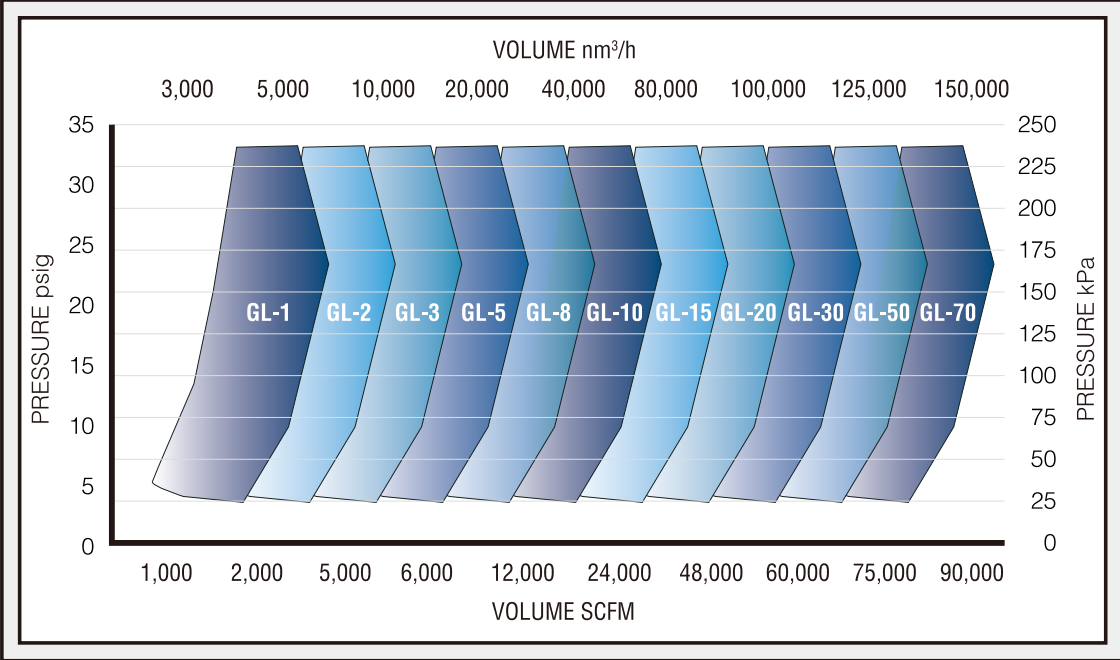

GL-TURBO

- ★ GL-TURBO Global Headquarters
- GL-TURBO Global Branches



🌐 www.glturbo.com
✉ info@glturbo.com
📍 221 Boston Post East, Suite 420, Marlborough, MA 01752, USA

GL Series Geared Turbo Blower



Power
100 - 6000 HP / 75 - 4500 kW

Flow
1000 - 88000 SCFM
1700 - 150000 m³/h

ΔP
2 - 35 PSI / 0.1 - 2.0 bar


GL-TURBO (DT-2401)_US_Headquarter_04 | 2024

GL-TURBO

GL Series Integrally Geared Single Stage Turbo Blower

Aerodynamic Perfection

Our backward swept impeller design with splitter blades puts the peak efficiency on a stable part of the curve. Having a higher rise to surge allows for safer operation throughout the entire flow range. Radial or Forward Swept impellers are most efficient near surge conditions and are susceptible to tripping the blower off or causing damage.

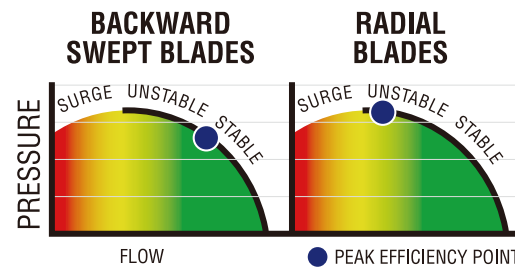

Tilt-Pad Bearings

The GL Series utilize force lubricated tilt-pad bearings proven to be a 30-year robust platform. The designed load is more than 3 times that of surge so that bearing and rotor are not damaged during surge.




Local Control Panel

Motor

Auxiliary Lubricant Pump



Optional Enclosure

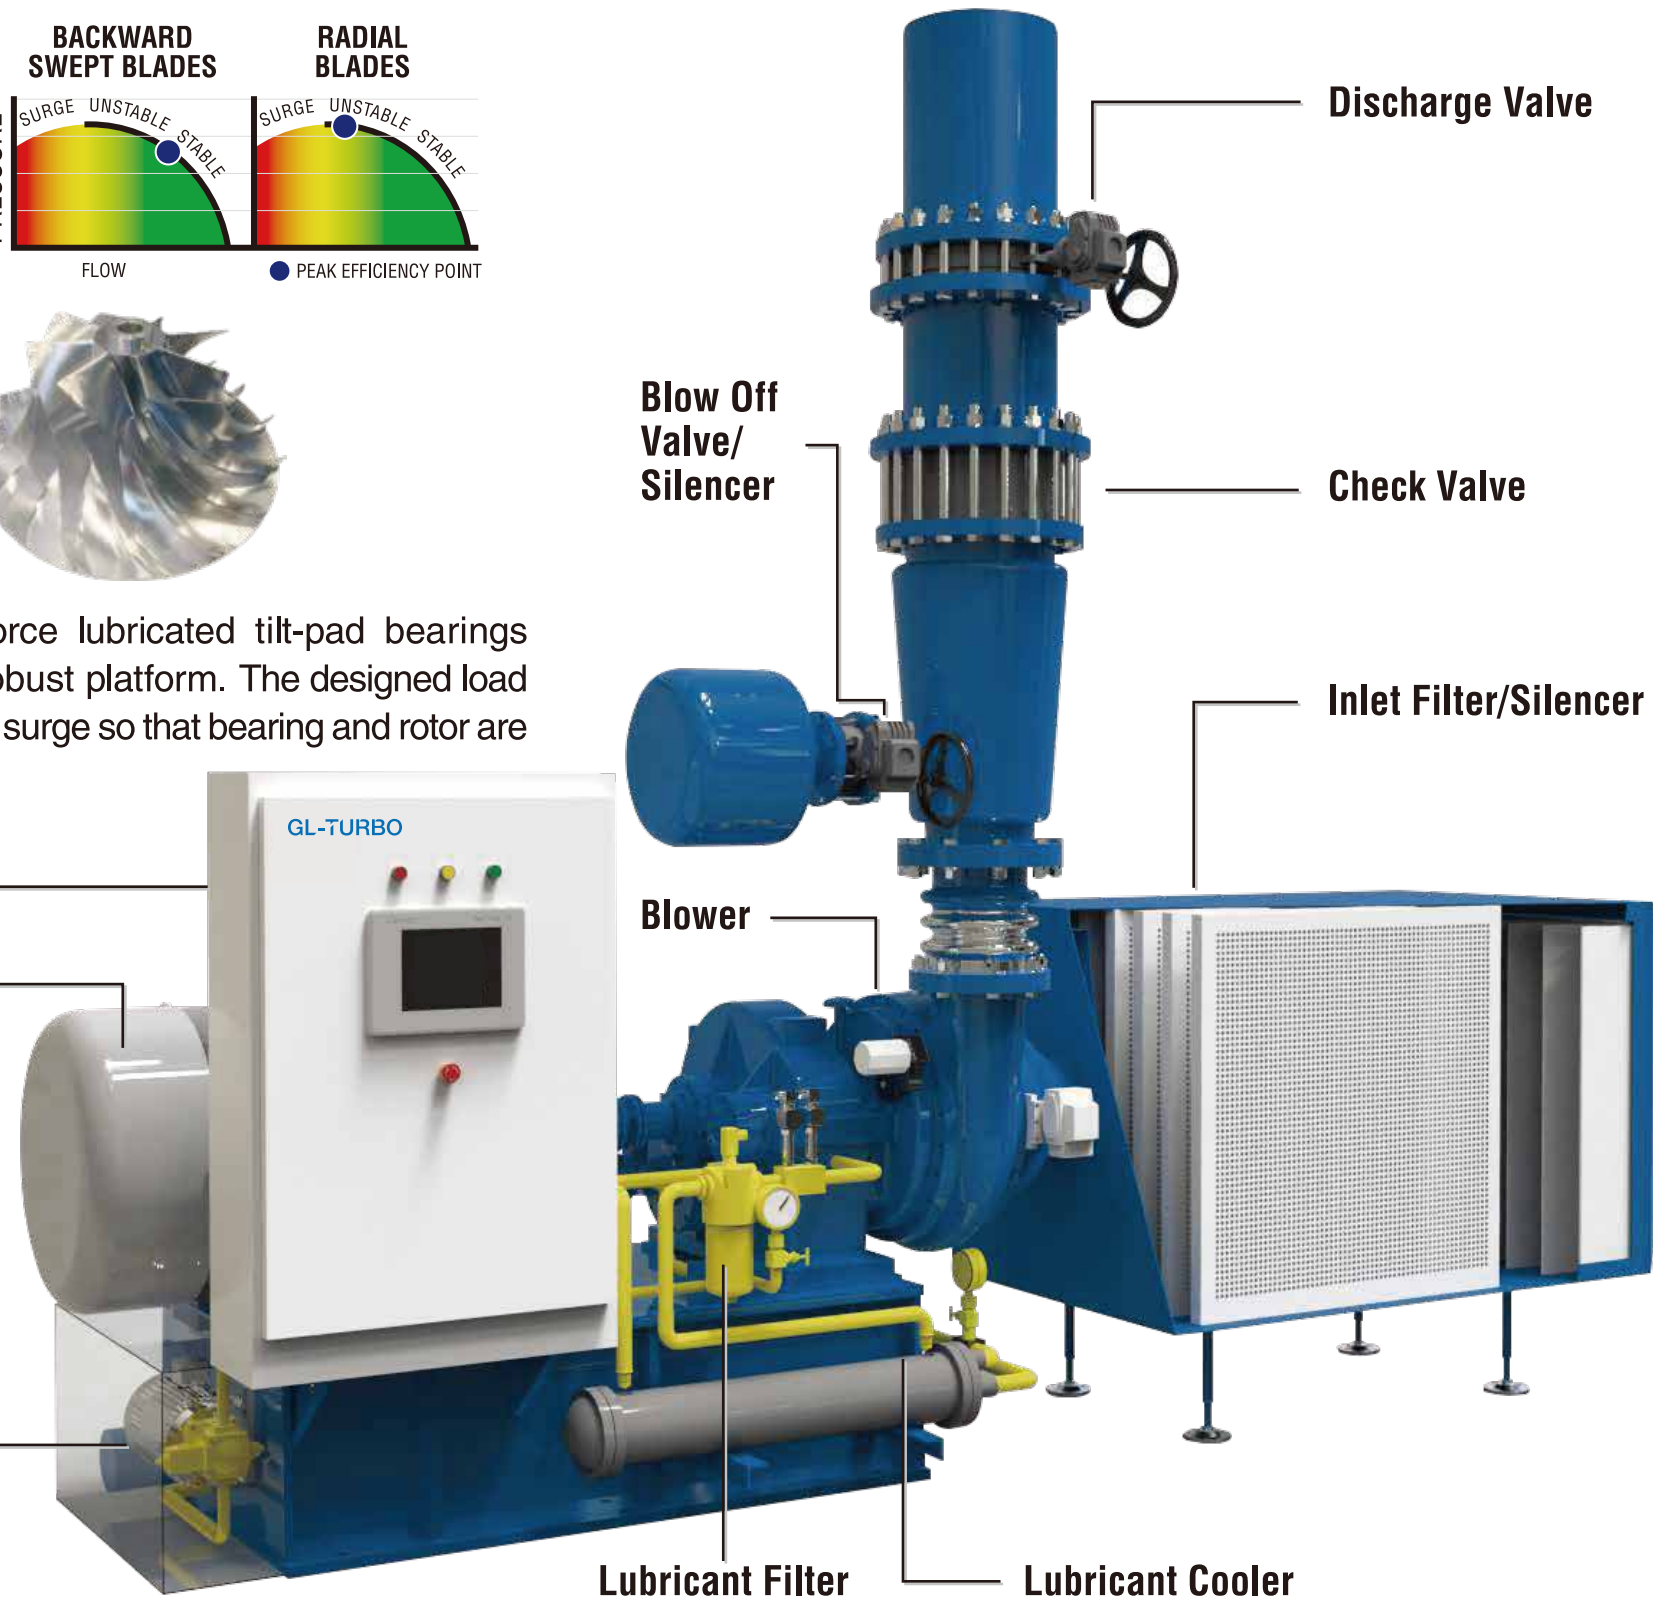

GL Packaged System

Casing

Class 30
cast ductile
iron

Vane Actuators

Rotary actuators
for long life and
little maintenance

Variable Inlet Guide Vanes

Regulates flow and
pre-rotates to
improve flow

Shaft and Gears

High and low
speed shaft
designed to API
standards

Sleeve Bearings

Force lubricated tilt
pad and slide sleeve
bearings on high and
low speed shaft
ensure a lifetime of
reliable service

Vane Actuators

Rotary actuators for
long life and little
maintenance

Stainless Vanes, Linkages, and Backplate

Anticorrosive
properties mean
vanes do not
stick

Variable Vane Diffuser

Secures stable
pressure and
allows wide turn
down without
efficiency loss

Impeller

Backward curve for
better stability and
high rise-to-surge;
Stainless or Anodized
Aluminum

Lubricant Pump



Mechanical
lubricant pump
self circulates
and cools unit

Integral Gearbox

Meets API
standards

Air or Gas Seal

Oil free
compression and
vented or purged
seal area

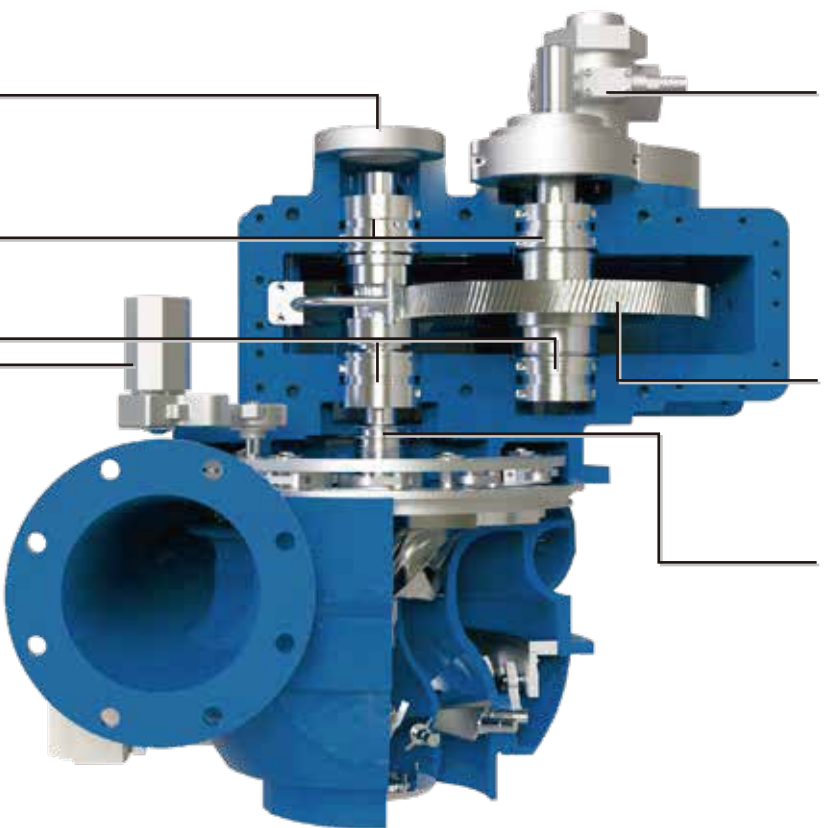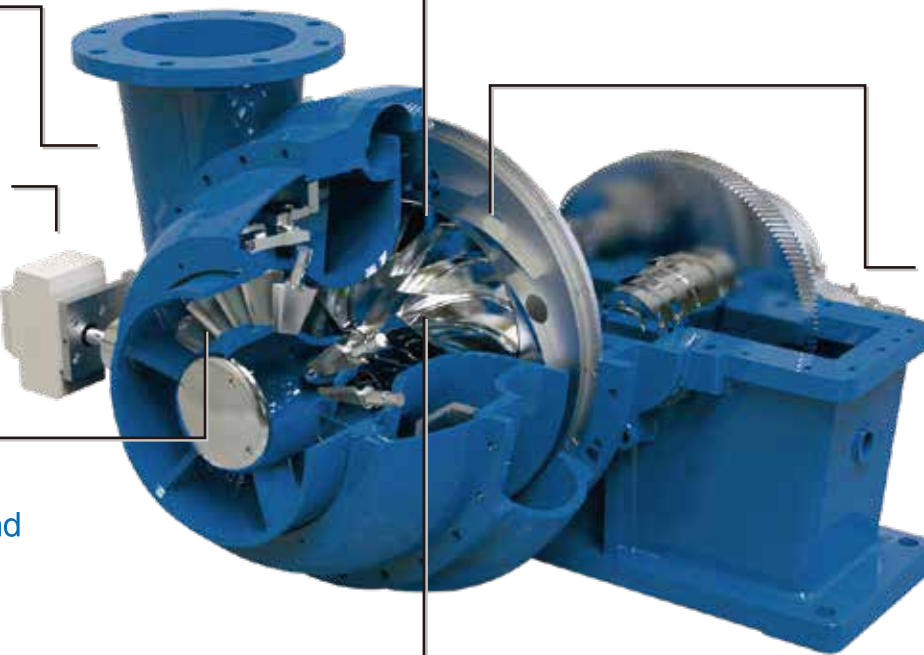

Applications



Water and Waste Water



Petrochemical



Utility Power



Food and Beverage



Industrial