





MassTrol Valve

GL-TURBO

The GL-TURBO MassTrol Valve is a new control valve that integrates precise valve control with accurate air flow measurement. It solves the longstanding problem of not being able to measure air flow accurately due to lack of long enough straight pipe required to install a thermal mass flow meter.

The MassTrol Valve can be controlled via a typical 4-20mA valve opening signal, or a more direct 4-20mA air flow signal. The valve HMI displays both the valve opening and the mass flow through the valve, making it especially useful for precision aeration control systems.

Face-to-face Length	DIN 3202/K1
Flange Standard	DIN 2532/1.0 MPa
Connection Type	Flange
Applicable Medium	Air
Rated Pressure (Absolute)	0.17 MPa
Medium Temperature	≤150℃
Ambient Temperature	-30 to 70℃
Intelligent Multi-turn Actuator	220V/50Hz/4-20mA DC

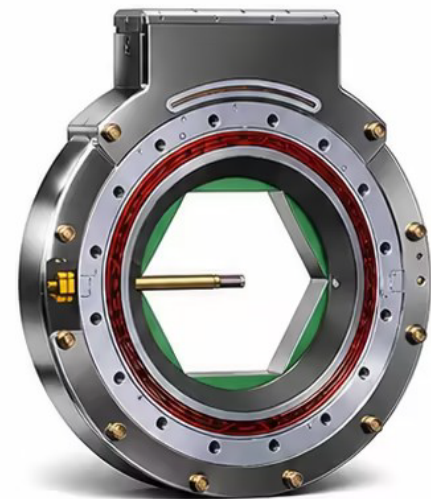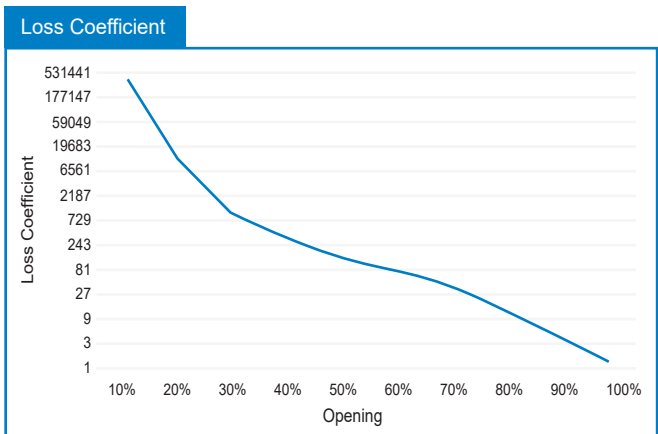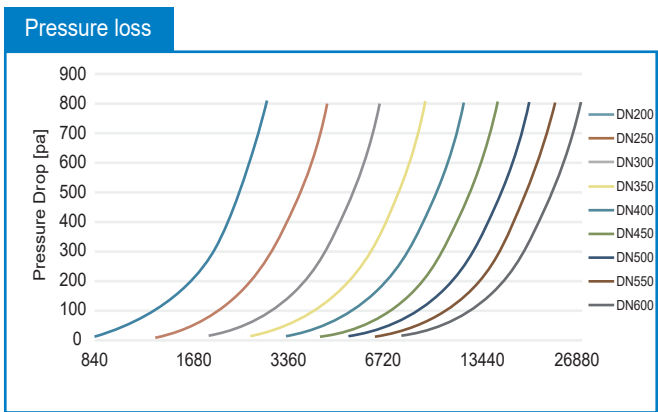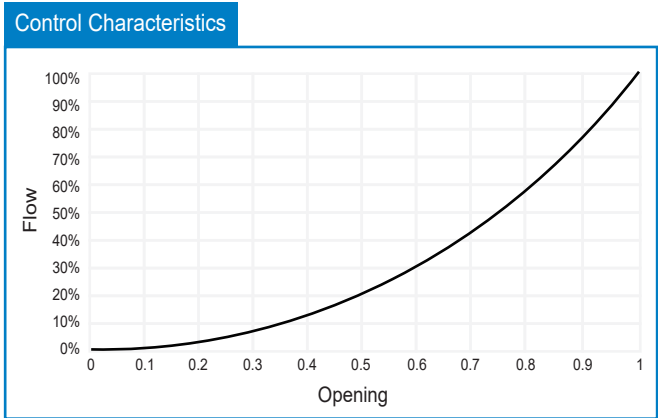


100% Opening



50% Opening



0% Opening

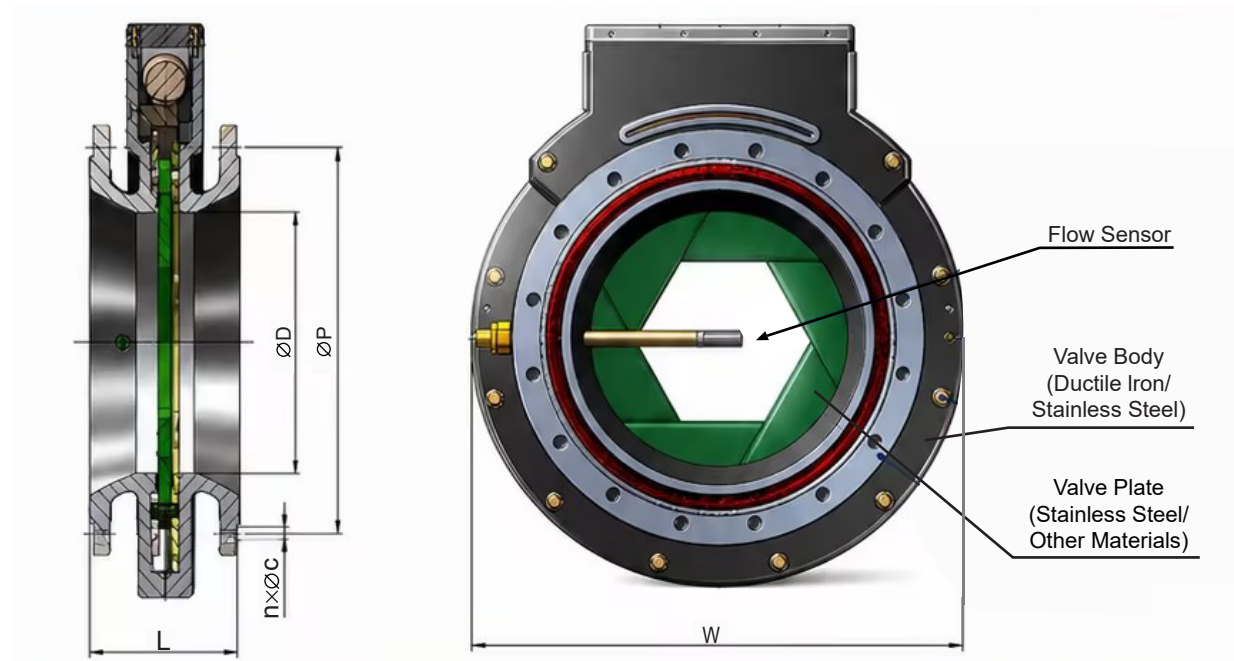

DN	L	W	D	P	M*C	Kv [m³/h]
200	152	486	190	295	8-23	60-6000
250	165	550	240	350	12-23	90-9000
300	181	614	290	400	12-23	150-10000
350	190	644	340	460	16-23	200-12000
400	216	673	340	515	16-25	250-20000
450	222	760	390	565	20-25	300-25000
500	230	868	440	620	20-25	400-30000
600	267	1010	540	725	20-30	600-35000
700	700	1190	600	840	24-30	700-40000

During operation, the center of the opening of the MassTrol Valve remains on the same centerline as the pipeline, and the air velocity across the cross-section of the opening follows a certain distribution. This unique characteristic makes it possible for MassTrol to incorporate a patented flow measuring feature, enabling accurate flow measurement at any pipeline configuration, even without the long-required straight pipe length. Under standard installation configuration of 5D upstream and 3D downstream of the valve, MassTrol could keep the measurement accuracy within $\pm 1.5\%$.

