

GL-TURBO

LS10

Multistage Turbo

Standard Specifications

Number of Stages	1 to 8 (60 Hz) 1 to 9 (50 Hz)
Inlet Connection	10" Flange, ASA 125# /150# Drilling Optional DIN 250 Flange
Outlet Connection.....	8" Flange, ASA 125# /150# Drilling Optional DIN 200 Flange
Operating Speed.....	Design 3,600 RPM - 60 Hz / 3,000 RPM - 50 Hz
Case Pressure	30 PSIG / 2 Bar
Seals (Air)	Labyrinth Type
Seals (Gas)	Carbon Ring with Purge, Custom Available
Bearings	Anti-friction type, AFBMA L10 100,000 hour rating
Lubrication	Splash Lubricated Oil or Oil Mist Connections
Impeller Diameter.....	28.00 in (711 mm) 60 Hz
Impeller Tip Speed	356 ft/s (108.7 m/s) @ 3550 RPM
First Critical	4,663 RPM (8 Stage 60 Hz)
Drive Type.....	Direct Coupled
Shaft End	2.874 in (73 mm) Diameter at Coupling
Vibration Tolerance	.18 in/s (4.57 m/s) Maximum

Materials of Construction

Casing	ASTM A48 Class 30 Cast Iron
Bearing Housings.....	ASTM A48 Class 30 Cast Iron
Oil Reservoir.....	ASTM A48 Class 30 Cast Iron
Shaft	ASTM A109 1045 Carbon Steel
Impellers	ASTM A356-T6 Cast Aluminum ASTM AA-6061 Fabricated
Seals (Air)	ASTM B86 Z35631 Zinc Alloy Aluminum
Seals (Gas)	ASTM C695 Molded Graphite
Interstage Vanes.....	ASTM A240 304 Stainless Steel
Joint Sealing.....	RTV Silicone Compound
Tie Rods	ASTM A108 1045 Carbon Steel
Blower Base.....	ASTM A36 Structural Steel
Motor Pedestal	ASTM A36 Structural Steel
Isolation Pads.....	Neoprene Rubber
Finish	2 Part Epoxy - Lone Star Gray

Testing



Balancing	Military Standard 167-1 or ISO 1940
Noise Level	OSHA 1910.95, ISO 2151:2004
Performance.....	ASME PTC-10, PTC-13, ISO 5389
Hydrotesting.....	API 612 @ 1.5 Times MAWP Witness Testing Available API 617 Option

Engineered Solutions



Alternative Materials - Stainless Steel, Ductile, or other
NACE Compliance for Process Gas
Special Coating or Seals
Custom Packaging to Hazardous Area Classification
Call Us Today to Discuss Your Needs



PRESSURE PERFORMANCE

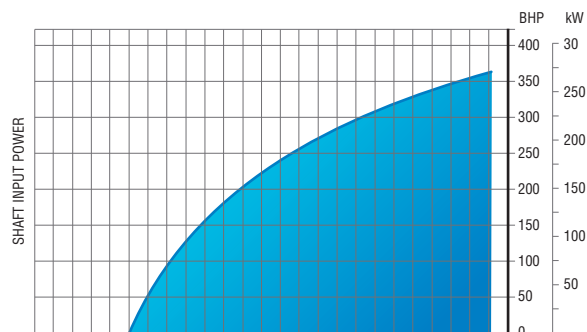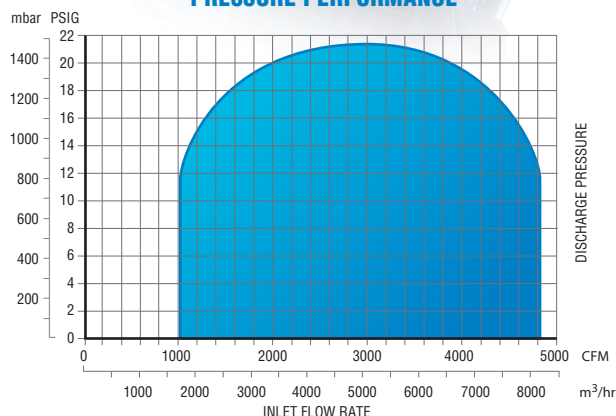


EXHAUSTER PERFORMANCE

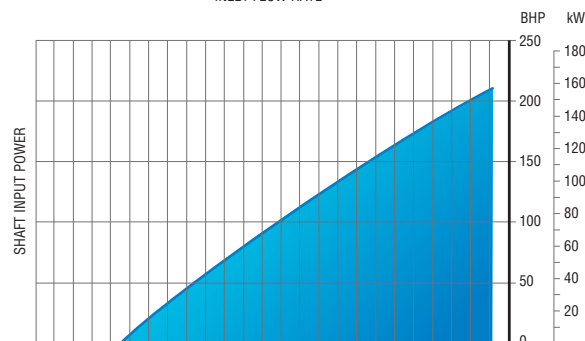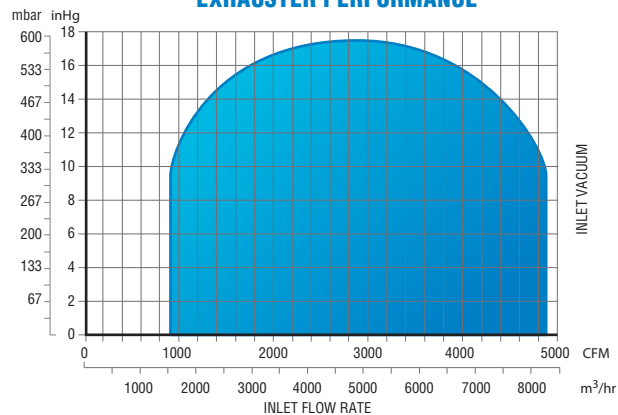

INLET & OUTLET ORIENTATION OPTIONS

The orientation of the inlet and outlet is selectable from any of the three different positions, as viewed when facing the exterior of the part:

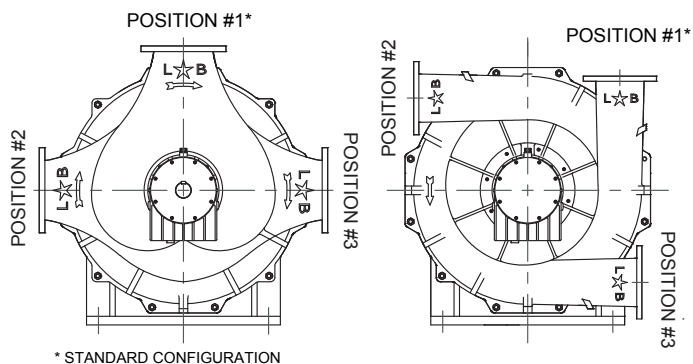

Model	Weight*		Wk ²	
	LB	Kg	LB-ft ²	Kg-m ²
LS10-2	2,339	1,061	23	0.96
LS10-3	2,989	1,356	34	1.44
LS10-4	3,640	1,651	45	1.92
LS10-5	4,290	1,946	57	2.4
LS10-6	4,941	2,241	68	2.88
LS10-7	5,591	2,536	79	3.36
LS10-8	6,241	2,831	91	3.84
LS10-9	6,892	3,126	102	4.32




*Approximate weight for blower only.

GENERAL ARRANGEMENT

10" OUTLET FLANGE (ANSI 150#), Ø16.00 (406.4) O.D.
 12X 7/8-9 UNC TAPPED HOLES ON Ø14.25 (361.95) B.C.
 OPTIONAL 250mm FLANGE (DIN), Ø15.55 (395) O.D.
 12X 18mm CLEARANCE HOLES ON Ø13.78 (350) B.C.

8" OUTLET FLANGE (ANSI 150#), Ø13.50 (342.9) O.D.
 8X 3/4-10 UNC TAPPED HOLES ON Ø11.75 (298.45) B.C.
 OPTIONAL 200mm FLANGE (DIN), Ø13.39 (340) O.D.
 8X 18mm CLEARANCE HOLES ON Ø11.61 (295) B.C.

4X Ø1.00 HOLES
 IN BOTTOM FLANGE

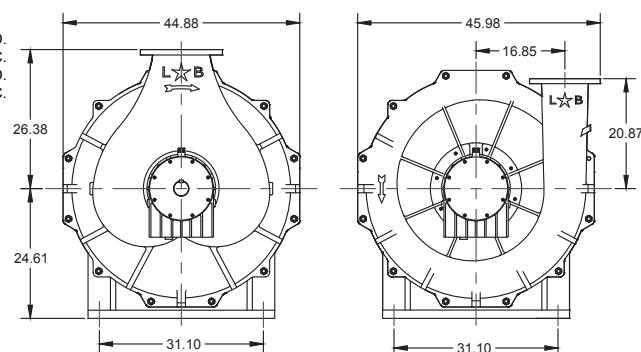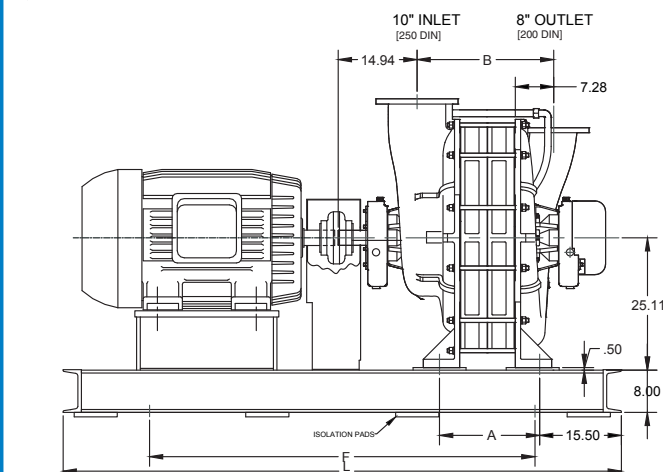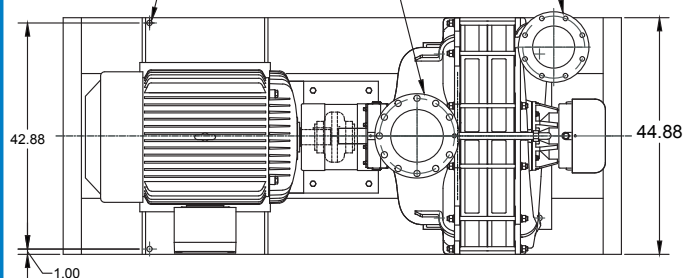

Packaged Dimensions

Model	A*	B*	F†	L†
LS10-2	13.9 (352.0)	16.0 (407.2)	20.8 (528.6)	73 (1854)
LS10-3	19.0 (482.1)	20.0 (508.0)	25.9 (658.6)	86 (2184)
LS10-4	24.1 (612.1)	24.0 (608.8)	31.0 (788.7)	86 (2184)
LS10-5	29.2 (742.2)	27.9 (709.9)	36.2 (918.7)	86 (2184)
LS10-6	34.3 (872.2)	31.9 (810.8)	41.3 (1048.8)	100 (2540)
LS10-7	39.5 (1002.3)	35.9 (911.9)	46.4 (1178.8)	113 (2870)
LS10-8	44.6 (1132.1)	39.9 (1012.7)	51.5 (1308.6)	113 (2870)
LS10-9	49.7 (1262.1)	43.8 (1113.8)	56.6 (1438.7)	113 (2870)

*Dimensions are shown in inches (and millimeters) are approximate. Do not use for constructions purposes.

†Dimensions vary depending on coupling & motor frame size.

GL-TURBO

info@glturbo.com
 www.glturbo.com