

GL-TURBO

LS6 Multistage Turbo Blower

Standard Specifications

Number of Stages	1 to 10 (60 Hz) 1 to 11 (50 Hz)
Inlet Connection	6" Flange, ASA 125# /150# Drilling Optional DIN 150 Flange
Outlet Connection	6" Flange, ASA 125# /150# Drilling Optional DIN 150 Flange
Operating Speed	Design 3,600 RPM - 60 Hz / 3,000 RPM - 50 Hz
Case Pressure	25 PSIG / 2 Bar
Seals (Air)	Labyrinth Type
Seals (Gas)	Carbon Ring with Purge, Custom Available
Bearings	Anti-friction type, AFBMA L10 100,000 hour rating
Lubrication	Splash Lubricated Oil or Oil Mist Connections
Impeller Diameter	24.5 in (622.3 mm) 60 Hz
Impeller Tip Speed	298.5 ft/s (91.0 m/s) @ 3550 RPM
First Critical	4,664 RPM (10 Stage 60 Hz)
Drive Type	Direct Coupled
Shaft End	2.047 in (52 mm) Diameter at Coupling
Vibration Tolerance	.18 in/s (4.57 m/s) Maximum

Materials of Construction

Casing	ASTM A48 Class 30 Cast Iron
Bearing Housings	ASTM A48 Class 30 Cast Iron
Oil Reservoir	ASTM A48 Class 30 Cast Iron
Shaft	ASTM A109 1045 Carbon Steel
Impellers	ASTM A356-T6 Cast Aluminum ASTM AA-6061 Fabricated
Seals (Air)	ASTM B86 Z35631 Zinc Alloy Aluminum
Seals (Gas)	ASTM C695 Molded Graphite
Interstage Vanes	ASTM A240 304 Stainless Steel
Joint Sealing	RTV Silicone Compound
Tie Rods	ASTM A108 1045 Carbon Steel
Blower Base	ASTM A36 Structural Steel
Motor Pedestal	ASTM A36 Structural Steel
Isolation Pads	Neoprene Rubber
Finish	2 Part Epoxy - Lone Star Gray

Testing



Balancing	Military Standard 167-1 or ISO 1940
Noise Level	OSHA 1910.95, ISO 2151:2004
Performance	ASME PTC-10, PTC-13, ISO 5389
Hydrotesting	API 612 @ 1.5 Times MAWP Witness Testing Available API 617 Option

Engineered Solutions



Alternative Materials - Stainless Steel, Ductile, or other
NACE Compliance for Process Gas
Special Coating or Seals
Custom Packaging to Hazardous Area Classification
Call Us Today to Discuss Your Needs



PRESSURE PERFORMANCE

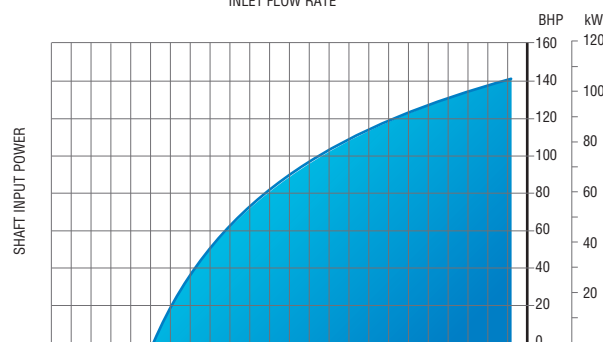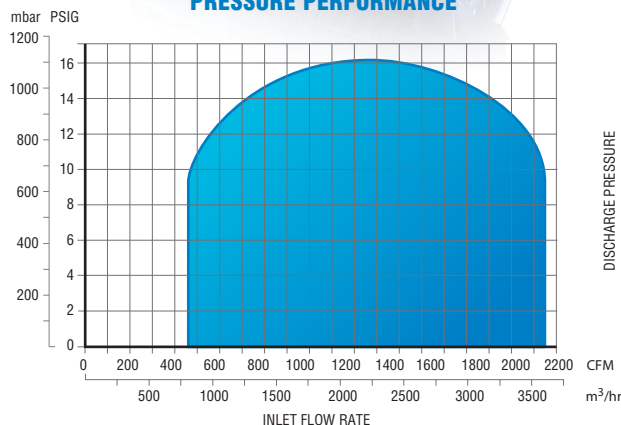

EXHAUSTER PERFORMANCE

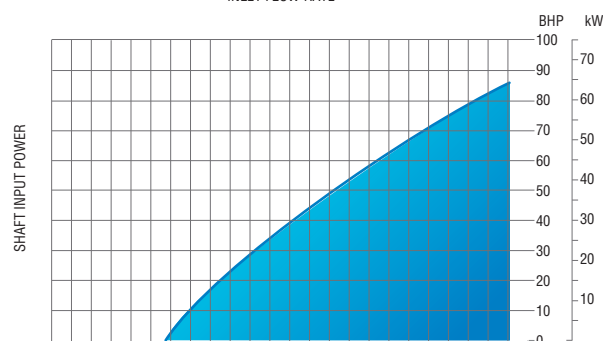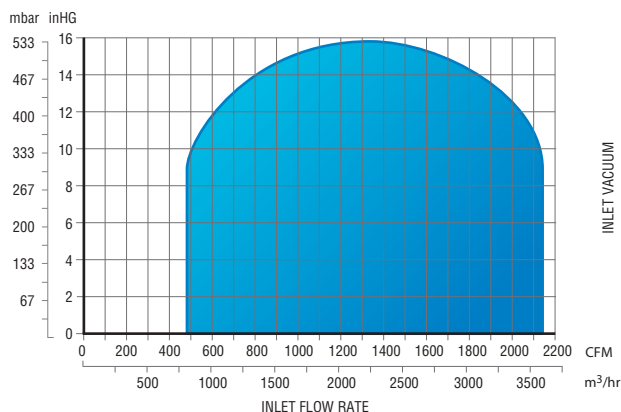


LS6

Multistage Turbo Blower

INLET & OUTLET ORIENTATION OPTIONS

The orientation of the inlet and outlet is selectable from any of the three different positions, as viewed when facing the exterior of the part:

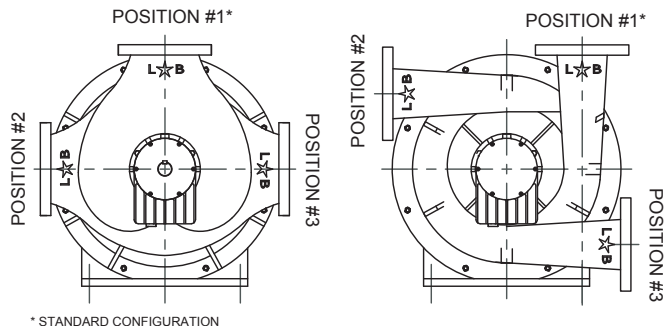

* STANDARD CONFIGURATION



Weight*

Wk²

Model	LB	Kg	LB-ft ²	Kg-m ²
LS6-2	1,400	635	16	78.12
LS6-3	1,550	703	23	112.3
LS6-4	1,945	883	31	151.36
LS6-5	2,120	962	39	190.42
LS6-6	2,375	1,077	48	234.36
LS6-7	2,520	1,143	54	263.66
LS6-8	2,700	1,225	60	292.95
LS6-9	2,880	1,306	69	336.89
LS6-10	3,060	1,388	77	375.95

*Approximate weight for blower only.

GENERAL ARRANGEMENT

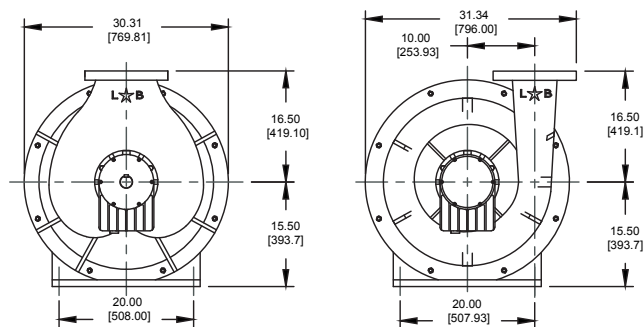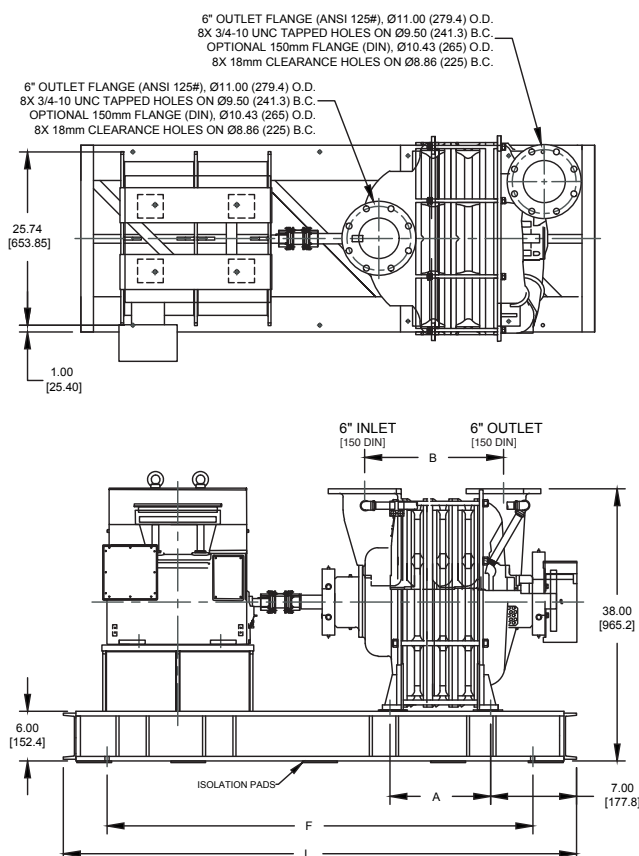

Packaged Dimensions

Model	A*	B*	F†	L†
LS6-2	7.6 (194.3)	12.9 (327)	59.6 (1513.6)	60 (1524)
LS6-3	11.3 (287.0)	16.5 (420)	63.2 (1606.3)	60 (1524)
LS6-4	14.9 (379.7)	20.2 (512)	63.2 (1606.3)	72 (1829)
LS6-5	18.6 (472.4)	23.8 (604)	66.9 (1699.0)	72 (1829)
LS6-6	22.2 (565.1)	27.4 (696)	66.9 (1699.0)	84 (2134)
LS6-7	25.9 (657.9)	31.0 (788)	70.5 (1791.7)	84 (2134)
LS6-8	29.5 (750.6)	34.6 (879)	74.2 (1884.4)	84 (2134)
LS6-9	33.2 (843.3)	38.3 (972)	77.8 (1977.1)	96 (2438)
LS6-10	36.8 (936.0)	42.7 (1084)	77.8 (1977.1)	108 (2747)

*Dimensions are shown in inches (and millimeters) are approximate. Do not use for constructions purposes.

†Dimensions vary depending on coupling & motor frame size.

GL-TURBO

info@glturbo.com
www.glturbo.com