

GL-TURBO

MC5

Multistage Turbo

Standard Specifications

Number of Stages	1 to 10
Inlet Connection	5" Flange, ASA 125# /150# Drilling
Outlet Connection	5" Flange, ASA 125# /150# Drilling
Operating Speed	Design 3,600 RPM - 60 Hz / 3,000 RPM - 50 Hz
Case Pressure	20 PSIG / 1.4 Bar
Seals (Air)	Labyrinth Type
Seals (Gas)	Carbon Ring with Purge, Custom Available
Bearings	Anti-friction type, AFBMA L10 100,000 hour rating
Lubrication	Splash Lubricated Oil or Grease
Impeller Diameter	22 in (558.8 mm)
Impeller Tip Speed	341 ft/s (104 m/s) @ 3550 RPM
First Critical	4505 RPM (10 Stage- 60 Hz)
Drive Type	Direct Coupled
Shaft End	1.625 in (41.28 mm) Diameter at Coupling
Vibration Tolerance	0.25 in/s (6.4 mm/s) Maximum

Materials of Construction

Casing	ASTM A48 Class 25 Cast Iron
Bearing Housings	ASTM A48 Class 25 Cast Iron
Oil Reservoir	ASTM A48 Class 25 Cast Iron
Shaft	AISI 4140
Impellers	ASTM A356-T6 Cast Aluminum ANSI AA6061 Fabricated
Seals (Air)	ASTM B86 Z35631 Zinc Alloy Aluminum
Seals (Gas)	ASTM C695 Molded Graphite
Interstage Baffle Ring	ASTM A240 304 Stainless Steel
Joint Sealing	RTV Silicone Compound
Tie Rods	ASTM A108
Blower Base	ASTM A36 Structural Steel
Motor Pedestal	ASTM A36 Structural Steel
Isolation Pads	Neoprene Rubber
Finish	2 Part Epoxy - Lone Star Gray


Testing

Balancing	Military Standard 167-1 or ISO 1940
Noise Level	OSHA 1910.95, ISO 2151:2004
Performance	ASME PTC-10, PTC-13, ISO 5389
Hydrotesting	API 612 @ 1.5 Times MAWP



Compatibility

Dimensional and Performance Equal and
Parts Interchangeable for Competitor Models:
Lamson 510, HSI 51, Atlas Copco ZM51



Try our LS series Multistage Turbo
for better efficiency and pressure

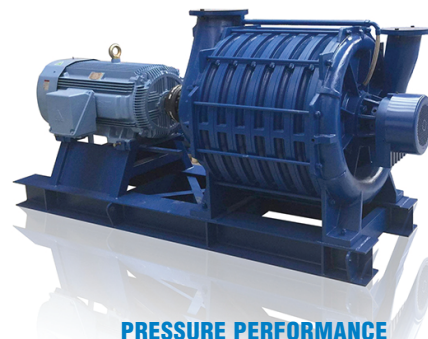

PRESSURE PERFORMANCE

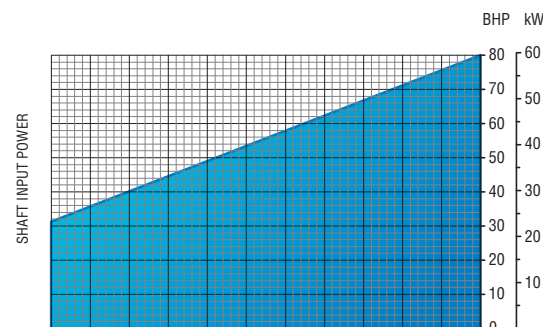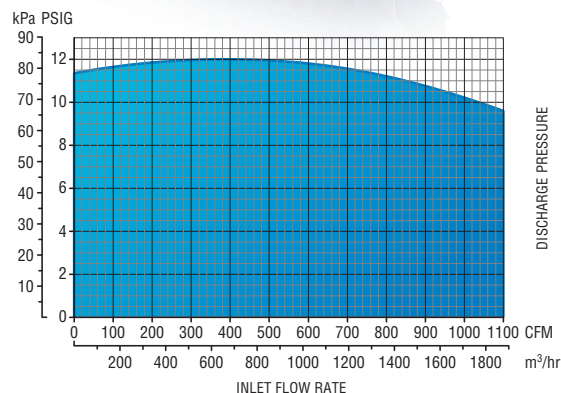

EXHAUSTER PERFORMANCE

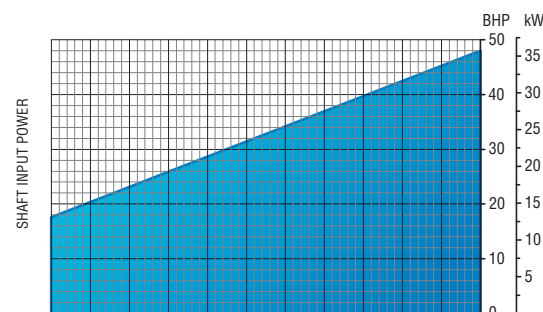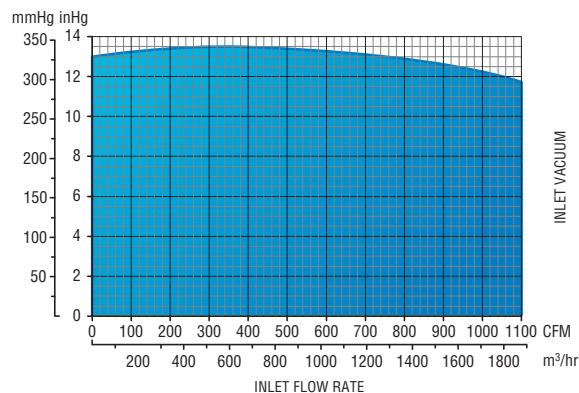


MC5

Multistage Turbo

INLET & OUTLET ORIENTATION OPTIONS

The orientation of the inlet and outlet is selectable from any of the three different positions, as viewed when facing the exterior of the part:



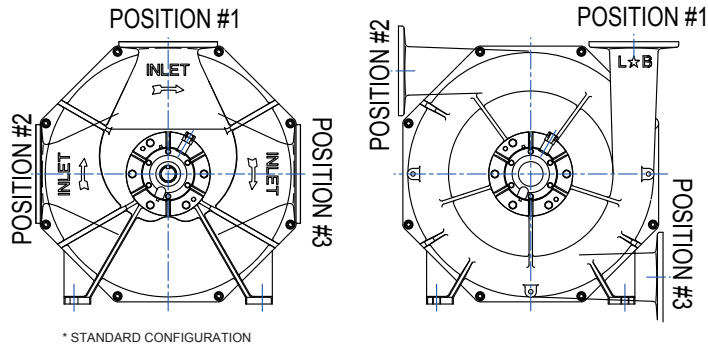


Model	Weight*		Wk ²	
	LB	Kg	LB-ft ²	Kg-m ²
MC5-1	480	218	6	0.26
MC5-2	607	275	12	0.51
MC5-3	730	331	18	0.76
MC5-4	860	390	24	1.02
MC5-5	987	448	30	1.27
MC5-6	1113	505	36	1.52
MC5-7	1240	562	42	1.77
MC5-8	1367	620	48	2.03
MC5-9	1493	677	54	2.28
MC5-10	1620	735	60	2.53

*Approximate weight for blower only.

†Inertia based on cast impellers.

GENERAL ARRANGEMENT

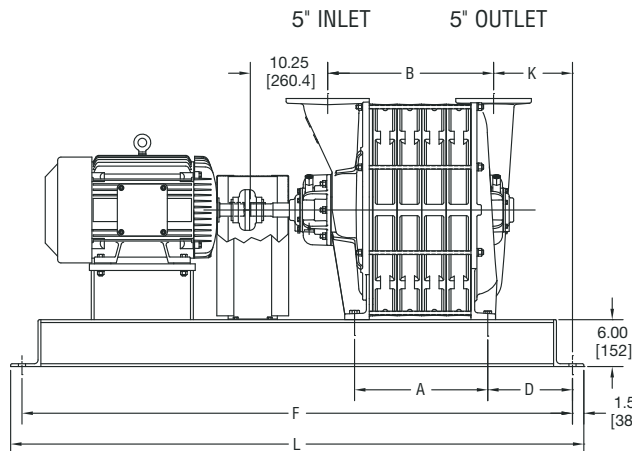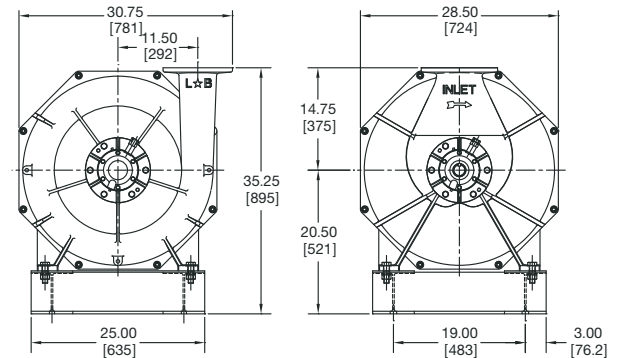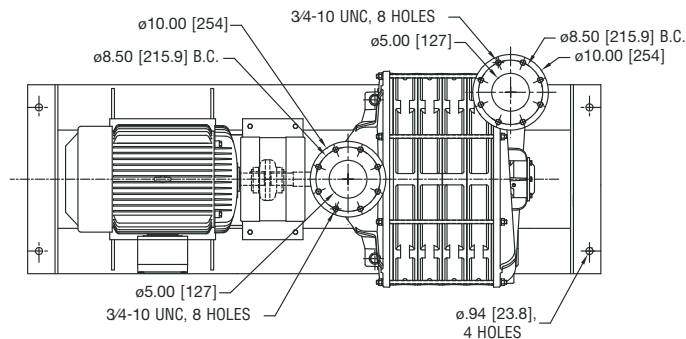

Packaged Dimensions

Model	A*	B*	D*	F†	L†	K*
MC5-1	4.62 (117)	8.00 (203)	7.50 (190)	50 (1270)	53 (1346)	7.19 (183)
MC5-2	7.88 (200)	11.25 (286)	7.50 (190)	56 (1422)	59 (1499)	7.19 (183)
MC5-3	11.14 (283)	14.50 (368)	10.75 (273)	64 (1626)	67 (1702)	10.44 (265)
MC5-4	14.40 (366)	17.75 (451)	7.50 (190)	64 (1626)	67 (1702)	7.19 (183)
MC5-5	17.66 (449)	21.00 (533)	10.75 (273)	73 (1854)	76 (1930)	10.44 (265)
MC5-6	20.92 (531)	24.25 (616)	7.50 (190)	73 (1854)	76 (1930)	7.19 (183)
MC5-7	24.18 (614)	27.50 (698)	10.75 (273)	81 (2057)	84 (2134)	10.44 (265)
MC5-8	27.44 (697)	30.75 (781)	7.50 (190)	81 (2057)	84 (2134)	7.19 (183)
MC5-9	30.70 (780)	34.00 (864)	10.75 (273)	91 (2311)	94 (2388)	10.44 (265)
MC5-10	33.96 (863)	37.25 (946)	7.50 (190)	91 (2311)	94 (2388)	7.19 (183)

*Dimensions are shown in inches (and millimeters) are approximate. Do not use for constructions purposes.

†Dimensions vary depending on coupling & motor frame size.

GL-TURBO

info@glturbo.com
www.glturbo.com