

GL-TURBO

MC8

Multistage Turbo

Standard Specifications

Number of Stages	1 to 9
Inlet Connection	8" Flange, ASA 125# /150# Drilling
Outlet Connection.....	8" Flange, ASA 125# /150# Drilling
Operating Speed.....	Design 3,600 RPM - 60 Hz / 3,000 RPM - 50 Hz
Case Pressure	20 PSIG / 1.4 Bar
Seals (Air)	Labyrinth Type
Seals (Gas)	Carbon Ring with Purge, Custom Available
Bearings	Anti-friction type, AFBMA L10 100,000 hour rating
Lubrication	Splash Lubricated Oil or Grease
Impeller Diameter.....	24.10 in (612.1 mm)
Impeller Tip Speed	373 ft/s (114 m/s) @ 3550 RPM
First Critical	4666 RPM (9 Stage- 60 Hz)
Drive Type.....	Direct Coupled
Shaft End	1.875 in (47.63 mm) Diameter at Coupling
Vibration Tolerance	0.25 in/s (6.4 mm/s) Maximum

Materials of Construction

Materials of Construction.....	
Casing	ASTM A48 Class 25 Cast Iron
Bearing Housings.....	ASTM A48 Class 25 Cast Iron
Oil Reservoir.....	ASTM A48 Class 25 Cast Iron
Shaft	AISI 4140
Impellers	ASTM A356-T6 Cast Aluminum ANSI AA6061 Fabricated
Seals (Air)	ASTM B86 Z35631 Zinc Alloy Aluminum
Seals (Gas)	ASTM C695 Molded Graphite
Interstage Baffle Rings.....	ASTM A240 304 Stainless Steel
Joint Sealing.....	RTV Silicone Compound
Tie Rods	ASTM A108
Blower Base.....	ASTM A36 Structural Steel
Motor Pedestal	ASTM A36 Structural Steel
Isolation Pads.....	Neoprene Rubber
Finish.....	2 Part Epoxy - Lone Star Gray

Testing

Balancing	Military Standard 167-1 or ISO 1940
Noise Level	OSHA 1910.95, ISO 2151:2004
Performance.....	ASME PTC-10, PTC-13, ISO 5389
Hydrotesting.....	API 612 @ 1.5 Times MAWP



Compatibility

Dimensional and Performance Equal and
Parts Interchangeable for Competitor Models:
Lamson 850, 810, HSI 81, 82
Atlas Copco ZM 81, 82



Try our LS series Multistage Turbo
for better efficiency and pressure



PRESSURE PERFORMANCE

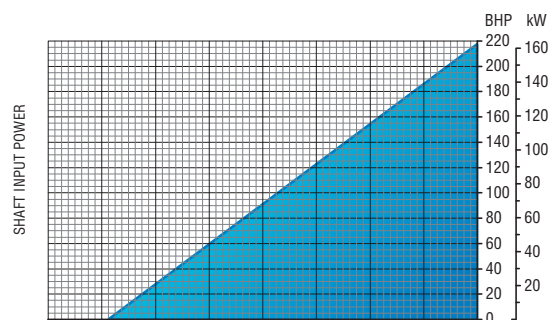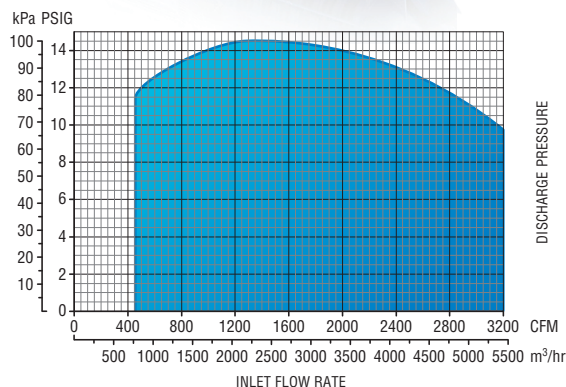

EXHAUSTER PERFORMANCE

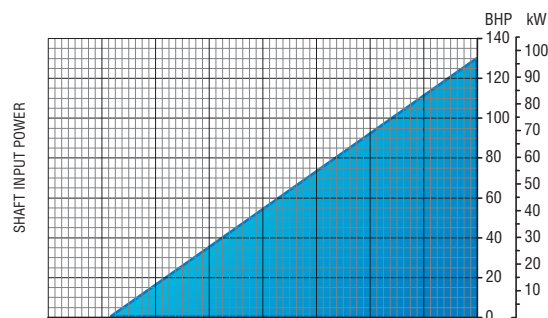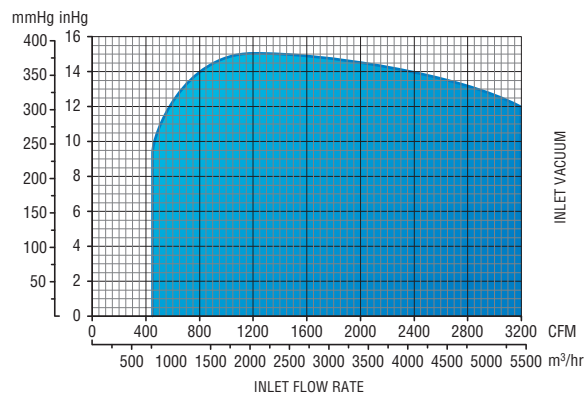


MC8

Multistage Turbo

INLET & OUTLET ORIENTATION OPTIONS

The orientation of the inlet and outlet is selectable from any of the three different positions, as viewed when facing the exterior of the part:



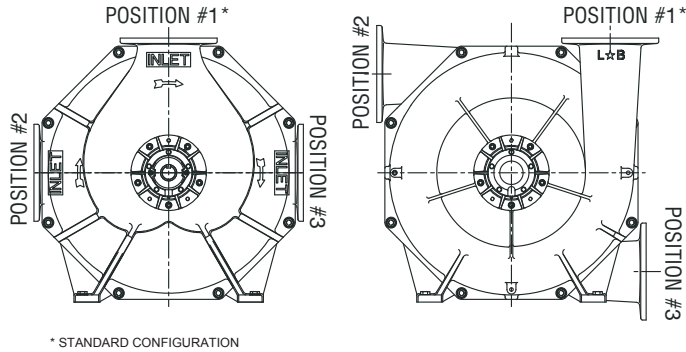


	Weight*		Wk ²	
Model	LB	Kg	LB-ft ²	Kg-m ²
MC8-1	560	2543	10	0.27
MC8-2	860	90	19	0.53
MC8-3	1160	526	29	0.78
MC8-4	1460	662	38	1.04
MC8-5	1760	798	47	1.30
MC8-6	2060	934	57	1.45
MC8-7	2360	1070	66	1.82
MC8-8	2660	1207	76	2.08
MC8-9	2960	1343	86	2.34

*Approximate weight for blower only.

†Inertia based on cast impellers.

GENERAL ARRANGEMENT

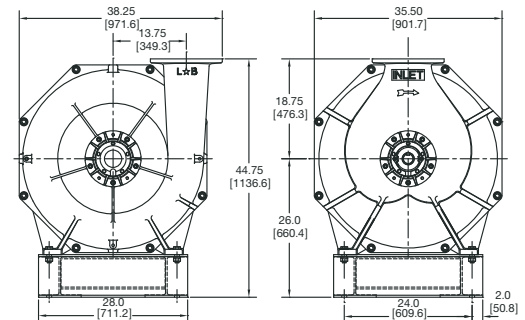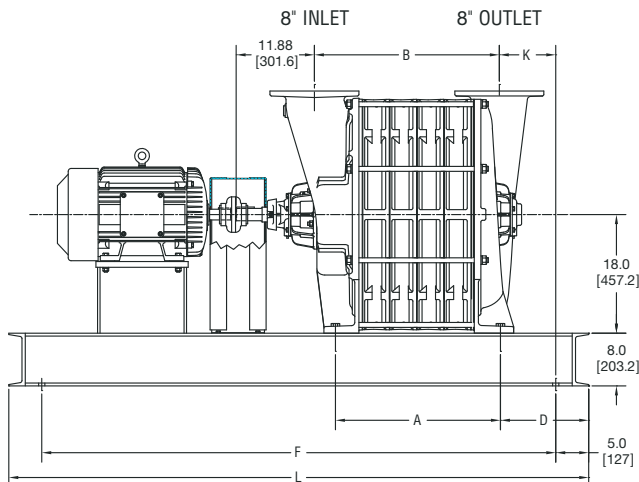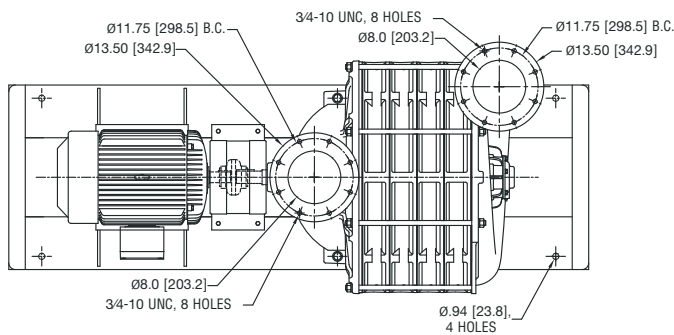

Packaged Dimensions

Model	A*	B*	D*	F†	L†	K*
MC8-1	7.13 (181)	11.56 (294)	10.50 (267)	52 (1321)	62 (1575)	4.56 (116)
MC8-2	11.25 (286)	15.69 (398)	10.50 (267)	58 (1473)	68 (1727)	4.56 (116)
MC8-3	15.38 (391)	19.81 (503)	10.50 (267)	65 (1651)	75 (1905)	4.56 (116)
MC8-4	19.50 (495)	23.94 (608)	14.63 (372)	78 (1981)	88 (2235)	8.69 (221)
MC8-5	23.63 (600)	28.06 (713)	10.50 (267)	78 (1981)	88 (2235)	4.56 (116)
MC8-6	27.75 (705)	32.19 (818)	14.63 (372)	92 (2337)	102 (2591)	8.69 (221)
MC8-7	31.88 (810)	36.31 (922)	10.50 (267)	92 (2337)	102 (2591)	4.56 (116)
MC8-8	36.00 (914)	40.44 (1027)	14.63 (372)	107 (2718)	117 (2972)	8.69 (221)
MC8-9	40.13 (1019)	44.56 (1132)	10.50 (267)	107 (2718)	117 (2972)	4.56 (116)

*Dimensions are shown in inches (and millimeters) are approximate. Do not use for constructions purposes.

†Dimensions vary depending on coupling & motor frame size.

GL-TURBO

info@glturbo.com
www.glturbo.com