

MOVESTAR: An Open-Source Vehicle Fuel and Emission Model based on USEPA MOVES

Ziran Wang, Guoyuan Wu, George Scora

Center for Environmental Research and Technology
University of California, Riverside

zwang050@ucr.edu, {gywu, gscora}@cert.ucr.edu

Abstract: In this paper, we introduce an open-source model “MOVESTAR” to calculate the fuel consumption and pollutant emissions of motor vehicles. This model is developed based on U.S. Environmental Protection Agency’s (EPA) Motor Vehicle Emission Simulator (MOVES), which provides an accurate estimate of vehicle emissions under a wide range of user-defined conditions. Originally, MOVES requires users to specify many parameters through its software, including vehicle types, time periods, geographical areas, pollutants, vehicle operating characteristics, and road types. In this paper, MOVESTAR is developed as a simplified version, which only takes the second-by-second vehicle speed data and vehicle type as inputs. To enable easy integration of this model, its source code is provided in various languages, including MATLAB and C++. A case study is introduced in this paper to illustrate the effectiveness of the model in the development of advanced vehicle technology.

Keywords: Energy consumption, fuel consumption, emission, open source

1 Introduction

Environmental sustainability has been a crucial factor in the development of transportation systems nowadays. Transportation sources emit greenhouse gases (GHGs) that contribute to climate change, and as the total number of motor vehicles around the globe increases over time, transportation sector becomes one of the largest sources of GHG emissions [1]. Specifically in the United States, transportation sector was in charge of 28.2% of 2018 GHGs, where over 90% of the fuel used for transportation is petroleum based, including primarily gasoline and diesel. Therefore, the research studies on reducing fuel consumption and pollutant emissions of our transportation systems (especially motor vehicles) becomes substantially important.

During the past two decades, a significant amount of “eco-driving” studies has been proposed, focusing on the policy [2, 3], methodology [4, 5, 6], as well as field implementation [7, 8, 9]. By adopting advanced vehicular technologies, motor vehicles can be driven in an economic or ecologic style, so that their impacts on the environment can be reduced, making our transportation systems more sustainable.

In order to conduct environment-related research for motor vehicles, a proper model is needed to calculate their fuel consumption and pollutant emissions. To this purpose, the United States Environmental Protection Agency (EPA) developed Motor Vehicle Emission Simulator (MOVES). MOVES is a state-of-the-science emission modeling system that estimates emissions for mobile sources at the national, county, and project level for criteria air pollutants, greenhouse gases, and air toxics [10]. In the modeling process, the user specifies vehicle types, time periods, geographical areas, pollutants, vehicle operating characteristics, and road types to be modeled. The model then performs a series of calculations, which have been carefully developed to accurately reflect vehicle operating processes, such as running, starts, or idling, and provide estimates of total emissions or emission rates per vehicle or unit of activity [11].

Although USEPA encourages using MOVES to estimate on-road GHG emissions or energy consumption regardless of the user’s experience level, it is a sophisticated model that requires the user to read through extensive documentations to get familiar with its graphical user interface and data

inputs [12]. We think MOVES is a well-developed and well-maintained model for experts in the field of fuel or emission. However, for users that are not in this field of study, who just want to get an estimation of the fuel consumption and pollutant emissions of their vehicles (in simulations or field implementations), MOVES might be relatively difficult to implement.

In this paper, we develop an open-source model based on MOVES, which allows users of all levels to easily integrate with their simulation. This “MOVESTAR” model is developed in multiple platforms and programming languages, which enables both real-time calculation and post-processing evaluation. The model is introduced in section 2, and its implementations in different platforms are introduced in section 3. Section 4 conducts a case study of MOVESTAR model to prove its effectiveness in the development of advanced vehicle technology, while section 5 concludes the paper.

2 MOVESTAR Model

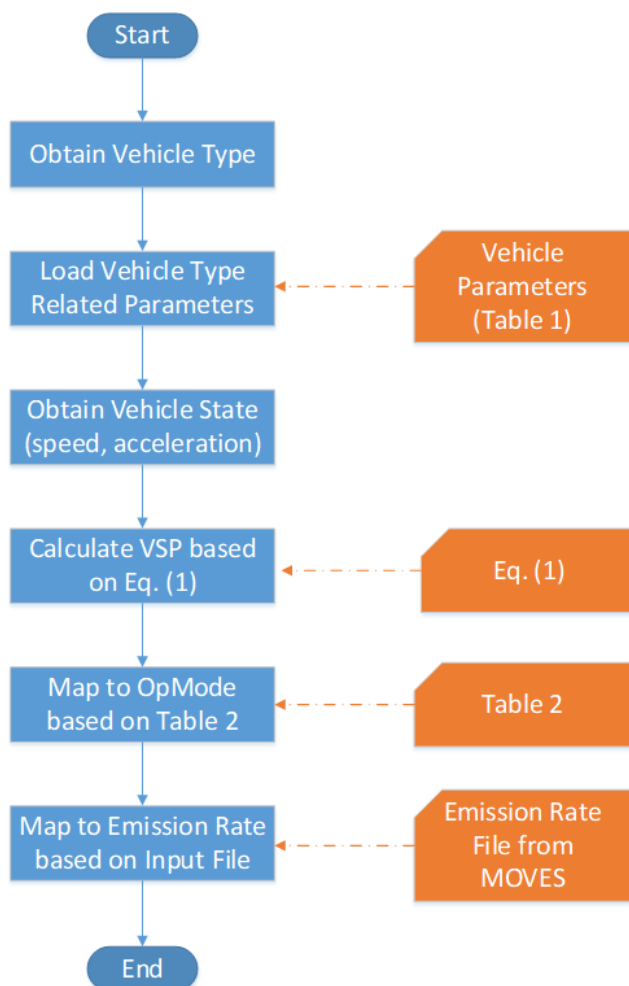


Figure 1: Flowchart of the proposed MOVESTAR model as a simplified version of USEPA MOVES

In this section, MOVESTAR model is introduced step by step, which is summarized by the flowchart shown in figure 1. The very first step is to define the vehicle type of the target vehicle that needs to be considered. Originally, the user of MOVES has to select from 13 “source use types”, which is the terminology defined by MOVES to describe vehicles, including . Additionally, the user also needs to select from six different fuel types, including gasoline, diesel, ethanol E-85, compressed natural gas (CNG), electricity, and liquefied petroleum gas. Both steps are conducted in the graphical user interface (GUI) of MOVES. However, in order to simplify this first process of MOVESTAR, we only

provides limited options of vehicle types, which will be discussed in the implementation details in section 3.

Actually, before this vehicle type selection, MOVES originally has four additional steps in its GUI, including “description”, “scale” (including model type, analysis scale, and calculation type selections), “time spans” (including time aggregation level, years, months, days, and hours selections), and “geographic bounds” (including region, states, counties, and project selections). For the sake of simplicity, these steps are all removed in our proposed MOVESTAR model.

Once the vehicle type is selected, the related parameters of each vehicle type can be loaded for further calculation of the vehicle specific power (VSP). The variables A , B , C , M and f are derived from the following table 1 based on different vehicle types for further calculation.

Table 1: Coefficients for each vehicle source type

Source TypeID	HPMS Vtype ID	SourceType Name	Rolling TermA (kW-s/m)	Rotating TermB (kW-s ² /m ³)	Drag TermC (kW-s ³ /m ³)	Source Mass (metric tons)	FixedMass Factor (metric tons)
11	10	Motorcycle	0.0251	0	0.000315	0.285	0.285
21	20	Passenger Car	0.156461	0.002002	0.000493	1.4788	1.4788
31	30	Passenger Truck	0.22112	0.002838	0.000698	1.86686	1.86686
32	30	Light Commercial Truck	0.235008	0.003039	0.000748	2.05979	2.05979
41	40	Intercity Bus	1.29515	0	0.003715	19.5937	17.1
42	40	Transit Bus	1.0944	0	0.003587	16.556	17.1
43	40	School Bus	0.746718	0	0.002176	9.06989	17.1
51	50	Refuse Truck	1.41705	0	0.003572	20.6845	17.1
52	50	Single Unit Short-haul Truck	0.561933	0	0.001603	7.64159	17.1
53	50	Single Unit Long-haul Truck	0.498699	0	0.001474	6.25047	17.1
54	50	Motor Home	0.617371	0	0.002105	6.73483	17.1
61	60	Combination Short-haul Truck	1.96354	0	0.004031	29.3275	17.1
62	60	Combination Long-haul Truck	2.08126	0	0.004188	31.4038	17.1

In order to calculate the VSP, we need to also obtain the vehicle state. VSP is calculated by normalizing the continuous power output for each vehicle to its own weight. Vehicles on tested on full chassis dynamometers, and emission standards are in units of grams per mile. Therefore, the emission standards are largely independent of the weight (as well as other physical characteristics) of the vehicle and depend on distance [13].

As mentioned earlier, the proposed MOVESTAR model only requires second-by-second vehicle speed data as model input, so the user needs to pre-process the data if its frequency is not 1Hz. Additionally, MOVESTAR model has an additional function that can convert the second-by-second speed data into the second-by-second acceleration data. Therefore, only the speed data is needed to proceed with MOVESTAR model.

Then, the VSP can be calculated as below

$$VSP = \frac{A \cdot v + B \cdot v^2 + C \cdot v^3 + M \cdot (a + g \cdot \sin \theta) \cdot v}{f} \quad (1)$$

where A is the rolling term; B is the rotating term; C is the drag term; M is the source mass (in metric tons); f is the fixed mass factor (in metric tons); g is the acceleration due to gravity (9.8 m/s^2); v is the vehicle speed in m/s ; a is the vehicle acceleration in m/s^2 ; and θ is the (fractional) road grade.

Once the VSP is calculated, MOVESTAR model will be proceeded to the operating mode calculation. Operating mode is directly used to calculate fuel consumption and pollutant emissions in

MOVESTAR model. It is also calculated on a second-by-second basis, and based on the VSP and speed class of the vehicle. The mapping relationship from VSP and speed class to operating mode is illustrated as table 2 [14].

Table 2: Operating modes for running exhaust emissions

	Speed Class (mph)		
	1-25	25-50	50 +
30 +	16	30	40
27-30			
24-27		29	39
21-24		28	38
18-21			
15-18			37
12-15		27	
9-12	15	25	
6-9	14	24	35
3-6	13	23	
0-3	12	22	33
< 0	11	21	

As can be seen from the table, the values in the center of the table stand for the operating modes of a vehicle, which are mapped from VSP and speed class. Specifically, 21 operating modes (all expect for “11” and “21”) represent the cruise/acceleration scenario, where VSP is larger than zero. Two operating modes (“11” and “21”) represent the coasting scenario, where VSP is smaller than zero. Additionally, two scenarios are not shown in this table since they do not require VSP, where the deceleration/braking scenario has a mode of “0”, and the idle scenario has a mode of “1”.

Once the operating mode calculation is completed, MOVESTAR model can be proceeded to the last step. The emission rate associated with the operating modes is defined in USEPA MOVES, where we only extract the values of specific vehicle types as defined earlier. Therefore, different outputs of our MOVESTAR model can be generated as table 3.

Table 3: Outputs of MOVESTAR model

Output	CO	HC	NO _x	PM _{2.5} Elementary Carbon	PM _{2.5} Organic Carbon	Energy	CO ₂	Fuel	Travel Time	Travel Distance
Unit	g	g	g	g	g	KJ	g	g	s	mi

3 Open-Source Implementation in Various Platforms

In this section, we introduce the implementation of MOVESTAR in various platforms as open-source codes. The detailed integration frameworks and guidelines are introduced with respect to Mathworks MATLAB and PTV Vissim. Specifically, MOVESTAR is implemented in MATLAB as post-processing code, and in Vissim as real-time processing code.

3.1 Mathworks MATLAB

MOVESTAR model is implemented in Mathworks MATLAB [15] as “.m” files that can process the speed data generated by vehicles in advance¹. There are five files in the MATLAB version of MOVESTAR model, where their features, inputs and outputs are listed in table 4.

Table 4: MOVESTAR model implementation in Mathworks MATLAB

File Name	Feature	Input(s)	Output(s)
MOVESTAR.m	Main function	Vehicle speed data, vehicle type	Fuel and emission results
Spd2Acc.m	Generate second-by-second acceleration data	Second-by-second speed data	Second-by-second acceleration data
OMCal.m	Calculate operating modes	Speed data, acceleration data, VSP	Operating mode
EmsRateCal.m	Emission rate table	Operating mode, vehicle type	Emission rate
sbsSpd.m	(Optional) Aggregate Simulink sub-second speed data into second-by-second	Sub-second Simulink speed data	Second-by-second speed data

At the current version of MOVESTAR model, there are only two different vehicle types that the user needs to choose from. If the user specify “1” in the main function “MOVESTAR.m”, then the tested vehicle is a light-duty vehicle; Otherwise, if “2” is entered, then the tested vehicle is a light-duty truck.

In terms of the other input of MOVESTAR model besides the vehicle type, the vehicle speed data needs to be processed by the user as the second-by-second format. If the user generates the data by MATLAB Simulink, MOVESTAR model does provide a “spdSpd.m” file that can convert sub-second speed data (in “.mat” format) into second-by-second speed data.

The MATLAB version of MOVESTAR model provides two output files in “.dat” format, where the one with a “ER” suffix means the emission rate results, as shown in table 3. Additionally, MOVESTAR also provides the normalized fuel and emission results based on the travel distance (i.e., emission factor), which are included in the file with a “EF” file.

3.2 Microscopic Traffic Simulator Vissim with C++ API

As a widely used microscopic traffic simulator, PTV Vissim [16] provides C++ API for users to load external emission models. Therefore, MOVESTAR model also provides a C++ project can be integrated in Vissim to calculate fuel and emission in real simulation time².

This C++ project includes an “EmissionModel.cpp” file and an “EmissionModel.h” file. The “.cpp” file is the main script that includes the calculations of VSP, operating mode, and emission rate. The “.h” file is defined by Vissim to allow the user to interact with its API. This “Emission-Model.vcxproj” project can be compiled to a “.dll” file, which can be further loaded in Vissim GUI. The high-level integration framework of MOVESTAR in Vissim is illustrated as figure 2, while the detailed integration steps should be referred to the Vissim manual.

¹MOVESTAR for MATLAB source code:https://github.com/ziranw/MOVESTAR-Fuel-and-Emission-Model/tree/master/MOVESTAR_MATLAB_v1.0

²MOVESTAR for Vissim source code:https://github.com/ziranw/MOVESTAR-Fuel-and-Emission-Model/tree/master/MOVESTAR_VISSIM_v1.0

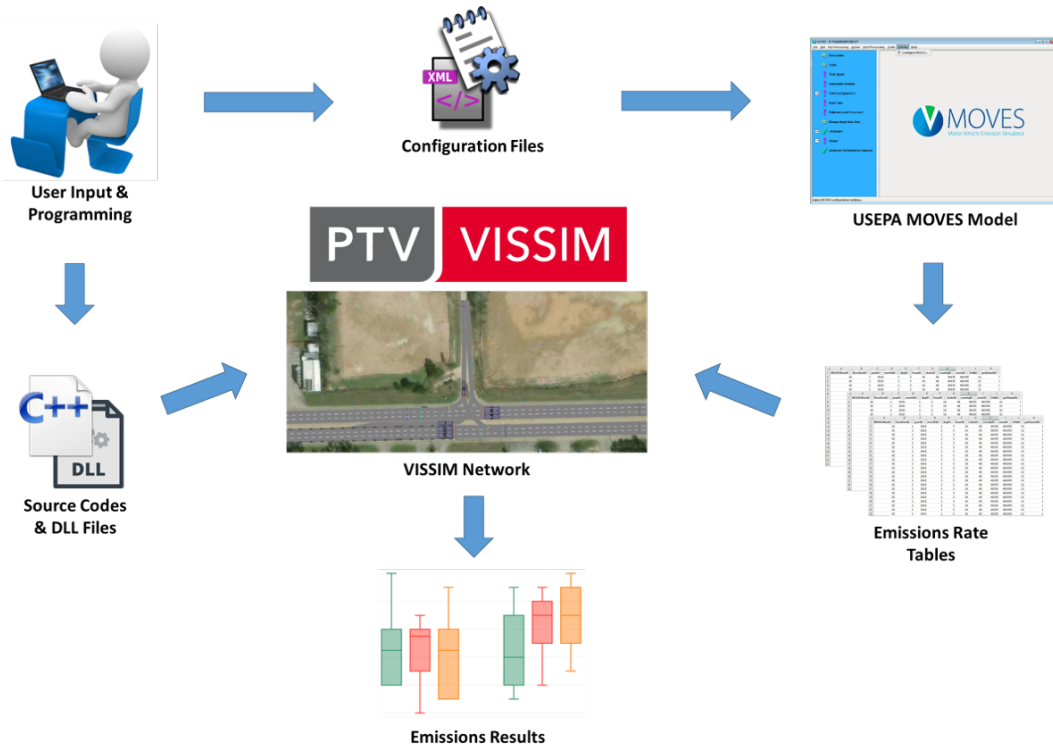


Figure 2: Integration framework of MOVESTAR in PTV Vissim microscopic traffic simulator

4 Case Study and Results Evaluation

In this section, we perform a case study of MOVESTAR model based on a cooperative eco-driving (CED) system with connected and automated vehicles (CAVs) [17]. This case study develops a system to improve the energy efficiency along a corridor with signalized intersections. To study the effect of penetration rate of CAVs, two different types of vehicles are defined in the system as conventional vehicles and CED vehicles. The high-level concept of this CED system can be illustrated as figure 3.

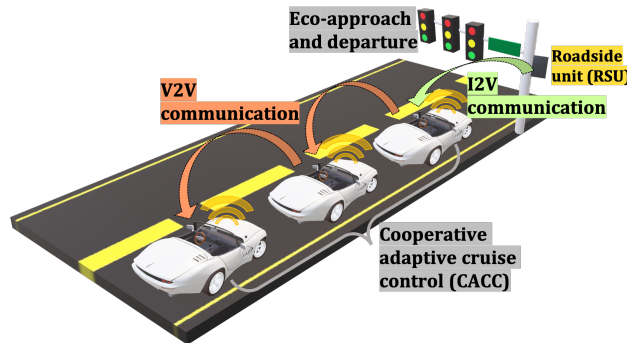


Figure 3: Illustration of the CED system in MOVESTAR case study

A microscopic traffic simulation network based on the real-world map in Riverside, CA, USA is modeled in Vissim as figure 4, with real-world signal phase and timing data and traffic count data. Different vehicle longitudinal control models and their relevant logic (e.g., role transition) are integrated into simulation network to simulate vehicles' behavior, and MOVESTAR energy/emission

model is implemented to analyze the environmental impacts of proposed methodologies. This integration architecture is illustrated in figure 5.

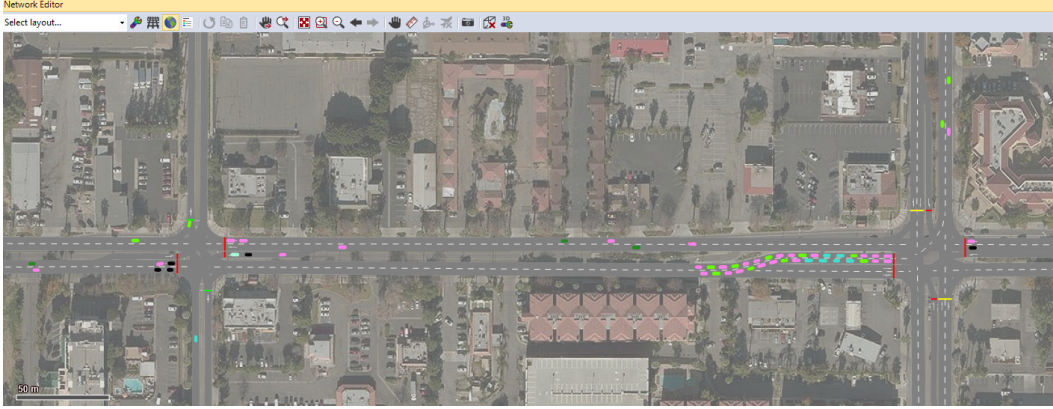


Figure 4: Vissim simulation traffic network in MOVESTAR case study

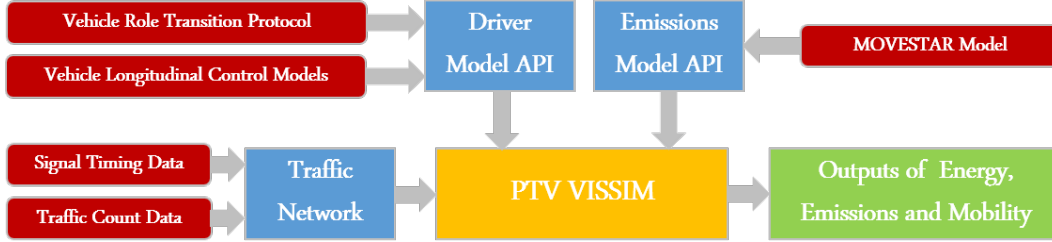


Figure 5: Vissim simulation system architecture in MOVESTAR case study

The simulation is conducted under different penetration rates of CED vehicles and conventional vehicles. The simulation results are compared with two baseline scenarios, where the first scenario contains 100% conventional vehicles, and the second scenario contains 100% eco-approach and departure (EAD) vehicles. EAD vehicles are CAVs that conduct eco-driving maneuvers solely with the traffic signals, which do not cooperate with other CAVs.

As can be seen from the simulation results table 5, the results of energy consumption, NO_x emission, HC emission, CO emission, and CO₂ emission can all be calculated by MOVESTAR model in different scenarios, which are eventually shown as relative values with respect to two baseline scenarios.

Table 5: Simulation results in MOVESTAR case study

Scenario	Vehicle Composition	Energy		NO _x		HC		CO		CO ₂	
(1)	0% CED & 100% Conventional	4930.6 kJ/km		0.066 g/km		0.019 g/km		1.764 g/km		358.0 g/km	
(2)	0% CED & 100% EAD-Only	4758.9 kJ/km		0.061 g/km		0.017 g/km		1.614 g/km		345.5 g/km	
	Reductions ratio with respect to	Sce.(1)	Sce.(2)	Sce.(1)	Sce.(2)	Sce.(1)	Sce.(2)	Sce.(1)	Sce.(2)	Sce.(1)	Sce.(2)
(3)	10% CED & 90% Conventional	1.1%	-2.6%	7.0%	-0.2%	7.8%	-0.7%	7.7%	-1.0%	1.1%	-2.6%
(4)	20% CED & 80% Conventional	2.6%	-1.0%	14.8%	8.2%	16.1%	8.4%	15.5%	7.5%	2.6%	-1.0%
(5)	30% CED & 70% Conventional	4.0%	0.5%	21.3%	15.2%	23.2%	16.2%	22.3%	15.0%	4.0%	0.5%
(6)	40% CED & 60% Conventional	4.8%	1.3%	25.4%	19.6%	27.6%	20.9%	26.5%	19.6%	4.8%	1.3%
(7)	50% CED & 50% Conventional	5.6%	2.1%	30.1%	24.7%	32.5%	26.3%	31.5%	25.0%	5.6%	2.1%
(8)	60% CED & 40% Conventional	6.4%	2.9%	35.4%	30.4%	38.1%	32.4%	37.6%	31.7%	6.4%	2.9%
(9)	70% CED & 30% Conventional	7.7%	4.2%	39.9%	35.3%	42.7%	37.4%	42.4%	37.0%	7.7%	4.2%
(10)	80% CED & 20% Conventional	8.2%	4.8%	43.9%	39.6%	46.8%	41.9%	46.8%	41.7%	8.2%	4.8%
(11)	90% CED & 10% Conventional	9.8%	6.4%	49.0%	45.0%	51.9%	47.4%	52.8%	48.4%	9.8%	6.4%
(12)	100% CED	10.0%	6.6%	52.1%	48.4%	54.8%	50.6%	56.3%	52.1%	10.0%	6.6%

5 Conclusion

In this paper, we introduced an open-source model “MOVESTAR” for users to calculate generate the fuel and emission results in their research studies. USEPA MOVES model originally requires users to specify many parameters through its software GUI. MOVESTAR model, developed as a simplified version of MOVES, only takes vehicle speed and vehicle type as inputs of the model, which provides a much easier access for users of all levels to calculate fuel and emission results. The open-source implementations of MOVESTAR model were demonstrated in MATLAB and Vissim C++ API, and a case study of the CAV technology was conducted to evaluate the effectiveness of the model.

References

- [1] United States Environmental Protection Agency. Sources of greenhouse gas emissions, Accessed: 2020-08-06. URL <https://www.epa.gov/ghgemissions/sources-greenhouse-gas-emissions>.
- [2] J. N. Barkenbus. Eco-driving: An overlooked climate change initiative. *Energy policy*, 38(2): 762–769, 2010.
- [3] M. Sivak and B. Schoettle. Eco-driving: Strategic, tactical, and operational decisions of the driver that influence vehicle fuel economy. *Transport Policy*, 22:96–99, 2012.
- [4] M. Barth and K. Boriboonsomsin. Energy and emissions impacts of a freeway-based dynamic eco-driving system. *Transportation Research Part D: Transport and Environment*, 14(6):400 – 410, 2009. ISSN 1361-9209. doi:<https://doi.org/10.1016/j.trd.2009.01.004>. URL <http://www.sciencedirect.com/science/article/pii/S1361920909000121>. The interaction of environmental and traffic safety policies.
- [5] M. Barth, S. Mandava, K. Boriboonsomsin, and H. Xia. Dynamic eco-driving for arterial corridors. In *2011 IEEE Forum on Integrated and Sustainable Transportation Systems*, pages 182–188, June 2011. doi:[10.1109/FISTS.2011.5973594](https://doi.org/10.1109/FISTS.2011.5973594).
- [6] K. Katsaros, R. Kernchen, M. Dianati, and D. Rieck. Performance study of a green light optimized speed advisory (glosa) application using an integrated cooperative its simulation platform. In *2011 7th International Wireless Communications and Mobile Computing Conference*, pages 918–923, July 2011. doi:[10.1109/IWCMC.2011.5982524](https://doi.org/10.1109/IWCMC.2011.5982524).
- [7] O. D. Altan, G. Wu, M. J. Barth, K. Boriboonsomsin, and J. A. Stark. Glidepath: Eco-friendly automated approach and departure at signalized intersections. *IEEE Transactions on Intelligent Vehicles*, 2(4):266–277, Dec 2017. ISSN 2379-8904. doi:[10.1109/TIV.2017.2767289](https://doi.org/10.1109/TIV.2017.2767289).
- [8] P. Hao, G. Wu, K. Boriboonsomsin, and M. J. Barth. Eco-approach and departure (ead) application for actuated signals in real-world traffic. *IEEE Transactions on Intelligent Transportation Systems*, 20(1):30–40, Jan 2019. ISSN 1524-9050. doi:[10.1109/TITS.2018.2794509](https://doi.org/10.1109/TITS.2018.2794509).
- [9] Z. Wang, Y. Hsu, A. Vu, F. Caballero, P. Hao, G. Wu, K. Boriboonsomsin, M. J. Barth, A. Kailas, P. Amar, E. Garmon, and S. Tanugula. Early findings from field trials of heavy-duty truck connected eco-driving system. In *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*, pages 3037–3042, 2019.
- [10] United States Environmental Protection Agency. MOVES and other mobile source emissions models, Accessed: 2020-08-04. URL <https://www.epa.gov/moves>.
- [11] United States Environmental Protection Agency. MOVES2014a user interface reference manual, Accessed: 2020-08-06. URL <https://nepis.epa.gov/Exe/ZyPDF.cgi?Dockey=P100Q3C1.pdf>.
- [12] United States Environmental Protection Agency. Using MOVES for estimating state and local inventories of onroad greenhouse gas emissions and energy consumption, Accessed: 2020-08-06. URL <http://www.ourenergypolicy.org/wp-content/uploads/2016/09/P1000W0B.pdf>.

- [13] United States Environmental Protection Agency. Exhaust emission rates for heavy-duty onroad vehicles in moves201x, Accessed: 2020-08-09. URL https://cfpub.epa.gov/si/si_public_record_report.cfm?Lab=OTAQ&dirEntryId=328830.
- [14] J. Warila, E. Nam, L. Landman, and A. Kahan. Light-duty exhaust emission rates in moves2010, Accessed: 2020-08-10. URL <http://citeseerx.ist.psu.edu/viewdoc/download;jsessionid=AAE023D542E3688088AD383D57B1BE19?doi=10.1.1.360.5490&rep=rep1&type=pdf>.
- [15] MathWorks. Matlab, Accessed: 2020-08-10. URL https://www.mathworks.com/products/matlab.html?s_tid=hp_products_matlab.
- [16] PTV GROUP. PTV Vissim is the world's most advanced and flexible traffic simulation software, Accessed: 2020-08-10. URL <https://www.ptvgroup.com/en/solutions/products/ptv-vissim/>.
- [17] Z. Wang, G. Wu, and M. J. Barth. Cooperative eco-driving at signalized intersections in a partially connected and automated vehicle environment. *IEEE Transactions on Intelligent Transportation Systems*, 21(5):2029–2038, 2020.