

JCB

COMPACT AND CONVENIENT

JCB SKID STEER LOADER



Unique
Monoboom Design



Ease of
Maintenance and
Serviceability



Operators'
Convenient Side
Door Entry



Enhanced
270 Degree
Visibility

1 YEAR
STANDARD
WARRANTY*
—OR—
2000
HOURS



SSL 135: Unladen Weight: 2770 kg | Rated Operating Capacity: 612 kg
SSL 155: Unladen Weight: 2900 kg | Rated Operating Capacity: 703 kg

*T & C Apply.

SPECIFICATION: JCB SKID STEER LOADER

ENGINE

				135	155
Make				Perkins 404D-22	Perkins 404D-22T
Power (As per ISO 14396)	hp (kW)	@2800 RPM		50 (37.3)	60 (44.7)
	hp (kW)	@2600 RPM		46 (34.0)	57 (42.3)
Gross torque (As per SAE J1995)	lb/ft (Nm)	@1800 RPM		105 (143)	139 (192)
Aspiration				Naturally aspirated	Turbo charged
Fuel				Diesel	

HYDRAULICS

In addition to the main hydrostatic drive pumps, there is a dedicated loader and attachments supply pump (Auxiliary hydraulics circuit standard on all the base models).

- Low lever efforts give excellent and easy control of transmission loader and attachments.
- Auxiliary hydraulics are actuated via the right hand controller giving progressive control of oil flow for precise attachment control.
- Loader arm hydraulic lines, under protective steel guard on power boom.
- Canister style, full flow, hydraulic oil filter.
- Separate hydraulic pump for transmission charge and hydraulic fan.

Pump flow	70 lpm @ 2600 rpm engine speed
Main relief pressure	3335 psi (230 Bar)
Controls	JCB servo controls - 3 way joystick
High flow option (Available in SSL 155)	100 lpm @ 2600 rpm in auxiliary circuit

TRANSMISSION

A full servo controlled hydrostatic transmission giving zero to maximum speed, both forward and reverse at full power. Independent transmission systems for both left and right side, controlled through servo controls for precise and easy operation. Transmission power systems maintain full engine power availability, maximising loader and attachment control. Creep speed is standard on 155 machine for precise control when it's operating with attachments.

Model	135	155
Max speed (km/hr)	12.0	

CAPACITY

Hydraulic system (Including tank)	69 L
Fuel tank	98 L
Engine coolant	15 L
Engine oil	10 L
LH chain case	19 L
RH chain case	19 L

TYRE


Tyre options	10 X 16.5 - 10 PR Heavy-duty tyre (Standard)
	31 X 10 Solid tyre (Optional)

LIFT PATH

Radial	Advantages: More reach at mid-range height Half the number of pins & rams
--------	---

OPERATOR ENVIRONMENT

Roll over protective structure • Falling over protective structure • Full audio and visual warning systems • Mobile charger • Visibility window on CAB roof • Single arm design • Best all around visibility • Fully adjustable seat • Seat belt fitted as standard • All in a bigger, more comfortable cab with a superior control layout • Air conditioner (Optional for SSL 155)

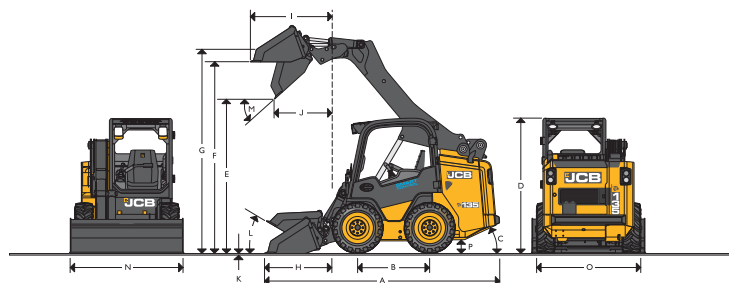

STATIC DIMENSIONS

Model			135	155
A	Overall length	m (ft-in)	3.49 (11-5)	3.49 (11-5)
B	Wheel base	m (ft-in)	1.07 (3-6)	1.07 (3-6)
C	Angle of departure		25°	25°
D	Overall height	m (ft-in)	1.98 (6-6)	1.98 (6-6)
E	Dump height	m (ft-in)	2.26 (7-5)	2.26 (7-5)
F	Loadover height	m (ft-in)	2.84 (9-4)	2.84 (9-4)
G	Height to hinge pin fully raised	m (ft-in)	3.00 (9-10)	3.00 (9-10)
H	Reach at the ground level (cutting edge)	m (ft-in)	1.00 (3-3)	1.00 (3-3)
I	Max reach at full height	m (ft-in)	0.91 (3-0)	0.91 (3-0)
J	Reach at full height-fully dumped	m (ft-in)	0.56 (1-10)	0.56 (1-10)
K	Dig depth (toe plate horizontal clearance)	mm (in)	-10 (-0.4)	-10 (-0.4)
L	Rollback at ground		30°	30°
M	Dump angle		42°	42°
N	Shovel width-Standard	m(ft-in)	1.52 (5-0)	1.68 (5-5)
O	Width over tyres-Standard	m (ft-in)	1.52 (5-0)	1.60 (5-3)
P	Ground clearance	mm (in)	210 (8.3)	210 (8.3)
	Lift path	m (ft-in)	Radial	Radial
	Machine unladen weight	Kg	2770	2900
	Rated operating capacity (ROC)	SAE kg	612	703
	Bucket capacity - Standard	cu.m	0.36	0.40
	Maximum tipping load	SAE kg	1224	1406

Turning radius

- Bucket corner radius	m (ft-in)	2.09 (6-10)	2.09 (6-10)
- Quick hitch radius	m (ft-in)	1.10 (3-7)	1.10 (3-7)
- Rear chassis radius	m (ft-in)	1.65 (5-5)	1.65 (5-5)

ELECTRICALS


Type	12V, negative ground system
Battery	90 AH, 1000 cold cranking amp (CCA) Standard Battery Isolator
Alternator	65 amp (135), 85 amp (155)
Starter motor	12V
Instrument panel	Cab mounted instrument panel with ignition, fuel gauge, hour meter
Instrument panel with warning lights cluster	Engine coolant temperature, engine oil pressure, hydraulic oil temperature, battery charging
Fuse & Relay	Cab mounted fuse and relay box designated to keep dirt and water out
External electrical connections	Dust and water proof IP 67 & 69 certified

SERVICEABILITY

Machine entry/exit cab side door • Tilting cab • Rear maintenance door
• LiveLink (Optional)

* All dimensions, weights and timings are variable within 1.5%, JCB reserves the right to change specifications without any prior notice.

EXPERIENCE THE BEST SERVICE



Extended warranty



Best-in-class service



Easy parts availability

To know more, visit your nearest dealership

