
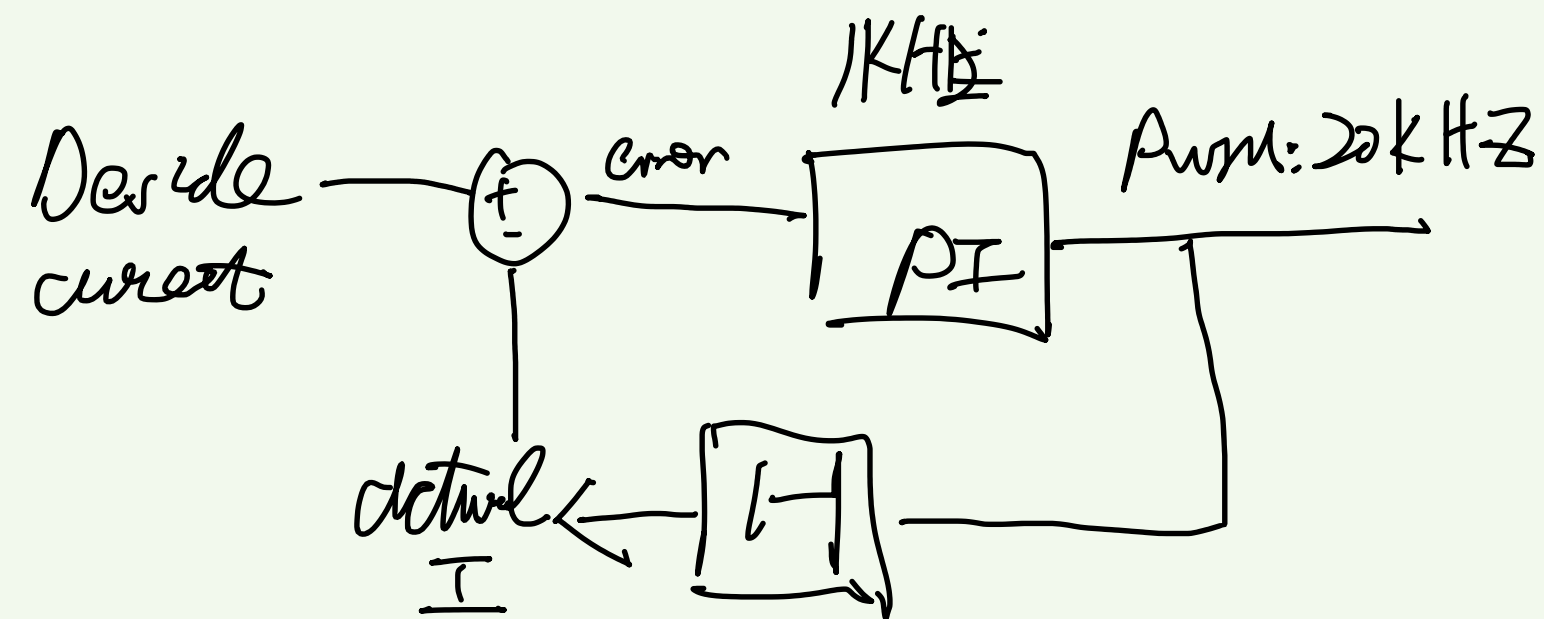


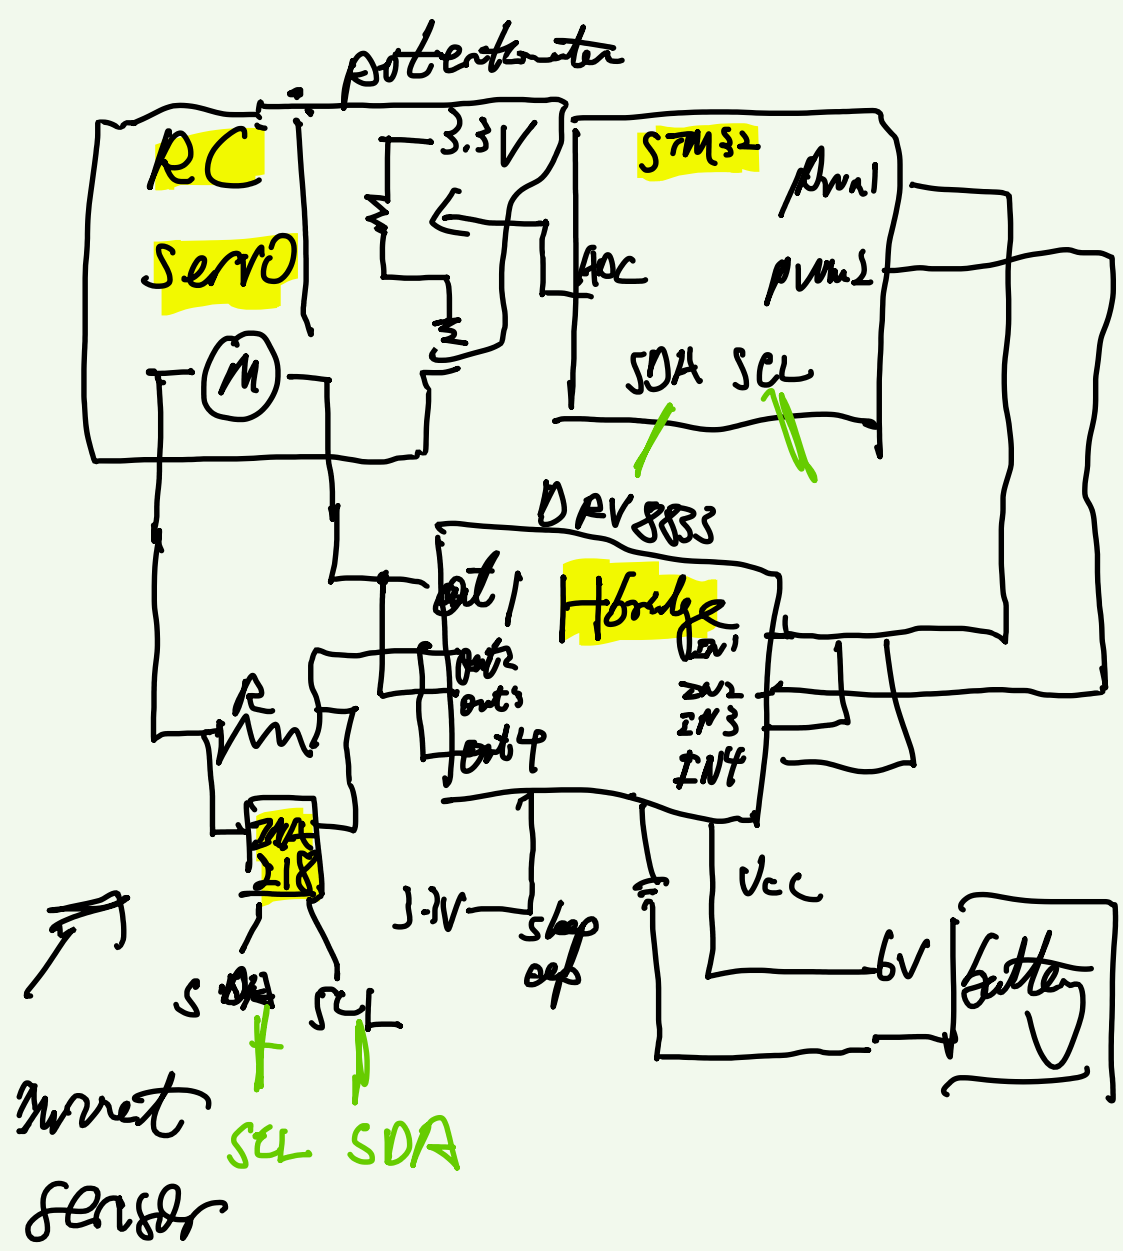

Noise Isolation.

STM: High current stuff

Pico: Low power stuff.

Wiring

Pot STM32
 + → CN7-12 (3.3V)
 - → CN7-8 (GND)
 wiper → CN7-28 (PA0)

DRV8833 Motor driver STM32
 IN1 → CN9-D7 (PA8)
 IN2 → CN8-A1 (PA1)
 IN3 → IN1
 IN4 → IN2

Sleep → 3.3V

GND → GND

VCC → battery 6V

Motor

lead 1 → DRV8833 out1

lead 2 → INA219 V_{int}+

DRV8833 in out 4 → INA219 V_{in}-

INA219 Current Sensor STM32

SDA → CN10-13 (PA6) ^(pin 7)

SCL → CN10-15 (PA7) ^(pin 8)

VCC → 3.3V

GND → GND