

BAG FILTERS


BAG FILTERS

Coarse Dust Bag Filter Metal Frame



Description

Used as first stage filter or as prefilters to higher efficiency filters in ventilation units with durable frame which can be produced variety of bags and bag depth according to field of applications. Synthetic filter media and metal frame can resist difficult operation conditions and perform medium filtering efficiency.

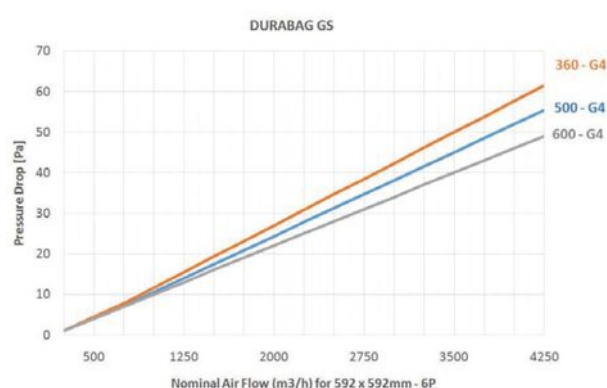

Special Features

Filter Type - Coarse Bag Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel

Filter Class - G4 / Coarse %65

Final Pressure Drop - 250 Pa

Max. Temperature - 80 °C

Applications

→ Primary filter air conditioning and ventilation systems

Product Code

YAFI-VF

Advantages

- Robust construction for reliable operation
- Optimized media surface by conical pocket shape
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Customised sizes can be produced.
- Available with plastic frame

Filter Type	TF	Bag Filter
Frame	G	G: Galvanized P: Plastic
Media	S	Syntetic Fiber
Frame Thickness	H	L:20 mm H:25mm
Dimension	-	WxHxD
Pocket No	6	6 pockets
Efficiency	G4	EN 779
		Coarse 65 % EN 16890

Product Code	Dimensions (WxHxD)	Bags	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
G3- ISO Coarse 50 %							
YAFI-VF-287/592/360-3-G3	287 X 592 X 360	3	G3	Coarse 50 %	1,30	1700/40	1,20
YAFI-VF-490/592/360-5-G3	490 x 592 x 360	5	G3	Coarse 50 %	2,20	2800/40	1,85
YAFI-VF-592/592/360-6-G3	592 x 592 x 360	6	G3	Coarse 50 %	2,70	3400/40	2,00
YAFI-VF-287/592/500-3-G3	287 X 592 X 500	3	G3	Coarse 50 %	1,90	1700/35	1,35
YAFI-VF-490/592/500-5-G3	490 x 592 x 500	5	G3	Coarse 50 %	3,10	2800/35	2,00
YAFI-VF-592/592/500-6-G3	592 x 592 x 500	6	G3	Coarse 50 %	3,70	3400/35	2,25
YAFI-VF-287/592/600-3-G3	287 X 592 X 600	3	G3	Coarse 50 %	2,20	1700/30	1,50
YAFI-VF-490/592/600-5-G3	490 x 592 x 600	5	G3	Coarse 50 %	3,70	2800/30	2,20
YAFI-VF-592/592/600-6-G3	592 x 592 x 600	6	G3	Coarse 50 %	4,50	3400/30	2,50

G4- ISO Coarse 65 %							
YAFI-VF-287/592/360-3-G4	287 X 592 X 360	3	G4	Coarse 65 %	1,30	1700/50	1,20
YAFI-VF-490/592/360-5-G4	490 x 592 x 360	5	G4	Coarse 65 %	2,20	2800/50	1,85
YAFI-VF-592/592/360-6-G4	592 x 592 x 360	6	G4	Coarse 65 %	2,70	3400/50	2,00
YAFI-VF-287/592/500-3-G4	287 X 592 X 500	3	G4	Coarse 65 %	1,90	1700/45	1,35
YAFI-VF-490/592/500-5-G4	490 x 592 x 500	5	G4	Coarse 65 %	3,10	2800/45	2,00
YAFI-VF-592/592/500-6-G4	592 x 592 x 500	6	G4	Coarse 65 %	3,70	3400/45	2,25
YAFI-VF-287/592/600-3-G4	287 X 592 X 600	3	G4	Coarse 65 %	2,20	1700/40	1,50
YAFI-VF-490/592/600-5-G4	490 x 592 x 600	5	G4	Coarse 65 %	3,70	2800/40	2,20
YAFI-VF-592/592/600-6-G4	592 x 592 x 600	6	G4	Coarse 65 %	4,50	3400/40	2,50

M5- ISO Coarse 80 %							
YAFI-VF-287/592/360-3-M5	287 X 592 X 360	3	M5	Coarse 80 %	1,30	1700/ 55	1,20
YAFI-VF-490/592/360-5-M5	490 x 592 x 360	5	M5	Coarse 80 %	2,20	2800/55	1,85
YAFI-VF-592/592/360-6-M5	592 x 592 x 360	6	M5	Coarse 80 %	2,70	3400/55	2,00
YAFI-VF-287/592/500-3-M5	287 X 592 X 500	3	M5	Coarse 80 %	1,90	1700/50	1,35
YAFI-VF-490/592/500-5-M5	490 x 592 x 500	5	M5	Coarse 80 %	3,10	2800/50	2,00
YAFI-VF-592/592/500-6-M5	592 x 592 x 500	6	M5	Coarse 80 %	3,70	3400/50	2,25
YAFI-VF-287/592/600-3-M5	287 X 592 X 600	3	M5	Coarse 80 %	2,20	1700/45	1,50
YAFI-VF-490/592/600-5-M5	490 x 592 x 600	5	M5	Coarse 80 %	3,70	2800/45	2,20
YAFI-VF-592/592/600-6-M5	592 x 592 x 600	6	M5	Coarse 80 %	4,50	3400/45	2,50


BAG FILTERS

Fine Dust Bag Filter Metal Frame



Description

Made of three layer high quality synthetic media as fine and high efficiency filters after first stage filtration. Thermo-welded bags guarantee a perfect seal and durability. The filter media is constructed of a series of sealed bags for gaining high air flow at low pressure drop. Frame can be produced by plastic or galvanized metal.

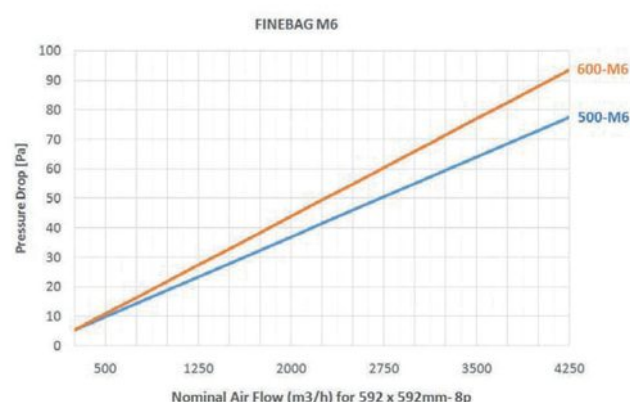

Special Features

Filter Type - High Efficiency Bag Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel

Filter Class - M6 / ePM10 65%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications.

Advantages

- Robust construction for reliable operation
- Optimized media surface by conical pocket shape
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Frame thickness can be 20mm or 25mm
- Available with plastic frame

Product Code

YAFI VF

Filter Type	TF	Bag Filter
Frame	G	G: Galvanized P: Plastic
Media	S	Synthetic Fiber
Frame Thickness	H	L:20mm H:25mm
Dimension	-	WxHxD
Pocket No	8	8 pockets
Efficiency	M6	EN 779
	ePM10 65%	EN 16890

Product Code	Dimensions (WxHxD)	Bags	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 - 500							
YAFI VF-287/287/500-3-M6	287 x 287 x 500	3	M6	ePM10 65%	1,1	560 / 60 Pa	0,65
YAFI VF-287/287/500-4-M6	287 x 287 x 500	4	M6	ePM10 65%	1,4	560 / 50 Pa	0,70
YAFI VF-287/592/500-3-M6	287 x 592 x 500	3	M6	ePM10 65%	2,0	1125 / 60 Pa	1,10
YAFI VF-287/592/500-4-M6	287 x 592 x 500	4	M6	ePM10 65%	2,7	1125 / 50 Pa	1,20
YAFI VF-490/592/500-5-M6	490 x 592 x 500	5	M6	ePM10 65%	3,4	1870 / 60 Pa	1,85
YAFI VF-490/592/500-6-M6	490 x 592 x 500	6	M6	ePM10 65%	4,1	1870 / 50 Pa	2,00
YAFI VF-592/592/500-6-M6	592 x 592 x 500	6	M6	ePM10 65%	4,1	2250 / 60 Pa	2,00
YAFI VF-592/592/500-8-M6	592 x 592 x 500	8	M6	ePM10 65%	5,4	2250 / 50 Pa	2,20

M6 - 600							
YAFI VF-287/287/600-3-M6	287 x 287 x 600	3	M6	ePM10 65%	1,3	640 / 70 Pa	0,70
YAFI VF-287/287/600-4-M6	287 x 287 x 600	4	M6	ePM10 65%	1,7	640 / 60 Pa	0,75
YAFI VF-287/592/600-3-M6	287 x 592 x 600	3	M6	ePM10 65%	2,4	1275 / 70 Pa	1,20
YAFI VF-287/592/600-4-M6	287 x 592 x 600	4	M6	ePM10 65%	3,3	1275 / 60 Pa	1,30
YAFI VF-490/592/600-5-M6	490 x 592 x 600	5	M6	ePM10 65%	4,1	2050 / 70 Pa	2,00
YAFI VF-490/592/600-6-M6	490 x 592 x 600	6	M6	ePM10 65%	4,9	2050 / 60 Pa	2,20
YAFI VF-592/592/600-6-M6	592 x 592 x 600	6	M6	ePM10 65%	4,9	2550 / 70 Pa	2,20
YAFI VF-592/592/600-8-M6	592 x 592 x 600	8	M6	ePM10 65%	6,5	2550 / 60 Pa	2,40


BAG FILTERS

Fine Dust Bag Filter Metal Frame



Description

Made of three layer high quality synthetic media as fine and high efficiency filters after first stage filtration. Thermo-welded bags guarantee a perfect seal and durability. The filter media is constructed of a series of sealed bags for gaining high air flow at low pressure drop. Frame can be produced by plastic or galvanized metal.

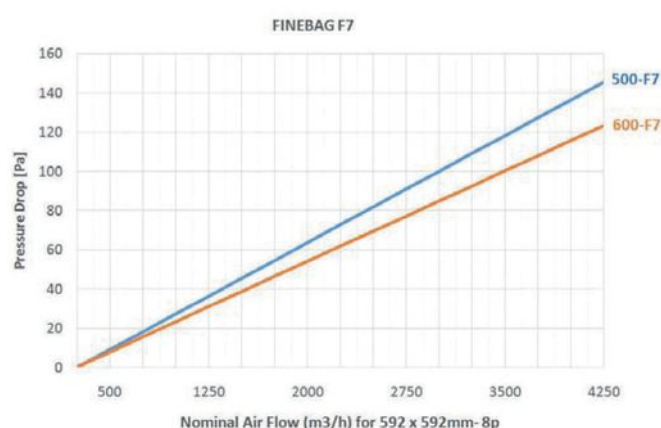

Special Features

Filter Type - High Efficiency Bag Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel

Filter Class - F7 / ePM_{2.5} 65%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications.

Advantages

- Robust construction for reliable operation
- Optimized media surface by conical pocket shape
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Frame thickness can be 20mm or 25mm
- Available with plastic frame

Product Code

YAFI-VF

Filter Type	TF	Bag Filter
Frame	G	Gs Galvanized Ps Plastic
Media	S	Syntetic Fiber Frame
Thickness	H	L:20 mm H:25mm
Dimension	-	WxHxD
Pocket No	8	8 pockets
Efficiency	F7	EN 779:2012 ePM _{2.5} 65% ISO 16890

Product Code	Dimensions (WxHxD)	Bags	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
F7 - 500							
YAFI-VF-287/287/500-3-F7	287 x 287 x 500	3	F7	ePM2,5 65%	1,1	560 / 85 Pa	0,65
YAFI-VF-287/287/500-4-F7	287 x 287 x 500	4	F7	ePM2,5 65%	1,4	560 / 75 Pa	0,70
YAFI-VF-287/592/500-3-F7	287 x 592 x 500	3	F7	ePM2,5 65%	2,0	1125 / 85 Pa	1,10
YAFI-VF-287/592/500-4-F7	287 x 592 x 500	4	F7	ePM2,5 65%	2,7	1125 / 75 Pa	1,20
YAFI-VF-490/592/500-5-F7	490 x 592 x 500	5	F7	ePM2,5 65%	3,4	1870 / 85 Pa	1,85
YAFI-VF-490/592/500-6-F7	490 x 592 x 500	6	F7	ePM2,5 65%	4,1	1870 / 75 Pa	2,00
YAFI-VF-592/592/500-6-F7	592 x 592 x 500	6	F7	ePM2,5 65%	4,1	2250 / 85 Pa	2,00
YAFI-VF-592/592/500-8-F7	592 x 592 x 500	8	F7	ePM2,5 65%	5,4	2250 / 75 Pa	2,20

F7 - 600							
YAFI-VF-287/287/600-3-F7	287 x 287 x 600	3	F7	ePM2,5 65%	1,3	640 / 95 Pa	0,70
YAFI-VF-287/287/600-4-F7	287 x 287 x 600	4	F7	ePM2,5 65%	1,7	640 / 85 Pa	0,75
YAFI-VF-287/592/600-3-F7	287 x 592 x 600	3	F7	ePM2,5 65%	2,4	1275 / 95 Pa	1,20
YAFI-VF-287/592/600-4-F7	287 x 592 x 600	4	F7	ePM2,5 65%	3,3	1275 / 85 Pa	1,30
YAFI-VF-490/592/600-5-F7	490 x 592 x 600	5	F7	ePM2,5 65%	4,1	2050 / 95 Pa	2,00
YAFI-VF-490/592/600-6-F7	490 x 592 x 600	6	F7	ePM2,5 65%	4,9	2050 / 85 Pa	2,20
YAFI-VF-592/592/600-6-F7	592 x 592 x 600	6	F7	ePM2,5 65%	4,9	2550 / 95 Pa	2,20
YAFI-VF-592/592/600-8-F7	592 x 592 x 600	8	F7	ePM2,5 65%	6,5	2550 / 85 Pa	2,40


BAG FILTERS

Fine Dust Bag Filter Metal Frame



Description

Made of three layer high quality synthetic media as fine and high efficiency filters after first stage filtration. Thermo-welded bags guarantee a perfect seal and durability. The filter media is constructed of a series of sealed bags for gaining high air flow at low pressure drop. Frame can be produced by plastic or galvanized metal.

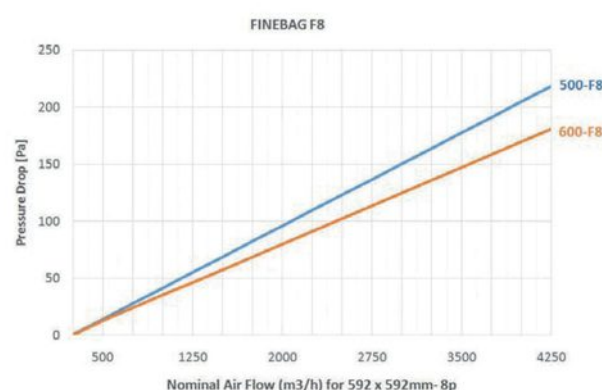

Special Features

Filter Type - High Efficiency Bag Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel

Filter Class - F8 / ePM1 70%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications.

Advantages

- Robust construction for reliable operation
- Optimized media surface by conical pocket shape
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Frame thickness can be 20mm or 25mm
- Available with plastic frame

Product Code

YAFI VF

Filter Type	TF	Bag Filter
Frame	G	G: Galvanized P: Plastic
Media	S	Synthetic Fiber
Frame Thickness	H	L:20mm H:25mm
Dimension	-	WxHxD
Pocket No	8	8 pockets
Efficiency	F8	EN 779
	ePM1 70%	ISO 16890

Product Code	Dimensions (WxHxD)	Bags	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
F8 - 500							
YAFI VF-287/287/500-3-F8	287 x 287 x 500	3	F8	ePM1 70%	1,1	560 / 125 Pa	0,65
YAFI VF-287/287/500-4-F8	287 x 287 x 500	4	F8	ePM1 70%	1,4	560 / 115 Pa	0,70
YAFI VF-287/592/500-3-F8	287 x 592 x 500	3	F8	ePM1 70%	2,0	1125 / 125 Pa	1,10
YAFI VF-287/592/500-4-F8	287 x 592 x 500	4	F8	ePM1 70%	2,7	1125 / 115 Pa	1,20
YAFI VF-490/592/500-5-F8	490 x 592 x 500	5	F8	ePM1 70%	3,4	1870 / 125 Pa	1,85
YAFI VF-490/592/500-6-F8	490 x 592 x 500	6	F8	ePM1 70%	4,1	1870 / 115 Pa	2,00
YAFI VF-592/592/500-6-F8	592 x 592 x 500	6	F8	ePM1 70%	4,1	2250 / 125 Pa	2,00
YAFI VF-592/592/500-8-F8	592 x 592 x 500	8	F8	ePM1 70%	5,4	2250 / 115 Pa	2,20

F8 - 600							
YAFI VF-287/287/600-3-F8	287 x 287 x 600	3	F8	ePM1 70%	1,3	640 / 140 Pa	0,70
YAFI VF-287/287/600-4-F8	287 x 287 x 600	4	F8	ePM1 70%	1,7	640 / 125 Pa	0,75
YAFI VF-287/592/600-3-F8	287 x 592 x 600	3	F8	ePM1 70%	2,4	1275 / 140 Pa	1,20
YAFI VF-287/592/600-4-F8	287 x 592 x 600	4	F8	ePM1 70%	3,3	1275 / 125 Pa	1,30
YAFI VF-490/592/600-5-F8	490 x 592 x 600	5	F8	ePM1 70%	4,1	2050 / 140 Pa	2,00
YAFI VF-490/592/600-6-F8	490 x 592 x 600	6	F8	ePM1 70%	4,9	2050 / 125 Pa	2,20
YAFI VF-592/592/600-6-F8	592 x 592 x 600	6	F8	ePM1 70%	4,9	2550 / 140 Pa	2,20
YAFI VF-592/592/600-8-F8	592 x 592 x 600	8	F8	ePM1 70%	6,5	2550 / 125 Pa	2,40


BAG FILTERS

Fine Dust Bag Filter Glass Fiber Filter Media



Description

Made of high quality glass fiber media as fine and high efficiency filters after first stage filtration. Overlooked-welded bags guarantee a perfect seal and durability. The filter media is constructed of a series of sealed bags for gaining high air flow at low pressure drop. Frame is produced by plastic or galvanized frame.

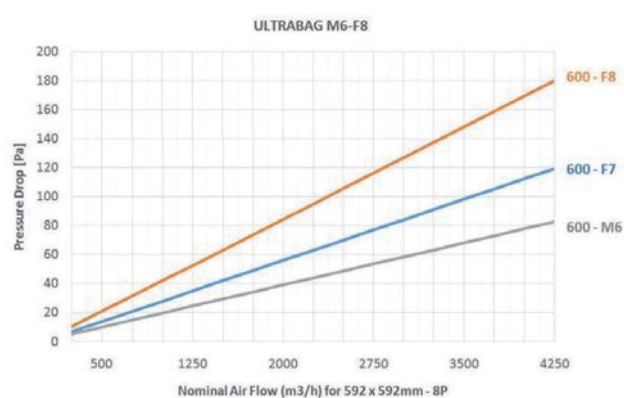

Special Features

Filter Type - High Efficiency Bag Filter

Filter Media - Glass Fiber

Frame - Galvanized Steel

Filter Class - M6 to F8 / ePM10 60%- ePM1 65%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications.

Advantages

- Robust construction for reliable operation
- For the best air distribution new developed pocket design
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Frame thickness can be 20mm or 25mm
- Available with plastic frame

Product Code

YAFI VF-GF

Filter Type	TF	Bag Filter
Frame	G	G: Galvanized P: Plastic
Media	G	Glass Fiber
Frame Thickness	H	L:20mm H:25mm
Dimension	-	WxHxD
Pocket No	8	8 pockets
Efficiency	M6-F9	EN 779
	ePM10 60%- ePM1 80%	EN 16890

Product Code	Dimensions (WxHxD)	Bags	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6							
YAFI VF-GF-592/287/500-3-M6	592 X 287 X 500	4	M6	ePM10 65%	2,4	1700/75	1,20
YAFI VF-GF-592/492/500-4-M6	592 x 492 x 500	6	M6	ePM10 65%	3,6	2800/75	2,10
YAFI VF-GF-592/592/500-8-M6	592 x 592 x 500	8	M6	ePM10 65%	4,8	3400/75	2,20
YAFI VF-GF-592/287/600-3-M6	592 X 287 X 600	4	M6	ePM10 65%	2,8	1700/65	1,30
YAFI VF-GF-592/492/600-4-M6	592 x 492 x 600	6	M6	ePM10 65%	4,3	2800/65	2,20
YAFI VF-GF-592/592/600-8-M6	592 x 592 x 600	8	M6	ePM10 65%	5,6	3400/ 65	2,30

F7							
YAFI VF-GF-592/287/500-3-F7	592 X 287 X 500	4	F7	ePM1 55%	2,4	1700/105	1,20
YAFI VF-GF-592/492/500-4-F7	592 x 492 x 500	6	F7	ePM1 55%	3,6	2800/105	2,10
YAFI VF-GF-592/592/500-8-F7	592 x 592 x 500	8	F7	ePM1 55%	4,8	3400/105	2,20
YAFI VF-GF-592/287/600-3-F7	592 X 287 X 600	4	F7	ePM1 55%	2,8	1700 / 95	1,30
YAFI VF-GF-592/492/600-4-F7	592 x 492 x 600	6	F7	ePM1 55%	4,3	2800/95	2,20
YAFI VF-GF-592/592/600-8-F7	592 x 592 x 600	8	F7	ePM1 55%	5,6	3400/95	2,30

F8							
YAFI VF-GF-592/287/500-3-F8	592 X 287 X 500	4	F8	ePMI80%	2,4	1700/160	1,20
YAFI VF-GF-592/492/500-4-F8	592 x 492 x 500	6	F8	ePMI80%	3,6	2800/160	2,10
YAFI VF-GF-592/592/500-8-F8	592 x 592 x 500	8	F8	ePMI80%	4,8	3400/160	2,20
YAFI VF-GF-592/287/600-3-F8	592 X 287 X 600	4	F8	ePMI80%	2,8	1700/145	1,30
YAFI VF-GF-592/492/600-4-F8	592 x 492 x 600	6	F8	ePMI80%	4,3	2800/145	2,20
YAFI VF-GF-592/592/600-8-F8	592 x 592 x 600	8	F8	ePMI80%	5,6	3400/145	2,30