


CASSETTE FILTERS


CASSETTE FILTERS

Cardboard Frame Pre-Filter

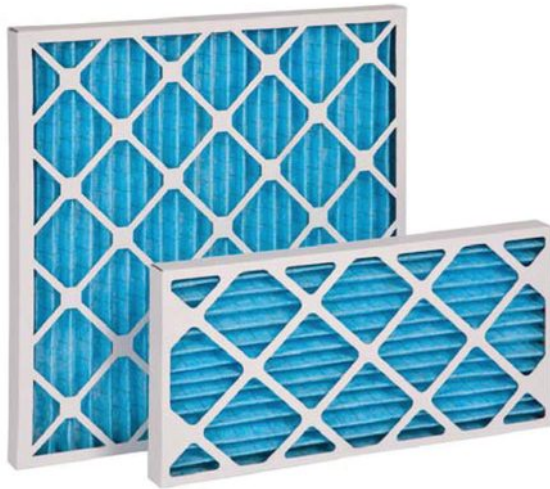

Description

Specially designed as first stage filters in ventilation units for dry dust and as prefilter to higher efficiency filters. Blue colour syththetic filter media which is supported with thin metal mesh placed in to water proof cardboard frame. For low pressure drop and high dust holding capacity filter media is placed as zig-zag shape. Available in standard and customized sizes.

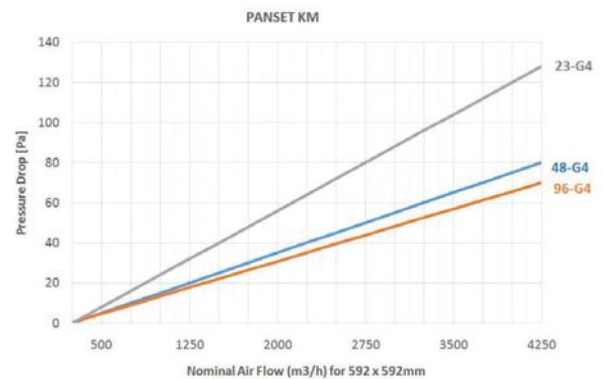

Special Features

Filter Type - Extended Surface Panel Filter

Filter Media - Synthetic Fibre Laminated with Extended Metal Mesh

Frame - Cardboard

Filter Class - G4 / ISO Coarse %65

Final Pressure Drop - 250 Pa Max.

Temperature - 80 °C

Applications

→ Primary filter for air conditioning systems.

Advantages

- Water resistant disposable cardboard frame
- Fully supported media laminated onto a wire grid
- Economic operation and high filtration surface
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Rapid installation

Product Code

YAFI KKF

Filter Type	KF	Panel Filter
Frame	K	Cardboard Frame
Media	M	Blue Media
Pleat Type	Z	Zik zag
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G4	EN 779
		Coarse 65 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
23-G4 - Coarse 65 %						
YAFI KKF-289/289/23-G4	289 x 289 x 23	G4	Coarse 65 %	0,20	450 / 50	0,30
YAFI KKF-394/495/23-G4	394 x 495 x 23	G4	Coarse 65 %	0,50	1000 / 50	0,45
YAFI KKF-495/495/23-G4	495 x 495 x 23	G4	Coarse 65 %	0,60	1300 / 50	0,55
YAFI KKF-495/622/23-G4	495 x 622 x 23	G4	Coarse 65 %	0,75	1600 / 50	0,65
YAFI KKF-289/594/23-G4	289 x 594 x 23	G4	Coarse 65 %	0,40	900 / 50	0,40
YAFI KKF-495/594/23-G4	495 x 594 x 23	G4	Coarse 65 %	0,70	1460 / 50	0,65
YAFI KKF-594/594/23-G4	594 x 594 x 23	G4	Coarse 65 %	0,85	1800 / 50	0,70

48-G4 - Coarse 65 %						
YAFI KKF-289/289/48-G4	289 x 289 x 48	G4	Coarse 65 %	0,45	850 / 60	0,30
YAFI KKF-394/495/48-G4	394 x 495 x 48	G4	Coarse 65 %	1,10	1950 / 60	0,60
YAFI KKF-495/495/48-G4	495 x 495 x 48	G4	Coarse 65 %	1,30	2450 / 60	0,70
YAFI KKF-495/622/48-G4	495 x 622 x 48	G4	Coarse 65 %	1,40	300 / 60	0,80
YAFI KKF-289/594/48-G4	289 x 594 x 48	G4	Coarse 65 %	0,90	1700 / 60	0,50
YAFI KKF-495/594/48-G4	495 x 594 x 48	G4	Coarse 65 %	1,20	2800 / 60	0,80
YAFI KKF-594/594/48-G4	594 x 594 x 48	G4	Coarse 65 %	1,60	3400 / 60	0,90

98-G4 - Coarse 65 %						
YAFI KKF-289/289/96-G4	289 x 289 x 96	G4	Coarse 65 %	0,70	1000 / 70	0,45
YAFI KKF-394/495/96-G4	394 x 495 x 96	G4	Coarse 65 %	1,50	2400 / 70	0,75
YAFI KKF-495/495/96-G4	495 x 495 x 96	G4	Coarse 65 %	1,90	3000 / 70	0,85
YAFI KKF-495/622/96-G4	496 x 622 x 96	G4	Coarse 65 %	1,85	3600 / 70	0,95
YAFI KKF-289/594/96-G4	289 x 594 x 96	G4	Coarse 65 %	1,30	2100 / 70	0,75
YAFI KKF-495/594/96-G4	495 x 594 x 96	G4	Coarse 65 %	2,10	3500 / 70	1,05
YAFI KKF-594/594/96-G4	594 x 594 x 96	G4	Coarse 65 %	2,50	4250 / 70	1,15


CASSETTE FILTERS

Metal Frame Pre-Filter



Description

Specially designed as first stage filters in ventilation units for dry dust and as prefilter to higher efficiency filters. Synthetic filter media which is supported with metal mesh placed into metal frame. For low pressure drop and high dust holding capacity filter media is placed as zig-zag shape. Available in standard and customized sizes.

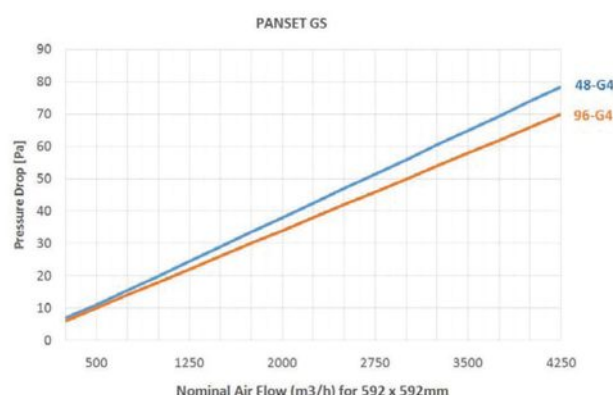

Special Features

Filter Type - Extended Surface Panel Filter

Filter Media - Synthetic Fibre Laminated with
Extended Metal Mesh

Frame - Galvanized Steel

Filter Class - G4 / ISO Coarse %65 Final Pressure
Drop - 250 Pa Max.

Temperature - 100 °C

Applications

→ Primary filter for air conditioning systems.

Advantages

- Robust construction for reliable operation
- Fully supported media laminated onto a wire grid
- Economic operation and high filtration surface
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Customised sizes are available on request

Product Code

YAFI KF

Filter Type	KF	Panel Filter
Frame	G	Galvanized Steel
Media	S	Syntetic Fiber
Pleat Type	Z	Zik zag
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G4	EN 779 Coarse 65 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
48-G4 - Coarse 65 %						
YAFI KF-287/287/48-G4	287 x 287 x 48	G4	Coarse 65 %	0,17	850 / 60	0,60
YAFI KF-392/492/48-G4	392 x 492 x 48	G4	Coarse 65 %	0,40	1950 / 60	1,00
YAFI KF-492/492/48-G4	492 x 492 x 48	G4	Coarse 65 %	0,50	2600 / 60	1,50
YAFI KF-495/625/48-G4	492 x 625 x 48	G4	Coarse 65 %	0,62	3000 / 60	1,70
YAFI KF-287/592/48-G4	287 x 592 x 48	G4	Coarse 65 %	0,34	1700 / 60	1,10
YAFI KF-492/592/48-G4	492 x 592 x 48	G4	Coarse 65 %	0,60	2820 / 60	1,60
YAFI KF-592/592/48-G4	592 x 592 x 48	G4	Coarse 65 %	0,70	3400 / 60	1,80

96-G4 - Coarse 65 %						
YAFI KF-287/287/96-G4	287 x 287 x 96	G4	Coarse 65 %	0,25	1070 / 70	0,70
YAFI KF-392/492/96-G4	392 x 492 x 96	G4	Coarse 65 %	0,60	2400 / 70	1,60
YAFI KF-492/492/96-G4	492 x 492 x 96	G4	Coarse 65 %	0,75	3000 / 70	2,00
YAFI KF-495/625/96-G4	492 x 625 x 96	G4	Coarse 65 %	0,95	3700 / 70	2,60
YAFI KF-287/592/96-G4	287 x 592 x 96	G4	Coarse 65 %	0,50	2125 / 70	1,45
YAFI KF-492/592/96-G4	492 x 592 x 96	G4	Coarse 65 %	0,90	3500 / 70	2,40
YAFI KF-592/592/96-G4	592 x 592 x 96	G4	Coarse 65 %	1,10	4250 / 70	3,00


CASSETTE FILTERS

Metal Frame Washable Pre-Filter



Description

Washable filters are specially designed as first stage filters in ventilation units for dry dust and as prefilter to higher efficiency filters. Polyurethane filter media which is supported with metal mesh placed into metal frame. Due to polyurethane filter media it can be washed several times easily. For low pressure drop and high dust holding capacity filter media is placed as zig-zag shape. Available in standard and customized sizes.

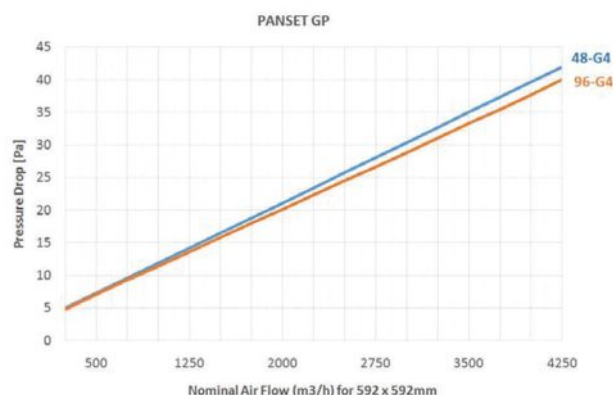

Special Features

Filter Type - Extended Surface Panel Filter

Filter Media - Polyurethane Filter

Foam Frame - Galvanized Steel

Filter Class - G2 / ISO Coarse %50 Final

Pressure Drop - 300 Pa Max.

Temperature - 80 °C

Applications

→ Primary filter for air conditioning systems.

Advantages

- Robust construction for reliable operation
- Fully supported media laminated onto a wire grid
- Economic operation and high filtration surface
- Fully washable and regenerable media
- Compact, rigid construction for rapid installation
- Customised sizes can be produced easily

Product Code

YAFI PKF

Filter Type	YK	Washable Filter
Frame	G	Galvanized Steel
Media	P	Polyurethane Media
Pleat Type	Z	Zik zag
Gasket	4	POL 45/10
Dimension	-	WxHxD
Efficiency	G4	EN 779
		Coarse 50 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
48-G3 - Coarse 50 %						
YAFI PKF-287/287/48-G3	287 x 287 x 48	G3	Coarse 50 %	0,17	850 / 35	0,38
YAFI PKF-392/492/48-G3	392 x 492 x 48	G3	Coarse 50 %	0,40	1950 / 35	1,10
YAFI PKF-492/492/48-G3	492 x 492 x 48	G3	Coarse 50 %	0,50	2600 / 35	1,50
YAFI PKF-492/625/48-G3	492 x 625 x 48	G3	Coarse 50 %	0,62	3000 / 35	1,40
YAFI PKF-287/592/48-G3	287 x 592 x 48	G3	Coarse 50 %	0,34	1700 / 35	0,80
YAFI PKF-492/592/48-G3	492 x 592 x 48	G3	Coarse 50 %	0,60	2820 / 35	1,35
YAFI PKF-592/592/48-G3	592 x 592 x 48	G3	Coarse 50 %	0,70	3400 / 35	1,65

96-G3 - Coarse 50 %						
YAFI PKF-287/287/96-G3	287 x 287 x 96	G3	Coarse 50 %	0,25	1060 / 40	0,80
YAFI PKF-392/492/96-G3	392 x 492 x 96	G3	Coarse 50 %	0,60	2400 / 40	1,75
YAFI PKF-492/492/96-G3	492 x 492 x 96	G3	Coarse 50 %	0,75	3000 / 40	2,20
YAFI PKF-492/625/96-G3	492 x 625 x 96	G3	Coarse 50 %	0,95	3600 / 40	2,90
YAFI PKF-287/592/96-G3	287 x 592 x 96	G3	Coarse 50 %	0,50	2125 / 40	1,60
YAFI PKF-492/592/96-G3	492 x 592 x 96	G3	Coarse 50 %	0,90	3500 / 40	2,65
YAFI PKF-592/592/96-G3	592 x 592 x 96	G3	Coarse 50 %	1,10	4250 / 40	3,30


CASSETTE FILTERS

Cardboard Frame Disposable Panel Filter



Description

Used in ventilation units and industrial HVAC units as dust and paint stop filters. Density of the glass fibre media which is used inside the card board increase from air in take to the clean air side. This progressive structure provide high filtering performance. Available in standard and customized sizes.

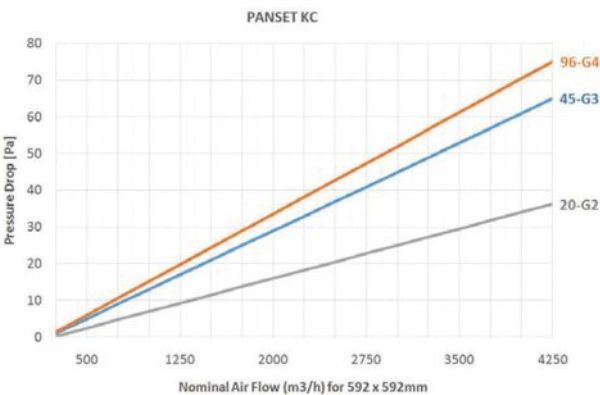

Special Features

- Filter Type** - Panel Filter
- Filter Media** - Glass Fiber
- Frame** - Cardboard Frame
- Filter Class** - G4 / Coarse %65
- Final Pressure Drop** - 250 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Robust construction for reliable operation
- ➔ Economic operation and high filtration surface
- ➔ High dust holding capacity, low pressure drop
- ➔ Customised sizes are available on request.

Applications

- ➔ Primary filter for air conditioning systems.

Product Code

YAFI PKF

Filter Type	KF	Panel Filter
Frame	K	Cardboard
Media	C	Glass Fiber
Pleat Type	L	Straight
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G3	EN 779
		Coarse 55 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	-----------------	-----------	--------------------	--------------------------	----------------


20-G2 - Coarse 45 %						
YAFI PKF-287/287/20-G2	289 x 595 x 20	G2	Coarse 40 %	0,17	1700 / 25	0,10
YAFI PKF-392/492/20-G2	495 x 595 x 20	G2	Coarse 40 %	0,29	2500 / 25	0,15
YAFI PKF-492/492/20-G2	595 x 595 x 20	G2	Coarse 40 %	0,35	3400 / 25	0,20
YAFI PKF-495/625/20-G2	495 x 495 x 20	G2	Coarse 40 %	0,25	2400 / 25	0,30
YAFI PKF-287/592/20-G2	395 x 495 x 20	G2	Coarse 40 %	0,20	1850 / 25	0,15
YAFI PKF-492/592/20-G2	395 x 624 x 20	G2	Coarse 40 %	0,25	2400 / 25	0,30
YAFI PKF-592/592/20-G2	495 x 624 x 20	G2	Coarse 40 %	0,31	3000 / 25	0,35

45-G3 - Coarse 55 %						
YAFI PKF-287/287/45-G4	287 x 287 x 45	G3	Coarse 50 %	0,25	1700 / 45	0,15
YAFI PKF-392/492/45-G4	392 x 492 x 45	G3	Coarse 50 %	0,60	4500 / 45	0,20
YAFI PKF-492/492/45-G4	492 x 492 x 45	G3	Coarse 50 %	0,75	3400 / 45	0,25
YAFI PKF-495/625/45-G4	492 x 625 x 45	G3	Coarse 50 %	0,95	2400 / 45	0,35
YAFI PKF-287/592/45-G4	287 x 592 x 45	G3	Coarse 50 %	0,50	1850 / 45	0,20
YAFI PKF-492/592/45-G4	492 x 592 x 45	G3	Coarse 50 %	0,90	2400 / 45	0,35
YAFI PKF-592/592/45-G4	592 x 592 x 45	G3	Coarse 50 %	1,10	3000 / 45	0,40

45-G3 - Coarse 65 %						
YAFI PKF-287/287/96-G4	287 x 287 x 96	G4	Coarse 60 %	0,25	1070 / 75	0,25
YAFI PKF-392/492/96-G4	392 x 492 x 96	G4	Coarse 60 %	0,60	2400 / 75	0,30
YAFI PKF-492/492/96-G4	492 x 492 x 96	G4	Coarse 60 %	0,75	3000 / 75	0,35
YAFI PKF-495/625/96-G4	492 x 625 x 96	G4	Coarse 60 %	0,95	3700 / 75	0,45
YAFI PKF-287/592/96-G4	287 x 592 x 96	G4	Coarse 60 %	0,50	2125 / 75	0,30
YAFI PKF-492/592/96-G4	492 x 592 x 96	G4	Coarse 60 %	0,90	3500 / 75	0,45
YAFI PKF-592/592/96-G4	592 x 592 x 96	G4	Coarse 60 %	1,10	4250 / 75	0,55


CASSETTE FILTERS

Cardboard Frame Pre-Filter With Self Support Media

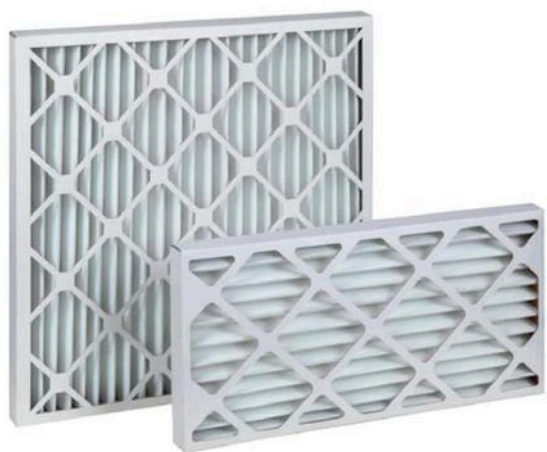

Description

Specially designed as a filter for air conditioning and ventilating equipment. The pleated high performance filter media is self supporting. It is non-corrosive and free of any metal and fully incinerable which makes the disposal easy. Folded self supported media is held together with a rigid card board frame. Available in standard and customized sizes.

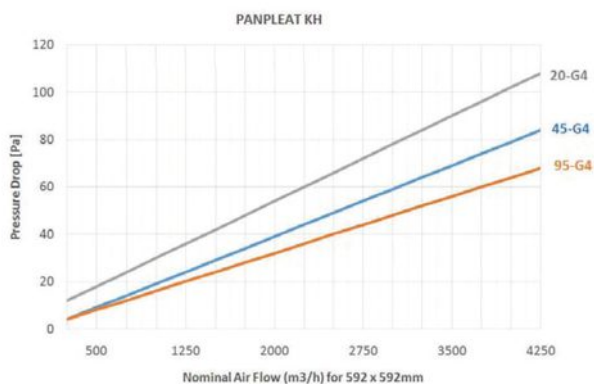

Special Features

Filter Type - Extended Surface Panel Filter

Filter Media - Self Standing Synthetic Fibre
Progressive Media

Frame - Cardboard

Filter Class - G4 / ISO Coarse %70

Final Pressure Drop - 250 Pa

Max. Temperature - 80 °C

Applications

➔ Primary filter for air conditioning systems.

Product Code

YAFI KKF

Advantages

- ➔ Adapted to conditions of high humidity
- ➔ Excellent mechanical resistance
- ➔ Economic operation and high filtration surface
- ➔ High dust holding capacity, low pressure drop
- ➔ Compact, rigid construction for rapid installation
- ➔ 100% Incineratable, non-corrosive

Filter Type	KF	Panel Filter
Frame	K	Cardboard Frame
Media	H	Self Standing Media
Pleat Type	M	Zik zag without mesh
Gasket	X	Without / Optional Gasket
Dimension	-	WxHxD
Efficiency	G4	EN 779
		Coarse 70 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	-----------------	-----------	--------------------	--------------------------	----------------

22-G4 - Coarse 70 %						
YAFI KKF-289/289/20-G4	289 x 289 x 20	G4	Coarse 70 %	0,25	850 / 95	0,10
YAFI KKF-394/495/20-G4	394 x 495 x 20	G4	Coarse 70 %	0,35	1850 / 95	0,25
YAFI KKF-495/495/20-G4	495 x 495 x 20	G4	Coarse 70 %	0,80	2400 / 95	0,35
YAFI KKF-495/622/20-G4	495 x 622 x 20	G4	Coarse 70 %	0,95	3000 / 95	0,45
YAFI KKF-289/594/20-G4	289 x 594 x 20	G4	Coarse 70 %	0,50	1700 / 95	0,20
YAFI KKF-495/594/20-G4	495 x 594 x 20	G4	Coarse 70 %	0,90	2500 / 95	0,40
YAFI KKF-594/594/20-G4	594 x 594 x 20	G4	Coarse 70 %	1,10	3400 / 95	0,45

48-G4 - Coarse 70 %						
YAFI KKF-289/289/45-G4	289 x 289 x 45	G4	Coarse 70 %	0,30	850 / 60	0,15
YAFI KKF-394/495/45-G4	394 x 495 x 45	G4	Coarse 70 %	0,80	1850 / 60	0,30
YAFI KKF-495/495/45-G4	495 x 495 x 45	G4	Coarse 70 %	1,00	2400 / 60	0,40
YAFI KKF-495/622/45-G4	495 x 622 x 45	G4	Coarse 70 %	1,20	3000 / 60	0,50
YAFI KKF-289/594/45-G4	289 x 594 x 45	G4	Coarse 70 %	0,65	1700 / 60	0,25
YAFI KKF-495/594/45-G4	495 x 594 x 45	G4	Coarse 70 %	1,05	2500 / 60	0,50
YAFI KKF-594/594/45-G4	594 x 594 x 45	G4	Coarse 70 %	1,30	3400 / 60	0,55

96-G4 - Coarse 70 %						
YAFI KKF-289/289/95-G4	289 x 289 x 95	G4	Coarse 70 %	0,55	1050 / 70	0,25
YAFI KKF-394/495/95-G4	394 x 495 x 95	G4	Coarse 70 %	1,30	2400 / 70	0,55
YAFI KKF-495/495/95-G4	495 x 495 x 95	G4	Coarse 70 %	1,60	3000 / 70	0,75
YAFI KKF-495/622/95-G4	495 x 622 x 95	G4	Coarse 70 %	1,50	3400 / 70	0,90
YAFI KKF-289/594/95-G4	289 x 594 x 95	G4	Coarse 70 %	1,10	2150 / 70	0,45
YAFI KKF-495/594/95-G4	495 x 594 x 95	G4	Coarse 70 %	1,90	3400 / 70	1,00
YAFI KKF-594/594/95-G4	594 x 594 x 95	G4	Coarse 70 %	2,20	4250 / 70	1,10