

FILTER MATERIALS

FILTER MATERIALS

Synthetic Fibre Roll Filters



Description


Made of %100 polyester fibres with nonwoven structure which can be used for wide range of air conditions. DustMax filters consist of highly elastic, tense, randomly arranged fibres with decreasing fibre thickness, the filter medium becomes denser and finer towards the clean air side (progressive construction), whereby high level of separation and high dust accumulation capacity are achieved. The materials are nonflammable, self-extinguishing and harmless to health.

Applications

➔ Preliminary filter for all types of air-conditioning and ventilation installations.

Advantages

- ➔ Assured by the progressive distribution of fibers
- ➔ High dust holding capacity, low pressure drop
- ➔ Nonflammable, self-extinguishing and harmless to health.
- ➔ Available in rolls or cut to size

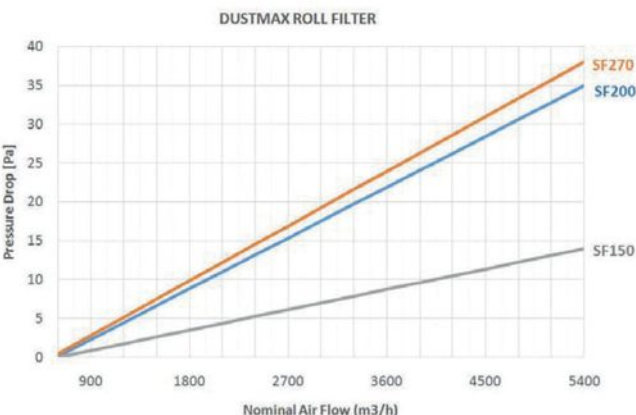

Product Code YAFI FM-G4

Filter Type	RF	Roll Filter
Filter Composition	SE	Syntetic Fiber
Model	SF2Y0	
Dimension	—	WxHxD
Efficiency	G4	EN 779
	Coarse 60 %	ISO 16890

TYPE	SF150	SF200	SF2YO
Filter Class (EN 779)	G2	G3	G4
Filter Class (ISO 16890)	Coarse 30%	Coarse 40%	Coarse 60%
Composition	Random-laid, non-woven fabric made of unbreakable synthetic fibre		
Thickness (mm)	8-10	15-18	20-22
Weight (g/m ²)	150	200	270
Nominal Face Velocity (m/s)	1,5	1,5	1,5
Nominal Air Flow (m ³ /h.m ²)	5400	5400	5400
Initial Pressure Drop	14	35	38
Final Pressure Drop (Pa)	250	250	250
Average Arrestance (Am)	80	87	91
Dust Holding Capacity (g)	517	400	478
Temperature Resistance °C	Continuous Temperature up to 100°C and peaks of 120°C		
Flammability (DIN53438)	F1	F1	F1
Roll Dimensions	2.00 x 20.00	2.00 x 20.00	2.00 x 20.00
Max.Relative Humidity	1	1	1

TYPE	SF150	SF200	SF2YO
Filter Class (EN 779)	G2	G3	G4
Filter Class (ISO 16890)	Coarse 30%	Coarse 40%	Coarse 60%
Composition	Random-laid, non-woven fabric made of unbreakable synthetic fibre		
Thickness (mm)	8-10	15-18	20-22
Weight (g/m ²)	150	200	270
Nominal Face Velocity (m/s)	1,5	1,5	1,5
Nominal Air Flow (m ³ /h.m ²)	5400	5400	5400
Initial Pressure Drop	14	35	38
Final Pressure Drop (Pa)	250	250	250
Average Arrestance (Am)	80	87	91
Dust Holding Capacity (g)	517	400	478
Temperature Resistance °C	Continuous Temperature up to 100°C and peaks of 120°C		
Flammability (DIN53438)	F1	F1	F1
Roll Dimensions	2.00 x 20.00	2.00 x 20.00	2.00 x 20.00
Max.Relative Humidity	1	1	1


FILTER MATERIALS

**Activated Carbon
Impregnated
Roll Filters**



Description

Carbon polyester media rolls are a simple way to reduce or eliminate odors and fumes. Carbomed Roll Filters are made of nonwoven polyester, impregnated with finely ground, activated carbon. Even distribution of the carbon throughout the polyester media assures an excellent capture percentage on the first pass. This media can be used for holding frame pads or blankets.

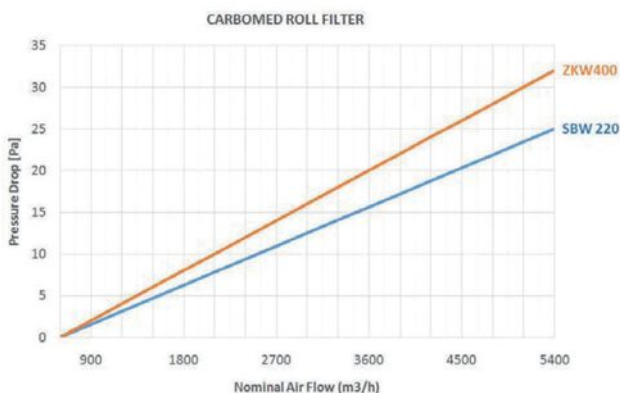

Applications

➔ Ideal for use in nonvented applications such as range hoods, air cleaners and purifiers, room air conditioner, and bath fans.

Advantages

- ➔ Assured by the progressive distribution of fibers
- ➔ Highly effective for organic based odors.
- ➔ Nonflammable, self-extinguishing and harmless to health.
- ➔ Available in rolls or cut to size

Product Code
YAFI FM-AC

Filter Type	RF	Roll Filter
Filter Composition	KE	Carbon Impregnated
Model	ZKW 400	
Dimension	-	WxL
Quantity	RL	Complete Roll
	M2	Cut to size

TYPE	SBW 220	ZKW 400
Mass per unit area EN 29073-1	340 ± 35	400 ± 40
Thickness (mm) EN ISO 9073-2 Method A	8 ± 1,5	11 ± 2
Air-permeability l/m ² /s (@50 Pa)	800 ± 200	1600 ± 350
Flammability DIN 53 438, part 3	F1	F1
Colour	Black & White	Black
Fibre composition	Polyester	Polyester
Fibre bonding	Thermo bonded	Thermo bonded
Treatment	Powdered (LDPE)	Impregnated
Temperature Resistance °C	Continuous Temperature up to 100°C and peaks of 120°C	
Roll Dimensions	20.00 x 2.00 - Cut to size	

FILTER MATERIALS


Washable Filter Foam



Description

Filter foam is an open-cell polyurethane foam on basis of polyether/polyester and can be used in filtration applications. Filter foams usually differ in their pore size and pore number per square inch (PPI).

POLFIL material can be used in any practical thickness and the range of pore sizes available covers a wide area of efficiencies, particularly since different porosities can be bonded together in tandem to produce the desired efficiency using a graded filtration mechanism.

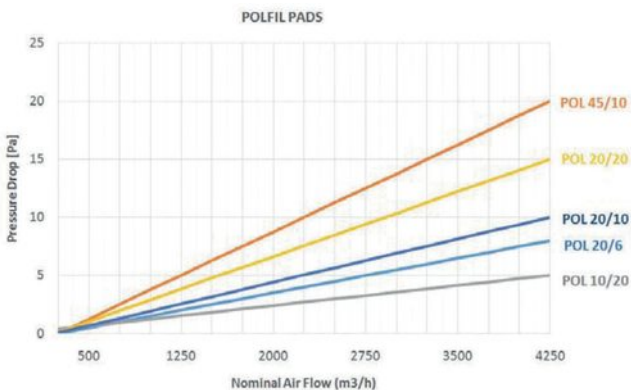

Applications

➔ Preliminary filter for all types of air-conditioning and ventilation installations.

Advantages

- ➔ Progressive open cell structure, high mechanical strength
- ➔ High dust holding capacity, low pressure drop
- ➔ Totally washable, reusable and harmless to health.
- ➔ Available in rolls or cut to size

Product Code



YAFI FM-PP

Filter Type	RF	Roll Filter
Filter Composition	POL	Polyurethane Foam
Model	20	Pore Size
Dimension	10	Thickness
Dimension	WxL	

TYPE	POL 10/20	POL 20/6	POL 20/10	POL 20/20	POL 45/10
Filter Class (EN 779)	G2	G2	G2-G3	G2-G3	G3
Filter Class (ISO 16890)	Coarse 30 %	Coarse 30 %	Coarse 35 %	Coarse 35 %	Coarse 40 %
Composition	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane
Thickness (mm)	20	6	10	20	10
Nominal Face Velocity (m/s)	1,5	1,5	1,5	1,5	0,25
Nominal Air Flow (m3/h.m2)	5400	5400	5400	5400	5400
Initial Pressure Drop	5	5	10	15	20
Final Pressure Drop (Pa)	250	250	250	250	250
Average Arrestance (Am)	75%	75%	77%	78%	80%
Dust Holding Capacity (g)	300	110	220	300	300
Temperature Resistance °C	Continuous Temperature up to 100°C and peaks of 120°C				
Flammability (DIN53438)	F1	F1	F1	F1	F1
Roll Dimensions	1.50 x 2.00 and Cut-to-size				
Max.Relative Humidity	100%	100%	100%	100%	100%

FILTER MATERIALS

Overspray Cardboard Separator Filters

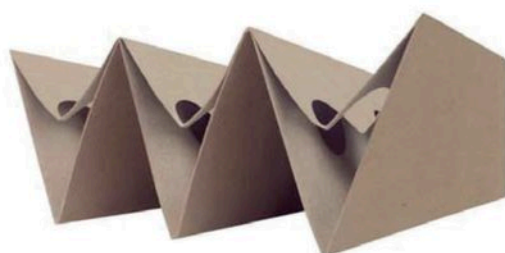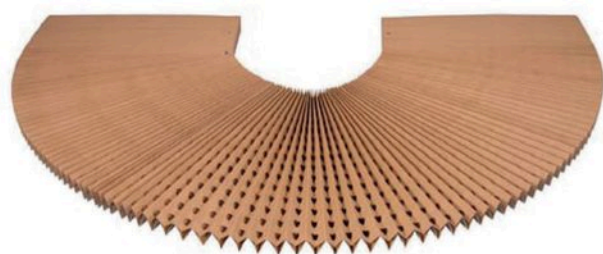

Description

PAINTFLO Filter are designed to capture any wet solids or liquid particles in an air stream: high solid enamels, baked and air dried enamels, glues, oils, stains, lacquers, fiberglass, epoxies, asphalts, clear coats, tar, teflon, etc.

Principle

Separation by inertia is the working principle of the PaintFlo Filter. The airflow, loaded with paint particles (overspray), suffers several radical changes in direction. The paint particles, heavier than air, follow tangent trajectories to the airflow. Therefore, the paint particles accumulate in the holding pockets and the airflow leaves the filter virtually free of overspray.

Applications

- ➔ Preliminary filter for all types of air-conditioning and ventilation installations.

Advantages

- ➔ Assured by the progressive distribution of fibers
- ➔ High dust and paint holding capacity, low pressure drop
- ➔ Self-supporting construction
- ➔ Nonflammable, self-extinguishing and harmless to health.
- ➔ Available in rolls or cut to size

Product Code **YAFI FM-KF**

Filter Type	PF	Cardboard Separator
Width	PAINTFLO100	100cm

TYPE	PAINTFLO Y5	PAINTFLO 90	PAINTFLO 100
Filter Area Composition	10	10	10
Composition	2 layers of heavy "kraf" paper, punched, pleated and glued		
Recommended Air Velocity	0,25 - 1,0 m/s	0,25 - 1,0 m/s	0,25 - 1,0 m/s
Pressure Drop		0,25 - 8 Pa 0,75 - 30 Pa 0,25 - 8 Pa 0,75 - 30 Pa	
Final Pressure Drop (Pa)		128 (Pa) possible up to 256	
Average Arrestance (Am)	98,1 %	98,1 %	98,1 %
Dust Holding Capacity (g)	18 kg/m ²	18 kg/m ²	18 kg/m ²
Temperature Resistance °C	100°C	100°C	100°C

FILTER MATERIALS

Glass Fibre Roll Filters



Description

Progressively structured glass fibre filtermedia especially designed for the filtration of solvent-based paint and lacquer particles.

As a result of this progressive construction which is the most important characteristic for a high-performance fibreglass filter PAINTSTOP filter mats offer lots of advantages.

Randomly arranged fine glass fibers with increasing density in direction to clean air side. Standard air intake side green / clean air side white.

Applications

- ➔ Preliminary filter for all types paint booth, cabins
- ➔ Protection of humidifiers and fans
- ➔ Prefiltration of compressors


Advantages

- ➔ Assured by the progressive distribution of fibers
- ➔ High dust and paint holding capacity, low pressure drop
- ➔ Nonflammable, self-extinguishing and harmless to health.
- ➔ Available in rolls or cut to size

Product Code

YAFI FM-PF

Filter Type	RF	Roll Filter
Filter Composition	CE	Glass Fiber
Model	PS500	
Dimension	-	WXH
Efficiency	G3	EN 779
	Coarse 65 %	ISO 16890

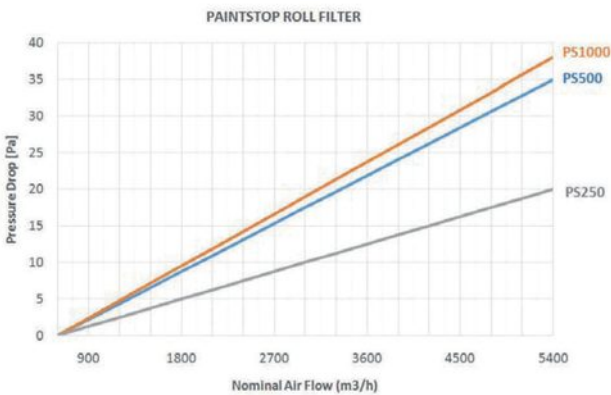

TYPE	PS250	PS500	PS1000
Filter Class (EN 779)	G3	G3	G4
Filter Class (EN 16890)	Coarse 30%	Coarse 40%	Coarse 60%
Composition		Glass Fibre	
Thickness (mm)	60	15-18	20-22
Weight (g/m ²)	200	200	270
Nominal Face Velocity (m/s)	1,5	1,5	1,5
Nominal Air Flow (m ³ /h.m ²)	5400	5400	5400
Initial Pressure Drop (Pa)	20	35	38
Final Pressure Drop (Pa)	250	250	250
Average Paint Overspray Arrestance (%)	90-95	87	91
Dust Holding Capacity (g)	3.000-5.000	400	478
Temperature Resistance °C	Continuous Temperature up to 100°C and peaks of 120°C		
Flammability (DIN53438)	F1	F1	F1
Roll Dimensions	Standard: 20.00 x 2.00 - Available Cut to Size		
Max.Relative Humidity	100%	100%	100%


FILTER MATERIALS

**Synthetic Fibre Roll
Filters - M5**



Description

Consist of superfine, thermally bonded polyester fibres are wetted with a bond-active agent, and their pure-air side is reinforced with a lattice structured fabric. Multilayer structure and progressive density provide very high standards in air purity. Contains no silicone or other lacquer harming substances.

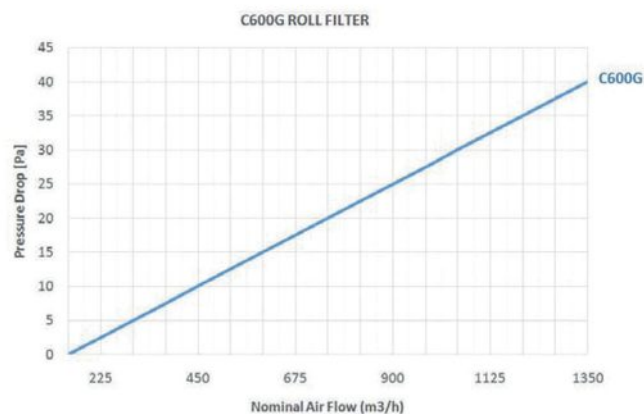

Applications

➔ For final filtration of supply air in painting and paint-spraying units.

Advantages

- ➔ Processed by the super long and anti-broken synthetic fiber
- ➔ Synthetic media is applied with solid adhesives
- ➔ Surface is affixed with high intensity fiber glass nets
- ➔ Distribute air flows evenly in the whole working space
- ➔ Available in rolls or cut to size

Product Code

YAFI FM-PLF

Filter Type	RF	Roll Filter
Filter Composition	SE	Synthetic Fiber
Model	SF600	
Dimension	-	WXL
Efficiency	M5	EN 779
	ePM10 %50	ISO 16890

TYPE	SF 600S
Filter Class (EN 779)/ISO16890	F5 / ISO ePM10 50%
Composition	Random-laid, non-woven fabric made of unbreakable synthetic fibre
Thickness (mm)	20-22
Weight (g/m ²)	600
Nominal Face Velocity (m/s)	0,25
Nominal Air Flow (m ³ /h.m ²)	900
Initial Pressure Drop	27
Final Pressure Drop (Pa)	250
Average Arrestance (Am)	97,1
Dust Holding Capacity (g)	330
Temperature Resistance °C	100°C
Flammability (DIN53438)	F1
Roll Dimensions	2.00 X 20.00
Max.Relative Humidity	100%