


HEPA FILTERS


HEPA FILTERS

Absolute HEPA Filters MDF Frame - 78mm

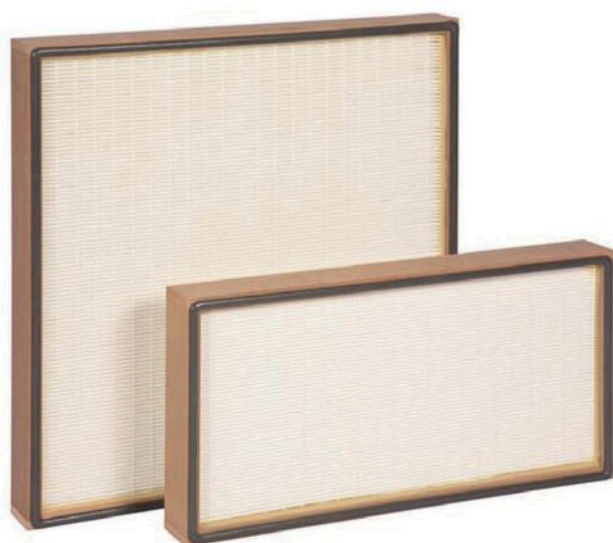

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermo plasticth reads and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

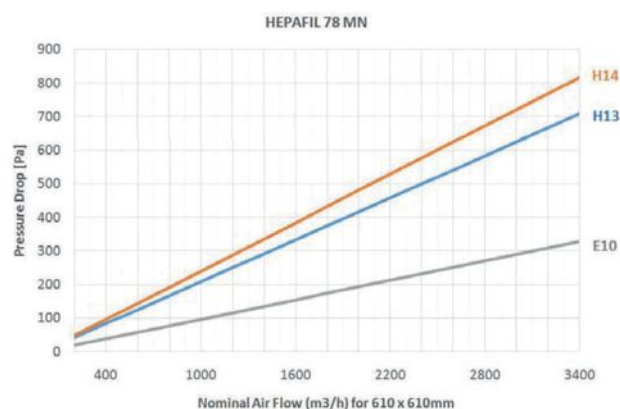

Special Features

Filter Type - Turbulent Flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - MDF (Medium-Density Fibreboard)

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Applications

- Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 78

Filter Type	HF Hepa filter
Frame	M M:Aluminium
Pleat Height	N N:55mm
Protection Mesh	X X:No T:Single D:Double
Gasket	P E:EPDM P:Polyurethane
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 78-305/305/78-E10	305 x 305 x 78	E10 - 85,00 %	2,6	700 / 250 Pa	1,40
YAFI HF 78-305/610/78-E10	305 x 610 x 78	E10 - 85,00 %	5,2	1400 / 250 Pa	2,50
YAFI HF 78-457/457/78-E10	457 x 457 x 78	E10 - 85,00 %	5,8	1570 / 250 Pa	2,90
YAFI HF 78-457/610/78-E10	457 x 610 x 78	E10 - 85,00 %	7,8	2100 / 250 Pa	3,20
YAFI HF 78-535/535/78-E10	535 x 535 x 78	E10 - 85,00 %	7,9	2150 / 250 Pa	3,40
YAFI HF 78-575/575/78-E10	575 x 575 x 78	E10 - 85,00 %	9,2	2490 / 250 Pa	3,80
YAFI HF 78-610/610/78-E10	610 x 610 x 78	E10 - 85,00 %	10,4	2800 / 250 Pa	3,90
YAFI HF 78-610/762/78-E10	610 x 762 x 78	E10 - 85,00 %	13,0	3500 / 250 Pa	5,20
YAFI HF 78-610/915/78-E10	610 x 915 x 78	E10 - 85,00 %	15,6	4200 / 250 Pa	6,20
YAFI HF 78-762/762/78-E10	762 x 762 x 78	E10 - 85,00 %	16,2	4370 / 250 Pa	6,50
YAFI HF 78-915/915/78-E10	915 x 915 x 78	E10 - 85,00 %	23,4	6300 / 250 Pa	9,50
YAFI HF 78-610/1220/78-E10	610 x 1220 x 78	E10 - 85,00 %	20,8	5600 / 250 Pa	8,50

H13					
YAFI HF 78-305/305/78-H13	305 x 305 x 78	H13 - 99,95 %	2,6	310 / 250 Pa	1,40
YAFI HF 78-305/610/78-H13	305 x 610 x 78	H13 - 99,95 %	5,2	625 / 250 Pa	2,50
YAFI HF 78-457/457/78-H13	457 x 457 x 78	H13 - 99,95 %	5,8	700 / 250 Pa	2,90
YAFI HF 78-457/610/78-H13	457 x 610 x 78	H13 - 99,95 %	7,8	930 / 250 Pa	3,20
YAFI HF 78-535/535/78-H13	535 x 535 x 78	H13 - 99,95 %	7,9	960 / 250 Pa	3,40
YAFI HF 78-575/575/78-H13	575 x 575 x 78	H13 - 99,95 %	9,2	1100 / 250 Pa	3,80
YAFI HF 78-610/610/78-H13	610 x 610 x 78	H13 - 99,95 %	10,4	1250 / 250 Pa	3,90
YAFI HF 78-610/762/78-H13	610 x 762 x 78	H13 - 99,95 %	13,0	1550 / 250 Pa	5,20
YAFI HF 78-610/915/78-H13	610 x 915 x 78	H13 - 99,95 %	15,6	1850 / 250 Pa	6,20
YAFI HF 78-762/762/78-H13	762 x 762 x 78	H13 - 99,95 %	16,2	1950 / 250 Pa	6,50
YAFI HF 78-915/915/78-H13	915 x 915 x 78	H13 - 99,95 %	23,4	2800 / 250 Pa	9,50
YAFI HF 78-610/1220/78-H13	610 x 1220 x 78	H13 - 99,95 %	20,8	2500 / 250 Pa	8,50

H14					
YAFI HF 78-305/305/78-H14	305 x 305 x 78	H14 - 99,995 %	2,6	275 / 250 Pa	1,40
YAFI HF 78-305/610/78-H14	305 x 610 x 78	H14 - 99,995 %	5,2	550 / 250 Pa	2,50
YAFI HF 78-457/457/78-H14	457 x 457 x 78	H14 - 99,995 %	5,8	615 / 250 Pa	2,90
YAFI HF 78-457/610/78-H14	457 x 610 x 78	H14 - 99,995 %	7,8	825 / 250 Pa	3,20
YAFI HF 78-535/535/78-H14	535 x 535 x 78	H14 - 99,995 %	7,9	845 / 250 Pa	3,40
YAFI HF 78-575/575/78-H14	575 x 575 x 78	H14 - 99,995 %	9,2	980 / 250 Pa	3,80
YAFI HF 78-610/610/78-H14	610 x 610 x 78	H14 - 99,995 %	10,4	1100 / 250 Pa	3,90
YAFI HF 78-610/762/78-H14	610 x 762 x 78	H14 - 99,995 %	13,0	1375 / 250 Pa	5,20
YAFI HF 78-610/915/78-H14	610 x 915 x 78	H14 - 99,995 %	15,6	1650 / 250 Pa	6,20
YAFI HF 78-762/762/78-H14	762 x 762 x 78	H14 - 99,995 %	16,2	1720 / 250 Pa	6,50
YAFI HF 78-915/915/78-H14	915 x 915 x 78	H14 - 99,995 %	23,4	2475 / 250 Pa	9,50
YAFI HF 78-610/1220/78-H14	610 x 1220 x 78	H14 - 99,995 %	20,8	2200 / 250 Pa	8,50

HEPA FILTERS

Absolute HEPA Filters MDF Frame - 150mm



Special Features


- Filter Type** - Turbulent Flow HEPA Panel
- Filter Media** - Micro Glass Fibre
- Frame** - Extruded Aluminium Frame
- Seperators** - Thermoplastic glue beads
- Bonding** - 2 component polyurethane
- Gasket** - Continuous poured gasket or EPDM
- Final Pressure Drop** - 600 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, labratories and clean-rooms. Glass fibre paper folded with thermo plasticth reads and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on toframein or-der t oguarantee a perfect seal. Each single filter is tested according to EN 1822.

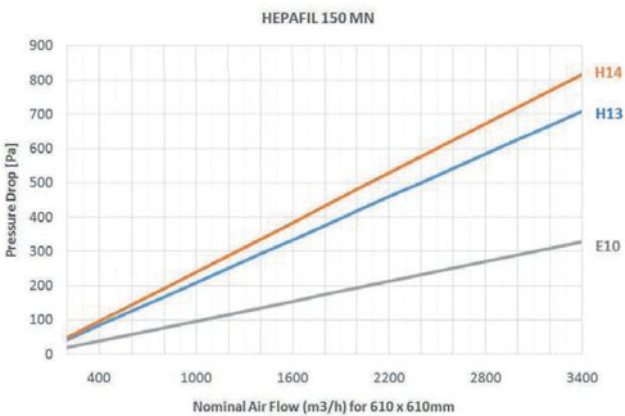

Applications

- ➔ Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 150

Filter Type	HF	Hepa filter
Frame	M	M:MDF Frame
Pleat Height	N	N:55mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 150-305/305/150-E10	305 x 305 x 150	E10 - 85,00 %	2,6	700 / 250 Pa	2,00
YAFI HF 150-305/610/150-E10	305 x 610 x 150	E10 - 85,00 %	5,2	1400 / 250 Pa	4,20
YAFI HF 150-457/457/150-E10	457 x 457 x 150	E10 - 85,00 %	5,8	1570 / 250 Pa	4,30
YAFI HF 150-457/610/150-E10	457 x 610 x 150	E10 - 85,00 %	7,8	2100 / 250 Pa	6,10
YAFI HF 150-535/535/150-E10	535 x 535 x 150	E10 - 85,00 %	7,9	2150 / 250 Pa	6,20
YAFI HF 150-575/575/150-E10	575 x 575 x 150	E10 - 85,00 %	9,2	2490 / 250 Pa	7,20
YAFI HF 150-610/610/150-E10	610 x 610 x 150	E10 - 85,00 %	10,4	2800 / 250 Pa	7,60
YAFI HF 150-610/762/150-E10	610 x 762 x 150	E10 - 85,00 %	13,0	3500 / 250 Pa	9,20
YAFI HF 150-610/915/150-E10	610 x 915 x 150	E10 - 85,00 %	15,6	4200 / 250 Pa	11,20
YAFI HF 150-762/762/150-E10	762 x 762 x 150	E10 - 85,00 %	16,2	4370 / 250 Pa	12,50
YAFI HF 150-915/915/150-E10	915 x 915 x 150	E10 - 85,00 %	23,4	6300 / 250 Pa	18,50
YAFI HF 150-610/1220/150-E10	610 x 1220 x 150	E10 - 85,00 %	20,8	5600 / 250 Pa	16,00

H13					
YAFI HF 150-305/305/150-H13	305 x 305 x 150	H13 - 99,95 %	2,6	310 / 250 Pa	2,00
YAFI HF 150-305/610/150-H13	305 x 610 x 150	H13 - 99,95 %	5,2	625 / 250 Pa	4,20
YAFI HF 150-457/457/150-H13	457 x 457 x 150	H13 - 99,95 %	5,8	700 / 250 Pa	4,30
YAFI HF 150-457/610/150-H13	457 x 610 x 150	H13 - 99,95 %	7,8	930 / 250 Pa	6,10
YAFI HF 150-535/535/150-H13	535 x 535 x 150	H13 - 99,95 %	7,9	960 / 250 Pa	6,20
YAFI HF 150-575/575/150-H13	575 x 575 x 150	H13 - 99,95 %	9,2	1100 / 250 Pa	7,20
YAFI HF 150-610/610/150-H13	610 x 610 x 150	H13 - 99,95 %	10,4	1250 / 250 Pa	7,60
YAFI HF 150-610/762/150-H13	610 x 762 x 150	H13 - 99,95 %	13,0	1550 / 250 Pa	9,20
YAFI HF 150-610/915/150-H13	610 x 915 x 150	H13 - 99,95 %	15,6	1850 / 250 Pa	11,20
YAFI HF 150-762/762/150-H13	762 x 762 x 150	H13 - 99,95 %	16,2	1950 / 250 Pa	12,50
YAFI HF 150-915/915/150-H13	915 x 915 x 150	H13 - 99,95 %	23,4	2800 / 250 Pa	18,50
YAFI HF 150-610/1220/150-H13	610 x 1220 x 150	H13 - 99,95 %	20,8	2500 / 250 Pa	16,00

H14					
YAFI HF 150-305/305/150-H14	305 x 305 x 150	H14 - 99,995 %	2,6	275 / 250 Pa	2,00
YAFI HF 150-305/610/150-H14	305 x 610 x 150	H14 - 99,995 %	5,2	550 / 250 Pa	4,20
YAFI HF 150-457/457/150-H14	457 x 457 x 150	H14 - 99,995 %	5,8	615 / 250 Pa	4,30
YAFI HF 150-457/610/150-H14	457 x 610 x 150	H14 - 99,995 %	7,8	825 / 250 Pa	6,10
YAFI HF 150-535/535/150-H14	535 x 535 x 150	H14 - 99,995 %	7,9	845 / 250 Pa	6,20
YAFI HF 150-575/575/150-H14	575 x 575 x 150	H14 - 99,995 %	9,2	980 / 250 Pa	7,20
YAFI HF 150-610/610/150-H14	610 x 610 x 150	H14 - 99,995 %	10,4	1100 / 250 Pa	7,60
YAFI HF 150-610/762/150-H14	610 x 762 x 150	H14 - 99,995 %	13,0	1375 / 250 Pa	9,20
YAFI HF 150-610/915/150-H14	610 x 915 x 150	H14 - 99,995 %	15,6	1650 / 250 Pa	11,20
YAFI HF 150-762/762/150-H14	762 x 762 x 150	H14 - 99,995 %	16,2	1720 / 250 Pa	12,50
YAFI HF 150-915/915/150-H14	915 x 915 x 150	H14 - 99,995 %	23,4	2475 / 250 Pa	18,50
YAFI HF 150-610/1220/150-H14	610 x 1220 x 150	H14 - 99,995 %	20,8	2200 / 250 Pa	16,00


HEPA FILTERS

Absolute HEPA Filters MDF Frame - 150mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermoplastic resins and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on top of frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

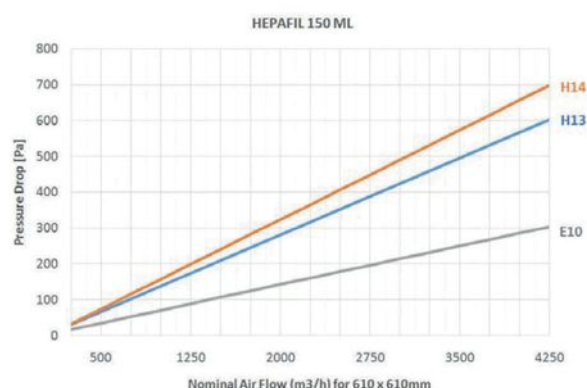

Special Features

Filter Type - Turbulent Flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Applications

- Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 150

Filter Type	HF	Hepa filter
Frame	M	M:MDF Frame
Pleat Height	L	L:100mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	F	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 150-305/305/150-E10	305 x 305 x 150	E10 - 85,00 %	4,5	900 / 250 Pa	2,20
YAFI HF 150-305/610/150-E10	305 x 610 x 150	E10 - 85,00 %	9,0	1800 / 250 Pa	4,40
YAFI HF 150-457/457/150-E10	457 x 457 x 150	E10 - 85,00 %	10,1	2000 / 250 Pa	4,60
YAFI HF 150-457/610/150-E10	457 x 610 x 150	E10 - 85,00 %	13,5	2700 / 250 Pa	6,50
YAFI HF 150-535/535/150-E10	535 x 535 x 150	E10 - 85,00 %	13,9	2770 / 250 Pa	6,40
YAFI HF 150-575/575/150-E10	575 x 575 x 150	E10 - 85,00 %	16,0	3200 / 250 Pa	7,50
YAFI HF 150-610/610/150-E10	610 x 610 x 150	E10 - 85,00 %	18,0	3600 / 250 Pa	7,90
YAFI HF 150-610/762/150-E10	610 x 762 x 150	E10 - 85,00 %	22,5	4500 / 250 Pa	9,60
YAFI HF 150-610/915/150-E10	610 x 915 x 150	E10 - 85,00 %	27,0	5400 / 250 Pa	11,80
YAFI HF 150-762/762/150-E10	762 x 762 x 150	E10 - 85,00 %	28,1	5600 / 250 Pa	13,50
YAFI HF 150-915/915/150-E10	915 x 915 x 150	E10 - 85,00 %	40,5	8100 / 250 Pa	19,40
YAFI HF 150-610/1220/150-E10	610 x 1220 x 150	E10 - 85,00 %	36,0	7200 / 250 Pa	16,80

H13					
YAFI HF 150-305/305/150-H13	305 x 305 x 150	H13 - 99,95 %	4,5	475 / 250 Pa	2,20
YAFI HF 150-305/610/150-H13	305 x 610 x 150	H13 - 99,95 %	9,0	950 / 250 Pa	4,40
YAFI HF 150-457/457/150-H13	457 x 457 x 150	H13 - 99,95 %	10,1	1065 / 250 Pa	4,60
YAFI HF 150-457/610/150-H13	457 x 610 x 150	H13 - 99,95 %	13,5	1420 / 250 Pa	6,50
YAFI HF 150-535/535/150-H13	535 x 535 x 150	H13 - 99,95 %	13,9	1460 / 250 Pa	6,40
YAFI HF 150-575/575/150-H13	575 x 575 x 150	H13 - 99,95 %	16,0	1690 / 250 Pa	7,50
YAFI HF 150-610/610/150-H13	610 x 610 x 150	H13 - 99,95 %	18,0	1900 / 250 Pa	7,90
YAFI HF 150-610/762/150-H13	610 x 762 x 150	H13 - 99,95 %	22,5	2370 / 250 Pa	9,60
YAFI HF 150-610/915/150-H13	610 x 915 x 150	H13 - 99,95 %	27,0	2850 / 250 Pa	11,80
YAFI HF 150-762/762/150-H13	762 x 762 x 150	H13 - 99,95 %	28,1	2960 / 250 Pa	13,50
YAFI HF 150-915/915/150-H13	915 x 915 x 150	H13 - 99,95 %	40,5	4275 / 250 Pa	19,40
YAFI HF 150-610/1220/150-H13	610 x 1220 x 150	H13 - 99,95 %	36,0	3800 / 250 Pa	16,80

H14					
YAFI HF 150-305/305/150-H14	305 x 305 x 150	H14 - 99,995 %	4,5	400 / 250 Pa	2,20
YAFI HF 150-305/610/150-H14	305 x 610 x 150	H14 - 99,995 %	9,0	800 / 250 Pa	4,40
YAFI HF 150-457/457/150-H14	457 x 457 x 150	H14 - 99,995 %	10,1	900 / 250 Pa	4,60
YAFI HF 150-457/610/150-H14	457 x 610 x 150	H14 - 99,995 %	13,5	1200 / 250 Pa	6,50
YAFI HF 150-535/535/150-H14	535 x 535 x 150	H14 - 99,995 %	13,9	1230 / 250 Pa	6,40
YAFI HF 150-575/575/150-H14	575 x 575 x 150	H14 - 99,995 %	16,0	1420 / 250 Pa	7,50
YAFI HF 150-610/610/150-H14	610 x 610 x 150	H14 - 99,995 %	18,0	1600 / 250 Pa	7,90
YAFI HF 150-610/762/150-H14	610 x 762 x 150	H14 - 99,995 %	22,5	2000 / 250 Pa	9,60
YAFI HF 150-610/915/150-H14	610 x 915 x 150	H14 - 99,995 %	27,0	2400 / 250 Pa	11,80
YAFI HF 150-762/762/150-H14	762 x 762 x 150	H14 - 99,995 %	28,1	2500 / 250 Pa	13,50
YAFI HF 150-915/915/150-H14	915 x 915 x 150	H14 - 99,995 %	40,5	3600 / 250 Pa	19,40
YAFI HF 150-610/1220/150-H14	610 x 1220 x 150	H14 - 99,995 %	36,0	3200 / 250 Pa	16,80


HEPA FILTERS

Absolute HEPA Filters MDF Frame - 292mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermoplastic resins and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on top of frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

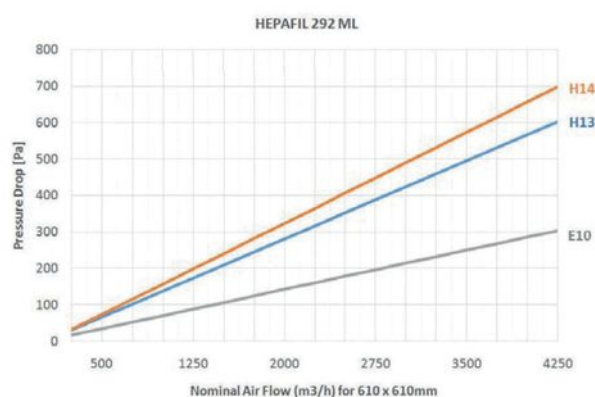

Special Features

Filter Type - HEPA Absolute Filter

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

→ Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	M	M:MDF Frame
Pleat Height	L	L:100mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	F	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	4,5	900 / 250 Pa	3,50
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	9,0	1800 / 250 Pa	7,40
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	10,0	2000 / 250 Pa	8,00
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	13,5	2700 / 250 Pa	10,80
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	18,0	3600 / 250 Pa	11,50
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	22,5	4500 / 250 Pa	12,60
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	27,0	5400 / 250 Pa	18,00

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	4,5	475 / 250 Pa	3,50
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	9,0	950 / 250 Pa	7,40
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	10,0	1065 / 250 Pa	8,00
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	13,5	1420 / 250 Pa	10,80
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	18,0	1900 / 250 Pa	11,50
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	22,5	2370 / 250 Pa	12,60
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	27,0	2850 / 250 Pa	18,00

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	4,5	400 / 250 Pa	3,50
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	9,0	800 / 250 Pa	7,40
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	10,0	900 / 250 Pa	8,00
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	13,5	1200 / 250 Pa	10,80
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	18,0	1600 / 250 Pa	11,50
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	22,5	2000 / 250 Pa	12,60
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	27,0	2400 / 250 Pa	18,00


HEPA FILTERS

Absolute HEPA Filters MDF Frame - 292mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and cleanrooms. Glass fibre paper folded with thermoplastic threads and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on the frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

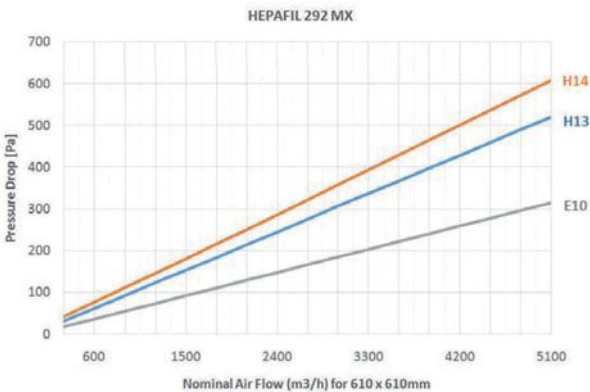

Special Features

- Filter Type** - HEPA Absolute Filter
- Filter Media** - Micro Glass Fibre
- Frame** - Extruded Aluminium Frame
- Separators** - Thermoplastic glue beads
- Bonding** - 2 component polyurethane
- Gasket** - Continuous poured gasket or EPDM
- Final Pressure Drop** - 600 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Applications

- ➔ Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	M	M:MDF Frame
Pleat Height	X	X:135mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	6,2	1100 / 250 Pa	4,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	12,5	2200 / 250 Pa	8,20
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	14,0	2470 / 250 Pa	8,80
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	18,7	3300 / 250 Pa	11,90
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	25,0	4400 / 250 Pa	12,80
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	31,2	5495 / 250 Pa	13,50
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	37,5	6600 / 250 Pa	20,00

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	6,2	630 / 250 Pa	4,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	12,5	1260 / 250 Pa	8,20
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	14,0	1415 / 250 Pa	8,80
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	18,7	1900 / 250 Pa	11,90
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	25,0	2500 / 250 Pa	12,80
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	31,2	3120 / 250 Pa	13,50
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	37,5	3750 / 250 Pa	20,00

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	6,2	565 / 250 Pa	4,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	12,5	1130 / 250 Pa	8,20
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	14,0	1280 / 250 Pa	8,80
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	18,7	1700 / 250 Pa	11,90
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	25,0	2260 / 250 Pa	12,80
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	31,2	2820 / 250 Pa	13,50
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	37,5	3390 / 250 Pa	20,00


HEPA FILTERS

Absolute HEPA Filters MDF Frame - 292mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and cleanrooms. Glass fibre paper folded with thermo plastic glue beads and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on top of frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

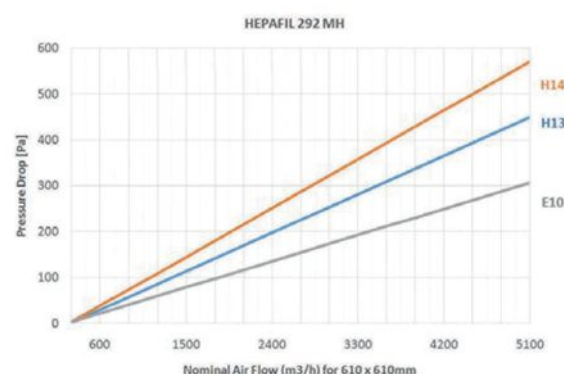

Special Features

Filter Type - HEPA Absolute Filter

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Applications

- Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	M	M:MDF Frame
Pleat Height	H	H:150mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	6,2	1100 / 250 Pa	4,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	12,5	2200 / 250 Pa	8,20
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	14,0	2470 / 250 Pa	8,80
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	18,7	3300 / 250 Pa	11,90
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	25,0	4400 / 250 Pa	12,80
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	31,2	5495 / 250 Pa	13,50
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	37,5	6600 / 250 Pa	20,00

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	6,2	630 / 250 Pa	4,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	12,5	1260 / 250 Pa	8,20
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	14,0	1415 / 250 Pa	8,80
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	18,7	1900 / 250 Pa	11,90
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	25,0	2500 / 250 Pa	12,80
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	31,2	3120 / 250 Pa	13,50
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	37,5	3750 / 250 Pa	20,00

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	6,2	565 / 250 Pa	4,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	12,5	1130 / 250 Pa	8,20
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	14,0	1280 / 250 Pa	8,80
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	18,7	1700 / 250 Pa	11,90
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	25,0	2260 / 250 Pa	12,80
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	31,2	2820 / 250 Pa	13,50
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	37,5	3390 / 250 Pa	20,00


HEPA FILTERS

Absolute HEPA Filters Galvanized Frame - 292 mm

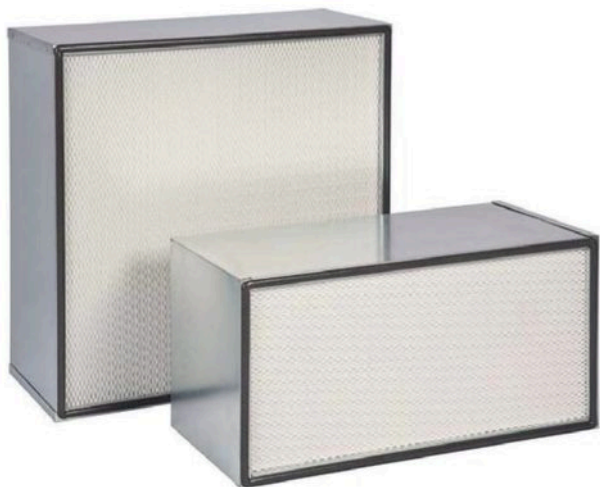

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, labratories and clean-rooms. Glass fibre paper folded with thermo plas-tich reads and media pack is placed into Galva-nized or Aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and fra One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

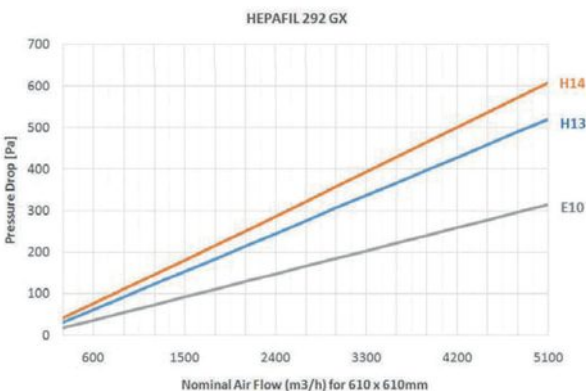

Special Features

- Filter Type** - HEPA Absolute Filter
- Filter Media** - Micro Glass Fibre
- Frame** - Galvanized Steel Frame
- Seperators** - Thermoplastic glue beads
- Bonding** - 2 component polyurethane
- Gasket** - Continuous poured gasket or EPDM
- Final Pressure Drop** - 600 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Applications

- ➔ Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	G	G:Galvanized
Pleat Height	X	X:135mm
Protection Mesh	T	X:No T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	5,5	1050 / 250 Pa	4,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	11,3	2100 / 250 Pa	7,50
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	12,5	2360 / 250 Pa	8,70
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	16,8	3150 / 250 Pa	10,80
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	22,5	4200 / 250 Pa	11,50
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	28,0	5245 / 250 Pa	13,20
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	33,8	6300 / 250 Pa	15,80

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	5,5	600 / 250 Pa	4,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	11,3	1200 / 250 Pa	7,50
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	12,5	1350 / 250 Pa	8,70
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	16,8	1800 / 250 Pa	10,80
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	22,5	2400 / 250 Pa	11,50
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	28,0	3000 / 250 Pa	13,20
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	33,8	3600 / 250 Pa	15,80

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	5,5	550 / 250 Pa	4,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	11,3	1075 / 250 Pa	7,50
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	12,5	1210 / 250 Pa	8,70
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	16,8	1610 / 250 Pa	10,80
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	22,5	2150 / 250 Pa	11,50
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	28,0	2685 / 250 Pa	13,20
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	33,8	3225 / 250 Pa	15,80


HEPA FILTERS

Absolute HEPA Filters Galvanized Frame - 292 mm

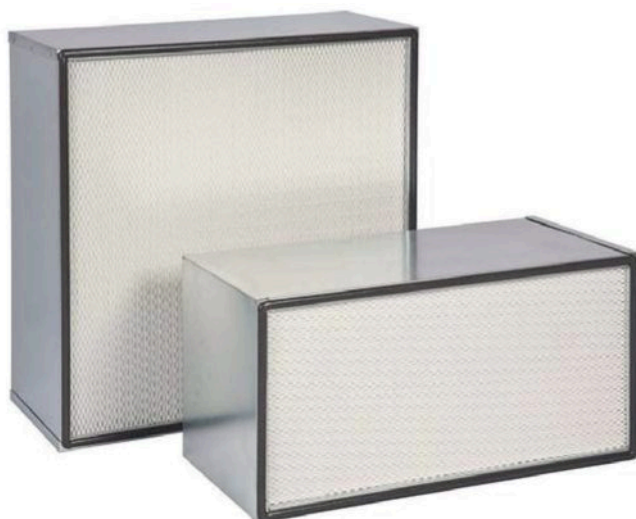

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermo plasticth reads and media pack is placed into Galvanized or Aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

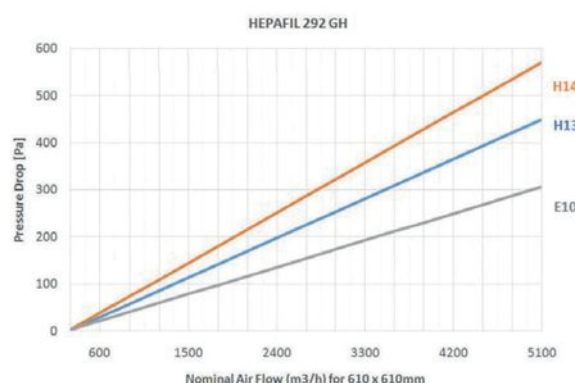

Special Features

Filter Type - HEPA Absolute Filter

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Applications

- Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	G	G:Galvanized
Pleat Height	H	H:150mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	6,2	1100 / 250 Pa	4,40
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	12,5	2200 / 250 Pa	8,20
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	14,0	2470 / 250 Pa	9,50
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	18,7	3300 / 250 Pa	11,80
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	25,0	4400 / 250 Pa	12,50
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	31,2	5495 / 250 Pa	14,50
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	37,5	6600 / 250 Pa	17,10

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	6,2	630 / 250 Pa	4,40
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	12,5	1260 / 250 Pa	8,20
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	14,0	1415 / 250 Pa	9,50
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	18,7	1900 / 250 Pa	11,80
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	25,0	2500 / 250 Pa	12,50
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	31,2	3120 / 250 Pa	14,50
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	37,5	3750 / 250 Pa	17,10

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	5,5	565 / 250 Pa	4,40
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	11,3	1130 / 250 Pa	8,20
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	12,5	1280 / 250 Pa	9,50
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	16,8	1700 / 250 Pa	11,80
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	22,5	2260 / 250 Pa	12,50
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	28,0	2820 / 250 Pa	14,50
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	33,8	3390 / 250 Pa	17,10


HEPA FILTERS

Absolute HEPA Filters Aluminium Frame - 292 mm

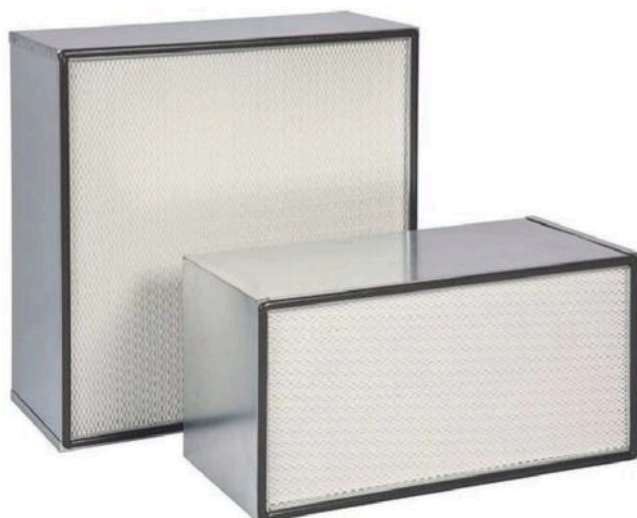

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermoplastic resins and media pack is placed into Galvanized or Aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

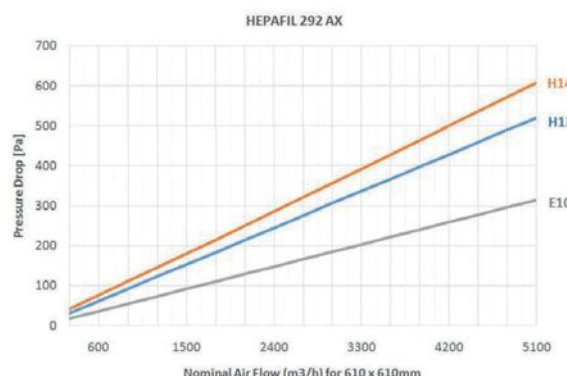

Special Features

Filter Type - Absolute HEPA Filter

Filter Media - Micro Glass Fibre

Frame - Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

➔ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Product Code

YAFI HF 292

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat Height	X	X:135mm
Protection Mesh	T	T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	5,5	1050 / 250 Pa	3,80
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	11,3	2100 / 250 Pa	7,20
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	12,5	2360 / 250 Pa	8,00
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	16,8	3150 / 250 Pa	10,00
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	22,5	4200 / 250 Pa	11,00
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	28,0	5245 / 250 Pa	12,50
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	33,8	6300 / 250 Pa	14,00

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	5,5	600 / 250 Pa	3,80
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	11,3	1200 / 250 Pa	7,20
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	12,5	1350 / 250 Pa	8,00
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	16,8	1800 / 250 Pa	10,00
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	22,5	2400 / 250 Pa	11,00
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	28,0	3000 / 250 Pa	12,50
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	33,8	3600 / 250 Pa	14,00

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	5,5	550 / 250 Pa	3,80
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	11,3	1075 / 250 Pa	7,20
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	12,5	1210 / 250 Pa	8,00
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	16,8	1610 / 250 Pa	10,00
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	22,5	2150 / 250 Pa	11,00
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	28,0	2685 / 250 Pa	12,50
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	33,8	3225 / 250 Pa	14,00


HEPA FILTERS

Absolute HEPA Filters Aluminium Frame - 292 mm

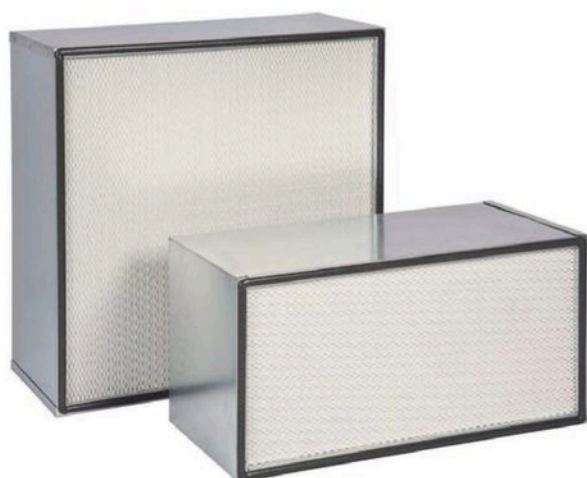

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermoplastic resins and media pack is placed into Galvanized or Aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

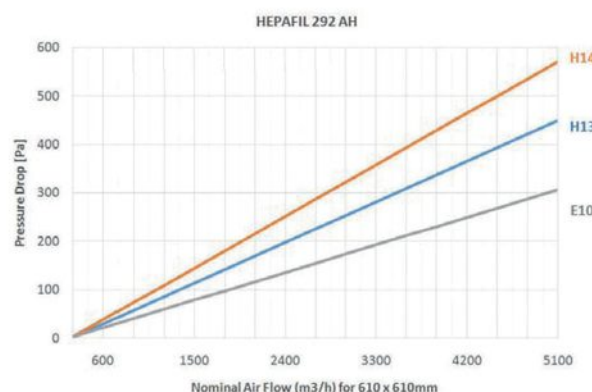

Special Features

Filter Type - Absolute HEPA Filter

Filter Media - Micro Glass

Fibre Frame - Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Applications

- HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat Height	H	H:150mm
Protection Mesh	T	T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	6,2	1100 / 250 Pa	4,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	12,5	2200 / 250 Pa	7,50
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	14,0	2470 / 250 Pa	8,70
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	18,7	3300 / 250 Pa	10,80
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	25,0	4400 / 250 Pa	11,50
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	31,2	5495 / 250 Pa	13,20
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	37,5	6600 / 250 Pa	15,80

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	6,2	630 / 250 Pa	4,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	12,5	1260 / 250 Pa	7,50
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	14,0	1415 / 250 Pa	8,70
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	18,7	1900 / 250 Pa	10,80
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	25,0	2500 / 250 Pa	11,50
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	31,2	3120 / 250 Pa	13,20
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	37,5	3750 / 250 Pa	15,80

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	6,2	565 / 250 Pa	4,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	12,5	1130 / 250 Pa	7,50
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	14,0	1280 / 250 Pa	8,70
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	18,7	1700 / 250 Pa	10,80
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	25,0	2260 / 250 Pa	11,50
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	31,2	2820 / 250 Pa	13,20
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	37,5	3390 / 250 Pa	15,80


HEPA FILTERS

Rigid Bag Filter Plastic Frame 4V | EPA & HEPA



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermoplastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

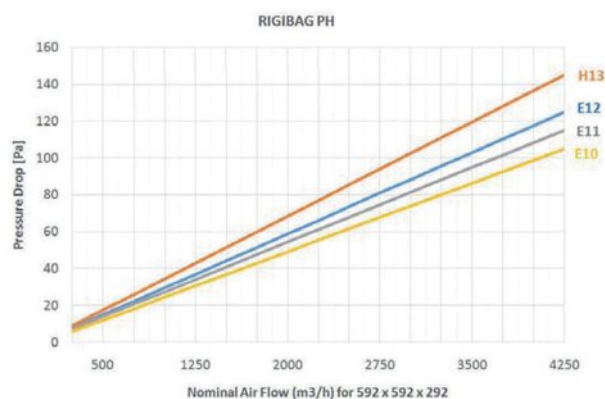

Special Features

- Filter Type** - W Compact Hepa Filter
- Filter Media** - Micro Glass Fibre
- Frame** - Plastic Frame (Polypropylene)
- Seperators** - Thermoplastic glue beads
- Bonding** - 2 component polyurethane
- Final Pressure Drop** - 600 Pa
- Max. Temperature** - 80 °C

Advantages

- Low Energy Consumption with close pleats
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Light and easy maintenance through handles

Applications

- Air conditioning applications or industrial processing systems

Product Code

YAFI HRF

Filter Type	WH W Compact Hepa filter	
Frame	P	P:Plastic
Pleat Height	H	H:25mm - hepa grade
Protection Mesh	T	T:Single plastic
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822 E10 to H14	

Product Code	Dimensions (WxHxD)	Class EN 779	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
292-E10					
YAFI HRF-287/592/292-E10	287x592x292	E10	9,0	2000 / 200	5,00
YAFI HRF-490/592/292-E10	490x592x292	E10	14,5	3300 / 200	7,00
YAFI HRF-592/592/292-E10	592x592x292	E10	18,0	4000 / 200	8,00
292-E11					
YAFI HRF-287/592/292-E11	287x592x292	E11	9,0	1700 / 190	5,00
YAFI HRF-490/592/292-E11	490x592x292	E11	14,5	2800 / 190	7,00
YAFI HRF-592/592/292-E11	592x592x292	E11	18,0	3400 / 190	8,00
292-E12					
YAFI HRF-287/592/292-E12	287x592x292	E12	9,0	1500 / 270	5,00
YAFI HRF-490/592/292-E12	490x592x292	E12	14,5	2470 / 270	7,00
YAFI HRF-592/592/292-E12	592x592x292	E12	18,0	3400 / 270	8,00
292-H13					
YAFI HRF-287/592/292-H13	287x592x292	H13	9,0	1250 / 250	5,00
YAFI HRF-490/592/292-H13	490x592x292	H13	14,5	2000 / 250	7,00
YAFI HRF-592/592/292-H13	592x592x292	H13	18,0	2500 / 250	8,00


HEPA FILTERS

Rigid Bag FilterMetal Frame 4V | EPA & HEPA



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermoplastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

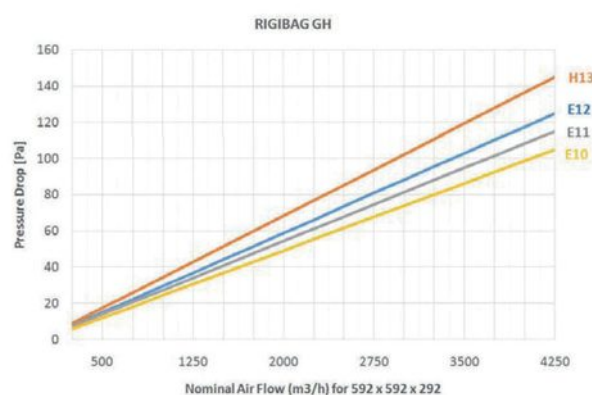

Special Features

Filter Type - W Compact Hepa Filter

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Low Energy Consumption with close pleats
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Customised sizes can be produced.

Applications

- Air conditioning applications or industrial processing systems

Product Code

YAFI HRF

Filter Type	WH W Bank Hepa filter
Frame	G G:Galvanized steel
Pleat Height	H H:25mm - hepa grade
Protection Mesh	T T:Single metal mesh
Gasket	P E:EPDM P:Polyurethane
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Class EN 779	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
292-E10					
YAFI HRF-287/592/292-E10	287x592x292	E10	9,0	2000 / 200	7,00
YAFI HRF-490/592/292-E10	490x592x292	E10	14,5	3300 / 200	11,00
YAFI HRF-592/592/292-E10	592x592x292	E10	18,0	4000 / 200	12,00
292-E11					
YAFI HRF-287/592/292-E11	287x592x292	E11	9,0	3400 / 190	7,00
YAFI HRF-490/592/292-E11	490x592x292	E11	14,5	2800 / 190	11,00
YAFI HRF-592/592/292-E11	592x592x292	E11	18,0	1700 / 190	12,00
292-E12					
YAFI HRF-287/592/292-E12	287x592x292	E12	9,0	1500 / 270	7,00
YAFI HRF-490/592/292-E12	490x592x292	E12	14,5	2470 / 270	11,00
YAFI HRF-592/592/292-E12	592x592x292	E12	18,0	3000 / 270	12,00
292-E13					
YAFI HRF-287/592/292-H13	287x592x292	H13	9,0	1250 / 250	7,00
YAFI HRF-490/592/292-H13	490x592x292	H13	14,5	2000 / 250	11,00
YAFI HRF-592/592/292-H13	592x592x292	H13	18,0	2500 / 250	12,00


HEPA FILTERS

Galvanized Frame Frame Depth 292 mm



Description

Deep pleat filters are designed for high efficiency filtration and high air flow rate for use in hospitals, pharmaceutical industry etc. Instead of traditional mini pleat design corrugated aluminium is used as separator. These separators with doubled edge gives stiffness to the filter and filter can resist to high operation conditions. Made of galvanized sheet with front flange and double flange model is also available on request.

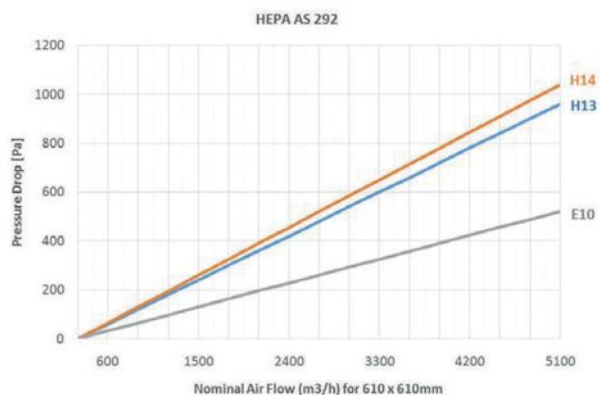

Special Features

Filter Type - Aluminum Separator Panel Filter

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel

Separators - Corrugated Aluminum

Bonding - 2 component polyurethane

Final Pressure Drop - 450 Pa

Max. Temperature - 350 °C

Applications

➔ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Product Code

YAFI HF 292

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter

Filter Type	HS	Aluminium Sep. Hepa filter
Frame	G	G: Galvanized steel
Pleat Height	S	S: Standard H: High air flow
Flange Number	X	X: Without T: Single D: Double
Gasket	P	X: No E: EPDM P: Polyurethane
Efficiency	EN1822	E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-287/592/292-E10	287 x 592 x 292	E10 - 85,00 %	7,0	750 / 130 Pa	7,00
YAFI HF 292-592/592/292-E10	592 x 592 x 292	E10 - 85,00 %	14,0	1500 / 130 Pa	11,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	7,0	750 / 130 Pa	7,50
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	14,0	1500 / 130 Pa	12,00
YAFI HF 292-287/592/292-E10	287 x 592 x 292	E10 - 85,00 %	11,0	1250 / 130 Pa	8,50
YAFI HF 292-592/592/292-E10	592 x 592 x 292	E10 - 85,00 %	22,0	2500 / 130 Pa	13,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	11,0	1250 / 130 Pa	9,00
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	22,0	2500 / 130 Pa	13,50

H13					
YAFI HF 292-287/592/292-H13	287 x 592 x 292	H13 - 99,95 %	7,0	750 / 240 Pa	7,00
YAFI HF 292-592/592/292-H13	592 x 592 x 292	H13 - 99,95 %	14,0	1500 / 240 Pa	11,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	7,0	750 / 240 Pa	7,50
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	14,0	1500 / 240 Pa	12,00
YAFI HF 292-287/592/292-H13	287 x 592 x 292	H13 - 99,95 %	11,0	1250 / 240 Pa	8,50
YAFI HF 292-592/592/292-H13	592 x 592 x 292	H13 - 99,95 %	22,0	2500 / 240 Pa	13,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	11,0	1250 / 240 Pa	9,00
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	22,0	2500 / 240 Pa	13,50

H14					
YAFI HF 292-287/592/292-H14	287 x 592 x 292	H14 - 99,995 %	7,0	750 / 260 Pa	7,00
YAFI HF 292-592/592/292-H14	592 x 592 x 292	H14 - 99,995 %	14,0	1500 / 260 Pa	11,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	7,0	750 / 260 Pa	7,50
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	14,0	1500 / 260 Pa	12,00
YAFI HF 292-287/592/292-H14	287 x 592 x 292	H14 - 99,995 %	7,0	1250 / 260 Pa	8,50
YAFI HF 292-592/592/292-H14	592 x 592 x 292	H14 - 99,995 %	14,0	2500 / 260 Pa	13,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	7,0	1250 / 260 Pa	9,00
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	14,0	2500 / 260 Pa	13,50


HEPA FILTERS

Absolute HEPA Filters High Capacity V Type - Standard



Description

Designed as very high efficiency final filters for very high air flow rate for use in air conditioning systems, housing- ducts or diffusers of hospitals, laboratories and clean rooms. Multi-V panels which allows high media area, low pressure drop and high dust holding capacity in same the same filter dimensions. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

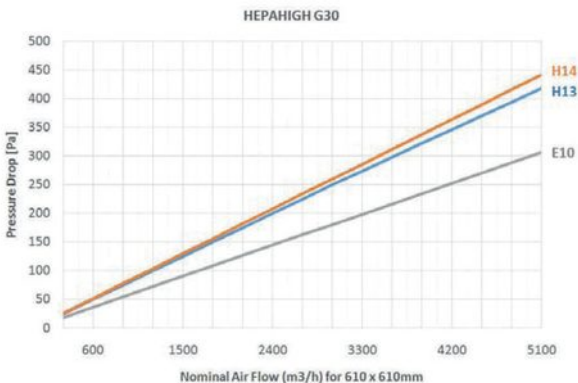

Special Features

Filter Type - Absolute HEPA Filter V Type

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

→ High efficiency final filtration in air conditioning systems

Product Code

YAFI HF

Advantages

- Compact design suitable for high air flow
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Individual test certificate is provided with filter
- Ergonomic handle

Filter Type	HH Hepa filter High Capacity
Frame	G G:Galvanized
Gasket	P E:EPDM P:Polyurethane
Air flow capacity	30 Air flow rate: 3400m³/h
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF-30-287/592/292-E10	287 x 592 x 292	E10 - 85 %	17,0	2500 / 250 Pa	6,80
YAFI HF-30-592/592/292-E10	592 x 592 x 292	E10 - 85 %	34,0	5000 / 250 Pa	23,00
YAFI HF-30-305/305/292-E10	305 x 305 x 292	E10 - 85 %	9,0	1250 / 250 Pa	7,00
YAFI HF-30-305/610/292-E10	305 x 610 x 292	E10 - 85 %	17,5	2500 / 250 Pa	12,80
YAFI HF-30-457/610/292-E10	457 x 610 x 292	E10 - 85 %	26,0	3750 / 250 Pa	21,00
YAFI HF-30-610/610/292-E10	610 x 610 x 292	E10 - 85 %	35,0	5000 / 250 Pa	23,50
YAFI HF-30-610/762/292-E10	610 x 762 x 292	E10 - 85 %	45,0	6250 / 250 Pa	25,40

H13					
YAFI HF-30-287/592/292-H13	287 x 592 x 292	H13 - 99,95 %	17,0	1700 / 250 Pa	6,80
YAFI HF-30-592/592/292-H13	592 x 592 x 292	H13 - 99,95 %	34,0	3400 / 250 Pa	23,00
YAFI HF-30-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	9,0	850 / 250 Pa	7,00
YAFI HF-30-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	17,5	1700 / 250 Pa	12,80
YAFI HF-30-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	26,0	2550 / 250 Pa	21,00
YAFI HF-30-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	35,0	3400 / 250 Pa	23,50
YAFI HF-30-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	45,0	4250 / 250 Pa	25,40

H14					
YAFI HF-30-287/592/292-H14	287 x 592 x 292	H14 - 99,995 %	17,0	1400 / 250 Pa	6,80
YAFI HF-30-592/592/292-H14	592 x 592 x 292	H14 - 99,995 %	34,0	2800 / 250 Pa	23,00
YAFI HF-30-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	9,0	700 / 250 Pa	7,00
YAFI HF-30-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	17,5	1400 / 250 Pa	12,80
YAFI HF-30-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	26,0	2100 / 250 Pa	21,00
YAFI HF-30-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	35,0	2800 / 250 Pa	23,50
YAFI HF-30-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	45,0	3600 / 250 Pa	25,40


HEPA FILTERS

Absolute HEPA Filters High Capacity V Type – MAX.Flow



Description

Designed as very high efficiency final filters for very high air flow rate for use in air conditioning systems, housing- ducts or diffusers of hospitals, laboratories and clean rooms. Multi-V panels which allows high media area, low pressure drop and high dust holding capacity in same the same filter dimensions. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

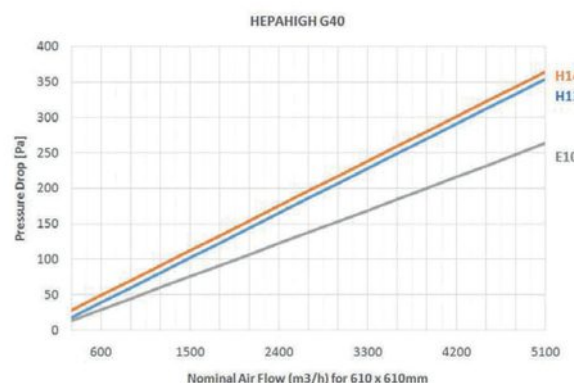

Special Features

Filter Type - Absolute HEPA Filter V Type

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

→ High efficiency final filtration
in air conditioning systems

Product Code

YAFI HF

Advantages

- Compact design suitable for high air flow
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Individual test certificate is provided with filter
- Ergonomic handle

Filter Type	HH Hepa filter High Capacity
Frame	G G:Galvanized
Gasket	P E:EPDM P:Polyurethane
Air flow capacity	40 Air flow rate: 4000m³/h
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF-40-287/592/292-E10	287 x 592 x 292	E10 - 85,00 %	20,0	2750 / 250 Pa	7,00
YAFI HF-40-592/592/292-E10	592 x 592 x 292	E10 - 85,00 %	40,0	5500 / 250 Pa	23,50
YAFI HF-40-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	10,0	1375 / 250 Pa	7,80
YAFI HF-40-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	20,0	2750 / 250 Pa	13,50
YAFI HF-40-360/430/292-E10	457 x 610 x 292	E10 - 85,00 %	30,0	4120 / 250 Pa	22,00
YAFI HF-40-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	40,0	5500 / 250 Pa	24,50
YAFI HF-40-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	50,0	6800 / 250 Pa	26,80

H13					
YAFI HF-40-287/592/292-H13	287 x 592 x 292	H13 - 99,95 %	20,0	2000 / 250 Pa	7,00
YAFI HF-40-592/592/292-H13	592 x 592 x 292	H13 - 99,95 %	40,0	4000 / 250 Pa	23,50
YAFI HF-40-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	10,0	1000 / 250 Pa	7,80
YAFI HF-40-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	20,0	2000 / 250 Pa	13,50
YAFI HF-40-360/430/292-E10	457 x 610 x 292	H13 - 99,95 %	30,0	3000 / 250 Pa	22,00
YAFI HF-40-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	40,0	4000 / 250 Pa	24,50
YAFI HF-40-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	50,0	5000 / 250 Pa	26,80

H14					
YAFI HF-40-287/592/292-H14	287 x 592 x 292	H14 - 99,995 %	20,0	1600 / 280 Pa	7,00
YAFI HF-40-592/592/292-H14	592 x 592 x 292	H14 - 99,995 %	40,0	3200 / 280 Pa	23,50
YAFI HF-40-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	10,0	800 / 280 Pa	7,80
YAFI HF-40-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	20,0	1600 / 280 Pa	13,50
YAFI HF-40-360/430/292-E10	457 x 610 x 292	H14 - 99,995 %	30,0	2400 / 280 Pa	22,00
YAFI HF-40-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	40,0	3200 / 280 Pa	24,50
YAFI HF-40-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	50,0	4000 / 280 Pa	26,80


HEPA FILTERS

Absolute HEPA Filters High Capacity V Type - Standard Plastic Frame



Description

Designed as very high efficiency final filters for very high air flow rate for use in air conditioning systems, housing- ducts or diffusers of hospitals, laboratories and clean rooms. Multi-V panels which allows high media area, low pressure drop and high dust holding capacity in same the same filter dimensions. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

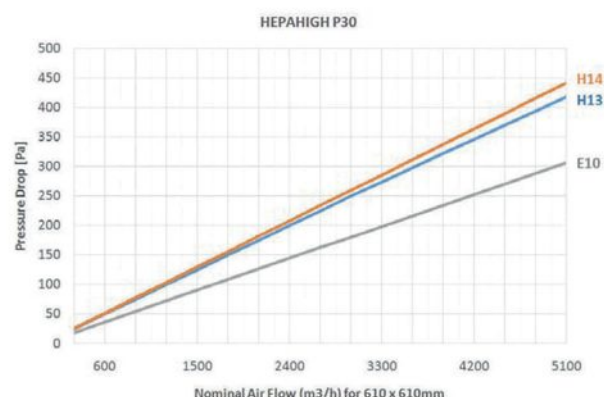

Special Features

Filter Type - Absolute HEPA Filter V Type

Filter Media - Micro Glass Fibre

Frame - Plastic Frame (Polypropylene)

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design suitable for high air flow
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Individual test certificate is provided with filter
- Ergonomic handle

Applications

- High efficiency final filtration in air conditioning systems

Product Code

YAFI HF

Filter Type	HH Hepa filter High Capacity
Frame	P P:Plastic
Gasket	P E:EPDM P:Polyurethane
Air flow capacity	30 Air flow rate: 3000m³/h
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF-30-305/305/292-E10	305 x 305 x 292	E10 - 85 %	9,0	1250 / 250 Pa	6,50
YAFI HF-30-305/610/292-E10	305 x 610 x 292	E10 - 85 %	17,5	2500 / 250 Pa	12,00
YAFI HF-30-457/610/292-E10	457 x 610 x 292	E10 - 85 %	26,0	3750 / 250 Pa	19,00
YAFI HF-30-610/610/292-E10	610 x 610 x 292	E10 - 85 %	35,0	5000 / 250 Pa	21,50
YAFI HF-30-610/762/292-E10	610 x 762 x 292	E10 - 85 %	45,0	6250 / 250 Pa	22,40

H13					
YAFI HF-30-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	9,0	850 / 250 Pa	6,50
YAFI HF-30-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	17,5	1700 / 250 Pa	12,00
YAFI HF-30-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	26,0	2550 / 250 Pa	19,00
YAFI HF-30-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	35,0	3400 / 250 Pa	21,50
YAFI HF-30-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	45,0	4250 / 250 Pa	22,40

H14					
YAFI HF-30-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	9,0	700 / 250 Pa	6,50
YAFI HF-30-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	17,5	1400 / 250 Pa	12,00
YAFI HF-30-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	26,0	2100 / 250 Pa	19,00
YAFI HF-30-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	35,0	2800 / 250 Pa	21,50
YAFI HF-30-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	45,0	3600 / 250 Pa	22,40


HEPA FILTERS

Absolute HEPA Filters High Capacity V Type - Max.Flow Plastic Frame



Description

Designed as very high efficiency final filters for very high air flow rate for use in air conditioning systems, housing- ducts or diffusers of hospitals, laboratories and clean rooms. Multi-V panels which allows high media area, low pressure drop and high dust holding capacity in same the same filter dimensions. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

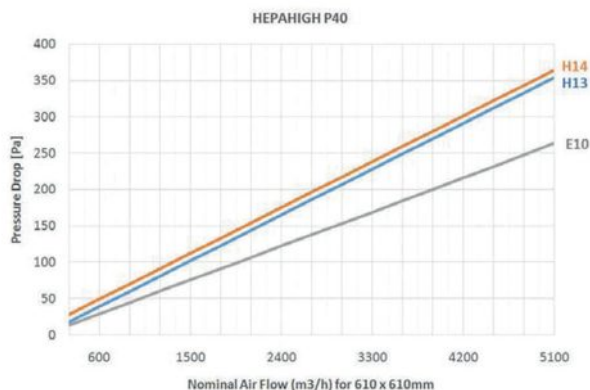

Special Features

Filter Type - Absolute HEPA Filter V Type

Filter Media - Micro Glass Fibre

Frame - Plastic Frame (Polypropylene)

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

➔ High efficiency final filtration in air conditioning systems

Product Code

YAFI HF

Advantages

- ➔ Compact design suitable for high air flow
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Individual test certificate is provided with filter
- ➔ Ergonomic handle

Filter Type	HH Hepa filter High Capacity
Frame	P P:Plastic
Gasket	P E:EPDM P:Polyurethane
Air flow capacity	40 Air flow rate: 4000m3/h
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF-40-305/305/292-E10	305 x 305 x 292	E10 - 85 %	9,3	1375 / 250 Pa	6,80
YAFI HF-40-305/610/292-E10	305 x 610 x 292	E10 - 85 %	18,5	2750 / 250 Pa	12,50
YAFI HF-40-457/610/292-E10	457 x 610 x 292	E10 - 85 %	27,5	4120 / 250 Pa	19,80
YAFI HF-40-610/610/292-E10	610 x 610 x 292	E10 - 85 %	37,0	5500 / 250 Pa	22,00
YAFI HF-40-610/762/292-E10	610 x 762 x 292	E10 - 85 %	46,0	6800 / 250 Pa	23,00

H13					
YAFI HF-40-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	9,3	1000 / 280 Pa	6,80
YAFI HF-40-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	18,5	2000 / 280 Pa	12,50
YAFI HF-40-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	27,5	3000 / 280 Pa	19,80
YAFI HF-40-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	37,0	4000 / 280 Pa	22,00
YAFI HF-40-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	46,0	5000 / 280 Pa	23,00

H14					
YAFI HF-40-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	9,3	800 / 280 Pa	6,80
YAFI HF-40-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	18,5	1600 / 280 Pa	12,50
YAFI HF-40-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	27,5	2400 / 280 Pa	19,80
YAFI HF-40-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	37,0	3200 / 280 Pa	22,00
YAFI HF-40-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	46,0	4000 / 280 Pa	23,00

HEPA FILTERS

Absolute HEPA Filters High Capacity V Type - NBC Grade



Special Features

Filter Type - Absolute HEPA Filter V Type

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Silicon

Final Pressure Drop - 600 Pa

Max. Temperature - 120 °C

Applications


→ Designed for the special systems such as in supply and exhaust air systems in industry and nuclear installations.

Advantages

- Compact design suitable for high air flow
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Individual test certificate is provided with filter
- Ergonomic handle

Description

Designed as very high efficiency final filters for very high air flow rate for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories, clean rooms and nuclear installations. Multi-V panels which allows high media area, low pressure drop and high dust holding capacity in same the same filter dimensions. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

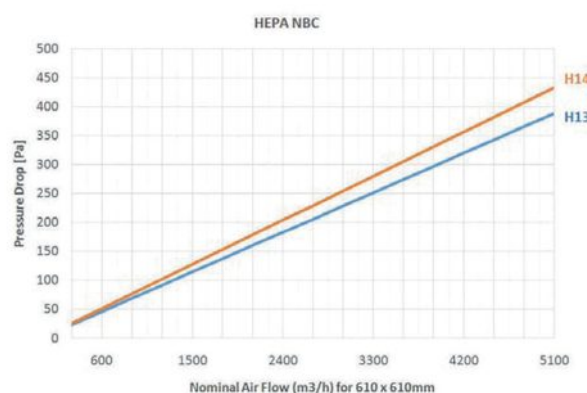

Product Code

YAFI HF

Filter Type	HN Hepa filter NBC grade
Frame	G G:Galvanized
Gasket	S S:Silicone
Air flow capacity	40 Air flow rate: 4000m³/h
Efficiency	EN1822 H13

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
NBC 40					
YAFI HF-40-287/592/292-NBC	287 x 592 x 292	H13 - 99,95 % - NBC	18,5	2000 / 300 Pa	7,00
YAFI HF-40-592/592/292-NBC	592 x 592 x 292	H13 - 99,95 % - NBC	37,0	4000 / 300 Pa	23,00
YAFI HF-40-305/305/292-NBC	305 x 305 x 292	H13 - 99,95 % - NBC	9,3	1000 / 300 Pa	7,80
YAFI HF-40-305/610/292-NBC	305 x 610 x 292	H13 - 99,95 % - NBC	18,5	2000 / 300 Pa	13,50
YAFI HF-40-457/610/292-NBC	457 x 610 x 292	H13 - 99,95 % - NBC	27,5	3000 / 300 Pa	22,00
YAFI HF-40-610/610/292-NBC	610 x 610 x 292	H13 - 99,95 % - NBC	37,0	4000 / 300 Pa	24,50
YAFI HF-40-610/762/292-NBC	610 x 762 x 292	H13 - 99,95 % - NBC	46,0	5000 / 300 Pa	26,80

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 30mm



Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass

Fibre Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications


→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

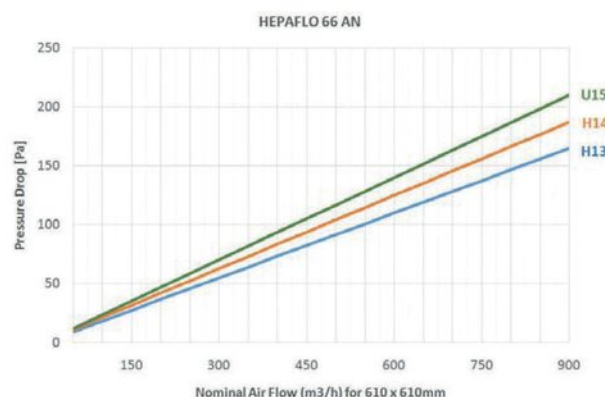

Product Code

YAFI HF 30

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	S	S:25mm
Protektion mesh	D	T:Sinle D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 30-305/305/30-H13	305 x 305 x 30	H13 - 99,95 %	1,3	150 / 155 Pa	1,00
YAFI HF 30-305/610/30-H13	305 x 610 x 30	H13 - 99,95 %	2,4	300 / 155 Pa	1,60
YAFI HF 30-457/457/30-H13	457 x 457 x 30	H13 - 99,95 %	2,7	340 / 155 Pa	1,70
YAFI HF 30-457/610/30-H13	457 x 610 x 30	H13 - 99,95 %	3,6	450 / 155 Pa	1,90
YAFI HF 30-535/535/30-H13	535 x 535 x 30	H13 - 99,95 %	3,7	465 / 155 Pa	2,00
YAFI HF 30-575/575/30-H13	575 x 575 x 30	H13 - 99,95 %	4,2	535 / 155 Pa	2,20
YAFI HF 30-610/610/30-H13	610 x 610 x 30	H13 - 99,95 %	4,7	600 / 155 Pa	2,40
YAFI HF 30-610/762/30-H13	610 x 762 x 30	H13 - 99,95 %	5,8	750 / 155 Pa	3,20
YAFI HF 30-610/915/30-H13	610 x 915 x 30	H13 - 99,95 %	7,1	900 / 155 Pa	3,90
YAFI HF 30-762/762/30-H13	762 x 762 x 30	H13 - 99,95 %	7,4	940 / 155 Pa	4,20
YAFI HF 30-915/915/30-H13	915 x 915 x 30	H13 - 99,95 %	10,7	1350 / 155 Pa	5,60
YAFI HF 30-610/1220/30-H13	610 x 1220 x 30	H13 - 99,95 %	9,5	1200 / 155 Pa	5,20

H14					
YAFI HF 30-305/305/30-H14	305 x 305 x 30	H14 - 99,995 %	1,3	150 / 185 Pa	1,00
YAFI HF 30-305/610/30-H14	305 x 610 x 30	H14 - 99,995 %	2,4	300 / 185 Pa	1,60
YAFI HF 30-457/457/30-H14	457 x 457 x 30	H14 - 99,995 %	2,7	340 / 185 Pa	1,70
YAFI HF 30-457/610/30-H14	457 x 610 x 30	H14 - 99,995 %	3,6	450 / 185 Pa	1,90
YAFI HF 30-535/535/30-H14	535 x 535 x 30	H14 - 99,995 %	3,7	465 / 185 Pa	2,00
YAFI HF 30-575/575/30-H14	575 x 575 x 30	H14 - 99,995 %	4,2	535 / 185 Pa	2,20
YAFI HF 30-610/610/30-H14	610 x 610 x 30	H14 - 99,995 %	4,7	600 / 185 Pa	2,40
YAFI HF 30-610/762/30-H14	610 x 762 x 30	H14 - 99,995 %	5,8	750 / 185 Pa	3,20
YAFI HF 30-610/915/30-H14	610 x 915 x 30	H14 - 99,995 %	7,1	900 / 185 Pa	3,90
YAFI HF 30-762/762/30-H14	762 x 762 x 30	H14 - 99,995 %	7,4	940 / 185 Pa	4,20
YAFI HF 30-915/915/30-H14	915 x 915 x 30	H14 - 99,995 %	10,7	1350 / 185 Pa	5,60
YAFI HF 30-610/1220/30-H14	610 x 1220 x 30	H14 - 99,995 %	9,5	1200 / 185 Pa	5,20

U15					
YAFI HF 30-305/305/30-U15	305 x 305 x 30	U15 - 99,9995 %	1,3	150 / 215 Pa	1,00
YAFI HF 30-305/610/30-U15	305 x 610 x 30	U15 - 99,9995 %	2,4	300 / 215 Pa	1,60
YAFI HF 30-457/457/30-U15	457 x 457 x 30	U15 - 99,9995 %	2,7	340 / 215 Pa	1,70
YAFI HF 30-457/610/30-U15	457 x 610 x 30	U15 - 99,9995 %	3,6	450 / 215 Pa	1,90
YAFI HF 30-535/535/30-U15	535 x 535 x 30	U15 - 99,9995 %	3,7	465 / 215 Pa	2,00
YAFI HF 30-575/575/30-U15	575 x 575 x 30	U15 - 99,9995 %	4,2	535 / 215 Pa	2,20
YAFI HF 30-610/610/30-U15	610 x 610 x 30	U15 - 99,9995 %	4,7	600 / 215 Pa	2,40
YAFI HF 30-610/762/30-U15	610 x 762 x 30	U15 - 99,9995 %	5,8	750 / 215 Pa	3,20
YAFI HF 30-610/915/30-U15	610 x 915 x 30	U15 - 99,9995 %	7,1	900 / 215 Pa	3,90
YAFI HF 30-762/762/30-U15	762 x 762 x 30	U15 - 99,9995 %	7,4	940 / 215 Pa	4,20
YAFI HF 30-915/915/30-U15	915 x 915 x 30	U15 - 99,9995 %	10,7	1350 / 215 Pa	5,60
YAFI HF 30-610/1220/30-U15	610 x 1220 x 30	U15 - 99,9995 %	9,5	1200 / 215 Pa	5,20

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 66mm



Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications


→ HEPA-/WLPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

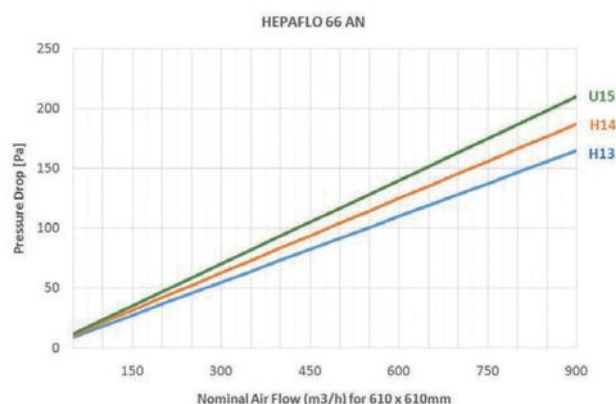

Product Code

YAFI HF 66

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:50mm
Protektion mesh	D	T:Sinle D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 66-305/305/66-H13	305 x 305 x 66	H13 - 99,95 %	2,4	150 / 100 Pa	1,80
YAFI HF 66-305/610/66-H13	305 x 610 x 66	H13 - 99,95 %	4,6	300 / 100 Pa	3,10
YAFI HF 66-457/457/66-H13	457 x 457 x 66	H13 - 99,95 %	5,2	340 / 100 Pa	3,30
YAFI HF 66-457/610/66-H13	457 x 610 x 66	H13 - 99,95 %	6,8	450 / 100 Pa	3,60
YAFI HF 66-535/535/66-H13	535 x 535 x 66	H13 - 99,95 %	7,0	465 / 100 Pa	3,70
YAFI HF 66-575/575/66-H13	575 x 575 x 66	H13 - 99,95 %	8,0	535 / 100 Pa	4,00
YAFI HF 66-610/610/66-H13	610 x 610 x 66	H13 - 99,95 %	9,0	600 / 100 Pa	4,20
YAFI HF 66-610/762/66-H13	610 x 762 x 66	H13 - 99,95 %	11,2	750 / 100 Pa	5,20
YAFI HF 66-610/915/66-H13	610 x 915 x 66	H13 - 99,95 %	13,5	900 / 100 Pa	6,60
YAFI HF 66-762/762/66-H13	762 x 762 x 66	H13 - 99,95 %	14,0	940 / 100 Pa	7,00
YAFI HF 66-915/915/66-H13	915 x 915 x 66	H13 - 99,95 %	20,3	1350 / 100 Pa	9,60
YAFI HF 66-610/1220/66-H13	610 x 1220 x 66	H13 - 99,95 %	18,0	1200 / 100 Pa	8,80

H14					
YAFI HF 66-305/305/66-H14	305 x 305 x 66	H14 - 99,995 %	2,4	150 / 125 Pa	1,80
YAFI HF 66-305/610/66-H14	305 x 610 x 66	H14 - 99,995 %	4,6	300 / 125 Pa	3,10
YAFI HF 66-457/457/66-H14	457 x 457 x 66	H14 - 99,995 %	5,2	340 / 125 Pa	3,30
YAFI HF 66-457/610/66-H14	457 x 610 x 66	H14 - 99,995 %	6,8	450 / 125 Pa	3,60
YAFI HF 66-535/535/66-H14	535 x 535 x 66	H14 - 99,995 %	7,0	465 / 125 Pa	3,70
YAFI HF 66-575/575/66-H14	575 x 575 x 66	H14 - 99,995 %	8,0	535 / 125 Pa	4,00
YAFI HF 66-610/610/66-H14	610 x 610 x 66	H14 - 99,995 %	9,0	600 / 125 Pa	4,20
YAFI HF 66-610/762/66-H14	610 x 762 x 66	H14 - 99,995 %	11,2	750 / 125 Pa	5,20
YAFI HF 66-610/915/66-H14	610 x 915 x 66	H14 - 99,995 %	13,5	900 / 125 Pa	6,60
YAFI HF 66-762/762/66-H14	762 x 762 x 66	H14 - 99,995 %	14,0	940 / 125 Pa	7,00
YAFI HF 66-915/915/66-H14	915 x 915 x 66	H14 - 99,995 %	20,3	1350 / 125 Pa	9,60
YAFI HF 66-610/1220/66-H14	610 x 1220 x 66	H14 - 99,995 %	18,0	1200 / 125 Pa	8,80

U15					
YAFI HF 66-305/305/66-U15	305 x 305 x 66	U15 - 99,9995 %	2,4	150 / 140 Pa	1,80
YAFI HF 66-305/610/66-U15	305 x 610 x 66	U15 - 99,9995 %	4,6	300 / 140 Pa	3,10
YAFI HF 66-457/457/66-U15	457 x 457 x 66	U15 - 99,9995 %	5,2	340 / 140 Pa	3,30
YAFI HF 66-457/610/66-U15	457 x 610 x 66	U15 - 99,9995 %	6,8	450 / 140 Pa	3,60
YAFI HF 66-535/535/66-U15	535 x 535 x 66	U15 - 99,9995 %	7,0	465 / 140 Pa	3,70
YAFI HF 66-575/575/66-U15	575 x 575 x 66	U15 - 99,9995 %	8,0	535 / 140 Pa	4,00
YAFI HF 66-610/610/66-U15	610 x 610 x 66	U15 - 99,9995 %	9,0	600 / 140 Pa	4,20
YAFI HF 66-610/762/66-U15	610 x 762 x 66	U15 - 99,9995 %	11,2	750 / 140 Pa	5,20
YAFI HF 66-610/915/66-U15	610 x 915 x 66	U15 - 99,9995 %	13,5	900 / 140 Pa	6,60
YAFI HF 66-762/762/66-U15	762 x 762 x 66	U15 - 99,9995 %	14,0	940 / 140 Pa	7,00
YAFI HF 66-915/915/66-U15	915 x 915 x 66	U15 - 99,9995 %	20,3	1350 / 140 Pa	9,60
YAFI HF 66-610/1220/66-U15	610 x 1220 x 66	U15 - 99,9995 %	18,0	1200 / 140 Pa	8,80

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 69mm

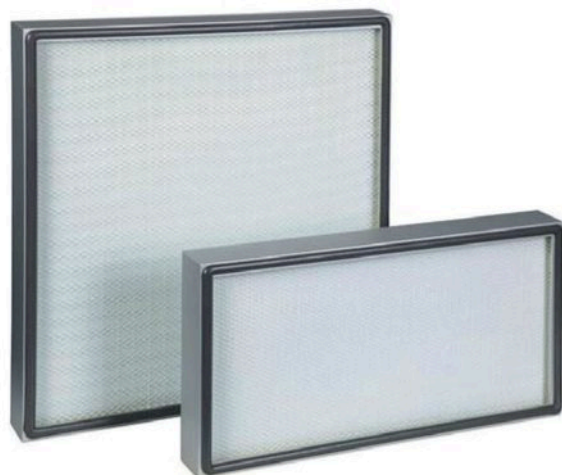

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass

Fibre Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications


→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

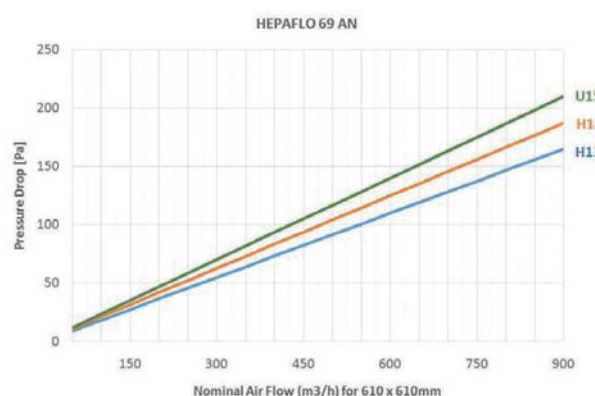

Product Code

YAFI HF 69

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:50mm
Protektion mesh	D	T:Sinle D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 69-305/305/69-H13	305 x 305 x 69	H13 - 99,95 %	2,4	150 / 100 Pa	2,00
YAFI HF 69-305/610/69-H13	305 x 610 x 69	H13 - 99,95 %	4,6	300 / 100 Pa	3,30
YAFI HF 69-457/457/69-H13	457 x 457 x 69	H13 - 99,95 %	5,2	340 / 100 Pa	3,50
YAFI HF 69-457/610/69-H13	457 x 610 x 69	H13 - 99,95 %	6,8	450 / 100 Pa	3,80
YAFI HF 69-535/535/69-H13	535 x 535 x 69	H13 - 99,95 %	7,0	465 / 100 Pa	4,00
YAFI HF 69-575/575/69-H13	575 x 575 x 69	H13 - 99,95 %	8,0	535 / 100 Pa	4,20
YAFI HF 69-610/610/69-H13	610 x 610 x 69	H13 - 99,95 %	9,0	600 / 100 Pa	4,60
YAFI HF 69-610/762/69-H13	610 x 762 x 69	H13 - 99,95 %	11,2	750 / 100 Pa	5,40
YAFI HF 69-610/915/69-H13	610 x 915 x 69	H13 - 99,95 %	13,5	900 / 100 Pa	7,00
YAFI HF 69-762/762/69-H13	762 x 762 x 69	H13 - 99,95 %	14,0	940 / 100 Pa	7,40
YAFI HF 69-915/915/69-H13	915 x 915 x 69	H13 - 99,95 %	20,3	1350 / 100 Pa	10,20
YAFI HF 69-610/1220/69-H13	610 x 1220 x 69	H13 - 99,95 %	18,0	1200 / 100 Pa	9,20

H14					
YAFI HF 69-305/305/69-H14	305 x 305 x 69	H14 - 99,995 %	2,4	150 / 125 Pa	2,00
YAFI HF 69-305/610/69-H14	305 x 610 x 69	H14 - 99,995 %	4,6	300 / 125 Pa	3,30
YAFI HF 69-457/457/69-H14	457 x 457 x 69	H14 - 99,995 %	5,2	340 / 125 Pa	3,50
YAFI HF 69-457/610/69-H14	457 x 610 x 69	H14 - 99,995 %	6,8	450 / 125 Pa	3,80
YAFI HF 69-535/535/69-H14	535 x 535 x 69	H14 - 99,995 %	7,0	465 / 125 Pa	4,00
YAFI HF 69-575/575/69-H14	575 x 575 x 69	H14 - 99,995 %	8,0	535 / 125 Pa	4,20
YAFI HF 69-610/610/69-H14	610 x 610 x 69	H14 - 99,995 %	9,0	600 / 125 Pa	4,60
YAFI HF 69-610/762/69-H14	610 x 762 x 69	H14 - 99,995 %	11,2	750 / 125 Pa	5,40
YAFI HF 69-610/915/69-H14	610 x 915 x 69	H14 - 99,995 %	13,5	900 / 125 Pa	7,00
YAFI HF 69-762/762/69-H14	762 x 762 x 69	H14 - 99,995 %	14,0	940 / 125 Pa	7,40
YAFI HF 69-915/915/69-H14	915 x 915 x 69	H14 - 99,995 %	20,3	1350 / 125 Pa	10,20
YAFI HF 69-610/1220/69-H14	610 x 1220 x 69	H14 - 99,995 %	18,0	1200 / 125 Pa	9,20

U15					
YAFI HF 69-305/305/69-U15	305 x 305 x 69	U15 - 99,9995 %	2,4	150 / 140 Pa	2,00
YAFI HF 69-305/610/69-U15	305 x 610 x 69	U15 - 99,9995 %	4,6	300 / 140 Pa	3,30
YAFI HF 69-457/457/69-U15	457 x 457 x 69	U15 - 99,9995 %	5,2	340 / 140 Pa	3,50
YAFI HF 69-457/610/69-U15	457 x 610 x 69	U15 - 99,9995 %	6,8	450 / 140 Pa	3,80
YAFI HF 69-535/535/69-U15	535 x 535 x 69	U15 - 99,9995 %	7,0	465 / 140 Pa	4,00
YAFI HF 69-575/575/69-U15	575 x 575 x 69	U15 - 99,9995 %	8,0	535 / 140 Pa	4,20
YAFI HF 69-610/610/69-U15	610 x 610 x 69	U15 - 99,9995 %	9,0	600 / 140 Pa	4,60
YAFI HF 69-610/762/69-U15	610 x 762 x 69	U15 - 99,9995 %	11,2	750 / 140 Pa	5,40
YAFI HF 69-610/915/69-U15	610 x 915 x 69	U15 - 99,9995 %	13,5	900 / 140 Pa	7,00
YAFI HF 69-762/762/69-U15	762 x 762 x 69	U15 - 99,9995 %	14,0	940 / 140 Pa	7,40
YAFI HF 69-915/915/69-U15	915 x 915 x 69	U15 - 99,9995 %	20,3	1350 / 140 Pa	10,20
YAFI HF 69-610/1220/69-U15	610 x 1220 x 69	U15 - 99,9995 %	18,0	1200 / 140 Pa	9,20

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 78mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can be used on to frame in order to guarantee a perfect seal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame


Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

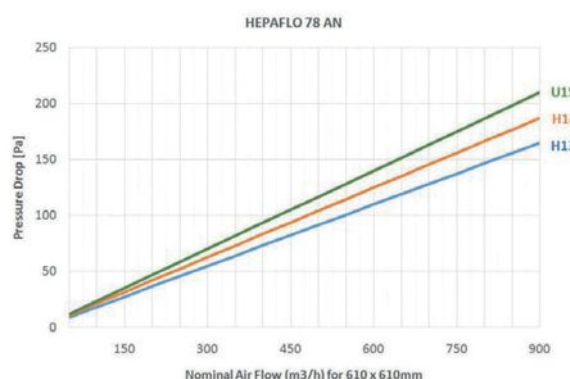

Applications

→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Product Code

YAFI HF

Filter Type	HF Hepa filter
Frame	A A:Aluminium
Pleat height	N N:50mm
Protection mesh	D T:Single D:Double
Gasket	P E:EPDM P:Polyurethane
Efficiency	EN1822 E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF-305/305/78-H13	305 x 305 x 78	H13 - 99,95 %	2,4	150 / 100 Pa	2,20
YAFI HF-305/610/78-H13	305 x 610 x 78	H13 - 99,95 %	4,6	300 / 100 Pa	3,50
YAFI HF-457/457/78-H13	457 x 457 x 78	H13 - 99,95 %	5,2	340 / 100 Pa	3,80
YAFI HF-457/610/78-H13	457 x 610 x 78	H13 - 99,95 %	6,8	450 / 100 Pa	3,90
YAFI HF-535/535/78-H13	535 x 535 x 78	H13 - 99,95 %	7,0	465 / 100 Pa	4,20
YAFI HF-575/575/78-H13	575 x 575 x 78	H13 - 99,95 %	8,0	535 / 100 Pa	4,60
YAFI HF-610/610/78-H13	610 x 610 x 78	H13 - 99,95 %	9,0	600 / 100 Pa	4,90
YAFI HF-610/762/78-H13	610 x 762 x 78	H13 - 99,95 %	11,2	750 / 100 Pa	5,80
YAFI HF-610/915/78-H13	610 x 915 x 78	H13 - 99,95 %	13,5	900 / 100 Pa	7,20
YAFI HF-762/762/78-H13	762 x 762 x 78	H13 - 99,95 %	14,0	940 / 100 Pa	7,70
YAFI HF-915/915/78-H13	915 x 915 x 78	H13 - 99,95 %	20,3	1350 / 100 Pa	10,80
YAFI HF-610/1220/78-H13	610 x 1220 x 78	H13 - 99,95 %	18,0	1200 / 100 Pa	9,60

H14					
YAFI HF-305/305/78-H14	305 x 305 x 78	H14 - 99,995 %	2,4	150 / 125 Pa	2,20
YAFI HF-305/610/78-H14	305 x 610 x 78	H14 - 99,995 %	4,6	300 / 125 Pa	3,50
YAFI HF-457/457/78-H14	457 x 457 x 78	H14 - 99,995 %	5,2	340 / 125 Pa	3,80
YAFI HF-457/610/78-H14	457 x 610 x 78	H14 - 99,995 %	6,8	450 / 125 Pa	3,90
YAFI HF-535/535/78-H14	535 x 535 x 78	H14 - 99,995 %	7,0	465 / 125 Pa	4,20
YAFI HF-575/575/78-H14	575 x 575 x 78	H14 - 99,995 %	8,0	535 / 125 Pa	4,60
YAFI HF-610/610/78-H14	610 x 610 x 78	H14 - 99,995 %	9,0	600 / 125 Pa	4,90
YAFI HF-610/762/78-H14	610 x 762 x 78	H14 - 99,995 %	11,2	750 / 125 Pa	5,80
YAFI HF-610/915/78-H14	610 x 915 x 78	H14 - 99,995 %	13,5	900 / 125 Pa	7,20
YAFI HF-762/762/78-H14	762 x 762 x 78	H14 - 99,995 %	14,0	940 / 125 Pa	7,70
YAFI HF-915/915/78-H14	915 x 915 x 78	H14 - 99,995 %	20,3	1350 / 125 Pa	10,80
YAFI HF-610/1220/78-H14	610 x 1220 x 78	H14 - 99,995 %	18,0	1200 / 125 Pa	9,60

U15					
YAFI HF-305/305/78-W15	305 x 305 x 78	U15 - 99,9995 %	2,4	150 / 140 Pa	2,20
YAFI HF-305/610/78-W15	305 x 610 x 78	U15 - 99,9995 %	4,6	300 / 140 Pa	3,50
YAFI HF-457/457/78-W15	457 x 457 x 78	U15 - 99,9995 %	5,2	340 / 140 Pa	3,80
YAFI HF-457/610/78-W15	457 x 610 x 78	U15 - 99,9995 %	6,8	450 / 140 Pa	3,90
YAFI HF-535/535/78-W15	535 x 535 x 78	U15 - 99,9995 %	7,0	465 / 140 Pa	4,20
YAFI HF-575/575/78-W15	575 x 575 x 78	U15 - 99,9995 %	8,0	535 / 140 Pa	4,60
YAFI HF-610/610/78-W15	610 x 610 x 78	U15 - 99,9995 %	9,0	600 / 140 Pa	4,90
YAFI HF-610/762/78-W15	610 x 762 x 78	U15 - 99,9995 %	11,2	750 / 140 Pa	5,80
YAFI HF-610/915/78-W15	610 x 915 x 78	U15 - 99,9995 %	13,5	900 / 140 Pa	7,20
YAFI HF-762/762/78-W15	762 x 762 x 78	U15 - 99,9995 %	14,0	940 / 140 Pa	7,70
YAFI HF-915/915/78-W15	915 x 915 x 78	U15 - 99,9995 %	20,3	1350 / 140 Pa	10,80
YAFI HF-610/1220/78-W15	610 x 1220 x 78	U15 - 99,9995 %	18,0	1200 / 140 Pa	9,60

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 110mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can be used on to frame in order to guarantee a perfect seal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame


Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

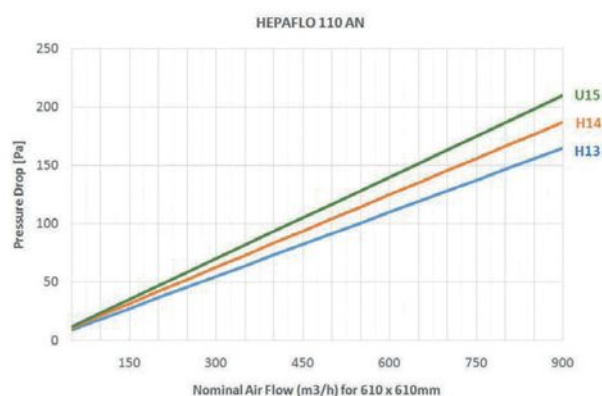

Applications

- ➔ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Product Code

YAFI HF 110

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:50mm
Protection mesh	D	X:no T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 110-305/305/110-H13	305 x 305 x 110	H13 - 99,95 %	2,4	150 / 100 Pa	2,80
YAFI HF 110-305/610/110-H13	305 x 610 x 110	H13 - 99,95 %	4,6	300 / 100 Pa	4,50
YAFI HF 110-457/457/110-H13	457 x 457 x 110	H13 - 99,95 %	5,2	340 / 100 Pa	4,80
YAFI HF 110-457/610/110-H13	457 x 610 x 110	H13 - 99,95 %	6,8	450 / 100 Pa	5,40
YAFI HF 110-535/535/110-H13	535 x 535 x 110	H13 - 99,95 %	7,0	465 / 100 Pa	5,70
YAFI HF 110-575/575/110-H13	575 x 575 x 110	H13 - 99,95 %	8,0	535 / 100 Pa	5,92
YAFI HF 110-610/610/110-H13	610 x 610 x 110	H13 - 99,95 %	9,0	600 / 100 Pa	6,00
YAFI HF 110-610/762/110-H13	610 x 762 x 110	H13 - 99,95 %	11,2	750 / 100 Pa	7,70
YAFI HF 110-610/915/110-H13	610 x 915 x 110	H13 - 99,95 %	13,5	900 / 100 Pa	9,20
YAFI HF 110-762/762/110-H13	762 x 762 x 110	H13 - 99,95 %	14,0	940 / 100 Pa	10,00
YAFI HF 110-915/915/110-H13	915 x 915 x 110	H13 - 99,95 %	20,3	1350 / 100 Pa	13,80
YAFI HF 110-610/1220/110-H13	610 x 1220 x 110	H13 - 99,95 %	18,0	1200 / 100 Pa	13,10

H14					
YAFI HF 110-305/305/110-H14	305 x 305 x 110	H14 - 99,995 %	2,4	150 / 125 Pa	2,80
YAFI HF 110-305/610/110-H14	305 x 610 x 110	H14 - 99,995 %	4,6	300 / 125 Pa	4,50
YAFI HF 110-457/457/110-H14	457 x 457 x 110	H14 - 99,995 %	5,2	340 / 125 Pa	4,80
YAFI HF 110-457/610/110-H14	457 x 610 x 110	H14 - 99,995 %	6,8	450 / 125 Pa	5,40
YAFI HF 110-535/535/110-H14	535 x 535 x 110	H14 - 99,995 %	7,0	465 / 125 Pa	5,70
YAFI HF 110-575/575/110-H14	575 x 575 x 110	H14 - 99,995 %	8,0	535 / 125 Pa	5,92
YAFI HF 110-610/610/110-H14	610 x 610 x 110	H14 - 99,995 %	9,0	600 / 125 Pa	6,00
YAFI HF 110-610/762/110-H14	610 x 762 x 110	H14 - 99,995 %	11,2	750 / 125 Pa	7,70
YAFI HF 110-610/915/110-H14	610 x 915 x 110	H14 - 99,995 %	13,5	900 / 125 Pa	9,20
YAFI HF 110-762/762/110-H14	762 x 762 x 110	H14 - 99,995 %	14,0	940 / 125 Pa	10,00
YAFI HF 110-915/915/110-H14	915 x 915 x 110	H14 - 99,995 %	20,3	1350 / 125 Pa	13,80
YAFI HF 110-610/1220/110-H14	610 x 1220 x 110	H14 - 99,995 %	18,0	1200 / 125 Pa	13,10

U15					
YAFI HF 110-305/305/110-U15	305 x 305 x 110	U15 - 99,9995 %	2,4	150 / 140 Pa	2,80
YAFI HF 110-305/610/110-U15	305 x 610 x 110	U15 - 99,9995 %	4,6	300 / 140 Pa	4,50
YAFI HF 110-457/457/110-U15	457 x 457 x 110	U15 - 99,9995 %	5,2	340 / 140 Pa	4,80
YAFI HF 110-457/610/110-U15	457 x 610 x 110	U15 - 99,9995 %	6,8	450 / 140 Pa	5,40
YAFI HF 110-535/535/110-U15	535 x 535 x 110	U15 - 99,9995 %	7,0	465 / 140 Pa	5,70
YAFI HF 110-575/575/110-U15	575 x 575 x 110	U15 - 99,9995 %	8,0	535 / 140 Pa	5,92
YAFI HF 110-610/610/110-U15	610 x 610 x 110	U15 - 99,9995 %	9,0	600 / 140 Pa	6,00
YAFI HF 110-610/762/110-U15	610 x 762 x 110	U15 - 99,9995 %	11,2	750 / 140 Pa	7,70
YAFI HF 110-610/915/110-U15	610 x 915 x 110	U15 - 99,9995 %	13,5	900 / 140 Pa	9,20
YAFI HF 110-762/762/110-U15	762 x 762 x 110	U15 - 99,9995 %	14,0	940 / 140 Pa	10,00
YAFI HF 110-915/915/110-U15	915 x 915 x 110	U15 - 99,9995 %	20,3	1350 / 140 Pa	13,80
YAFI HF 110-610/1220/110-U15	610 x 1220 x 110	U15 - 99,9995 %	18,0	1200 / 140 Pa	13,10

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 110mm



Applications

- HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa


Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

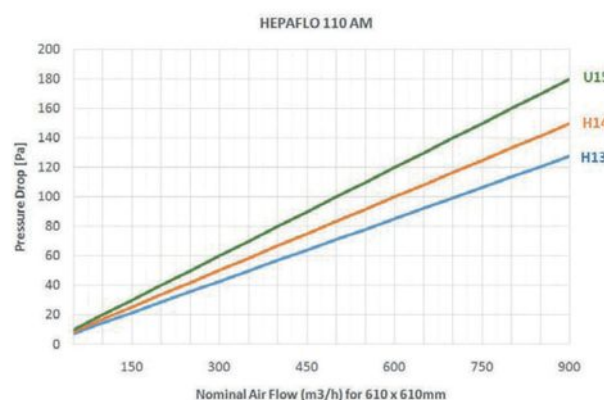

Product Code

YAFI HF 110

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	M	M:75mm
Protektion mesh	D	X:no T:Sinle D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 110-305/305/110-H13	305 x 305 x 110	H13 - 99,95 %	3,1	150 / 85 Pa	3,00
YAFI HF 110-305/610/110-H13	305 x 610 x 110	H13 - 99,95 %	6,2	300 / 85 Pa	4,70
YAFI HF 110-457/457/110-H13	457 x 457 x 110	H13 - 99,95 %	7,0	340 / 85 Pa	5,00
YAFI HF 110-457/610/110-H13	457 x 610 x 110	H13 - 99,95 %	9,4	450 / 85 Pa	5,60
YAFI HF 110-535/535/110-H13	535 x 535 x 110	H13 - 99,95 %	9,6	465 / 85 Pa	5,90
YAFI HF 110-575/575/110-H13	575 x 575 x 110	H13 - 99,95 %	11,0	535 / 85 Pa	6,10
YAFI HF 110-610/610/110-H13	610 x 610 x 110	H13 - 99,95 %	12,4	600 / 85 Pa	6,30
YAFI HF 110-610/762/110-H13	610 x 762 x 110	H13 - 99,95 %	15,5	750 / 85 Pa	8,00
YAFI HF 110-610/915/110-H13	610 x 915 x 110	H13 - 99,95 %	18,6	900 / 85 Pa	9,80
YAFI HF 110-762/762/110-H13	762 x 762 x 110	H13 - 99,95 %	19,2	940 / 85 Pa	10,20
YAFI HF 110-915/915/110-H13	915 x 915 x 110	H13 - 99,95 %	28,0	1350 / 85 Pa	14,20
YAFI HF 110-610/1220/110-H13	610 x 1220 x 110	H13 - 99,95 %	24,8	1200 / 85 Pa	13,80

H14					
HF-AM-DP-305/305/110-H14	305 x 305 x 110	H14 - 99,995 %	3,1	150 / 100 Pa	3,00
HF-AM-DP-305/610/110-H14	305 x 610 x 110	H14 - 99,995 %	6,2	300 / 100 Pa	4,70
YAFI HF 110-457/457/110-H14	457 x 457 x 110	H14 - 99,995 %	7,0	340 / 100 Pa	5,00
YAFI HF 110-457/610/110-H14	457 x 610 x 110	H14 - 99,995 %	9,4	450 / 100 Pa	5,60
YAFI HF 110-535/535/110-H14	535 x 535 x 110	H14 - 99,995 %	9,6	465 / 100 Pa	5,90
YAFI HF 110-575/575/110-H14	575 x 575 x 110	H14 - 99,995 %	11,0	535 / 100 Pa	6,10
YAFI HF 110-610/610/110-H14	610 x 610 x 110	H14 - 99,995 %	12,4	600 / 100 Pa	6,30
YAFI HF 110-610/762/110-H14	610 x 762 x 110	H14 - 99,995 %	15,5	750 / 100 Pa	8,00
YAFI HF 110-610/915/110-H14	610 x 915 x 110	H14 - 99,995 %	18,6	900 / 100 Pa	9,80
YAFI HF 110-762/762/110-H14	762 x 762 x 110	H14 - 99,995 %	19,2	940 / 100 Pa	10,20
YAFI HF 110-915/915/110-H14	915 x 915 x 110	H14 - 99,995 %	28,0	1350 / 100 Pa	14,20
YAFI HF 110-610/1220/110-H14	610 x 1220 x 110	H14 - 99,995 %	24,8	1200 / 100 Pa	13,80

U15					
YAFI HF 110-305/305/110-U15	305 x 305 x 110	U15 - 99,9995 %	3,1	150 / 120 Pa	3,00
YAFI HF 110-305/610/110-U15	305 x 610 x 110	U15 - 99,9995 %	6,2	300 / 120 Pa	4,70
YAFI HF 110-457/457/110-U15	457 x 457 x 110	U15 - 99,9995 %	7,0	340 / 120 Pa	5,00
YAFI HF 110-457/610/110-U15	457 x 610 x 110	U15 - 99,9995 %	9,4	450 / 120 Pa	5,60
YAFI HF 110-535/535/110-U15	535 x 535 x 110	U15 - 99,9995 %	9,6	465 / 120 Pa	5,90
YAFI HF 110-575/575/110-U15	575 x 575 x 110	U15 - 99,9995 %	11,0	535 / 120 Pa	6,10
YAFI HF 110-610/610/110-U15	610 x 610 x 110	U15 - 99,9995 %	12,4	600 / 120 Pa	6,30
YAFI HF 110-610/762/110-U15	610 x 762 x 110	U15 - 99,9995 %	15,5	750 / 120 Pa	8,00
YAFI HF 110-610/915/110-U15	610 x 915 x 110	U15 - 99,9995 %	18,6	900 / 120 Pa	9,80
YAFI HF 110-762/762/110-U15	762 x 762 x 110	U15 - 99,9995 %	19,2	940 / 120 Pa	10,20
YAFI HF 110-915/915/110-U15	915 x 915 x 110	U15 - 99,9995 %	28,0	1350 / 120 Pa	14,20
YAFI HF 110-610/1220/110-U15	610 x 1220 x 110	U15 - 99,9995 %	24,8	1200 / 120 Pa	13,80

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 125mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can be used on to frame in order to guarantee a perfect seal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame


Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

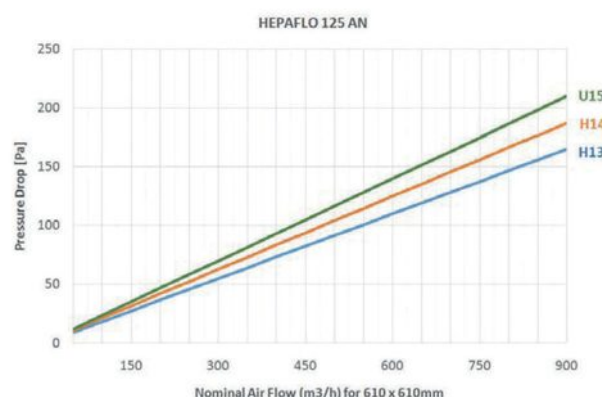

Applications

→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Product Code

YAFI HF 125

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:75mm
Protection mesh	D	X:no T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822 E10 to U15	

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 125-305/305/125-H13	305 x 305 x 125	H13 - 99,95 %	2,4	150 / 100 Pa	3,20
YAFI HF 125-305/610/125-H13	305 x 610 x 125	H13 - 99,95 %	4,6	300 / 100 Pa	4,90
YAFI HF 125-457/457/125-H13	457 x 457 x 125	H13 - 99,95 %	5,2	340 / 100 Pa	5,20
YAFI HF 125-457/610/125-H13	457 x 610 x 125	H13 - 99,95 %	6,8	450 / 100 Pa	5,80
YAFI HF 125-535/535/125-H13	535 x 535 x 125	H13 - 99,95 %	7,0	465 / 100 Pa	6,20
YAFI HF 125-575/575/125-H13	575 x 575 x 125	H13 - 99,95 %	8,0	535 / 100 Pa	6,40
YAFI HF 125-610/610/125-H13	610 x 610 x 125	H13 - 99,95 %	9,0	600 / 100 Pa	6,50
YAFI HF 125-610/762/125-H13	610 x 762 x 125	H13 - 99,95 %	11,2	750 / 100 Pa	8,30
YAFI HF 125-610/915/125-H13	610 x 915 x 125	H13 - 99,95 %	13,5	900 / 100 Pa	10,20
YAFI HF 125-762/762/125-H13	762 x 762 x 125	H13 - 99,95 %	14,0	940 / 100 Pa	11,00
YAFI HF 125-915/915/125-H13	915 x 915 x 125	H13 - 99,95 %	20,3	1350 / 100 Pa	15,00
YAFI HF 125-610/1220/125-H13	610 x 1220 x 125	H13 - 99,95 %	18,0	1200 / 100 Pa	14,50

H14					
YAFI HF 125-305/305/125-H14	305 x 305 x 125	H14 - 99,995 %	2,4	150 / 125 Pa	3,20
YAFI HF 125-305/610/125-H14	305 x 610 x 125	H14 - 99,995 %	4,6	300 / 125 Pa	4,90
YAFI HF 125-457/457/125-H14	457 x 457 x 125	H14 - 99,995 %	5,2	340 / 125 Pa	5,20
YAFI HF 125-457/610/125-H14	457 x 610 x 125	H14 - 99,995 %	6,8	450 / 125 Pa	5,80
YAFI HF 125-535/535/125-H14	535 x 535 x 125	H14 - 99,995 %	7,0	465 / 125 Pa	6,20
YAFI HF 125-575/575/125-H14	575 x 575 x 125	H14 - 99,995 %	8,0	535 / 125 Pa	6,40
YAFI HF 125-610/610/125-H14	610 x 610 x 125	H14 - 99,995 %	9,0	600 / 125 Pa	6,50
YAFI HF 125-610/762/125-H14	610 x 762 x 125	H14 - 99,995 %	11,2	750 / 125 Pa	8,30
YAFI HF 125-610/915/125-H14	610 x 915 x 125	H14 - 99,995 %	13,5	900 / 125 Pa	10,20
YAFI HF 125-762/762/125-H14	762 x 762 x 125	H14 - 99,995 %	14,0	940 / 125 Pa	11,00
YAFI HF 125-915/915/125-H14	915 x 915 x 125	H14 - 99,995 %	20,3	1350 / 125 Pa	15,00
YAFI HF 125-610/1220/125-H14	610 x 1220 x 125	H14 - 99,995 %	18,0	1200 / 125 Pa	14,50

U15					
YAFI HF 125-305/305/125-U15	305 x 305 x 125	U15 - 99,9995 %	2,4	150 / 140 Pa	3,20
YAFI HF 125-305/610/125-U15	305 x 610 x 125	U15 - 99,9995 %	4,6	300 / 140 Pa	4,90
YAFI HF 125-457/457/125-U15	457 x 457 x 125	U15 - 99,9995 %	5,2	340 / 140 Pa	5,20
YAFI HF 125-457/610/125-U15	457 x 610 x 125	U15 - 99,9995 %	6,8	450 / 140 Pa	5,80
YAFI HF 125-535/535/125-U15	535 x 535 x 125	U15 - 99,9995 %	7,0	465 / 140 Pa	6,20
YAFI HF 125-575/575/125-U15	575 x 575 x 125	U15 - 99,9995 %	8,0	535 / 140 Pa	6,40
YAFI HF 125-610/610/125-U15	610 x 610 x 125	U15 - 99,9995 %	9,0	600 / 140 Pa	6,50
YAFI HF 125-610/762/125-U15	610 x 762 x 125	U15 - 99,9995 %	11,2	750 / 140 Pa	8,30
YAFI HF 125-610/915/125-U15	610 x 915 x 125	U15 - 99,9995 %	13,5	900 / 140 Pa	10,20
YAFI HF 125-762/762/125-U15	762 x 762 x 125	U15 - 99,9995 %	14,0	940 / 140 Pa	11,00
YAFI HF 125-915/915/125-U15	915 x 915 x 125	U15 - 99,9995 %	20,3	1350 / 140 Pa	15,00
YAFI HF 125-610/1220/125-U15	610 x 1220 x 125	U15 - 99,9995 %	18,0	1200 / 140 Pa	14,50

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 125mm



Special Features

Filter Type - Laminar flow HEPA Panel Filter

Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications


→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

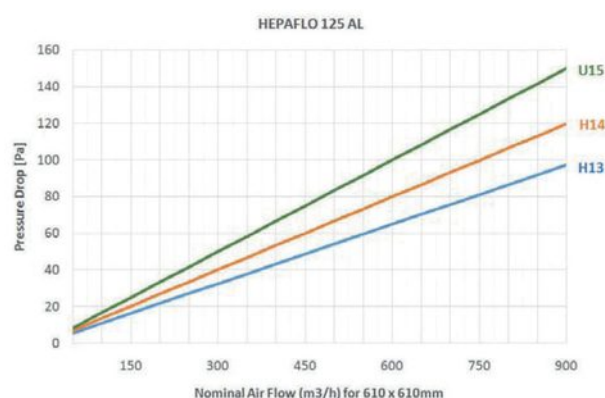

Product Code

YAFI HF 125

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	L	L:75mm
Protektion mesh	D	T:Sinle D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 125-305/305/125-H13	305 x 305 x 125	H13 - 99,95 %	4,5	150 / 65 Pa	3,30
YAFI HF 125-305/610/125-H13	305 x 610 x 125	H13 - 99,95 %	9,0	300 / 65 Pa	5,00
YAFI HF 125-457/457/125-H13	457 x 457 x 125	H13 - 99,95 %	10,2	340 / 65 Pa	5,40
YAFI HF 125-457/610/125-H13	457 x 610 x 125	H13 - 99,95 %	13,5	450 / 65 Pa	6,10
YAFI HF 125-535/535/125-H13	535 x 535 x 125	H13 - 99,95 %	14,0	465 / 65 Pa	6,40
YAFI HF 125-575/575/125-H13	575 x 575 x 125	H13 - 99,95 %	16,0	535 / 65 Pa	6,60
YAFI HF 125-610/610/125-H13	610 x 610 x 125	H13 - 99,95 %	18,0	600 / 65 Pa	6,80
YAFI HF 125-610/762/125-H13	610 x 762 x 125	H13 - 99,95 %	22,5	750 / 65 Pa	8,70
YAFI HF 125-610/915/125-H13	610 x 915 x 125	H13 - 99,95 %	27,0	900 / 65 Pa	10,80
YAFI HF 125-762/762/125-H13	762 x 762 x 125	H13 - 99,95 %	28,2	940 / 65 Pa	11,60
YAFI HF 125-915/915/125-H13	915 x 915 x 125	H13 - 99,95 %	40,5	1350 / 65 Pa	16,00
YAFI HF 125-610/1220/125-H13	610 x 1220 x 125	H13 - 99,95 %	36,0	1200 / 65 Pa	15,50

H14					
YAFI HF 125-305/305/125-H14	305 x 305 x 125	H14 - 99,995 %	4,5	150 / 80 Pa	3,30
YAFI HF 125-305/610/125-H14	305 x 610 x 125	H14 - 99,995 %	9,0	300 / 80 Pa	5,00
YAFI HF 125-457/457/125-H14	457 x 457 x 125	H14 - 99,995 %	10,2	340 / 80 Pa	5,40
YAFI HF 125-457/610/125-H14	457 x 610 x 125	H14 - 99,995 %	13,5	450 / 80 Pa	6,10
YAFI HF 125-535/535/125-H14	535 x 535 x 125	H14 - 99,995 %	14,0	465 / 80 Pa	6,40
YAFI HF 125-575/575/125-H14	575 x 575 x 125	H14 - 99,995 %	16,0	535 / 80 Pa	6,60
YAFI HF 125-610/610/125-H14	610 x 610 x 125	H14 - 99,995 %	18,0	600 / 80 Pa	6,80
YAFI HF 125-610/762/125-H14	610 x 762 x 125	H14 - 99,995 %	22,5	750 / 80 Pa	8,70
YAFI HF 125-610/915/125-H14	610 x 915 x 125	H14 - 99,995 %	27,0	900 / 80 Pa	10,80
YAFI HF 125-762/762/125-H14	762 x 762 x 125	H14 - 99,995 %	28,2	940 / 80 Pa	11,60
YAFI HF 125-915/915/125-H14	915 x 915 x 125	H14 - 99,995 %	40,5	1350 / 80 Pa	16,00
YAFI HF 125-610/1220/125-H14	610 x 1220 x 125	H14 - 99,995 %	36,0	1200 / 80 Pa	15,50

U15					
YAFI HF 125-305/305/125-U15	305 x 305 x 125	U15 - 99,9995 %	4,5	150 / 100 Pa	3,30
YAFI HF 125-305/610/125-U15	305 x 610 x 125	U15 - 99,9995 %	9,0	300 / 100 Pa	5,00
YAFI HF 125-457/457/125-U15	457 x 457 x 125	U15 - 99,9995 %	10,2	340 / 100 Pa	5,40
YAFI HF 125-457/610/125-U15	457 x 610 x 125	U15 - 99,9995 %	13,5	450 / 100 Pa	6,10
YAFI HF 125-535/535/125-U15	535 x 535 x 125	U15 - 99,9995 %	14,0	465 / 100 Pa	6,40
YAFI HF 125-575/575/125-U15	575 x 575 x 125	U15 - 99,9995 %	16,0	535 / 100 Pa	6,60
YAFI HF 125-610/610/125-U15	610 x 610 x 125	U15 - 99,9995 %	18,0	600 / 100 Pa	6,80
YAFI HF 125-610/762/125-U15	610 x 762 x 125	U15 - 99,9995 %	22,5	750 / 100 Pa	8,70
YAFI HF 125-610/915/125-U15	610 x 915 x 125	U15 - 99,9995 %	27,0	900 / 100 Pa	10,80
YAFI HF 125-762/762/125-U15	762 x 762 x 125	U15 - 99,9995 %	28,2	940 / 100 Pa	11,60
YAFI HF 125-915/915/125-U15	915 x 915 x 125	U15 - 99,9995 %	40,5	1350 / 100 Pa	16,00
YAFI HF 125-610/1220/125-U15	610 x 1220 x 125	U15 - 99,9995 %	36,0	1200 / 100 Pa	15,50

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 150mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can be used on to frame in order to guarantee a perfect seal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame


Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

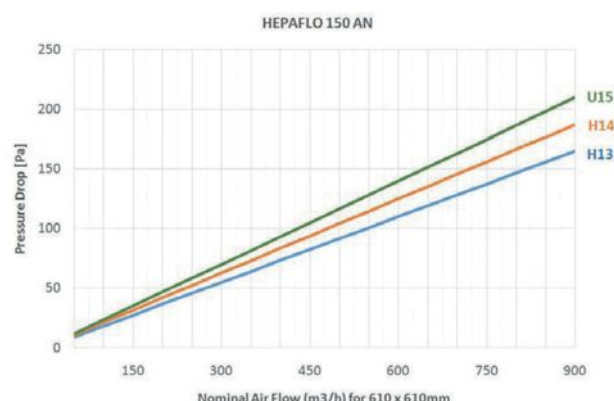

Applications

→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Product Code

YAFI HF 150

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:50mm
Protection mesh	D	T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
H13					
YAFI HF 150-305/305/150-H13	305 x 305 x 150	H13 - 99,95 %	2,4	150 / 100 Pa	3,60
YAFI HF 150-305/610/150-H13	305 x 610 x 150	H13 - 99,95 %	4,6	300 / 100 Pa	5,30
YAFI HF 150-457/457/150-H13	457 x 457 x 150	H13 - 99,95 %	5,2	340 / 100 Pa	5,70
YAFI HF 150-457/610/150-H13	457 x 610 x 150	H13 - 99,95 %	6,8	450 / 100 Pa	6,40
YAFI HF 150-535/535/150-H13	535 x 535 x 150	H13 - 99,95 %	7,0	465 / 100 Pa	6,80
YAFI HF 150-575/575/150-H13	575 x 575 x 150	H13 - 99,95 %	8,0	535 / 100 Pa	7,00
YAFI HF 150-610/610/150-H13	610 x 610 x 150	H13 - 99,95 %	9,0	600 / 100 Pa	7,20
YAFI HF 150-610/762/150-H13	610 x 762 x 150	H13 - 99,95 %	11,2	750 / 100 Pa	9,00
YAFI HF 150-610/915/150-H13	610 x 915 x 150	H13 - 99,95 %	13,5	900 / 100 Pa	11,20
YAFI HF 150-762/762/150-H13	762 x 762 x 150	H13 - 99,95 %	14,0	940 / 100 Pa	12,10
YAFI HF 150-915/915/150-H13	915 x 915 x 150	H13 - 99,95 %	20,3	1350 / 100 Pa	16,80
YAFI HF 150-610/1220/150-H13	610 x 1220 x 150	H13 - 99,95 %	18,0	1200 / 100 Pa	16,00

H14					
YAFI HF 150-305/305/150-H14	305 x 305 x 150	H14 - 99,995 %	2,4	150 / 125 Pa	3,60
YAFI HF 150-305/610/150-H14	305 x 610 x 150	H14 - 99,995 %	4,6	300 / 125 Pa	5,30
YAFI HF 150-457/457/150-H14	457 x 457 x 150	H14 - 99,995 %	5,2	340 / 125 Pa	5,70
YAFI HF 150-457/610/150-H14	457 x 610 x 150	H14 - 99,995 %	6,8	450 / 125 Pa	6,40
YAFI HF 150-535/535/150-H14	535 x 535 x 150	H14 - 99,995 %	7,0	465 / 125 Pa	6,80
YAFI HF 150-575/575/150-H14	575 x 575 x 150	H14 - 99,995 %	8,0	535 / 125 Pa	7,00
YAFI HF 150-610/610/150-H14	610 x 610 x 150	H14 - 99,995 %	9,0	600 / 125 Pa	7,20
YAFI HF 150-610/762/150-H14	610 x 762 x 150	H14 - 99,995 %	11,2	750 / 125 Pa	9,00
YAFI HF 150-610/915/150-H14	610 x 915 x 150	H14 - 99,995 %	13,5	900 / 125 Pa	11,20
YAFI HF 150-762/762/150-H14	762 x 762 x 150	H14 - 99,995 %	14,0	940 / 125 Pa	12,10
YAFI HF 150-915/915/150-H14	915 x 915 x 150	H14 - 99,995 %	20,3	1350 / 125 Pa	16,80
YAFI HF 150-610/1220/150-H14	610 x 1220 x 150	H14 - 99,995 %	18,0	1200 / 125 Pa	16,00

U15					
YAFI HF 150-305/305/150-U15	305 x 305 x 150	U15 - 99,9995 %	2,4	150 / 140 Pa	3,60
YAFI HF 150-305/610/150-U15	305 x 610 x 150	U15 - 99,9995 %	4,6	300 / 140 Pa	5,30
YAFI HF 150-457/457/150-U15	457 x 457 x 150	U15 - 99,9995 %	5,2	340 / 140 Pa	5,70
YAFI HF 150-457/610/150-U15	457 x 610 x 150	U15 - 99,9995 %	6,8	450 / 140 Pa	6,40
YAFI HF 150-535/535/150-U15	535 x 535 x 150	U15 - 99,9995 %	7,0	465 / 140 Pa	6,80
YAFI HF 150-575/575/150-U15	575 x 575 x 150	U15 - 99,9995 %	8,0	535 / 140 Pa	7,00
YAFI HF 150-610/610/150-U15	610 x 610 x 150	U15 - 99,9995 %	9,0	600 / 140 Pa	7,20
YAFI HF 150-610/762/150-U15	610 x 762 x 150	U15 - 99,9995 %	11,2	750 / 140 Pa	9,00
YAFI HF 150-610/915/150-U15	610 x 915 x 150	U15 - 99,9995 %	13,5	900 / 140 Pa	11,20
YAFI HF 150-762/762/150-U15	762 x 762 x 150	U15 - 99,9995 %	14,0	940 / 140 Pa	12,10
YAFI HF 150-915/915/150-U15	915 x 915 x 150	U15 - 99,9995 %	20,3	1350 / 140 Pa	16,80
YAFI HF 150-610/1220/150-U15	610 x 1220 x 150	U15 - 99,9995 %	18,0	1200 / 140 Pa	16,00

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 150mm

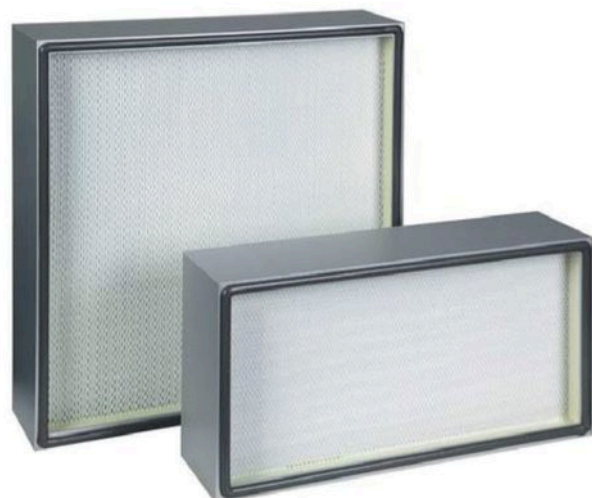

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications


→ HEPA-/WLPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

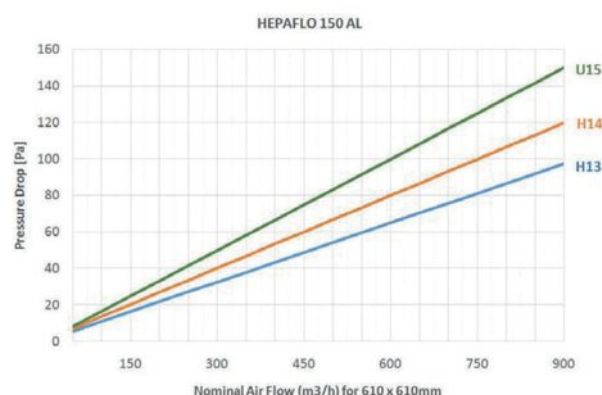

Product Code

YAFI HF 150

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	L	L:100mm
Protektion mesh	D	T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
H13					
YAFI HF 150-305/305/150-H13	305 x 305 x 150	H13 - 99,95 %	4,5	150 / 65 Pa	3,80
YAFI HF 150-305/610/150-H13	305 x 610 x 150	H13 - 99,95 %	9,0	300 / 65 Pa	5,50
YAFI HF 150-457/457/150-H13	457 x 457 x 150	H13 - 99,95 %	10,2	340 / 65 Pa	5,90
YAFI HF 150-457/610/150-H13	457 x 610 x 150	H13 - 99,95 %	13,5	450 / 65 Pa	6,60
YAFI HF 150-535/535/150-H13	535 x 535 x 150	H13 - 99,95 %	14,0	465 / 65 Pa	7,00
YAFI HF 150-575/575/150-H13	575 x 575 x 150	H13 - 99,95 %	16,0	535 / 65 Pa	7,20
YAFI HF 150-610/610/150-H13	610 x 610 x 150	H13 - 99,95 %	18,0	600 / 65 Pa	7,50
YAFI HF 150-610/762/150-H13	610 x 762 x 150	H13 - 99,95 %	22,5	750 / 65 Pa	9,40
YAFI HF 150-610/915/150-H13	610 x 915 x 150	H13 - 99,95 %	27,0	900 / 65 Pa	11,90
YAFI HF 150-762/762/150-H13	762 x 762 x 150	H13 - 99,95 %	28,2	940 / 65 Pa	12,80
YAFI HF 150-915/915/150-H13	915 x 915 x 150	H13 - 99,95 %	40,5	1350 / 65 Pa	17,20
YAFI HF 150-610/1220/150-H13	610 x 1220 x 150	H13 - 99,95 %	36,0	1200 / 65 Pa	16,50

H14					
YAFI HF 150-305/305/150-H14	305 x 305 x 150	H14 - 99,995 %	4,5	150 / 80 Pa	3,80
YAFI HF 150-305/610/150-H14	305 x 610 x 150	H14 - 99,995 %	9,0	300 / 80 Pa	5,50
YAFI HF 150-457/457/150-H14	457 x 457 x 150	H14 - 99,995 %	10,2	340 / 80 Pa	5,90
YAFI HF 150-457/610/150-H14	457 x 610 x 150	H14 - 99,995 %	13,5	450 / 80 Pa	6,60
YAFI HF 150-535/535/150-H14	535 x 535 x 150	H14 - 99,995 %	14,0	465 / 80 Pa	7,00
YAFI HF 150-575/575/150-H14	575 x 575 x 150	H14 - 99,995 %	16,0	535 / 80 Pa	7,20
YAFI HF 150-610/610/150-H14	610 x 610 x 150	H14 - 99,995 %	18,0	600 / 80 Pa	7,50
YAFI HF 150-610/762/150-H14	610 x 762 x 150	H14 - 99,995 %	22,5	750 / 80 Pa	9,40
YAFI HF 150-610/915/150-H14	610 x 915 x 150	H14 - 99,995 %	27,0	900 / 80 Pa	11,90
YAFI HF 150-762/762/150-H14	762 x 762 x 150	H14 - 99,995 %	28,2	940 / 80 Pa	12,80
YAFI HF 150-915/915/150-H14	915 x 915 x 150	H14 - 99,995 %	40,5	1350 / 80 Pa	17,20
YAFI HF 150-610/1220/150-H14	610 x 1220 x 150	H14 - 99,995 %	36,0	1200 / 80 Pa	16,50

U15					
YAFI HF 150-305/305/150-U15	305 x 305 x 150	U15 - 99,9995 %	4,5	150 / 100 Pa	3,80
YAFI HF 150-305/610/150-U15	305 x 610 x 150	U15 - 99,9995 %	9,0	300 / 100 Pa	5,50
YAFI HF 150-457/457/150-U15	457 x 457 x 150	U15 - 99,9995 %	10,2	340 / 100 Pa	5,90
YAFI HF 150-457/610/150-U15	457 x 610 x 150	U15 - 99,9995 %	13,5	450 / 100 Pa	6,60
YAFI HF 150-535/535/150-U15	535 x 535 x 150	U15 - 99,9995 %	14,0	465 / 100 Pa	7,00
YAFI HF 150-575/575/150-U15	575 x 575 x 150	U15 - 99,9995 %	16,0	535 / 100 Pa	7,20
YAFI HF 150-610/610/150-U15	610 x 610 x 150	U15 - 99,9995 %	18,0	600 / 100 Pa	7,50
YAFI HF 150-610/762/150-U15	610 x 762 x 150	U15 - 99,9995 %	22,5	750 / 100 Pa	9,40
YAFI HF 150-610/915/150-U15	610 x 915 x 150	U15 - 99,9995 %	27,0	900 / 100 Pa	11,90
YAFI HF 150-762/762/150-U15	762 x 762 x 150	U15 - 99,9995 %	28,2	940 / 100 Pa	12,80
YAFI HF 150-915/915/150-U15	915 x 915 x 150	U15 - 99,9995 %	40,5	1350 / 100 Pa	17,20
YAFI HF 150-610/1220/150-U15	610 x 1220 x 150	U15 - 99,9995 %	36,0	1200 / 100 Pa	16,50

HEPA FILTERS

Gel Seal HEPA Filters Aluminium Frame - 80mm

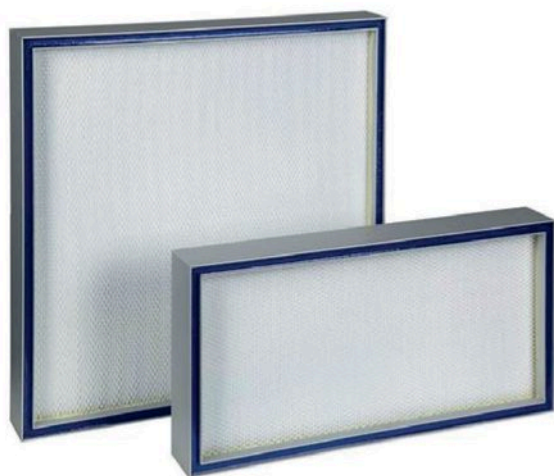

Applications

- ➔ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa


Max. Temperature - 80 °C

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms in order to provide laminar flow. Glass fi-bre paper folded with thermo plasticth reads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best seal-ing between filter medium and frame. Gel Seal is used on to frame in order to guarantee a perfect seal. Epoxy painted protection grid sare used both at up stream and down stream side. Each single filter is tested according to EN 1822.

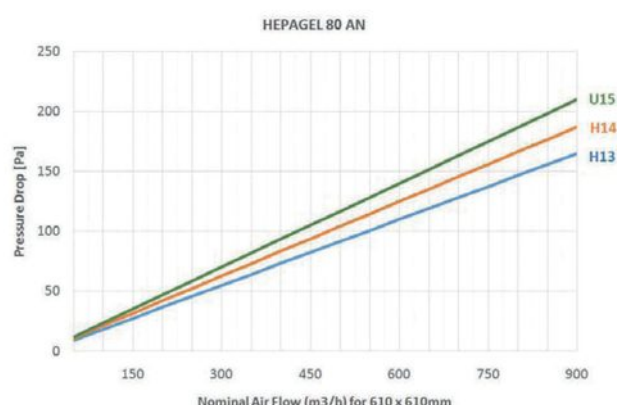

Product Code

YAFI HF 80

Filter Type	HG Hepa filter with Gel seal
Frame	A A:Aluminium
Pleat height	N N:55mm
Protektion mesh	D T:Single D:Double
Gasket	G G:Gel seal
Efficiency	EN1822 E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	--------------------------	--------------------	--------------------------	----------------

H13					
YAFI HF 80-305/305/80-H13	305 x 305 x 80	H13 - 99,95 %	2,4	150 / 100 Pa	3,10
YAFI HF 80-305/610/80-H13	305 x 610 x 80	H13 - 99,95 %	4,6	300 / 100 Pa	4,90
YAFI HF 80-457/457/80-H13	457 x 457 x 80	H13 - 99,95 %	5,2	340 / 100 Pa	5,30
YAFI HF 80-457/610/80-H13	457 x 610 x 80	H13 - 99,95 %	6,8	450 / 100 Pa	5,50
YAFI HF 80-535/535/80-H13	535 x 535 x 80	H13 - 99,95 %	7,0	465 / 100 Pa	5,90
YAFI HF 80-575/575/80-H13	575 x 575 x 80	H13 - 99,95 %	8,0	535 / 100 Pa	6,40
YAFI HF 80-610/610/80-H13	610 x 610 x 80	H13 - 99,95 %	9,0	600 / 100 Pa	6,90
YAFI HF 80-610/762/80-H13	610 x 762 x 80	H13 - 99,95 %	11,2	750 / 100 Pa	8,10
YAFI HF 80-610/915/80-H13	610 x 915 x 80	H13 - 99,95 %	13,5	900 / 100 Pa	10,10
YAFI HF 80-762/762/80-H13	762 x 762 x 80	H13 - 99,95 %	14,0	940 / 100 Pa	10,80
YAFI HF 80-915/915/80-H13	915 x 915 x 80	H13 - 99,95 %	20,3	1350 / 100 Pa	15,20
YAFI HF 80-610/1220/80-H13	610 x 1220 x 80	H13 - 99,95 %	18,0	1200 / 100 Pa	13,50

H14					
YAFI HF 80305/305/80-H14	305 x 305 x 80	H14 - 99,995 %	2,4	150 / 125 Pa	3,10
YAFI HF 80-305/610/80-H14	305 x 610 x 80	H14 - 99,995 %	4,6	300 / 125 Pa	4,90
YAFI HF 80-457/457/80-H14	457 x 457 x 80	H14 - 99,995 %	5,2	340 / 125 Pa	5,30
YAFI HF 80-457/610/80-H14	457 x 610 x 80	H14 - 99,995 %	6,8	450 / 125 Pa	5,50
YAFI HF 80-535/535/80-H14	535 x 535 x 80	H14 - 99,995 %	7,0	465 / 125 Pa	5,90
YAFI HF 80-575/575/80-H14	575 x 575 x 80	H14 - 99,995 %	8,0	535 / 125 Pa	6,40
YAFI HF 80-610/610/80-H14	610 x 610 x 80	H14 - 99,995 %	9,0	600 / 125 Pa	6,90
YAFI HF 80-610/762/80-H14	610 x 762 x 80	H14 - 99,995 %	11,2	750 / 125 Pa	8,10
YAFI HF 80-610/915/80-H14	610 x 915 x 80	H14 - 99,995 %	13,5	900 / 125 Pa	10,10
YAFI HF 80-762/762/80-H14	762 x 762 x 80	H14 - 99,995 %	14,0	940 / 125 Pa	10,80
YAFI HF 80-915/915/80-H14	915 x 915 x 80	H14 - 99,995 %	20,3	1350 / 125 Pa	15,20
YAFI HF 80-610/1220/80-H14	610 x 1220 x 80	H14 - 99,995 %	18,0	1200 / 125 Pa	13,50

U15					
YAFI HF 80-305/305/80-W15	305 x 305 x 80	U15 - 99,9995 %	2,4	150 / 140 Pa	3,10
YAFI HF 80-305/610/80-W15	305 x 610 x 80	U15 - 99,9995 %	4,6	300 / 140 Pa	4,90
YAFI HF 80-457/457/80-W15	457 x 457 x 80	U15 - 99,9995 %	5,2	340 / 140 Pa	5,30
YAFI HF 80-457/610/80-W15	457 x 610 x 80	U15 - 99,9995 %	6,8	450 / 140 Pa	5,50
YAFI HF 80-535/535/80-W15	535 x 535 x 80	U15 - 99,9995 %	7,0	465 / 140 Pa	5,90
YAFI HF 80-575/575/80-W15	575 x 575 x 80	U15 - 99,9995 %	8,0	535 / 140 Pa	6,40
YAFI HF 80-610/610/80-W15	610 x 610 x 80	U15 - 99,9995 %	9,0	600 / 140 Pa	6,90
YAFI HF 80-610/762/80-W15	610 x 762 x 80	U15 - 99,9995 %	11,2	750 / 140 Pa	8,10
YAFI HF 80-610/915/80-W15	610 x 915 x 80	U15 - 99,9995 %	13,5	900 / 140 Pa	10,10
YAFI HF 80-762/762/80-W15	762 x 762 x 80	U15 - 99,9995 %	14,0	940 / 140 Pa	10,80
YAFI HF 80-915/915/80-W15	915 x 915 x 80	U15 - 99,9995 %	20,3	1350 / 140 Pa	15,20
YAFI HF 80-610/1220/80-W15	610 x 1220 x 80	U15 - 99,9995 %	18,0	1200 / 140 Pa	13,50

HEPA FILTERS

Gel Seal HEPA Filters Aluminium Frame - 91mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms in order to provide laminar flow. Glass fibre paper folded with thermoplastic glue and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. Gel Seal is used on to frame in order to guarantee a perfect seal. Epoxy painted protection grid are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium


Frame Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

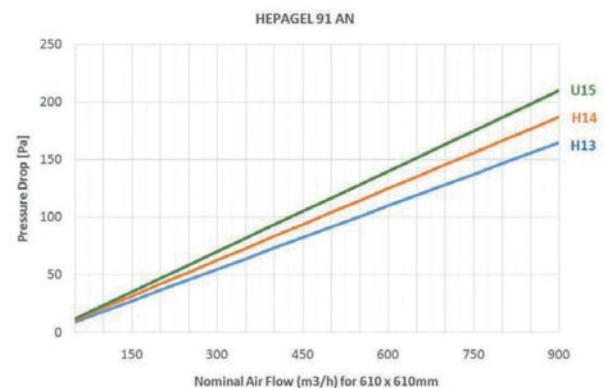

Applications

→ Air conditioning applications or industrial processing systems

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced.

Product Code

YAFI HF 91

Filter Type	HG Hepa filter with Gel seal
Frame	A A:Aluminium
Pleat height	N N:55mm
Protektion mesh	D T:Single D:Double
Gasket	G G:Gel seal
Efficiency	EN1822 E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	--------------------------	--------------------	--------------------------	----------------

H13					
YAFI HF 91-305/305/91-H13	305 x 305 x 91	H13 - 99,95 %	2,4	150 / 100 Pa	3,40
YAFI HF 91-305/610/91-H13	305 x 610 x 91	H13 - 99,95 %	4,6	300 / 100 Pa	5,30
YAFI HF 91-457/457/91-H13	457 x 457 x 91	H13 - 99,95 %	5,2	340 / 100 Pa	5,80
YAFI HF 91-457/610/91-H13	457 x 610 x 91	H13 - 99,95 %	6,8	450 / 100 Pa	5,90
YAFI HF 91-535/535/91-H13	535 x 535 x 91	H13 - 99,95 %	7,0	465 / 100 Pa	6,40
YAFI HF 91-575/575/91-H13	575 x 575 x 91	H13 - 99,95 %	8,0	535 / 100 Pa	6,80
YAFI HF 91-610/610/91-H13	610 x 610 x 91	H13 - 99,95 %	9,0	600 / 100 Pa	7,30
YAFI HF 91-610/762/91-H13	610 x 762 x 91	H13 - 99,95 %	11,2	750 / 100 Pa	8,50
YAFI HF 91-610/915/91-H13	610 x 915 x 91	H13 - 99,95 %	13,5	900 / 100 Pa	10,70
YAFI HF 91-762/762/91-H13	762 x 762 x 91	H13 - 99,95 %	14,0	940 / 100 Pa	11,50
YAFI HF 91-915/915/91-H13	915 x 915 x 91	H13 - 99,95 %	20,3	1350 / 100 Pa	16,20
YAFI HF 91-610/1220/91-H13	610 x 1220 x 91	H13 - 99,95 %	18,0	1200 / 100 Pa	14,30

H14					
YAFI HF 91-305/305/91-H14	305 x 305 x 91	H14 - 99,995 %	2,4	150 / 125 Pa	3,40
YAFI HF 91-305/610/91-H14	305 x 610 x 91	H14 - 99,995 %	4,6	300 / 125 Pa	5,30
YAFI HF 91-457/457/91-H14	457 x 457 x 91	H14 - 99,995 %	5,2	340 / 125 Pa	5,80
YAFI HF 91-457/610/91-H14	457 x 610 x 91	H14 - 99,995 %	6,8	450 / 125 Pa	5,90
YAFI HF 91-535/535/91-H14	535 x 535 x 91	H14 - 99,995 %	7,0	465 / 125 Pa	6,40
YAFI HF 91-575/575/91-H14	575 x 575 x 91	H14 - 99,995 %	8,0	535 / 125 Pa	6,80
YAFI HF 91-610/610/91-H14	610 x 610 x 91	H14 - 99,995 %	9,0	600 / 125 Pa	7,30
YAFI HF 91-610/762/91-H14	610 x 762 x 91	H14 - 99,995 %	11,2	750 / 125 Pa	8,50
YAFI HF 91-610/915/91-H14	610 x 915 x 91	H14 - 99,995 %	13,5	900 / 125 Pa	10,70
YAFI HF 91-762/762/91-H14	762 x 762 x 91	H14 - 99,995 %	14,0	940 / 125 Pa	11,50
YAFI HF 91-915/915/91-H14	915 x 915 x 91	H14 - 99,995 %	20,3	1350 / 125 Pa	16,20
YAFI HF 91-610/1220/91-H14	610 x 1220 x 91	H14 - 99,995 %	18,0	1200 / 125 Pa	14,30

U15					
YAFI HF 91-305/305/91-U15	305 x 305 x 91	U15 - 99,9995 %	2,4	150 / 140 Pa	3,40
YAFI HF 91-305/610/91-U15	305 x 610 x 91	U15 - 99,9995 %	4,6	300 / 140 Pa	5,30
YAFI HF 91-457/457/91-U15	457 x 457 x 91	U15 - 99,9995 %	5,2	340 / 140 Pa	5,80
YAFI HF 91-457/610/91-U15	457 x 610 x 91	U15 - 99,9995 %	6,8	450 / 140 Pa	5,90
YAFI HF 91-535/535/91-U15	535 x 535 x 91	U15 - 99,9995 %	7,0	465 / 140 Pa	6,40
YAFI HF 91-575/575/91-U15	575 x 575 x 91	U15 - 99,9995 %	8,0	535 / 140 Pa	6,80
YAFI HF 91-610/610/91-U15	610 x 610 x 91	U15 - 99,9995 %	9,0	600 / 140 Pa	7,30
YAFI HF 91-610/762/91-U15	610 x 762 x 91	U15 - 99,9995 %	11,2	750 / 140 Pa	8,50
YAFI HF 91-610/915/91-U15	610 x 915 x 91	U15 - 99,9995 %	13,5	900 / 140 Pa	10,70
YAFI HF 91-762/762/91-U15	762 x 762 x 91	U15 - 99,9995 %	14,0	940 / 140 Pa	11,50
YAFI HF 91-915/915/91-U15	915 x 915 x 91	U15 - 99,9995 %	20,3	1350 / 140 Pa	16,20
YAFI HF 91-610/1220/91-U15	610 x 1220 x 91	U15 - 99,9995 %	18,0	1200 / 140 Pa	14,30

HEPA FILTERS

Gel Seal HEPA Filters Aluminium Frame - 104mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms in order to provide laminar flow. Glass fibre paper folded with thermo plastic glue and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. Gel Seal is used on to frame in order to guarantee a perfect seal. Epoxy painted protection grid sare used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame


Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

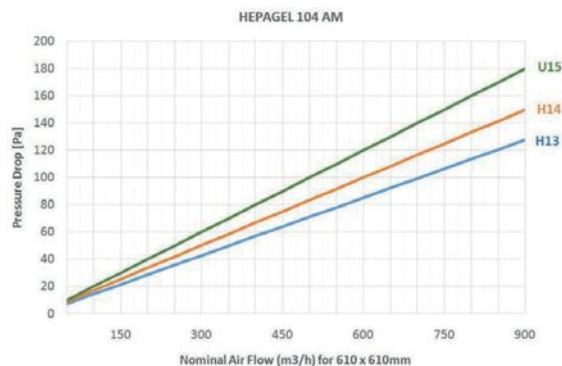

Applications

→ Air conditioning applications or industrial processing systems

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced.

Product Code

YAFI HF 104

Filter Type	HG Hepa filter with Gel seal
Frame	A A:Aluminium
Pleat height	M M:80mm
Protektion mesh	D T:Single D:Double
Gasket	G G:Gel seal
Efficiency	EN1822 E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	--------------------------	--------------------	--------------------------	----------------

H13					
YAFI HF 104-305/305/104-H13	305 x 305 x 104	H13 - 99,95 %	3,1	150 / 85 Pa	3,80
YAFI HF 104-305/610/104-H13	305 x 610 x 104	H13 - 99,95 %	6,2	300 / 85 Pa	5,90
YAFI HF 104-457/457/104-H13	457 x 457 x 104	H13 - 99,95 %	7,0	340 / 85 Pa	6,40
YAFI HF 104-457/610/104-H13	457 x 610 x 104	H13 - 99,95 %	9,4	450 / 85 Pa	6,50
YAFI HF 104-535/535/104-H13	535 x 535 x 104	H13 - 99,95 %	9,6	465 / 85 Pa	6,90
YAFI HF 104-575/575/104-H13	575 x 575 x 104	H13 - 99,95 %	11,0	535 / 85 Pa	7,40
YAFI HF 104-610/610/104-H13	610 x 610 x 104	H13 - 99,95 %	12,4	600 / 85 Pa	8,80
YAFI HF 104-610/762/104-H13	610 x 762 x 104	H13 - 99,95 %	15,5	750 / 85 Pa	9,70
YAFI HF 104-610/915/104-H13	610 x 915 x 104	H13 - 99,95 %	18,6	900 / 85 Pa	11,70
YAFI HF 104-762/762/104-H13	762 x 762 x 104	H13 - 99,95 %	19,2	940 / 85 Pa	12,80
YAFI HF 104-915/915/104-H13	915 x 915 x 104	H13 - 99,95 %	28,0	1350 / 85 Pa	17,20
YAFI HF 104-610/1220/104-H13	610 x 1220 x 104	H13 - 99,95 %	24,8	1200 / 85 Pa	15,30

H14					
YAFI HF 104-305/305/104-H14	305 x 305 x 104	H14 - 99,995 %	3,1	150 / 100 Pa	3,80
YAFI HF 104-305/610/104-H14	305 x 610 x 104	H14 - 99,995 %	6,2	300 / 100 Pa	5,90
YAFI HF 104-457/457/104-H14	457 x 457 x 104	H14 - 99,995 %	7,0	340 / 100 Pa	6,40
YAFI HF 104-457/610/104-H14	457 x 610 x 104	H14 - 99,995 %	9,4	450 / 100 Pa	6,50
YAFI HF 104-535/535/104-H14	535 x 535 x 104	H14 - 99,995 %	9,6	465 / 100 Pa	6,90
YAFI HF 104-575/575/104-H14	575 x 575 x 104	H14 - 99,995 %	11,0	535 / 100 Pa	7,40
YAFI HF 104-610/610/104-H14	610 x 610 x 104	H14 - 99,995 %	12,4	600 / 100 Pa	8,80
YAFI HF 104-610/762/104-H14	610 x 762 x 104	H14 - 99,995 %	15,5	750 / 100 Pa	9,70
YAFI HF 104-610/915/104-H14	610 x 915 x 104	H14 - 99,995 %	18,6	900 / 100 Pa	11,70
YAFI HF 104-762/762/104-H14	762 x 762 x 104	H14 - 99,995 %	19,2	940 / 100 Pa	12,80
YAFI HF 104-915/915/104-H14	915 x 915 x 104	H14 - 99,995 %	28,0	1350 / 100 Pa	17,20
YAFI HF 104-610/1220/104-H14	610 x 1220 x 104	H14 - 99,995 %	24,8	1200 / 100 Pa	15,30

U15					
YAFI HF 104-305/305/104-U15	305 x 305 x 104	U15 - 99,9995 %	3,1	150 / 120 Pa	3,80
YAFI HF 104-305/610/104-U15	305 x 610 x 104	U15 - 99,9995 %	6,2	300 / 120 Pa	5,90
YAFI HF 104-457/457/104-U15	457 x 457 x 104	U15 - 99,9995 %	7,0	340 / 120 Pa	6,40
YAFI HF 104-457/610/104-U15	457 x 610 x 104	U15 - 99,9995 %	9,4	450 / 120 Pa	6,50
YAFI HF 104-535/535/104-U15	535 x 535 x 104	U15 - 99,9995 %	9,6	465 / 120 Pa	6,90
YAFI HF 104-575/575/104-U15	575 x 575 x 104	U15 - 99,9995 %	11,0	535 / 120 Pa	7,40
YAFI HF 104-610/610/104-U15	610 x 610 x 104	U15 - 99,9995 %	12,4	600 / 120 Pa	8,80
YAFI HF 104-610/762/104-U15	610 x 762 x 104	U15 - 99,9995 %	15,5	750 / 120 Pa	9,70
YAFI HF 104-610/915/104-U15	610 x 915 x 104	U15 - 99,9995 %	18,6	900 / 120 Pa	11,70
YAFI HF 104-762/762/104-U15	762 x 762 x 104	U15 - 99,9995 %	19,2	940 / 120 Pa	12,80
YAFI HF 104-915/915/104-U15	915 x 915 x 104	U15 - 99,9995 %	28,0	1350 / 120 Pa	17,20
YAFI HF 104-610/1220/104-U15	610 x 1220 x 104	U15 - 99,9995 %	24,8	1200 / 120 Pa	15,30