

FILTERS FOR ODORS AND FATTY VAPORS


FILTERS FOR ODORS AND FATTY VAPORS

Extended Surface Activated Carbon Panel Filter



Description

Designed for adsorption of odours and gasses in air conditioning application in industrial and commercial air handling units. Activated carbon impregnated synthetic media is pleated and placed in to water resistant card board frame. Synthetic media is supported with metal mesh and pleated for high filtration area. Available at standard and out of standard size. Ideal solution to improve indoor air quality for light industrial applications.

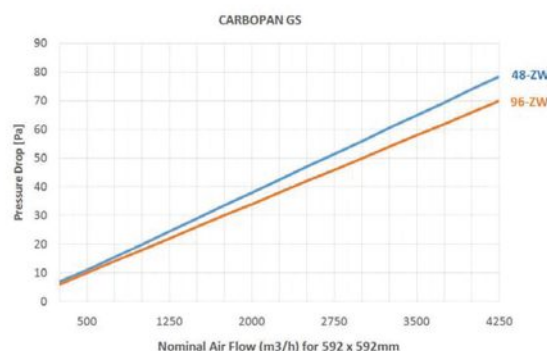

Special Features

Filter Type - Extended Surface Panel Filter

Filter Media - Synthetic Fiber Impregnated with Activated Carbon

Frame - Galvanized Steel

Filter Class - Odour Filtration

Final Pressure Drop - 250 Pa

Max. Temperature - 80 °C

Applications

→ Primary filter for odor and fumes filtration

Product Code

YAFI AU-KF

Advantages

- Robust Construction for rapid installation
- Fully supported media between two wire grid
- Economic operation and high filtration surface
- Synthetic Fiber Media impregnated with finely ground activated carbon.
- Customised sizes are available on request.


Filter Type	KK	Activated carbon panel filter
Frame	G	G:Galvanized steel
Media	S	Sintethic fiber media
Pleat Type	Z	ZigZag
Gasket	X	Without
Dimension	—	WxHxD
Efficiency	ZW	Activated carbon

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
48-ZW						
YAFI AU-KF-287/287/48-ZW	287 x 287 x 48	G4	Coarse 65 %	0,17	850 / 55	0,70
YAFI AU-KF-392/492/48-ZW	392 x 492 x 48	G4	Coarse 65 %	0,40	1950 / 55	1,30
YAFI AU-KF-492/492/48-ZW	492 x 492 x 48	G4	Coarse 65 %	0,50	2600 / 55	1,60
YAFI AU-KF-492/625/48-ZW	492 x 625 x 48	G4	Coarse 65 %	0,62	3000 / 55	2,00
YAFI AU-KF-287/592/48-ZW	287 x 592 x 48	G4	Coarse 65 %	0,34	1700 / 55	1,20
YAFI AU-KF-492/592/48-ZW	492 x 592 x 48	G4	Coarse 65 %	0,60	2820 / 55	1,80
YAFI AU-KF-592/592/48-ZW	592 x 592 x 48	G4	Coarse 65 %	0,70	3400 / 55	2,10

96-ZW						
YAFI AU-KF-287/287/96-ZW	287 x 287 x 96	G4	Coarse 65 %	0,25	1060 / 40	1,20
YAFI AU-KF-392/492/96-ZW	392 x 492 x 96	G4	Coarse 65 %	0,60	2400 / 40	2,30
YAFI AU-KF-492/492/96-ZW	492 x 492 x 96	G4	Coarse 65 %	0,75	3000 / 40	2,60
YAFI AU-KF-492/625/96-ZW	492 x 625 x 96	G4	Coarse 65 %	0,95	3600 / 40	3,20
YAFI AU-KF-287/592/96-ZW	287 x 592 x 96	G4	Coarse 65 %	0,50	2125 / 40	2,00
YAFI AU-KF-492/592/96-ZW	492 x 592 x 96	G4	Coarse 65 %	0,90	3500 / 40	3,20
YAFI AU-KF-592/592/96-ZW	592 x 592 x 96	G4	Coarse 65 %	1,10	4250 / 40	3,90


FILTERS FOR ODORS AND FATTY VAPORS

Activated Carbon Panel Filter Filled With Carbon Pellet

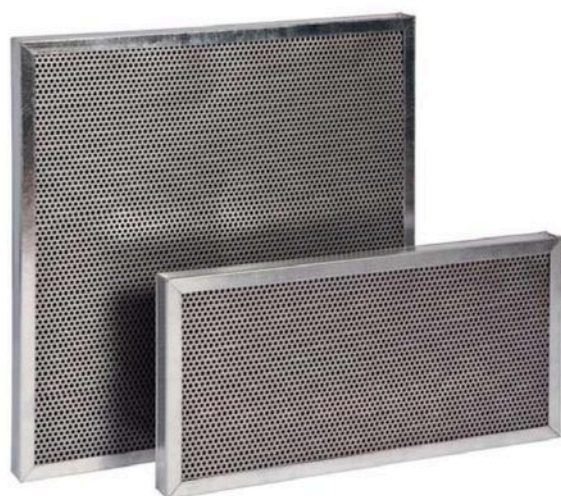

Description

Designed for adsorption of odours and gasses in air conditioning application in industrial and commercial air handling units. Plastic frame is filled with loose granular or extruded activated carbon media which allows very long service life. Suitable for heavy industrial application with high performance.

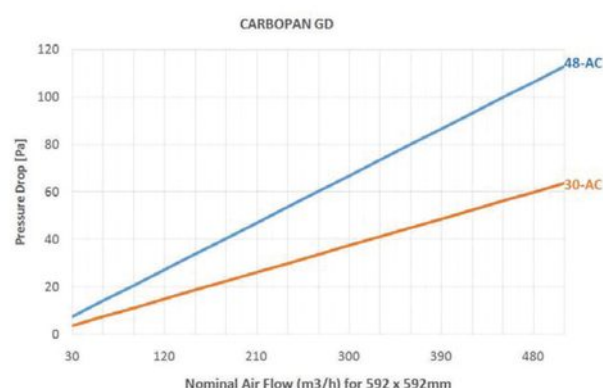

Special Features

Filter Type - AC Filled Panel Filter

Filter Media - Activated Carbon Pellet

Frame - Galvanized Steel / Stainless Steel

Filter Class - Odour Filtration

Max. Temperature - 80 °C

RH Max. - 70%

Applications

➔ Adsorption of odours and gases in air conditioning applications.

Product Code

YAFI AU PF

Advantages

- ➔ Robust Construction for rapid installation
- ➔ Vibrated fill technique to prevent media settlement
- ➔ Available in gas adsorption and chemisorption
- ➔ Robust construction allows easy mounting and removal
- ➔ Customised sizes can be produced.

Filter Type	KD	Activated carbon panel filter
Frame	G	G: Galvanized steel
Media	K	Pellet carbon media
Pleat Type	D	Filled
Gasket	X	Without
Dimension	—	WxHxD
Efficiency	AC	Activated carbon

Product Code	Dimensions (WxHxD)	Media	Carbon (Weight)	Rated Air Flow (m3/h)	Initial Pressure Drop (Pa)	Weight (Kg)
30-AC						
YAFI AU PF-287/287/30-AC	287 x 287 x 30	AC	1,35	85	45	2,80
YAFI AU PF-392/492/30-AC	392 x 492 x 30	AC	3,20	200	45	5,40
YAFI AU PF-492/492/30-AC	492 x 492 x 30	AC	4,00	240	45	8,00
YAFI AU PF-492/625/30-AC	492 x 625 x 30	AC	5,00	310	45	9,00
YAFI AU PF-287/592/30-AC	287 x 592 x 30	AC	2,80	175	45	5,50
YAFI AU PF-492/592/30-AC	492 x 592 x 30	AC	4,80	290	45	9,80
YAFI AU PF-592/592/30-AC	592 x 592 x 30	AC	5,80	350	45	11,50

48-AC						
YAFI AU PF-287/287/48-AC	287 x 287 x 48	AC	2,2	85	80	3,50
YAFI AU PF-392/492/48-AC	392 x 492 x 48	AC	5	200	80	6,75
YAFI AU PF-492/492/48-AC	492 x 492 x 48	AC	6,4	240	80	10,00
YAFI AU PF-492/625/48-AC	492 x 625 x 48	AC	8	310	80	11,20
YAFI AU PF-287/592/48-AC	287 x 592 x 48	AC	4,5	175	80	6,90
YAFI AU PF-492/592/48-AC	492 x 592 x 48	AC	7,7	290	80	12,00
YAFI AU PF-592/592/48-AC	592 x 592 x 48	AC	9	350	80	14,50

Weight calculated with a bulk density of ab. 500 kg/m3.

FILTERS FOR ODORS AND FATTY VAPORS

Activated Carbon Cartridges



Description

Designed for adsorption of odours (deodorization), adsorption of VOC and low toxicity gases for use in industrial and commercial air handling units. Best smell and contaminants adsorption is assured by the possibility of choosing the most suitable adsorption medium for each request. Cartridges are made with galvanized expanded sheet and filled with activated carbon which are connected with a quick fastening system to the supporting plate for 8 or 16 cartridges and gasket gives maximum air tightness. Special design of the cartridge makes maintenance and carbon change very easy.

Special Features

Filter Type - Activated Carbon Filled Cylinder

Filter Media - Activated Carbon, Impregnated Activated Carbon, Activated Alumina

Frame - Galvanized Steel / Stainless Steel

Filter Class - Odour Filtration

Max. Temperature - 40 °C

RH Max. - 70%

Applications

➔ Molecular filter for high efficiency and long-term control of molecular contaminants in

Product Code

YAFI AU-PA4

Advantages

- ➔ Robust construction for reliable operation
- ➔ Rapid bayonet fitting system
- ➔ Lower pressure drop with high performance
- ➔ Leak-free installation ensures maximum possible efficiency
- ➔ Re-Filable with new carbon media

Filter Type	SK	Carbon cartridges filter
Frame	G	G: Galvanized steel
	S	S: Stainless steel
Media	AC	AC: Activated carbon
Model	A	Model A
Dimension	–	WxHxD

Product Code	Dimensions (WxHxD)	Media	Carbon (Weight)	Rated Air Flow (m3/h)	Initial Pressure Drop (Pa)	Weight (Kg)
COMPLETE SET						
YAFI AU-PA4 - GA450 - 1/4	305 x 305 x 40	AC	9,60	850	150	11,00
YAFI AU-PA4 -GA450 - 1/2	305 x 610 x 40	AC	19,20	1700	150	22,50
YAFI AU-PA4 - GA450 - 3/4	508 x 610 x 40	AC	29,00	2550	150	34,00
YAFI AU-PA4 - GA450 - 1/1	610 x 610 x 40	AC	39,00	3400	150	44,50

Product Code	Diameter OD / ID Ø mm	Length	Rated Air Flow (m3/h)	Initial Pressure Drop (Pa)	Carbon (Weight)	Weight (total)
SPARE CARTRIDGE						
YAFI AU-PA4-145/250	145 / 88	250	85	80	1,40	2,20
YAFI AU-PA4-145/450	145 / 88	450	210	270	2,40	3,90
YAFI AU-PA4-145/600	145 / 88	600	210	145	3,40	5,50



Product Code	Dimensions	Cartridge No	Weight
SUPPORTING FRAME			
YAFI AU-PA4-04-305/305/40	305 x 305 x 70	4	1,5
YAFI AU-PA4-08-305/305/40	305 x 610 x 70	8	3,0
YAFI AU-PA4-12-305/305/40	508 x 610 x 70	12	5,0
YAFI AU-PA4-16-305/305/40	610 x 610 x 70	16	5,5



FILTERS FOR ODORS AND FATTY VAPORS

Activated Carbon Cartridges



Description

Designed for adsorption of odours (deodorization), adsorption of VOC and low toxicity gases for use in industrial and commercial air handling units. Best smell and contaminants adsorption is assured by the possibility of choosing the most suitable adsorption medium for each request. Cartridges are made with painted expanded sheet and filled with activated carbon which are connected with a quick fastening system to the supporting plate for 8 or 16 cartridges and gasket gives maximum air tightness. Special design of the cartridge makes maintenance and carbon change very easy.

Special Features

Filter Type - Activated Carbon Filled Cylinder

Filter Media - Activated Carbon, Impregnated Activated Carbon, Activated Alumina

Frame - Galvanized Steel / Stainless Steel

Filter Class - Odour Filtration

Max. Temperature - 40 °C

RH Max. - 70%

Applications

➔ Molecular filter for high efficiency and long-term control of molecular contaminants in

Product Code

YAFI AU PAU

Advantages

- ➔ Robust construction for reliable operation
- ➔ Rapid bayonet fitting system
- ➔ Lower pressure drop with high performance
- ➔ Leak-free installation ensures maximum possible efficiency
- ➔ Re-Filable with new carbon media

Filter Type	SK	Carbon cartridges filter
Frame	G	G:Galvanized steel
Media	AC	AC:Activated carbon
Model	B	Model B
Dimension	—	WxHxD

Product Code	Dimensions (WxHxD)	Media	Carbon (Weight)	Rated Air Flow (m3/h)	Initial Pressure Drop (Pa)	Weight (Kg)
COMPLETE SET						
YAFI AU PAU - GB400 - 1/4	305 x 305 x 40	AC	1,20	850	270	13,80
YAFI AU PAU -GB400 - 1/2	305 x 610 x 40	AC	24,0	1700	270	27,50
YAFI AU PAU - GB400 - 3/4	508 x 610 x 40	AC	36,0	2250	270	41,50
YAFI AU PAU - GB400 - 1/1	610 x 610 x 40	AC	48,0	3400	270	54,00

Product Code	Diameter OD / ID Ø mm	Length	Rated Air Flow (m3/h)	Initial Pressure Drop (Pa)	Carbon (Weight)	Weight (total)
SPARE CARTRIDGE						
YAFI AU PAU-140/250	140 / 68	250	85	80	1,90	2,60
YAFI AU PAU-140/400	140 / 68	400	210	270	3,00	4,10
YAFI AU PAU-140/600	140 / 68	600	210	145	4,50	6,10



Product Code	Dimensions	Cartridge No	Weight
SUPPORTING FRAME			
YAFI AU PAU-04-305/305/40	305 x 305 x 70	4	1,8
YAFI AU PAU-08-305/610/40	305 x 610 x 70	8	3,5
YAFI AU PAU-12-508/610/40	508 x 610 x 70	12	5,5
YAFI AU PAU-16-610/610/40	610 x 610 x 70	16	6,0



FILTERS FOR ODORS AND FATTY VAPORS

Rigid Bag Activated Carbon Filter



Special Features

Filter Type - W Compact AC Filter

Filter Media - AC Between Sythetic Layer
400 gr/m2

Frame - Plastic Frame (Polypropylene)


Filter Class - F7 / ePM1 55%

Final Pressure Drop - 450 Pa

Max. Temperature - 75 °C

Description

Designed for adsorption of odours and gasses with dust filtration efficiency in air conditioning application in industrial and commercial air handling units. F7 efficiency integrated non woven media which has two layers containing small granules of activated carbon is pleated and placed in to plastic frame. A polyurethane resin guarantee the seal between the filter pack and the frame. In order to extend the service life of the filter it is advised to use of G4-F5 prefilters before Rigicarb filters.

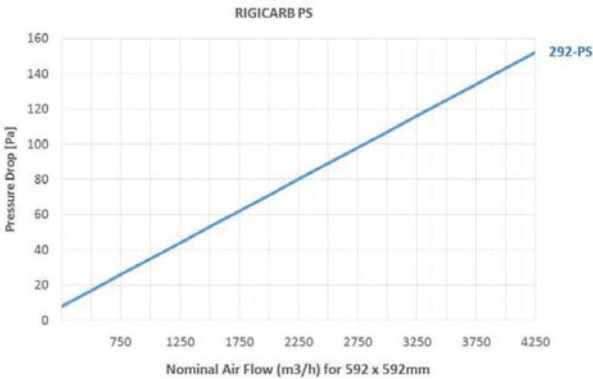

Applications

→ Molecular filter for high efficiency and long-term control of molecular contaminants in

Advantages

- Rigid construction filter used in narrow space
- Lower pressure drop with high performance with high contamination removal capacities
- Small granules of activated carbon in two layers of nonwoven fabric, no dust release and regeneration
- Light and easy maintenance through handles

Product Code

YAFI AU RF

Filter Type	KW	V Bank AC filter
Frame	P	P:Plasticic
Filter Media	C	C:25mm
Protection Mesh	X	X:No P:Plastic
Gasket	X	X:No E:EPDM P:Polyurethane
Efficiency	EN779 F7	
	ePM2,5 65%	ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
F7						
YAFI AU RF-287/592/292-CF7	287x592x292	F7	ePM1 55%	4,5	1700 / 120	4,50
YAFI AU RF-490/592/292-CF7	490x592x292	F7	ePM1 55%	7,2	2800 / 120	7,50
YAFI AU RF-592/592/292-CF7	592x592x292	F7	ePM1 55%	9,0	3400 / 120	8,20