

PANEL FILTERS


PANEL FILTERS

High Temperature Oven Filters



Description

Specially designed for filtration of the intake and circulating air in spray and drying booths. Progressively structured filtermedia composed of finest glass fibres, bonded with a high temperature resistant binder. Converted into finished filter cells by aluminium stretcher grids into galvanized frame

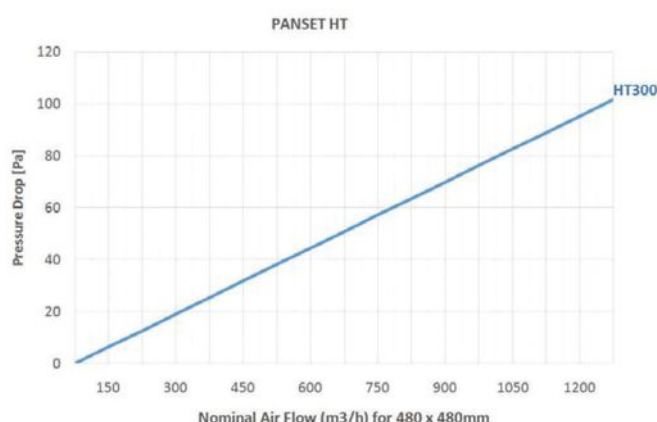

Special Features

Filter Type - Panel Filter for High Temperature

Filter Media - Highly temp.-resistant filtermedia (up to 300 °C) of randomly arranged finest glass fibers.

Frame - Galvanized with "+" support

Filter Class - G4 / Coarse %65 Final Pressure

Drop - 220 Pa Max. Temperature - 300 °C

Applications

→ Intake and circulating air filtration in spray and drying booths.

Advantages

- Filtermedia resisting to temperatures up to 300°C
- High degree of dedusting with minimum pressure loss
- Economic operation and high filtration surface
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Rapid installation

Product Code

YAFI PF

Filter Type	HT	High Temp.Filter
Frame	G	Galvanized Frame
Media	H	Glass Fiber Media
Pleat Type	L	Straight
Gasket	X	Without
Dimension	-	WxHxD

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
14 mm						
YAFI PF-240/480/14	240 x 480 x 14	G4	Coarse 65 %	0,11	420 / 60	0,40
YAFI PF-480/480/14	480 x 480 x 14	G4	Coarse 65 %	0,23	840 / 60	0,80
YAFI PF-610/610/14	610 x 610 x 14	G4	Coarse 65 %	0,37	1340 / 60	0,90
Other sizes are available on request.						


PANEL FILTERS

Flat Surface Metal Frame Pre-Filter



Description

Designed as prefilters for fan-coils and ventilation units. It protects your heating and cooling coil which offers low filtration efficiency with very low pressure drop. Fanset GS is produced by galvanized frame with synthetic media filter media. Filter media is supported with extended metal mesh at bothside of the frame. Available in standard and customized sizes.

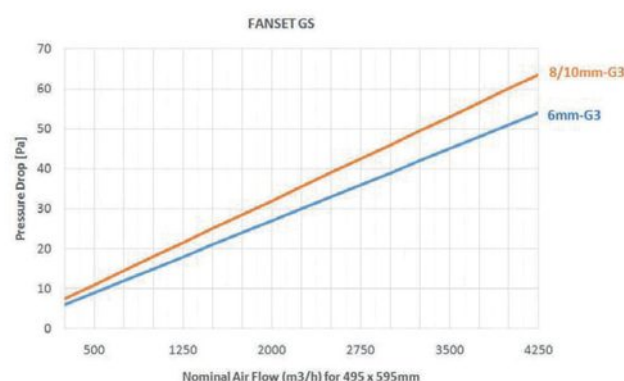

Special Features

Filter Type - Flat Panel Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel

Filter Class - G3 / ISO Coarse %50

Final Pressure Drop - 250 Pa

Max. Temperature - 100 °C

Applications

➔ Primary filter for air conditioning systems.

Product Code

YAFI PF

Advantages

- ➔ Robust construction for reliable operation
- ➔ Flat filter media between two metal mesh
- ➔ Economic operation
- ➔ Customised sizes can be produced easily

Filter Type	KF	Panel Filter
Frame	G	Galvanized Steel
Media	S	Syntetic Fiber
Pleat Type	L	Flat
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G3	EN 779
		Coarse 50 % ISO 16890


Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
6-G3						
YAFI PF-205/400/6-G3	205 x 400 x 6	G3	Coarse 50 %	0,08	720 / 35	0,40
YAFI PF-205/650/6-G3	205 x 650 x 6	G3	Coarse 50 %	0,13	1200 / 35	0,5
YAFI PF-205/800/6-G3	205 x 800 x 6	G3	Coarse 50 %	0,16	1450 / 35	0,65
YAFI PF-205/900/6-G3	205 x 900 x 6	G3	Coarse 50 %	0,18	1650 / 35	0,80
YAFI PF-395/495/6-G3	395 x 495 x 6	G3	Coarse 50 %	0,20	1800 / 35	0,90
YAFI PF-395/620/6-G3	395 x 620 x 6	G3	Coarse 50 %	0,24	2160 / 35	1,0
YAFI PF-495/595/6-G3	495 x 595 x 6	G3	Coarse 50 %	0,29	2650 / 35	1,0

8-G3						
YAFI PF-205/400/8-G3	205 x 400 x 8	G3	Coarse 50 %	0,08	720 / 40	0,40
YAFI PF-205/650/8-G3	205 x 650 x 8	G3	Coarse 50 %	0,13	1200 / 40	0,5
YAFI PF-205/800/8-G3	205 x 800 x 8	G3	Coarse 50 %	0,16	1450 / 40	0,65
YAFI PF-205/900/8-G3	205 x 900 x 8	G3	Coarse 50 %	0,18	1650 / 40	0,80
YAFI PF-395/495/8-G3	395 x 495 x 8	G3	Coarse 50 %	0,20	1800 / 40	0,90
YAFI PF-395/620/8-G3	395 x 620 x 8	G3	Coarse 50 %	0,24	2160 / 40	1,0
YAFI PF-495/595/8-G3	495 x 595 x 8	G3	Coarse 50 %	0,29	2650 / 40	1,0

10-G3						
YAFI PF-105/400/10-G3	105 x 400 x 10	G3	Coarse 50 %	0,08	720 / 40	0,40
YAFI PF-105/650/10-G3	105 x 650 x 10	G3	Coarse 50 %	0,13	1200 / 40	0,5
YAFI PF-105/800/10-G3	105 x 800 x 10	G3	Coarse 50 %	0,16	1450 / 40	0,65
YAFI PF-105/900/10-G3	105 x 900 x 10	G3	Coarse 50 %	0,18	1650 / 40	0,80
YAFI PF-395/495/10-G3	395 x 495 x 10	G3	Coarse 50 %	0,20	1800 / 40	0,90
YAFI PF-395/610/10-G3	395 x 610 x 10	G3	Coarse 50 %	0,24	2160 / 40	1,0
YAFI PF-495/595/10-G3	495 x 595 x 10	G3	Coarse 50 %	0,29	2650 / 40	1,0


PANEL FILTERS

Flat Surface Metal Frame Washable Pre-Filter

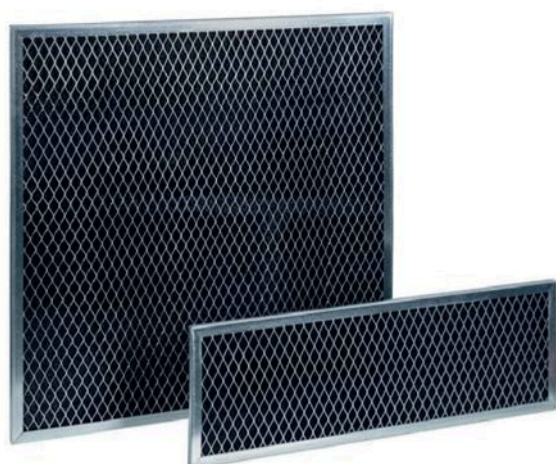

Description

Designed as prefilters for fan-coils and ventilation units. It protects your heating and cooling coil which offer slow filtration efficiency with very low pressure drop. Fanset GP is produced by galvanized frame with polyurethane washable filter media. Filter media is supported with extended metal mesh at bothside of the frame. Available in standard and customized sizes.

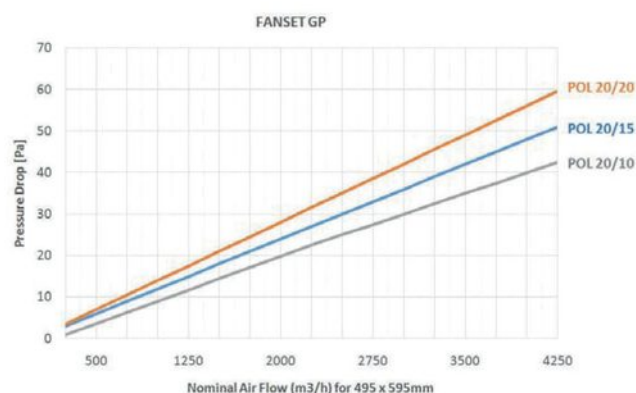

Special Features

Filter Type - Flat Panel Filter

Filter Media - Polyurethane Filter Foam

Frame - Galvanized Steel

Filter Class - G2 / ISO Coarse %40

Final Pressure Drop - 250 Pa

Max. Temperature - 100 °C

Applications

→ Primary filter for air conditioning systems.

Product Code

YAFI PPF

Advantages

- Robust construction for reliable operation
- Flat filter media between two metal mesh
- Fully washable and regenerable media
- Customised sizes can be produced easily.
- Frame thickness 6mm-8mm-10mm

Filter Type	YK	Panel Filter
Frame	G	Galvanized Steel
Media	P	Polyurethane Foam
Pleat Type	L	Flat
Gasket	2	POL 20/10
Dimension	-	WxHxD
Efficiency	G2	EN 779
		Coarse 40 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
10-G2 - POL 20/10						
YAFI PPF-205/400/10-G2	205 x 400 x 10	G2	Coarse 40 %	0,08	720 / 25	0,45
YAFI PPF-205/650/10-G2	205 x 650 x 10	G2	Coarse 40 %	0,13	1200 / 25	0,55
YAFI PPF-205/800/10-G2	205 x 800 x 10	G2	Coarse 40 %	0,16	1450 / 25	0,70
YAFI PPF-205/900/10-G2	205 x 900 x 10	G2	Coarse 40 %	0,18	1650 / 25	0,85
YAFI PPF-395/495/10-G2	395 x 495 x 10	G2	Coarse 40 %	0,20	1800 / 25	0,95
YAFI PPF-395/620/10-G2	395 x 620 x 10	G2	Coarse 40 %	0,24	2160 / 25	1,1
YAFI PPF-495/595/10-G2	495 x 595 x 10	G2	Coarse 40 %	0,29	2650 / 25	1,1

15-G2 - POL 20/15						
YAFI PPF-205/400/15-G2	205 x 400 x 15	G2	Coarse 40 %	0,08	720 / 30	0,45
YAFI PPF-205/650/15-G2	205 x 650 x 15	G2	Coarse 40 %	0,13	1200 / 30	0,55
YAFI PPF-205/800/15-G2	205 x 800 x 15	G2	Coarse 40 %	0,16	1450 / 30	0,70
YAFI PPF-205/900/15-G2	205 x 900 x 15	G2	Coarse 40 %	0,18	1650 / 30	0,85
YAFI PPF-395/495/15-G2	395 x 495 x 15	G2	Coarse 40 %	0,20	1800 / 30	0,95
YAFI PPF-395/620/15-G2	395 x 620 x 15	G2	Coarse 40 %	0,24	2160 / 30	1,1
YAFI PPF-495/595/15-G2	495 x 595 x 15	G2	Coarse 40 %	0,29	2650 / 30	1,1

20-G2 - POL 20/20						
YAFI PPF-205/400/20-G2	205 x 400 x 20	G2	Coarse 40 %	0,08	720 / 35	0,45
YAFI PPF-205/650/20-G2	205 x 650 x 20	G2	Coarse 40 %	0,13	1200 / 35	0,55
YAFI PPF-205/800/20-G2	205 x 800 x 20	G2	Coarse 40 %	0,16	1450 / 35	0,70
YAFI PPF-205/900/20-G2	205 x 900 x 20	G2	Coarse 40 %	0,18	1650 / 35	0,85
YAFI PPF-395/495/20-G2	395 x 495 x 20	G2	Coarse 40 %	0,20	1800 / 35	0,95
YAFI PPF-395/620/20-G2	395 x 620 x 20	G2	Coarse 40 %	0,24	2160 / 35	1,1
YAFI PPF-495/595/20-G2	495 x 595 x 20	G2	Coarse 40 %	0,29	2650 / 35	1,1


PANEL FILTERS

Wire Rod Frame Pre-Filter



Description

Designed as prefilters for air conditioning units, fan coil systems, warm air furnaces, refrigeration, counters and electronic equipment cabinets, they are also often used to protect heatexchanger coils from dust. Fanset GS is produced by sewing the synthetic media on to a pre-formed galvanized coated wire frame that has cross braces attached as necessary. Offer slow filtration efficiency with very low pressuredrop. Available in standard and customized sizes.

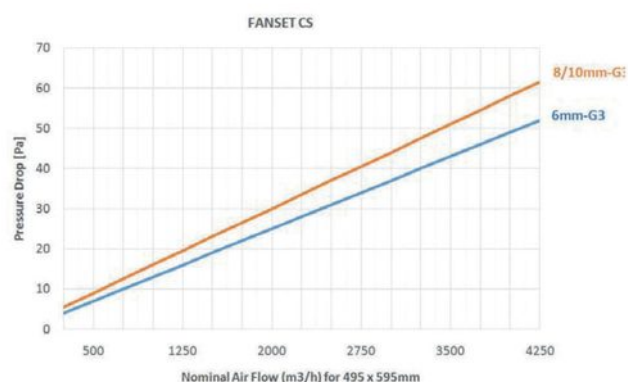

Special Features

Filter Type - Fan Coil Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel Rod

Filter Class - G3 / ISO Coarse %50

Final Pressure Drop - 250 Pa

Max. Temperature - 100 °C

Advantages

- Robust construction for reliable operation
- Economic operation
- Customised sizes can be produced

Applications

- Primary filter for fan coil and ventilation units.

Product Code

YAFI PŽF

Filter Type	CT	Wire Rod Filter
Frame	G	Galvanized Rod
Media	S	Syntetic Fiber
Pleat Type	X	Flat
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G3	EN 779
		Coarse 50 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	-----------------	-----------	--------------------	--------------------------	----------------


6-G3						
YAFI PŽF-205/400/4-G3	205 x 400 x 4	G3	Coarse 50%	0,08	720	0,15
YAFI PŽF-205/650/4-G3	205 x 650 x 4	G3	Coarse 50%	0,13	1200	0,20
YAFI PŽF-205/800/4-G3	205 x 800 x 4	G3	Coarse 50%	0,16	1450	0,30
YAFI PŽF-205/900/4-G3	205 x 900 x 4	G3	Coarse 50%	0,18	1650	0,35
YAFI PŽF-395/495/4-G3	395 x 495 x 4	G3	Coarse 50%	0,20	1800	0,25
YAFI PŽF-395/620/4-G3	395 x 620 x 4	G3	Coarse 50%	0,24	2160	0,25
YAFI PŽF-495/595/4-G3	495 x 595 x 4	G3	Coarse 50%	0,29	2650	0,30

8-G3						
YAFI PŽF-205/400/6-G3	205 x 400 x 6	G3	Coarse 50%	0,08	720	0,15
YAFI PŽF-205/650/6-G3	205 x 650 x 6	G3	Coarse 50%	0,13	1200	0,20
YAFI PŽF-205/800/6-G3	205 x 800 x 6	G3	Coarse 50%	0,16	1450	0,30
YAFI PŽF-205/900/6-G3	205 x 900 x 6	G3	Coarse 50%	0,18	1650	0,35
YAFI PŽF-395/495/6-G3	395 x 495 x 6	G3	Coarse 50%	0,20	1800	0,25
YAFI PŽF-395/620/6-G3	395 x 620 x 6	G3	Coarse 50%	0,24	2160	0,25
YAFI PŽF-495/595/6-G3	495 x 595 x 6	G3	Coarse 50%	0,29	2650	0,30

10-G3						
YAFI PŽF-105/400/8-G3	105 x 400 x 8	G3	Coarse 50%	0,08	720	0,20
YAFI PŽF-105/650/8-G3	105 x 650 x 8	G3	Coarse 50%	0,13	1200	0,25
YAFI PŽF-105/800/8-G3	105 x 800 x 8	G3	Coarse 50%	0,16	1450	0,35
YAFI PŽF-105/900/8-G3	105 x 900 x 8	G3	Coarse 50%	0,18	1650	0,40
YAFI PŽF-395/495/8-G3	395 x 495 x 8	G3	Coarse 50%	0,20	1800	0,30
YAFI PŽF-395/610/8-G3	395 x 610 x 8	G3	Coarse 50%	0,24	2160	0,30
YAFI PŽF-495/595/8-G3	495 x 595 x 8	G3	Coarse 50%	0,29	2650	0,35


PANEL FILTERS

Wire Rod Frame Pre-Filter Washable Media

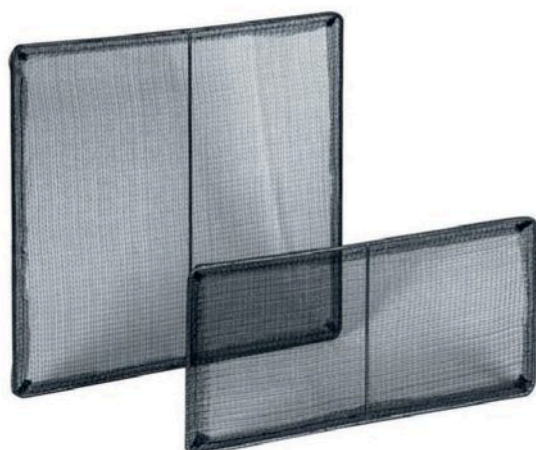

Description

Designed as prefilters for air conditioning units, fan coil systems, warm air furnaces, refrigeration, counters and electronic equipment cabinets, they are also often used to protect heat exchanger coils from dust. Fanset CB is produced by sewing the PP mesh filter media onto a pre-formed galvanized coated wire frame that has cross braces attached as necessary. Offer slow filtration efficiency with very low pressure drop. Available in standard and customized sizes.

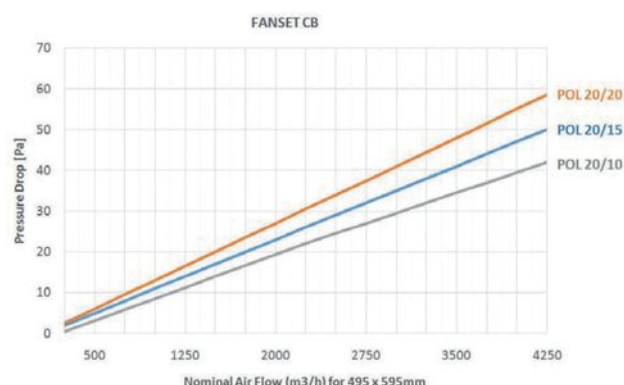

Special Features

Filter Type - Fan Coil Filter

Filter Media - PP Mesh - Black Colour

Frame - Galvanized Wire Rod Filter Class - G3 /
ISO Coarse %35

Final Pressure Drop - 250 Pa

Max. Temperature - 100 °C

Advantages

- Robust construction for reliable operation
- Economic operation
- Customised sizes can be produced
- Washable and regenerable

Applications

- Primary filter for fan coil and ventilation units.

Product Code

YAFI PPF

Filter Type	CT	Wire Rod Filter
Frame	G	Galvanized Rod
Media	B	PP Mesh
Pleat Type	X	Flat
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G3	EN 779
		Coarse 35 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
--------------	-----------------------	-----------------	-----------	---------------------------------	---------------------------------------	----------------


4-G2						
YAFI PPF-205/400/4-G2	205 x 400 x 4	G2	Coarse 35%	0,08	720 / 20	0,25
YAFI PPF-205/650/4-G2	205 x 650 x 4	G2	Coarse 35%	0,13	1200	0,40
YAFI PPF-205/800/4-G2	205 x 800 x 4	G2	Coarse 35%	0,16	1450	0,50
YAFI PPF-205/900/4-G2	205 x 900 x 4	G2	Coarse 35%	0,18	1650	0,55
YAFI PPF-395/495/4-G2	395 x 495 x 4	G2	Coarse 35%	0,20	1800	0,45
YAFI PPF-395/620/4-G2	395 x 620 x 4	G2	Coarse 35%	0,24	2160	0,55
YAFI PPF-495/595/4-G2	495 x 595 x 4	G2	Coarse 35%	0,29	2650	0,65

6-G2						
YAFI PPF-205/400/6-G2	205 x 400 x 6	G2	Coarse 35%	0,08	720	0,25
YAFI PPF-205/650/6-G2	205 x 650 x 6	G2	Coarse 35%	0,13	1200	0,40
YAFI PPF-205/800/6-G2	205 x 800 x 6	G2	Coarse 35%	0,16	1450	0,50
YAFI PPF-205/900/6-G2	205 x 900 x 6	G2	Coarse 35%	0,18	1650	0,55
YAFI PPF-395/495/6-G2	395 x 495 x 6	G2	Coarse 35%	0,20	1800	0,45
YAFI PPF-395/620/6-G2	395 x 620 x 6	G2	Coarse 35%	0,24	2160	0,55
YAFI PPF-495/595/6-G2	495 x 595 x 6	G2	Coarse 35%	0,29	2650	0,65

8-G2						
YAFI PPF-105/400/8-G2	105 x 400 x 8	G2	Coarse 35%	0,08	720	0,30
YAFI PPF-105/650/8-G2	105 x 650 x 8	G2	Coarse 35%	0,13	1200	0,45
YAFI PPF-105/800/8-G2	105 x 800 x 8	G2	Coarse 35%	0,16	1450	0,55
YAFI PPF-105/900/8-G2	105 x 900 x 8	G2	Coarse 35%	0,18	1650	0,60
YAFI PPF-395/495/8-G2	395 x 495 x 8	G2	Coarse 35%	0,20	1800	0,50
YAFI PPF-395/610/8-G2	395 x 610 x 8	G2	Coarse 35%	0,24	2160	0,60
YAFI PPF-495/595/8-G2	495 x 595 x 8	G2	Coarse 35%	0,29	2650	0,70


PANEL FILTERS

Metal Frame Kitchen Hood Filter

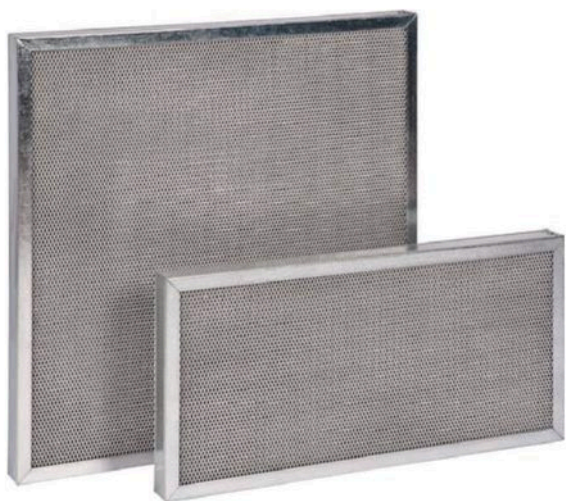

Description

Designed for heavy duty industrial applications and kitchen hoods as washable dust and grease filters. Filter frame can be produced by galvanized, aluminum or stainless steel and filter media consist of multiple layers aluminium mesh. Filter media ensures high grease holding capacity with very long service life. Available in standard and customized sizes.

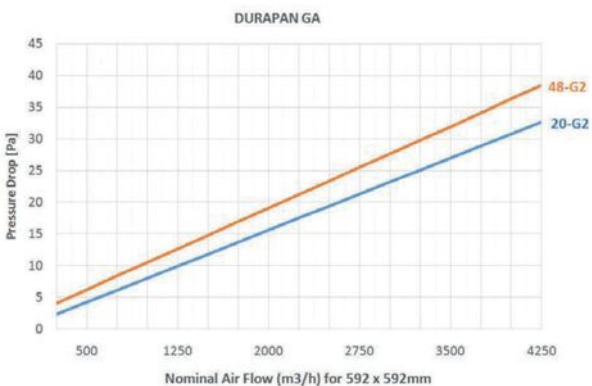

Special Features

- Filter Type** - Metal Panel Filter
- Filter Media** - Extended Aluminum Mesh
- Frame** - Galvanized Steel
- Filter Class** - G2 / ISO Coarse %40
- Final Pressure Drop** - 250 Pa
- Max. Temperature** - 120 °C

Applications

- ➔ Primary filter for grease or oil mist separation.

Product Code YAFI PKF

Advantages

- ➔ Robust construction for reliable operation
- ➔ Economic operation and high filtration surface
- ➔ High operating temperature
- ➔ Compact, rigid construction for rapid installation
- ➔ Stainless Steel model can be produced
- ➔ Can be cleaned in dishwasher or pressure washer


Filter Type	MK	Metal Panel Filter
Frame	G	Galvanized Steel
Media	A	Extended Aluminum
Pleat Type	Z	Zik zag
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G2	EN 779
		Coarse 40 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
20-G2						
YAFI PKF-287/287/20-G2	287 x 287 x 20	G2	Coarse 40 %	0,12	850 / 25	0,65
YAFI PKF-400/500/20-G2	400 x 500 x 20	G2	Coarse 40 %	0,35	1850 / 25	1,90
YAFI PKF-495/495/20-G2	495 x 495 x 20	G2	Coarse 40 %	0,45	2400 / 25	2,0
YAFI PKF-495/620/20-G2	495 x 620 x 20	G2	Coarse 40 %	0,55	3000 / 25	2,30
YAFI PKF-287/592/20-G2	287 x 592 x 20	G2	Coarse 40 %	0,35	1700 / 25	1,20
YAFI PKF-490/592/20-G2	490 x 592 x 20	G2	Coarse 40 %	0,55	2500 / 25	2,20
YAFI PKF-592/592/20-G2	592 x 592 x 20	G2	Coarse 40 %	0,60	3400 / 25	2,30

48-G2						
YAFI PKF-287/287/48-G2	287 x 287 x 48	G2	Coarse 40 %	0,20	850 / 30	0,75
YAFI PKF-400/500/48-G2	400 x 500 x 48	G2	Coarse 40 %	0,45	1850 / 30	2,00
YAFI PKF-495/495/48-G2	495 x 495 x 48	G2	Coarse 40 %	0,55	2400 / 30	2,2
YAFI PKF-495/620/48-G2	495 x 620 x 48	G2	Coarse 40 %	0,70	3000 / 30	2,50
YAFI PKF-287/592/48-G2	287 x 592 x 48	G2	Coarse 40 %	0,42	1700 / 30	1,40
YAFI PKF-490/592/48-G2	490 x 592 x 48	G2	Coarse 40 %	0,65	2500 / 30	2,40
YAFI PKF-592/592/48-G2	592 x 592 x 48	G2	Coarse 40 %	0,80	3400 / 30	2,50


PANEL FILTERS

Metal Frame Knitted Mesh Grease Filters

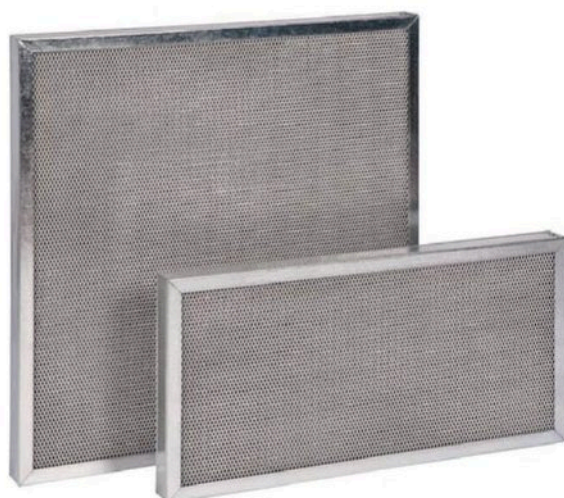

Description

Designed for heavy duty industrial applications and kitchen hoods as washable dust and grease filters. Filter frame can be produced by galvanized, aluminum or stainless steel and filter media consist of multiple layers galvanized knitted mesh. Filter media ensures high dust holding capacity with very long service life with optimum efficiency. Available in standard and customized sizes.

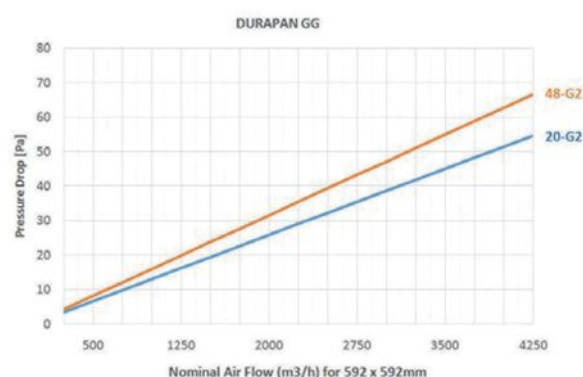

Special Features

Filter Type - Metal Panel Filter

Filter Media - Galvanized Knitted Mesh

Frame - Galvanized Steel

Filter Class - G2 / ISO Coarse %50

Final Pressure Drop - 250 Pa

Max. Temperature - 120 °C

Advantages

- Robust construction for reliable operation
- Economic operation and high filtration surface
- High operating temperature
- Compact, rigid construction for rapid installation
- Stainless Steel model can be produced
- Can be cleaned in dishwasher or pressure washer

Applications

- Primary filter for grease or oil mist separation.

Product Code

YAFI PKF

Filter Type	MK	Metal Panel Filter
Frame	G	Galvanized Steel
Media	G	Galvanized Knitted Mesh
Pleat Type	D	Filled With Mesh
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G3	EN 779
		Coarse 50 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
20-G2						
YAFI PKF-287/287/20-G3	287 x 287 x 20	G3	Coarse 50 %	0,10	850 / 45	1,00
YAFI PKF-400/500/20-G3	400 x 500 x 20	G3	Coarse 50 %	0,25	1850 / 45	3,00
YAFI PKF-495/495/20-G3	495 x 495 x 20	G3	Coarse 50 %	0,25	2400 / 45	3,10
YAFI PKF-495/620/20-G3	495 x 620 x 20	G3	Coarse 50 %	0,30	3000 / 45	3,30
YAFI PKF-287/592/20-G3	287 x 592 x 20	G3	Coarse 50 %	0,17	1700 / 45	1,80
YAFI PKF-490/592/20-G3	490 x 592 x 20	G3	Coarse 50 %	0,30	2500 / 45	3,20
YAFI PKF-592/592/20-G3	592 x 592 x 20	G3	Coarse 50 %	0,35	3400 / 45	3,40

48-G2						
YAFI PKF-287/287/48-G3	287 x 287 x 48	G3	Coarse 50 %	0,10	850 / 55	1,20
YAFI PKF-400/500/48-G3	400 x 500 x 48	G3	Coarse 50 %	0,25	1850 / 55	3,20
YAFI PKF-495/495/48-G3	495 x 495 x 48	G3	Coarse 50 %	0,25	2400 / 55	3,40
YAFI PKF-495/620/48-G3	495 x 620 x 48	G3	Coarse 50 %	0,30	3000 / 55	3,70
YAFI PKF-287/592/48-G3	287 x 592 x 48	G3	Coarse 50 %	0,17	1700 / 55	2,10
YAFI PKF-490/592/48-G3	490 x 592 x 48	G3	Coarse 50 %	0,30	2500 / 55	3,60
YAFI PKF-592/592/48-G3	592 x 592 x 48	G3	Coarse 50 %	0,35	3400 / 55	3,80