




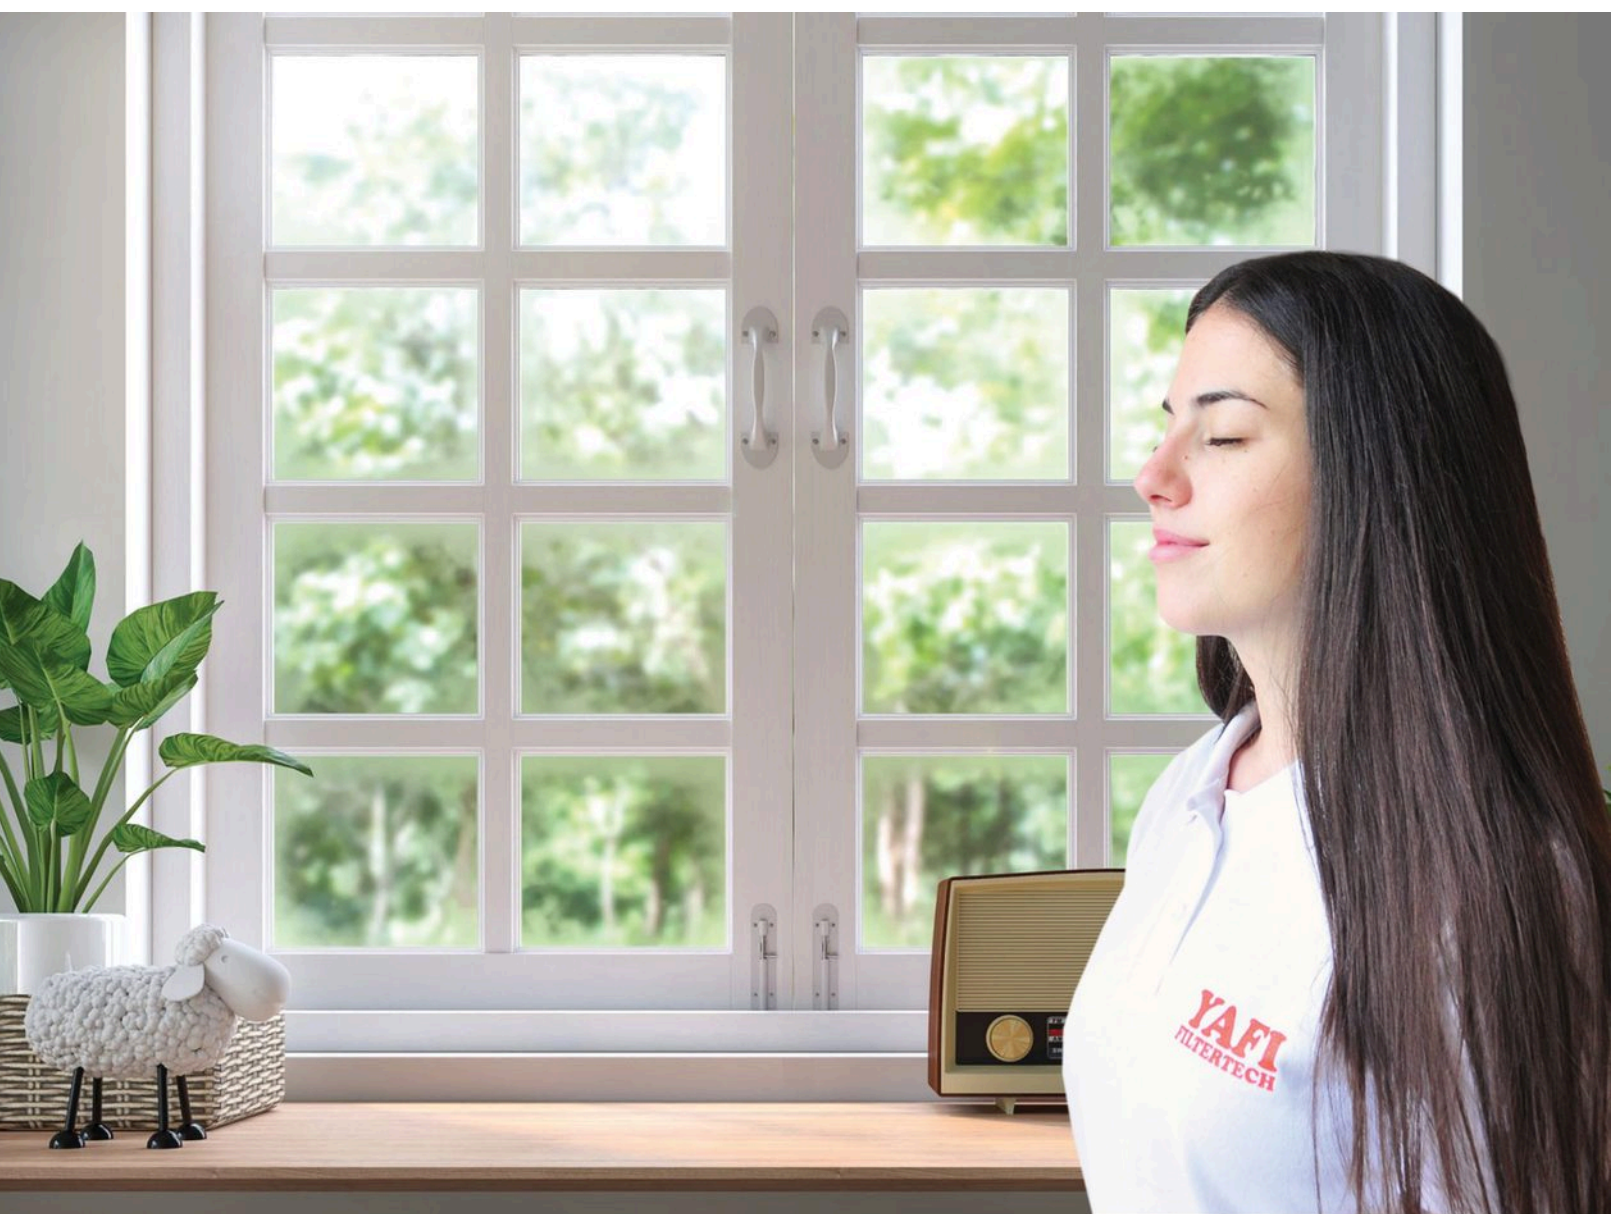

CONTENTS

7 FILTER MATERIALS

21 CASSETTE FILTERS

33 PANEL FILTERS

49 BAG FILTERS

61 RIGID FILTERS

85 HEPA FILTERS

149 FILTERS FOR ODORS
AND FATTY VAPORS

161 FILTER FRAMES

**Everyone
has the right
to clean air!**



**You can expect the perfect solution for all your
filtration needs from us!**

Quality comes first! We take care of every detail during the production of even the smallest product. Our focus is 100% on the needs and satisfaction of our clients

Since 2007, our team has been listening to the needs of the industry to create reliable products with the highest quality standards.

The experience of over fifteen years in the air filtration market, our research, development and investments in the last four to five years, have brought us and enabled us to gain competitive strength and thereby expand our capacities.

Everywhere in the world, visiting factories and fairs, we realized that the filters produced by YAFI FILTERTECH SERBIA do not differ either in quality or in all filtration parameters from G2/EU2 - G4/EU4 and M5 - F9. So it is clear to everyone that for a certain quality of filtration, all parameters should be taken and thus the right filter should be chosen - that's why there is no such thing as an ideal filter.

We constantly educate our customers that the ideal and best filter does not exist. That is why there is a way to measure filter durability, efficiency, current filter characteristics and compare them with parameters. There are many filter check factors. Also, during the operation of the filter, environmental conditions, air humidity and dust particles create a load on the filter.

We are very committed to ecology. YAFI FILTERTECH d.o.o., to each of its business partners, in addition to the quality of its products, can offer complete engineering in the field of air conditioning and, as the most important thing in the field of ecology, a document on the movement of eco-waste (old filters) with arrival at the site, its removal and storage at the landfill accompanied by an eco-inspection.



FILTER MATERIALS

FILTER MATERIALS

Synthetic Fibre Roll Filters



Description


Made of %100 polyester fibres with nonwoven structure which can be used for wide range of air conditions. DustMax filters consist of highly elastic, tense, randomly arranged fibres with decreasing fibre thickness, the filter medium becomes denser and finer towards the clean air side (progressive construction), whereby high level of separation and high dust accumulation capacity are achieved. The materials are nonflammable, self-extinguishing and harmless to health.

Applications

- ➔ Preliminary filter for all types of air-conditioning and ventilation installations.

Advantages

- ➔ Assured by the progressive distribution of fibers
- ➔ High dust holding capacity, low pressure drop
- ➔ Nonflammable, self-extinguishing and harmless to health.
- ➔ Available in rolls or cut to size

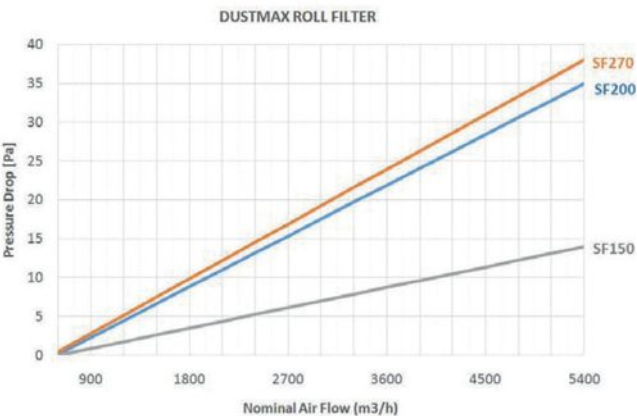

Product Code YAFI FM-G4

Filter Type	RF	Roll Filter
Filter Composition	SE	Syntetic Fiber
Model	SF2Y0	
Dimension	—	WxHxD
Efficiency	G4	EN 779
	Coarse 60 %	ISO 16890

TYPE	SF150	SF200	SF2YO
Filter Class (EN 779)	G2	G3	G4
Filter Class (ISO 16890)	Coarse 30%	Coarse 40%	Coarse 60%
Composition	Random-laid, non-woven fabric made of unbreakable synthetic fibre		
Thickness (mm)	8-10	15-18	20-22
Weight (g/m ²)	150	200	270
Nominal Face Velocity (m/s)	1,5	1,5	1,5
Nominal Air Flow (m ³ /h.m ²)	5400	5400	5400
Initial Pressure Drop	14	35	38
Final Pressure Drop (Pa)	250	250	250
Average Arrestance (Am)	80	87	91
Dust Holding Capacity (g)	517	400	478
Temperature Resistance °C	Continuous Temperature up to 100°C and peaks of 120°C		
Flammability (DIN53438)	F1	F1	F1
Roll Dimensions	2.00 x 20.00	2.00 x 20.00	2.00 x 20.00
Max.Relative Humidity	1	1	1

TYPE	SF150	SF200	SF2YO
Filter Class (EN 779)	G2	G3	G4
Filter Class (ISO 16890)	Coarse 30%	Coarse 40%	Coarse 60%
Composition	Random-laid, non-woven fabric made of unbreakable synthetic fibre		
Thickness (mm)	8-10	15-18	20-22
Weight (g/m ²)	150	200	270
Nominal Face Velocity (m/s)	1,5	1,5	1,5
Nominal Air Flow (m ³ /h.m ²)	5400	5400	5400
Initial Pressure Drop	14	35	38
Final Pressure Drop (Pa)	250	250	250
Average Arrestance (Am)	80	87	91
Dust Holding Capacity (g)	517	400	478
Temperature Resistance °C	Continuous Temperature up to 100°C and peaks of 120°C		
Flammability (DIN53438)	F1	F1	F1
Roll Dimensions	2.00 x 20.00	2.00 x 20.00	2.00 x 20.00
Max.Relative Humidity	1	1	1

FILTER MATERIALS

Activated Carbon Impregnated Roll Filters



Description


Carbon polyester media rolls are a simple way to reduce or eliminate odors and fumes. Carbomed Roll Filters are made of nonwoven polyester, impregnated with finely ground, activated carbon. Even distribution of the carbon throughout the polyester media assures an excellent capture percentage on the first pass. This media can be used for holding frame pads or blankets.

Applications

➔ Ideal for use in nonvented applications such as range hoods, air cleaners and purifiers, room air conditioner, and bath fans.

Advantages

- ➔ Assured by the progressive distribution of fibers
- ➔ Highly effective for organic based odors.
- ➔ Nonflammable, self-extinguishing and harmless to health.
- ➔ Available in rolls or cut to size

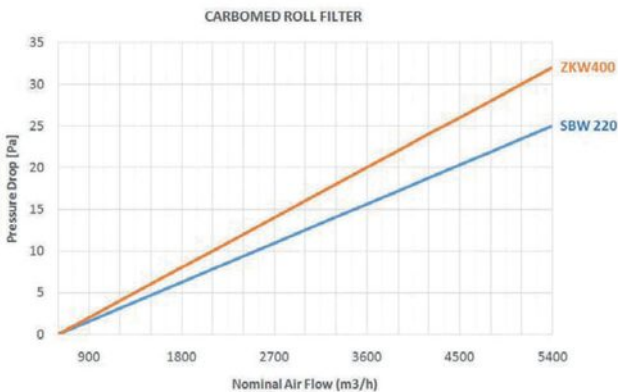

Product Code YAFI FM-AC

Filter Type	RF	Roll Filter
Filter Composition	KE	Carbon Impregnated
Model	ZKW 400	
Dimension	-	WxL
Quantity	RL	Complete Roll
	M2	Cut to size

TYPE	SBW 220	ZKW 400
Mass per unit area EN 29073-1	340 ± 35	400 ± 40
Thickness (mm) EN ISO 9073-2 Method A	8 ± 1,5	11 ± 2
Air-permeability l/m2/s (@50 Pa)	800 ± 200	1600 ± 350
Flammability DIN 53 438, part 3	F1	F1
Colour	Black & White	Black
Fibre composition	Polyester	Polyester
Fibre bonding	Thermo bonded	Thermo bonded
Treatment	Powdered (LDPE)	Impregnated
Temperature Resistance °C	Continuous Temperature up to 100°C and peaks of 120°C	
Roll Dimensions	20.00 x 2.00 - Cut to size	

FILTER MATERIALS


Washable Filter Foam



Description

Filter foam is an open-cell polyurethane foam on basis of polyether/polyester and can be used in filtration applications. Filter foams usually differ in their pore size and pore number per square inch (PPI).

POLFIL material can be used in any practical thickness and the range of pore sizes available covers a wide area of efficiencies, particularly since different porosities can be bonded together in tandem to produce the desired efficiency using a graded filtration mechanism.

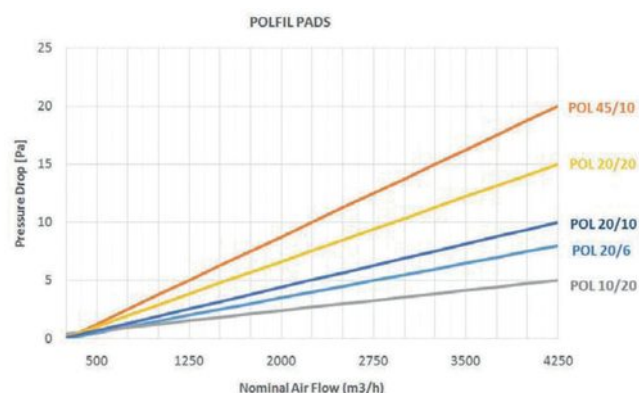

Applications

→ Preliminary filter for all types of air-conditioning and ventilation installations.

Advantages

- Progressive open cell structure, high mechanical strength
- High dust holding capacity, low pressure drop
- Totally washable, reusable and harmless to health.
- Available in rolls or cut to size

Product Code



YAFI FM-PP

Filter Type	RF	Roll Filter
Filter Composition	POL	Polyurethane Foam
Model	20	Pore Size
Dimension	10	Thickness
Dimension		WxL

TYPE	POL 10/20	POL 20/6	POL 20/10	POL 20/20	POL 45/10
Filter Class (EN 779)	G2	G2	G2-G3	G2-G3	G3
Filter Class (ISO 16890)	Coarse 30 %	Coarse 30 %	Coarse 35 %	Coarse 35 %	Coarse 40 %
Composition	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane
Thickness (mm)	20	6	10	20	10
Nominal Face Velocity (m/s)	1,5	1,5	1,5	1,5	0,25
Nominal Air Flow (m3/h.m2)	5400	5400	5400	5400	5400
Initial Pressure Drop	5	5	10	15	20
Final Pressure Drop (Pa)	250	250	250	250	250
Average Arrestance (Am)	75%	75%	77%	78%	80%
Dust Holding Capacity (g)	300	110	220	300	300
Temperature Resistance °C	Continuous Temperature up to 100°C and peaks of 120°C				
Flammability (DIN53438)	F1	F1	F1	F1	F1
Roll Dimensions	1.50 x 2.00 and Cut-to-size				
Max.Relative Humidity	100%	100%	100%	100%	100%

FILTER MATERIALS

Overspray Cardboard Separator Filters

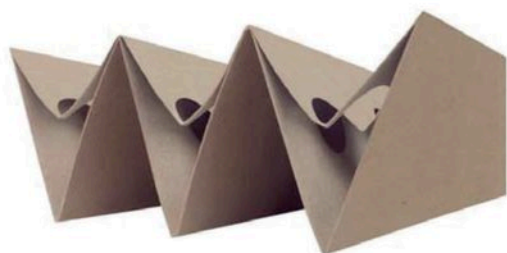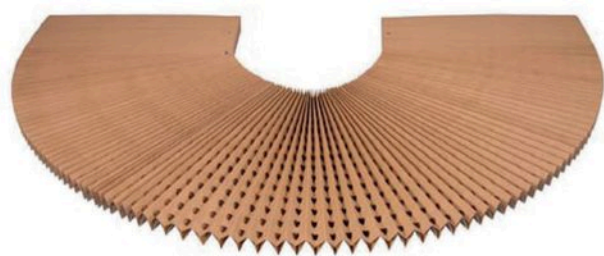

Description

PAINTFLO Filter are designed to capture any wet solids or liquid particles in an air stream: high solid enamels, baked and air dried enamels, glues, oils, stains, lacquers, fiberglass, epoxies, asphalts, clear coats, tar, teflon, etc.

Principle

Separation by inertia is the working principle of the PaintFlo Filter. The airflow, loaded with paint particles (overspray), suffers several radical changes in direction. The paint particles, heavier than air, follow tangent trajectories to the airflow. Therefore, the paint particles accumulate in the holding pockets and the airflow leaves the filter virtually free of overspray.

Applications

- ➔ Preliminary filter for all types of air-conditioning and ventilation installations.

Advantages

- ➔ Assured by the progressive distribution of fibers
- ➔ High dust and paint holding capacity, low pressure drop
- ➔ Self-supporting construction
- ➔ Nonflammable, self-extinguishing and harmless to health.
- ➔ Available in rolls or cut to size

Product Code YAFI FM-KF

Filter Type	PF	Cardboard Separator
Width	PAINTFLO100	100cm

TYPE	PAINTFLO Y5	PAINTFLO 90	PAINTFLO 100
Filter Area Composition	10	10	10
Composition	2 layers of heavy "kraf" paper, punched, pleated and glued		
Recommended Air Velocity	0,25 - 1,0 m/s	0,25 - 1,0 m/s	0,25 - 1,0 m/s
Pressure Drop		0,25 - 8 Pa 0,75 - 30 Pa 0,25 - 8 Pa 0,75 - 30 Pa	
Final Pressure Drop (Pa)		128 (Pa) possible up to 256	
Average Arrestance (Am)	98,1 %	98,1 %	98,1 %
Dust Holding Capacity (g)	18 kg/m ²	18 kg/m ²	18 kg/m ²
Temperature Resistance °C	100°C	100°C	100°C

FILTER MATERIALS

Glass Fibre Roll Filters



Description

Progressively structured glass fibre filtermedia especially designed for the filtration of solvent-based paint and lacquer particles.

As a result of this progressive construction which is the most important characteristic for a high-performance fibreglass filter PAINTSTOP filter mats offer lots of advantages.


Randomly arranged fine glass fibers with increasing density in direction to clean air side. Standard air intake side green / clean air side white.

Applications

- ➔ Preliminary filter for all types paint booth, cabins
- ➔ Protection of humidifiers and fans
- ➔ Prefiltration of compressors

Advantages

- ➔ Assured by the progressive distribution of fibers
- ➔ High dust and paint holding capacity, low pressure drop
- ➔ Nonflammable, self-extinguishing and harmless to health.
- ➔ Available in rolls or cut to size

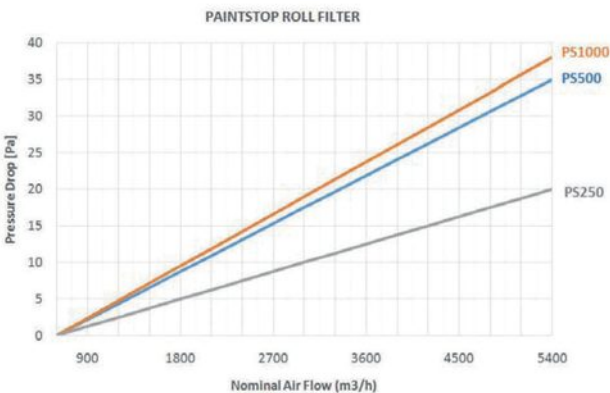

Product Code

YAFI FM-PF

Filter Type	RF	Roll Filter
Filter Composition	CE	Glass Fiber
Model	PS500	
Dimension	-	WXH
Efficiency	G3	EN 779
	Coarse 65 %	ISO 16890

TYPE	PS250	PS500	PS1000
Filter Class (EN 779)	G3	G3	G4
Filter Class (EN 16890)	Coarse 30%	Coarse 40%	Coarse 60%
Composition		Glass Fibre	
Thickness (mm)	60	15-18	20-22
Weight (g/m ²)	200	200	270
Nominal Face Velocity (m/s)	1,5	1,5	1,5
Nominal Air Flow (m ³ /h.m ²)	5400	5400	5400
Initial Pressure Drop (Pa)	20	35	38
Final Pressure Drop (Pa)	250	250	250
Average Paint Overspray Arrestance (%)	90-95	87	91
Dust Holding Capacity (g)	3.000-5.000	400	478
Temperature Resistance °C	Continuous Temperature up to 100°C and peaks of 120°C		
Flammability (DIN53438)	F1	F1	F1
Roll Dimensions	Standard: 20.00 x 2.00 - Available Cut to Size		
Max.Relative Humidity	100%	100%	100%


FILTER MATERIALS

Synthetic Fibre Roll Filters - M5



Description

Consist of superfine, thermally bonded polyester fibres are wetted with a bond-active agent, and their pure-air side is reinforced with a lattice structured fabric. Multilayer structure and progressive density provide very high standards in air purity. Contains no silicone or other lacquer harming substances.

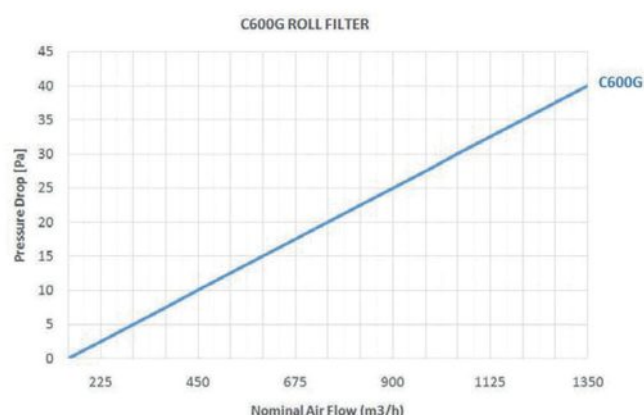

Applications

- ➔ For final filtration of supply air in painting and paint-spraying units.

Advantages

- ➔ Processed by the super long and anti-broken synthetic fiber
- ➔ Synthetic media is applied with solid adhesives
- ➔ Surface is affixed with high intensity fiber glass nets
- ➔ Distribute air flows evenly in the whole working space
- ➔ Available in rolls or cut to size

Product Code

YAFI FM-PLF

Filter Type	RF	Roll Filter
Filter Composition	SE	Synthetic Fiber
Model	SF600	
Dimension	-	WXL
Efficiency	M5	EN 779
	ePM10 %50	ISO 16890


TYPE	SF 600S
Filter Class (EN 779)/ISO16890	F5 / ISO ePM10 50%
Composition	Random-laid, non-woven fabric made of unbreakable synthetic fibre
Thickness (mm)	20-22
Weight (g/m ²)	600
Nominal Face Velocity (m/s)	0,25
Nominal Air Flow (m ³ /h.m ²)	900
Initial Pressure Drop	27
Final Pressure Drop (Pa)	250
Average Arrestance (Am)	97,1
Dust Holding Capacity (g)	330
Temperature Resistance °C	100°C
Flammability (DIN53438)	F1
Roll Dimensions	2.00 X 20.00
Max.Relative Humidity	100%



CASSETTE FILTERS


CASSETTE FILTERS

Cardboard Frame Pre-Filter

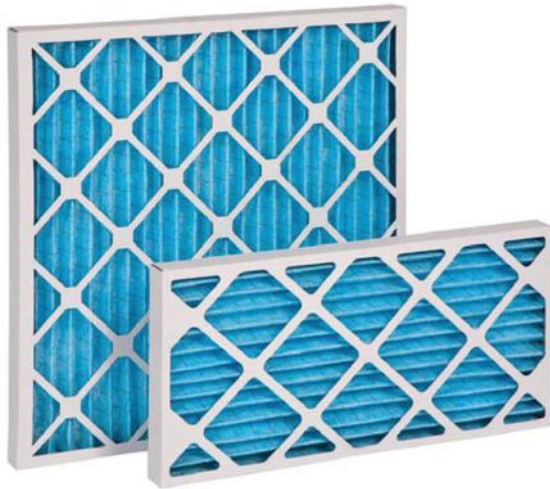

Description

Specially designed as first stage filters in ventilation units for dry dust and as prefilter to higher efficiency filters. Blue colour syththetic filter media which is supported with thin metal mesh placed in to water proof cardboard frame. For low pressure drop and high dust holding capacity filter media is placed as zig-zag shape. Available in standard and customized sizes.

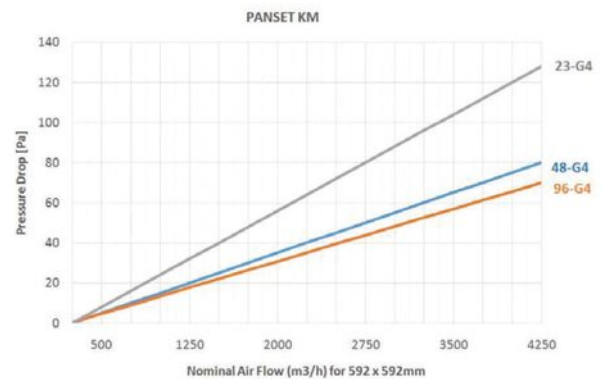

Special Features

Filter Type - Extended Surface Panel Filter

Filter Media - Synthetic Fibre Laminated with Extended Metal Mesh

Frame - Cardboard

Filter Class - G4 / ISO Coarse %65

Final Pressure Drop - 250 Pa Max.

Temperature - 80 °C

Applications

→ Primary filter for air conditioning systems.

Product Code

YAFI KKF

Advantages

- Water resistant disposable cardboard frame
- Fully supported media laminated onto a wire grid
- Economic operation and high filtration surface
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Rapid installation

Filter Type	KF	Panel Filter
Frame	K	Cardboard Frame
Media	M	Blue Media
Pleat Type	Z	Zik zag
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G4	EN 779
		Coarse 65 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
23-G4 - Coarse 65 %						
YAFI KKF-289/289/23-G4	289 x 289 x 23	G4	Coarse 65 %	0,20	450 / 50	0,30
YAFI KKF-394/495/23-G4	394 x 495 x 23	G4	Coarse 65 %	0,50	1000 / 50	0,45
YAFI KKF-495/495/23-G4	495 x 495 x 23	G4	Coarse 65 %	0,60	1300 / 50	0,55
YAFI KKF-495/622/23-G4	495 x 622 x 23	G4	Coarse 65 %	0,75	1600 / 50	0,65
YAFI KKF-289/594/23-G4	289 x 594 x 23	G4	Coarse 65 %	0,40	900 / 50	0,40
YAFI KKF-495/594/23-G4	495 x 594 x 23	G4	Coarse 65 %	0,70	1460 / 50	0,65
YAFI KKF-594/594/23-G4	594 x 594 x 23	G4	Coarse 65 %	0,85	1800 / 50	0,70

48-G4 - Coarse 65 %						
YAFI KKF-289/289/48-G4	289 x 289 x 48	G4	Coarse 65 %	0,45	850 / 60	0,30
YAFI KKF-394/495/48-G4	394 x 495 x 48	G4	Coarse 65 %	1,10	1950 / 60	0,60
YAFI KKF-495/495/48-G4	495 x 495 x 48	G4	Coarse 65 %	1,30	2450 / 60	0,70
YAFI KKF-495/622/48-G4	495 x 622 x 48	G4	Coarse 65 %	1,40	300 / 60	0,80
YAFI KKF-289/594/48-G4	289 x 594 x 48	G4	Coarse 65 %	0,90	1700 / 60	0,50
YAFI KKF-495/594/48-G4	495 x 594 x 48	G4	Coarse 65 %	1,20	2800 / 60	0,80
YAFI KKF-594/594/48-G4	594 x 594 x 48	G4	Coarse 65 %	1,60	3400 / 60	0,90

98-G4 - Coarse 65 %						
YAFI KKF-289/289/96-G4	289 x 289 x 96	G4	Coarse 65 %	0,70	1000 / 70	0,45
YAFI KKF-394/495/96-G4	394 x 495 x 96	G4	Coarse 65 %	1,50	2400 / 70	0,75
YAFI KKF-495/495/96-G4	495 x 495 x 96	G4	Coarse 65 %	1,90	3000 / 70	0,85
YAFI KKF-495/622/96-G4	496 x 622 x 96	G4	Coarse 65 %	1,85	3600 / 70	0,95
YAFI KKF-289/594/96-G4	289 x 594 x 96	G4	Coarse 65 %	1,30	2100 / 70	0,75
YAFI KKF-495/594/96-G4	495 x 594 x 96	G4	Coarse 65 %	2,10	3500 / 70	1,05
YAFI KKF-594/594/96-G4	594 x 594 x 96	G4	Coarse 65 %	2,50	4250 / 70	1,15


CASSETTE FILTERS

Metal Frame Pre-Filter



Description

Specially designed as first stage filters in ventilation units for dry dust and as prefilter to higher efficiency filters. Synthetic filter media which is supported with metal mesh placed into metal frame. For low pressure drop and high dust holding capacity filter media is placed as zig-zag shape. Available in standard and customized sizes.

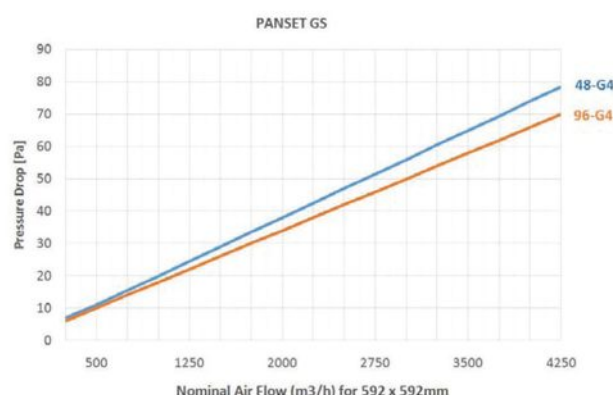

Special Features

Filter Type - Extended Surface Panel Filter

Filter Media - Synthetic Fibre Laminated with
Extended Metal Mesh

Frame - Galvanized Steel

Filter Class - G4 / ISO Coarse %65 Final Pressure
Drop - 250 Pa Max.

Temperature - 100 °C

Applications

→ Primary filter for air conditioning systems.

Advantages

- Robust construction for reliable operation
- Fully supported media laminated onto a wire grid
- Economic operation and high filtration surface
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Customised sizes are available on request

Product Code

YAFI KF

Filter Type	KF	Panel Filter
Frame	G	Galvanized Steel
Media	S	Syntetic Fiber
Pleat Type	Z	Zik zag
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G4	EN 779 Coarse 65 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
48-G4 - Coarse 65 %						
YAFI KF-287/287/48-G4	287 x 287 x 48	G4	Coarse 65 %	0,17	850 / 60	0,60
YAFI KF-392/492/48-G4	392 x 492 x 48	G4	Coarse 65 %	0,40	1950 / 60	1,00
YAFI KF-492/492/48-G4	492 x 492 x 48	G4	Coarse 65 %	0,50	2600 / 60	1,50
YAFI KF-495/625/48-G4	492 x 625 x 48	G4	Coarse 65 %	0,62	3000 / 60	1,70
YAFI KF-287/592/48-G4	287 x 592 x 48	G4	Coarse 65 %	0,34	1700 / 60	1,10
YAFI KF-492/592/48-G4	492 x 592 x 48	G4	Coarse 65 %	0,60	2820 / 60	1,60
YAFI KF-592/592/48-G4	592 x 592 x 48	G4	Coarse 65 %	0,70	3400 / 60	1,80

96-G4 - Coarse 65 %						
YAFI KF-287/287/96-G4	287 x 287 x 96	G4	Coarse 65 %	0,25	1070 / 70	0,70
YAFI KF-392/492/96-G4	392 x 492 x 96	G4	Coarse 65 %	0,60	2400 / 70	1,60
YAFI KF-492/492/96-G4	492 x 492 x 96	G4	Coarse 65 %	0,75	3000 / 70	2,00
YAFI KF-495/625/96-G4	492 x 625 x 96	G4	Coarse 65 %	0,95	3700 / 70	2,60
YAFI KF-287/592/96-G4	287 x 592 x 96	G4	Coarse 65 %	0,50	2125 / 70	1,45
YAFI KF-492/592/96-G4	492 x 592 x 96	G4	Coarse 65 %	0,90	3500 / 70	2,40
YAFI KF-592/592/96-G4	592 x 592 x 96	G4	Coarse 65 %	1,10	4250 / 70	3,00


CASSETTE FILTERS

Metal Frame Washable Pre-Filter



Description

Washable filters are specially designed as first stage filters in ventilation units for dry dust and as prefilter to higher efficiency filters. Polyurethane filter media which is supported with metal mesh placed into metal frame. Due to polyurethane filter media it can be washed several times easily. For low pressure drop and high dust holding capacity filter media is placed as zig-zag shape. Available in standard and customized sizes.

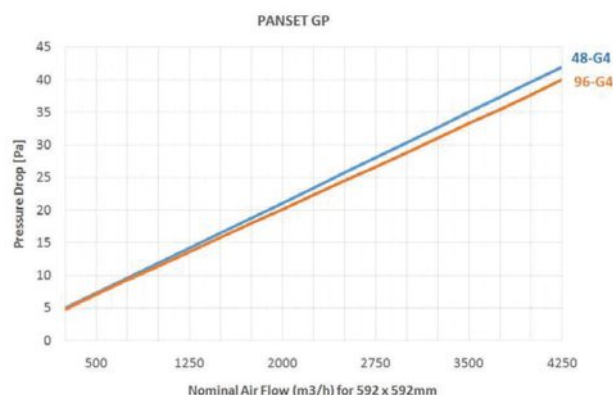

Special Features

Filter Type - Extended Surface Panel Filter

Filter Media - Polyurethane Filter

Foam Frame - Galvanized Steel

Filter Class - G2 / ISO Coarse %50 Final

Pressure Drop - 300 Pa Max.

Temperature - 80 °C

Applications

→ Primary filter for air conditioning systems.

Advantages

- Robust construction for reliable operation
- Fully supported media laminated onto a wire grid
- Economic operation and high filtration surface
- Fully washable and regenerable media
- Compact, rigid construction for rapid installation
- Customised sizes can be produced easily

Product Code

YAFI PKF

Filter Type	YK	Washable Filter
Frame	G	Galvanized Steel
Media	P	Polyurethane Media
Pleat Type	Z	Zik zag
Gasket	4	POL 45/10
Dimension	-	WxHxD
Efficiency	G4	EN 779
		Coarse 50 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
48-G3 - Coarse 50 %						
YAFI PKF-287/287/48-G3	287 x 287 x 48	G3	Coarse 50 %	0,17	850 / 35	0,38
YAFI PKF-392/492/48-G3	392 x 492 x 48	G3	Coarse 50 %	0,40	1950 / 35	1,10
YAFI PKF-492/492/48-G3	492 x 492 x 48	G3	Coarse 50 %	0,50	2600 / 35	1,50
YAFI PKF-492/625/48-G3	492 x 625 x 48	G3	Coarse 50 %	0,62	3000 / 35	1,40
YAFI PKF-287/592/48-G3	287 x 592 x 48	G3	Coarse 50 %	0,34	1700 / 35	0,80
YAFI PKF-492/592/48-G3	492 x 592 x 48	G3	Coarse 50 %	0,60	2820 / 35	1,35
YAFI PKF-592/592/48-G3	592 x 592 x 48	G3	Coarse 50 %	0,70	3400 / 35	1,65

96-G3 - Coarse 50 %						
YAFI PKF-287/287/96-G3	287 x 287 x 96	G3	Coarse 50 %	0,25	1060 / 40	0,80
YAFI PKF-392/492/96-G3	392 x 492 x 96	G3	Coarse 50 %	0,60	2400 / 40	1,75
YAFI PKF-492/492/96-G3	492 x 492 x 96	G3	Coarse 50 %	0,75	3000 / 40	2,20
YAFI PKF-492/625/96-G3	492 x 625 x 96	G3	Coarse 50 %	0,95	3600 / 40	2,90
YAFI PKF-287/592/96-G3	287 x 592 x 96	G3	Coarse 50 %	0,50	2125 / 40	1,60
YAFI PKF-492/592/96-G3	492 x 592 x 96	G3	Coarse 50 %	0,90	3500 / 40	2,65
YAFI PKF-592/592/96-G3	592 x 592 x 96	G3	Coarse 50 %	1,10	4250 / 40	3,30


CASSETTE FILTERS

Cardboard Frame Disposable Panel Filter



Description

Used in ventilation units and industrial HVAC units as dust and paint stop filters. Density of the glass fibre media which is used inside the card board increase from air in take to the clean air side. This progressive structure provide high filtering performance. Available in standard and customized sizes.

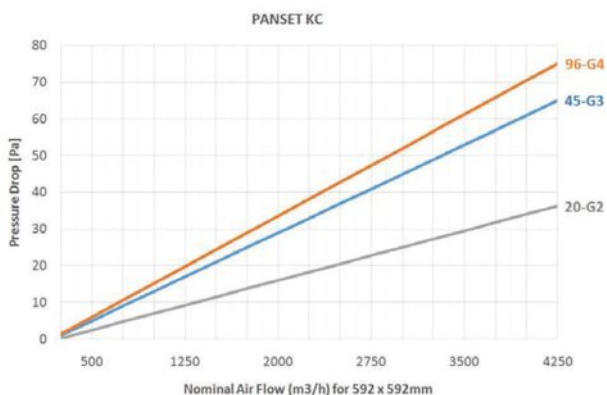

Special Features

- Filter Type** - Panel Filter
- Filter Media** - Glass Fiber
- Frame** - Cardboard Frame
- Filter Class** - G4 / Coarse %65
- Final Pressure Drop** - 250 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Robust construction for reliable operation
- ➔ Economic operation and high filtration surface
- ➔ High dust holding capacity, low pressure drop
- ➔ Customised sizes are available on request.

Applications

- ➔ Primary filter for air conditioning systems.

Product Code

YAFI PKF

Filter Type	KF	Panel Filter
Frame	K	Cardboard
Media	C	Glass Fiber
Pleat Type	L	Straight
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G3	EN 779
		Coarse 55 % ISO 16890


Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
20-G2 - Coarse 45 %						
YAFI PKF-287/287/20-G2	289 x 595 x 20	G2	Coarse 40 %	0,17	1700 / 25	0,10
YAFI PKF-392/492/20-G2	495 x 595 x 20	G2	Coarse 40 %	0,29	2500 / 25	0,15
YAFI PKF-492/492/20-G2	595 x 595 x 20	G2	Coarse 40 %	0,35	3400 / 25	0,20
YAFI PKF-495/625/20-G2	495 x 495 x 20	G2	Coarse 40 %	0,25	2400 / 25	0,30
YAFI PKF-287/592/20-G2	395 x 495 x 20	G2	Coarse 40 %	0,20	1850 / 25	0,15
YAFI PKF-492/592/20-G2	395 x 624 x 20	G2	Coarse 40 %	0,25	2400 / 25	0,30
YAFI PKF-592/592/20-G2	495 x 624 x 20	G2	Coarse 40 %	0,31	3000 / 25	0,35

45-G3 - Coarse 55 %						
YAFI PKF-287/287/45-G4	287 x 287 x 45	G3	Coarse 50 %	0,25	1700 / 45	0,15
YAFI PKF-392/492/45-G4	392 x 492 x 45	G3	Coarse 50 %	0,60	4500 / 45	0,20
YAFI PKF-492/492/45-G4	492 x 492 x 45	G3	Coarse 50 %	0,75	3400 / 45	0,25
YAFI PKF-495/625/45-G4	492 x 625 x 45	G3	Coarse 50 %	0,95	2400 / 45	0,35
YAFI PKF-287/592/45-G4	287 x 592 x 45	G3	Coarse 50 %	0,50	1850 / 45	0,20
YAFI PKF-492/592/45-G4	492 x 592 x 45	G3	Coarse 50 %	0,90	2400 / 45	0,35
YAFI PKF-592/592/45-G4	592 x 592 x 45	G3	Coarse 50 %	1,10	3000 / 45	0,40

45-G3 - Coarse 65 %						
YAFI PKF-287/287/96-G4	287 x 287 x 96	G4	Coarse 60 %	0,25	1070 / 75	0,25
YAFI PKF-392/492/96-G4	392 x 492 x 96	G4	Coarse 60 %	0,60	2400 / 75	0,30
YAFI PKF-492/492/96-G4	492 x 492 x 96	G4	Coarse 60 %	0,75	3000 / 75	0,35
YAFI PKF-495/625/96-G4	492 x 625 x 96	G4	Coarse 60 %	0,95	3700 / 75	0,45
YAFI PKF-287/592/96-G4	287 x 592 x 96	G4	Coarse 60 %	0,50	2125 / 75	0,30
YAFI PKF-492/592/96-G4	492 x 592 x 96	G4	Coarse 60 %	0,90	3500 / 75	0,45
YAFI PKF-592/592/96-G4	592 x 592 x 96	G4	Coarse 60 %	1,10	4250 / 75	0,55


CASSETTE FILTERS

Cardboard Frame Pre-Filter With Self Support Media

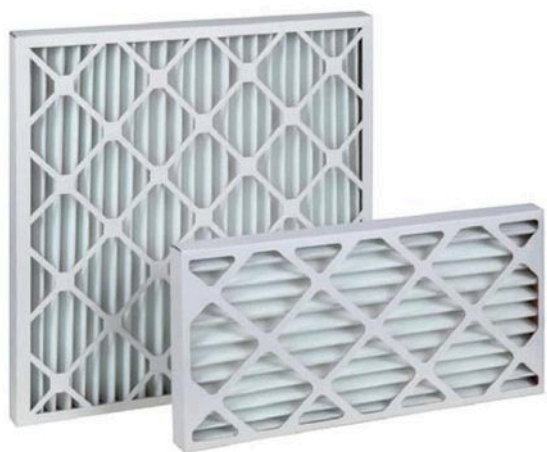

Description

Specially designed as a filter for air conditioning and ventilating equipment. The pleated high performance filter media is self supporting. It is non-corrosive and free of any metal and fully incinerable which makes the disposal easy. Folded self supported media is held together with a rigid card board frame. Available in standard and customized sizes.

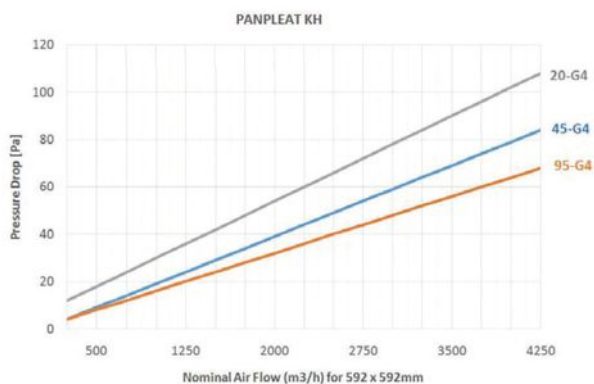

Special Features

Filter Type - Extended Surface Panel Filter

Filter Media - Self Standing Synthetic Fibre
Progressive Media

Frame - Cardboard

Filter Class - G4 / ISO Coarse %70

Final Pressure Drop - 250 Pa

Max. Temperature - 80 °C

Applications

➔ Primary filter for air conditioning systems.

Product Code

YAFI KKF

Advantages

- ➔ Adapted to conditions of high humidity
- ➔ Excellent mechanical resistance
- ➔ Economic operation and high filtration surface
- ➔ High dust holding capacity, low pressure drop
- ➔ Compact, rigid construction for rapid installation
- ➔ 100% Incineratable, non-corrosive

Filter Type	KF	Panel Filter
Frame	K	Cardboard Frame
Media	H	Self Standing Media
Pleat Type	M	Zik zag without mesh
Gasket	X	Without / Optional Gasket
Dimension	-	WxHxD
Efficiency	G4	EN 779
		Coarse 70 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
22-G4 - Coarse 70 %						
YAFI KKF-289/289/20-G4	289 x 289 x 20	G4	Coarse 70 %	0,25	850 / 95	0,10
YAFI KKF-394/495/20-G4	394 x 495 x 20	G4	Coarse 70 %	0,35	1850 / 95	0,25
YAFI KKF-495/495/20-G4	495 x 495 x 20	G4	Coarse 70 %	0,80	2400 / 95	0,35
YAFI KKF-495/622/20-G4	495 x 622 x 20	G4	Coarse 70 %	0,95	3000 / 95	0,45
YAFI KKF-289/594/20-G4	289 x 594 x 20	G4	Coarse 70 %	0,50	1700 / 95	0,20
YAFI KKF-495/594/20-G4	495 x 594 x 20	G4	Coarse 70 %	0,90	2500 / 95	0,40
YAFI KKF-594/594/20-G4	594 x 594 x 20	G4	Coarse 70 %	1,10	3400 / 95	0,45

48-G4 - Coarse 70 %						
YAFI KKF-289/289/45-G4	289 x 289 x 45	G4	Coarse 70 %	0,30	850 / 60	0,15
YAFI KKF-394/495/45-G4	394 x 495 x 45	G4	Coarse 70 %	0,80	1850 / 60	0,30
YAFI KKF-495/495/45-G4	495 x 495 x 45	G4	Coarse 70 %	1,00	2400 / 60	0,40
YAFI KKF-495/622/45-G4	495 x 622 x 45	G4	Coarse 70 %	1,20	3000 / 60	0,50
YAFI KKF-289/594/45-G4	289 x 594 x 45	G4	Coarse 70 %	0,65	1700 / 60	0,25
YAFI KKF-495/594/45-G4	495 x 594 x 45	G4	Coarse 70 %	1,05	2500 / 60	0,50
YAFI KKF-594/594/45-G4	594 x 594 x 45	G4	Coarse 70 %	1,30	3400 / 60	0,55

96-G4 - Coarse 70 %						
YAFI KKF-289/289/95-G4	289 x 289 x 95	G4	Coarse 70 %	0,55	1050 / 70	0,25
YAFI KKF-394/495/95-G4	394 x 495 x 95	G4	Coarse 70 %	1,30	2400 / 70	0,55
YAFI KKF-495/495/95-G4	495 x 495 x 95	G4	Coarse 70 %	1,60	3000 / 70	0,75
YAFI KKF-495/622/95-G4	495 x 622 x 95	G4	Coarse 70 %	1,50	3400 / 70	0,90
YAFI KKF-289/594/95-G4	289 x 594 x 95	G4	Coarse 70 %	1,10	2150 / 70	0,45
YAFI KKF-495/594/95-G4	495 x 594 x 95	G4	Coarse 70 %	1,90	3400 / 70	1,00
YAFI KKF-594/594/95-G4	594 x 594 x 95	G4	Coarse 70 %	2,20	4250 / 70	1,10



PANEL FILTERS


PANEL FILTERS

High Temperature Oven Filters



Description

Specially designed for filtration of the intake and circulating air in spray and drying booths. Progressively structured filtermedia composed of finest glass fibres, bonded with a high temperature resistant binder. Converted into finished filter cells by aluminium stretcher grids into galvanized frame

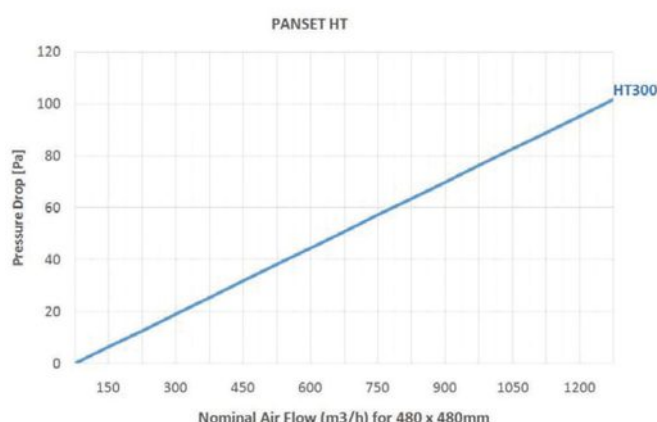

Special Features

Filter Type - Panel Filter for High Temperature

Filter Media - Highly temp.-resistant filtermedia (up to 300 °C) of randomly arranged finest glass fibers.

Frame - Galvanized with "+" support

Filter Class - G4 / Coarse %65 Final Pressure

Drop - 220 Pa Max. Temperature - 300 °C

Applications

→ Intake and circulating air filtration in spray and drying booths.

Advantages

- Filtermedia resisting to temperatures up to 300°C
- High degree of dedusting with minimum pressure loss
- Economic operation and high filtration surface
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Rapid installation

Product Code

YAFI PF

Filter Type	HT	High Temp.Filter
Frame	G	Galvanized Frame
Media	H	Glass Fiber Media
Pleat Type	L	Straight
Gasket	X	Without
Dimension	-	WxHxD

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
14 mm						
YAFI PF-240/480/14	240 x 480 x 14	G4	Coarse 65 %	0,11	420 / 60	0,40
YAFI PF-480/480/14	480 x 480 x 14	G4	Coarse 65 %	0,23	840 / 60	0,80
YAFI PF-610/610/14	610 x 610 x 14	G4	Coarse 65 %	0,37	1340 / 60	0,90
Other sizes are available on request.						


PANEL FILTERS

Flat Surface Metal Frame Pre-Filter



Description

Designed as prefilters for fan-coils and ventilation units. It protects your heating and cooling coil which offers low filtration efficiency with very low pressure drop. Fanset GS is produced by galvanized frame with synthetic media filter media. Filter media is supported with extended metal mesh at bothside of the frame. Available in standard and customized sizes.

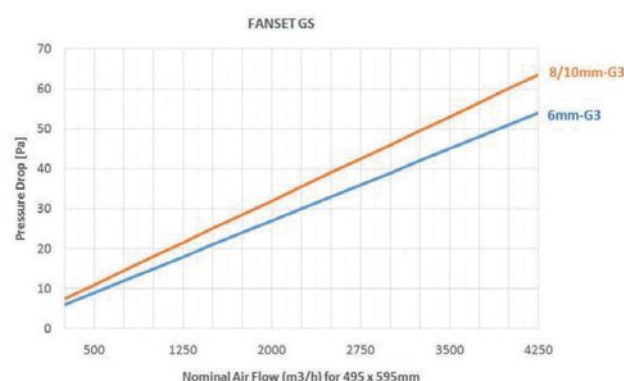

Special Features

Filter Type - Flat Panel Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel

Filter Class - G3 / ISO Coarse %50

Final Pressure Drop - 250 Pa

Max. Temperature - 100 °C

Applications

➔ Primary filter for air conditioning systems.

Product Code

YAFI PF

Advantages

- ➔ Robust construction for reliable operation
- ➔ Flat filter media between two metal mesh
- ➔ Economic operation
- ➔ Customised sizes can be produced easily

Filter Type	KF	Panel Filter
Frame	G	Galvanized Steel
Media	S	Syntetic Fiber
Pleat Type	L	Flat
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G3	EN 779
		Coarse 50 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	-----------------	-----------	--------------------	--------------------------	----------------


6-G3						
YAFI PF-205/400/6-G3	205 x 400 x 6	G3	Coarse 50 %	0,08	720 / 35	0,40
YAFI PF-205/650/6-G3	205 x 650 x 6	G3	Coarse 50 %	0,13	1200 / 35	0,5
YAFI PF-205/800/6-G3	205 x 800 x 6	G3	Coarse 50 %	0,16	1450 / 35	0,65
YAFI PF-205/900/6-G3	205 x 900 x 6	G3	Coarse 50 %	0,18	1650 / 35	0,80
YAFI PF-395/495/6-G3	395 x 495 x 6	G3	Coarse 50 %	0,20	1800 / 35	0,90
YAFI PF-395/620/6-G3	395 x 620 x 6	G3	Coarse 50 %	0,24	2160 / 35	1,0
YAFI PF-495/595/6-G3	495 x 595 x 6	G3	Coarse 50 %	0,29	2650 / 35	1,0

8-G3						
YAFI PF-205/400/8-G3	205 x 400 x 8	G3	Coarse 50 %	0,08	720 / 40	0,40
YAFI PF-205/650/8-G3	205 x 650 x 8	G3	Coarse 50 %	0,13	1200 / 40	0,5
YAFI PF-205/800/8-G3	205 x 800 x 8	G3	Coarse 50 %	0,16	1450 / 40	0,65
YAFI PF-205/900/8-G3	205 x 900 x 8	G3	Coarse 50 %	0,18	1650 / 40	0,80
YAFI PF-395/495/8-G3	395 x 495 x 8	G3	Coarse 50 %	0,20	1800 / 40	0,90
YAFI PF-395/620/8-G3	395 x 620 x 8	G3	Coarse 50 %	0,24	2160 / 40	1,0
YAFI PF-495/595/8-G3	495 x 595 x 8	G3	Coarse 50 %	0,29	2650 / 40	1,0

10-G3						
YAFI PF-105/400/10-G3	105 x 400 x 10	G3	Coarse 50 %	0,08	720 / 40	0,40
YAFI PF-105/650/10-G3	105 x 650 x 10	G3	Coarse 50 %	0,13	1200 / 40	0,5
YAFI PF-105/800/10-G3	105 x 800 x 10	G3	Coarse 50 %	0,16	1450 / 40	0,65
YAFI PF-105/900/10-G3	105 x 900 x 10	G3	Coarse 50 %	0,18	1650 / 40	0,80
YAFI PF-395/495/10-G3	395 x 495 x 10	G3	Coarse 50 %	0,20	1800 / 40	0,90
YAFI PF-395/610/10-G3	395 x 610 x 10	G3	Coarse 50 %	0,24	2160 / 40	1,0
YAFI PF-495/595/10-G3	495 x 595 x 10	G3	Coarse 50 %	0,29	2650 / 40	1,0


PANEL FILTERS

Flat Surface Metal Frame Washable Pre-Filter

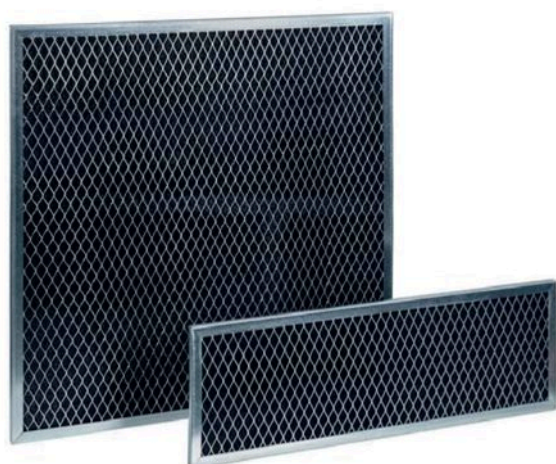

Description

Designed as prefilters for fan-coils and ventilation units. It protects your heating and cooling coil which offer slow filtration efficiency with very low pressure drop. Fanset GP is produced by galvanized frame with polyurethane washable filter media. Filter media is supported with extended metal mesh at bothside of the frame. Available in standard and customized sizes.

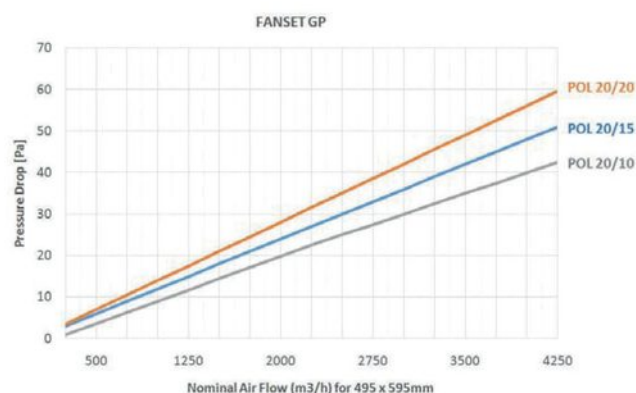

Special Features

Filter Type - Flat Panel Filter

Filter Media - Polyurethane Filter Foam

Frame - Galvanized Steel

Filter Class - G2 / ISO Coarse %40

Final Pressure Drop - 250 Pa

Max. Temperature - 100 °C

Applications

→ Primary filter for air conditioning systems.

Advantages

- Robust construction for reliable operation
- Flat filter media between two metal mesh
- Fully washable and regenerable media
- Customised sizes can be produced easily.
- Frame thickness 6mm-8mm-10mm

Product Code

YAFI PPF

Filter Type	YK	Panel Filter
Frame	G	Galvanized Steel
Media	P	Polyurethane Foam
Pleat Type	L	Flat
Gasket	2	POL 20/10
Dimension	-	WxHxD
Efficiency	G2	EN 779
		Coarse 40 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
10-G2 - POL 20/10						
YAFI PPF-205/400/10-G2	205 x 400 x 10	G2	Coarse 40 %	0,08	720 / 25	0,45
YAFI PPF-205/650/10-G2	205 x 650 x 10	G2	Coarse 40 %	0,13	1200 / 25	0,55
YAFI PPF-205/800/10-G2	205 x 800 x 10	G2	Coarse 40 %	0,16	1450 / 25	0,70
YAFI PPF-205/900/10-G2	205 x 900 x 10	G2	Coarse 40 %	0,18	1650 / 25	0,85
YAFI PPF-395/495/10-G2	395 x 495 x 10	G2	Coarse 40 %	0,20	1800 / 25	0,95
YAFI PPF-395/620/10-G2	395 x 620 x 10	G2	Coarse 40 %	0,24	2160 / 25	1,1
YAFI PPF-495/595/10-G2	495 x 595 x 10	G2	Coarse 40 %	0,29	2650 / 25	1,1

15-G2 - POL 20/15						
YAFI PPF-205/400/15-G2	205 x 400 x 15	G2	Coarse 40 %	0,08	720 / 30	0,45
YAFI PPF-205/650/15-G2	205 x 650 x 15	G2	Coarse 40 %	0,13	1200 / 30	0,55
YAFI PPF-205/800/15-G2	205 x 800 x 15	G2	Coarse 40 %	0,16	1450 / 30	0,70
YAFI PPF-205/900/15-G2	205 x 900 x 15	G2	Coarse 40 %	0,18	1650 / 30	0,85
YAFI PPF-395/495/15-G2	395 x 495 x 15	G2	Coarse 40 %	0,20	1800 / 30	0,95
YAFI PPF-395/620/15-G2	395 x 620 x 15	G2	Coarse 40 %	0,24	2160 / 30	1,1
YAFI PPF-495/595/15-G2	495 x 595 x 15	G2	Coarse 40 %	0,29	2650 / 30	1,1

20-G2 - POL 20/20						
YAFI PPF-205/400/20-G2	205 x 400 x 20	G2	Coarse 40 %	0,08	720 / 35	0,45
YAFI PPF-205/650/20-G2	205 x 650 x 20	G2	Coarse 40 %	0,13	1200 / 35	0,55
YAFI PPF-205/800/20-G2	205 x 800 x 20	G2	Coarse 40 %	0,16	1450 / 35	0,70
YAFI PPF-205/900/20-G2	205 x 900 x 20	G2	Coarse 40 %	0,18	1650 / 35	0,85
YAFI PPF-395/495/20-G2	395 x 495 x 20	G2	Coarse 40 %	0,20	1800 / 35	0,95
YAFI PPF-395/620/20-G2	395 x 620 x 20	G2	Coarse 40 %	0,24	2160 / 35	1,1
YAFI PPF-495/595/20-G2	495 x 595 x 20	G2	Coarse 40 %	0,29	2650 / 35	1,1


PANEL FILTERS

Wire Rod Frame Pre-Filter



Description

Designed as prefilters for air conditioning units, fan coil systems, warm air furnaces, refrigeration, counters and electronic equipment cabinets, they are also often used to protect heatexchanger coils from dust. Fanset GS is produced by sewing the synthetic media on to a pre-formed galvanized coated wire frame that has cross braces attached as necessary. Offer slow filtration efficiency with very low pressuredrop. Available in standard and customized sizes.

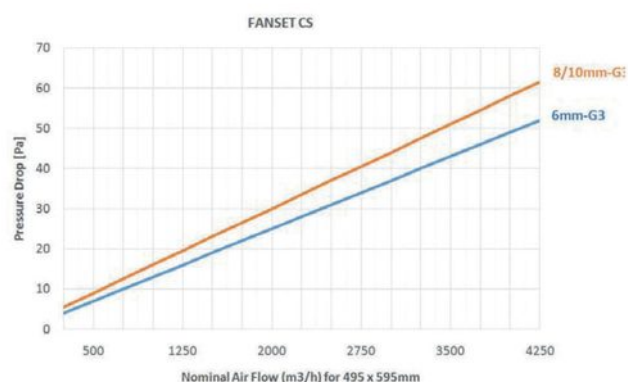

Special Features

Filter Type - Fan Coil Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel Rod

Filter Class - G3 / ISO Coarse %50

Final Pressure Drop - 250 Pa

Max. Temperature - 100 °C

Advantages

- Robust construction for reliable operation
- Economic operation
- Customised sizes can be produced

Applications

- Primary filter for fan coil and ventilation units.

Product Code

YAFI PŽF

Filter Type	CT	Wire Rod Filter
Frame	G	Galvanized Rod
Media	S	Syntetic Fiber
Pleat Type	X	Flat
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G3	EN 779
		Coarse 50 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	-----------------	-----------	--------------------	--------------------------	----------------


6-G3						
YAFI PŽF-205/400/4-G3	205 x 400 x 4	G3	Coarse 50%	0,08	720	0,15
YAFI PŽF-205/650/4-G3	205 x 650 x 4	G3	Coarse 50%	0,13	1200	0,20
YAFI PŽF-205/800/4-G3	205 x 800 x 4	G3	Coarse 50%	0,16	1450	0,30
YAFI PŽF-205/900/4-G3	205 x 900 x 4	G3	Coarse 50%	0,18	1650	0,35
YAFI PŽF-395/495/4-G3	395 x 495 x 4	G3	Coarse 50%	0,20	1800	0,25
YAFI PŽF-395/620/4-G3	395 x 620 x 4	G3	Coarse 50%	0,24	2160	0,25
YAFI PŽF-495/595/4-G3	495 x 595 x 4	G3	Coarse 50%	0,29	2650	0,30

8-G3						
YAFI PŽF-205/400/6-G3	205 x 400 x 6	G3	Coarse 50%	0,08	720	0,15
YAFI PŽF-205/650/6-G3	205 x 650 x 6	G3	Coarse 50%	0,13	1200	0,20
YAFI PŽF-205/800/6-G3	205 x 800 x 6	G3	Coarse 50%	0,16	1450	0,30
YAFI PŽF-205/900/6-G3	205 x 900 x 6	G3	Coarse 50%	0,18	1650	0,35
YAFI PŽF-395/495/6-G3	395 x 495 x 6	G3	Coarse 50%	0,20	1800	0,25
YAFI PŽF-395/620/6-G3	395 x 620 x 6	G3	Coarse 50%	0,24	2160	0,25
YAFI PŽF-495/595/6-G3	495 x 595 x 6	G3	Coarse 50%	0,29	2650	0,30

10-G3						
YAFI PŽF-105/400/8-G3	105 x 400 x 8	G3	Coarse 50%	0,08	720	0,20
YAFI PŽF-105/650/8-G3	105 x 650 x 8	G3	Coarse 50%	0,13	1200	0,25
YAFI PŽF-105/800/8-G3	105 x 800 x 8	G3	Coarse 50%	0,16	1450	0,35
YAFI PŽF-105/900/8-G3	105 x 900 x 8	G3	Coarse 50%	0,18	1650	0,40
YAFI PŽF-395/495/8-G3	395 x 495 x 8	G3	Coarse 50%	0,20	1800	0,30
YAFI PŽF-395/610/8-G3	395 x 610 x 8	G3	Coarse 50%	0,24	2160	0,30
YAFI PŽF-495/595/8-G3	495 x 595 x 8	G3	Coarse 50%	0,29	2650	0,35


PANEL FILTERS

Wire Rod Frame Pre-Filter Washable Media

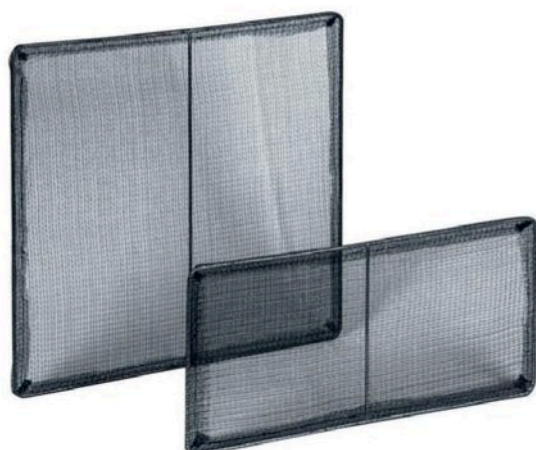

Description

Designed as prefilters for air conditioning units, fan coil systems, warm air furnaces, refrigeration, counters and electronic equipment cabinets, they are also often used to protect heat exchanger coils from dust. Fanset CB is produced by sewing the PP mesh filter media onto a pre-formed galvanized coated wire frame that has cross braces attached as necessary. Offer slow filtration efficiency with very low pressure drop. Available in standard and customized sizes.

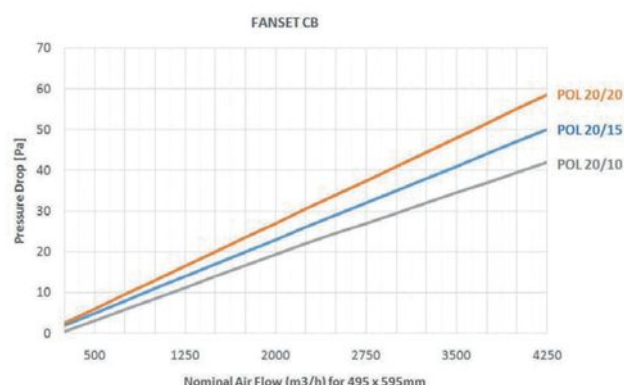

Special Features

Filter Type - Fan Coil Filter

Filter Media - PP Mesh - Black Colour

Frame - Galvanized Wire Rod Filter Class - G3 /
ISO Coarse %35

Final Pressure Drop - 250 Pa

Max. Temperature - 100 °C

Advantages

- Robust construction for reliable operation
- Economic operation
- Customised sizes can be produced
- Washable and regenerable

Applications

- Primary filter for fan coil and ventilation units.

Product Code

YAFI PPF

Filter Type	CT	Wire Rod Filter
Frame	G	Galvanized Rod
Media	B	PP Mesh
Pleat Type	X	Flat
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G3	EN 779
		Coarse 35 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
--------------	-----------------------	-----------------	-----------	---------------------------------	---------------------------------------	----------------


4-G2						
YAFI PPF-205/400/4-G2	205 x 400 x 4	G2	Coarse 35%	0,08	720 / 20	0,25
YAFI PPF-205/650/4-G2	205 x 650 x 4	G2	Coarse 35%	0,13	1200	0,40
YAFI PPF-205/800/4-G2	205 x 800 x 4	G2	Coarse 35%	0,16	1450	0,50
YAFI PPF-205/900/4-G2	205 x 900 x 4	G2	Coarse 35%	0,18	1650	0,55
YAFI PPF-395/495/4-G2	395 x 495 x 4	G2	Coarse 35%	0,20	1800	0,45
YAFI PPF-395/620/4-G2	395 x 620 x 4	G2	Coarse 35%	0,24	2160	0,55
YAFI PPF-495/595/4-G2	495 x 595 x 4	G2	Coarse 35%	0,29	2650	0,65

6-G2						
YAFI PPF-205/400/6-G2	205 x 400 x 6	G2	Coarse 35%	0,08	720	0,25
YAFI PPF-205/650/6-G2	205 x 650 x 6	G2	Coarse 35%	0,13	1200	0,40
YAFI PPF-205/800/6-G2	205 x 800 x 6	G2	Coarse 35%	0,16	1450	0,50
YAFI PPF-205/900/6-G2	205 x 900 x 6	G2	Coarse 35%	0,18	1650	0,55
YAFI PPF-395/495/6-G2	395 x 495 x 6	G2	Coarse 35%	0,20	1800	0,45
YAFI PPF-395/620/6-G2	395 x 620 x 6	G2	Coarse 35%	0,24	2160	0,55
YAFI PPF-495/595/6-G2	495 x 595 x 6	G2	Coarse 35%	0,29	2650	0,65

8-G2						
YAFI PPF-105/400/8-G2	105 x 400 x 8	G2	Coarse 35%	0,08	720	0,30
YAFI PPF-105/650/8-G2	105 x 650 x 8	G2	Coarse 35%	0,13	1200	0,45
YAFI PPF-105/800/8-G2	105 x 800 x 8	G2	Coarse 35%	0,16	1450	0,55
YAFI PPF-105/900/8-G2	105 x 900 x 8	G2	Coarse 35%	0,18	1650	0,60
YAFI PPF-395/495/8-G2	395 x 495 x 8	G2	Coarse 35%	0,20	1800	0,50
YAFI PPF-395/610/8-G2	395 x 610 x 8	G2	Coarse 35%	0,24	2160	0,60
YAFI PPF-495/595/8-G2	495 x 595 x 8	G2	Coarse 35%	0,29	2650	0,70


PANEL FILTERS

Metal Frame Kitchen Hood Filter

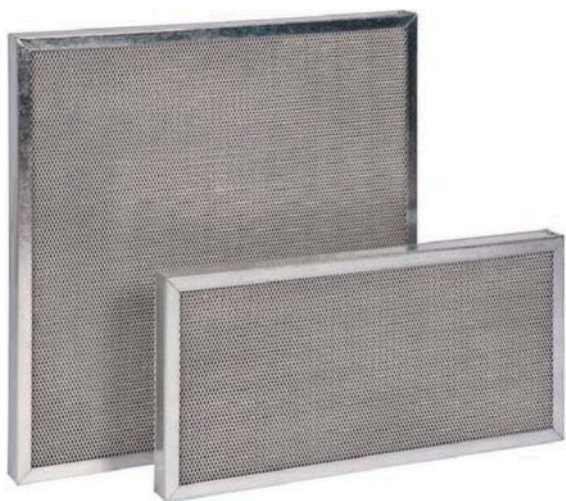

Description

Designed for heavy duty industrial applications and kitchen hoods as washable dust and grease filters. Filter frame can be produced by galvanized, aluminum or stainless steel and filter media consist of multiple layers aluminium mesh. Filter media ensures high grease holding capacity with very long service life. Available in standard and customized sizes.

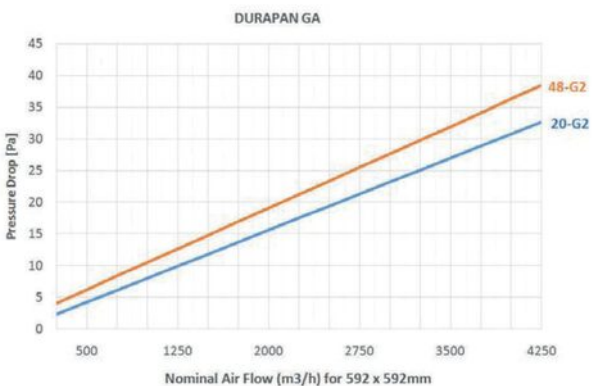

Special Features

- Filter Type** - Metal Panel Filter
- Filter Media** - Extended Aluminum Mesh
- Frame** - Galvanized Steel
- Filter Class** - G2 / ISO Coarse %40
- Final Pressure Drop** - 250 Pa
- Max. Temperature** - 120 °C

Applications

- ➔ Primary filter for grease or oil mist separation.

Product Code YAFI PKF

Advantages

- ➔ Robust construction for reliable operation
- ➔ Economic operation and high filtration surface
- ➔ High operating temperature
- ➔ Compact, rigid construction for rapid installation
- ➔ Stainless Steel model can be produced
- ➔ Can be cleaned in dishwasher or pressure washer


Filter Type	MK	Metal Panel Filter
Frame	G	Galvanized Steel
Media	A	Extended Aluminum
Pleat Type	Z	Zik zag
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G2	EN 779
		Coarse 40 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
20-G2						
YAFI PKF-287/287/20-G2	287 x 287 x 20	G2	Coarse 40 %	0,12	850 / 25	0,65
YAFI PKF-400/500/20-G2	400 x 500 x 20	G2	Coarse 40 %	0,35	1850 / 25	1,90
YAFI PKF-495/495/20-G2	495 x 495 x 20	G2	Coarse 40 %	0,45	2400 / 25	2,0
YAFI PKF-495/620/20-G2	495 x 620 x 20	G2	Coarse 40 %	0,55	3000 / 25	2,30
YAFI PKF-287/592/20-G2	287 x 592 x 20	G2	Coarse 40 %	0,35	1700 / 25	1,20
YAFI PKF-490/592/20-G2	490 x 592 x 20	G2	Coarse 40 %	0,55	2500 / 25	2,20
YAFI PKF-592/592/20-G2	592 x 592 x 20	G2	Coarse 40 %	0,60	3400 / 25	2,30

48-G2						
YAFI PKF-287/287/48-G2	287 x 287 x 48	G2	Coarse 40 %	0,20	850 / 30	0,75
YAFI PKF-400/500/48-G2	400 x 500 x 48	G2	Coarse 40 %	0,45	1850 / 30	2,00
YAFI PKF-495/495/48-G2	495 x 495 x 48	G2	Coarse 40 %	0,55	2400 / 30	2,2
YAFI PKF-495/620/48-G2	495 x 620 x 48	G2	Coarse 40 %	0,70	3000 / 30	2,50
YAFI PKF-287/592/48-G2	287 x 592 x 48	G2	Coarse 40 %	0,42	1700 / 30	1,40
YAFI PKF-490/592/48-G2	490 x 592 x 48	G2	Coarse 40 %	0,65	2500 / 30	2,40
YAFI PKF-592/592/48-G2	592 x 592 x 48	G2	Coarse 40 %	0,80	3400 / 30	2,50


PANEL FILTERS

Metal Frame Knitted Mesh Grease Filters

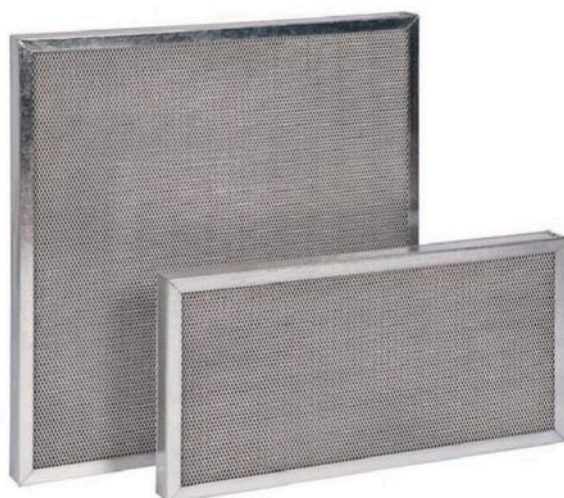

Description

Designed for heavy duty industrial applications and kitchen hoods as washable dust and grease filters. Filter frame can be produced by galvanized, aluminum or stainless steel and filter media consist of multiple layers galvanized knitted mesh. Filter media ensures high dust holding capacity with very long service life with optimum efficiency. Available in standard and customized sizes.

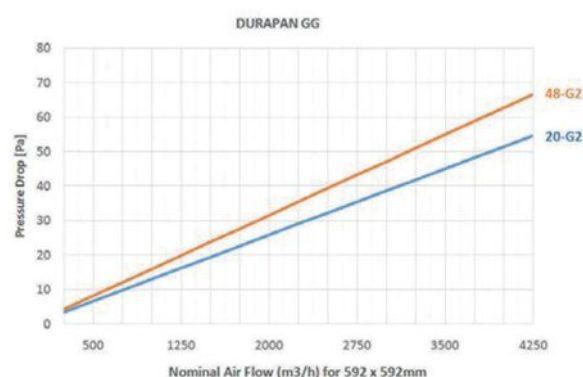

Special Features

Filter Type - Metal Panel Filter

Filter Media - Galvanized Knitted Mesh

Frame - Galvanized Steel

Filter Class - G2 / ISO Coarse %50

Final Pressure Drop - 250 Pa

Max. Temperature - 120 °C

Advantages

- Robust construction for reliable operation
- Economic operation and high filtration surface
- High operating temperature
- Compact, rigid construction for rapid installation
- Stainless Steel model can be produced
- Can be cleaned in dishwasher or pressure washer

Applications

- Primary filter for grease or oil mist separation.

Product Code

YAFI PKF

Filter Type	MK	Metal Panel Filter
Frame	G	Galvanized Steel
Media	G	Galvanized Knitted Mesh
Pleat Type	D	Filled With Mesh
Gasket	X	Without
Dimension	-	WxHxD
Efficiency	G3	EN 779
		Coarse 50 % ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
20-G2						
YAFI PKF-287/287/20-G3	287 x 287 x 20	G3	Coarse 50 %	0,10	850 / 45	1,00
YAFI PKF-400/500/20-G3	400 x 500 x 20	G3	Coarse 50 %	0,25	1850 / 45	3,00
YAFI PKF-495/495/20-G3	495 x 495 x 20	G3	Coarse 50 %	0,25	2400 / 45	3,10
YAFI PKF-495/620/20-G3	495 x 620 x 20	G3	Coarse 50 %	0,30	3000 / 45	3,30
YAFI PKF-287/592/20-G3	287 x 592 x 20	G3	Coarse 50 %	0,17	1700 / 45	1,80
YAFI PKF-490/592/20-G3	490 x 592 x 20	G3	Coarse 50 %	0,30	2500 / 45	3,20
YAFI PKF-592/592/20-G3	592 x 592 x 20	G3	Coarse 50 %	0,35	3400 / 45	3,40

48-G2						
YAFI PKF-287/287/48-G3	287 x 287 x 48	G3	Coarse 50 %	0,10	850 / 55	1,20
YAFI PKF-400/500/48-G3	400 x 500 x 48	G3	Coarse 50 %	0,25	1850 / 55	3,20
YAFI PKF-495/495/48-G3	495 x 495 x 48	G3	Coarse 50 %	0,25	2400 / 55	3,40
YAFI PKF-495/620/48-G3	495 x 620 x 48	G3	Coarse 50 %	0,30	3000 / 55	3,70
YAFI PKF-287/592/48-G3	287 x 592 x 48	G3	Coarse 50 %	0,17	1700 / 55	2,10
YAFI PKF-490/592/48-G3	490 x 592 x 48	G3	Coarse 50 %	0,30	2500 / 55	3,60
YAFI PKF-592/592/48-G3	592 x 592 x 48	G3	Coarse 50 %	0,35	3400 / 55	3,80



← All Departure Gates
← Areas 2,3
← Toilets & Prayer Rooms

1

FOOD
Cafe
Bar
Lounge

BAG FILTERS


BAG FILTERS

Coarse Dust Bag Filter Metal Frame



Description

Used as first stage filter or as prefilters to higher efficiency filters in ventilation units with durable frame which can be produced variety of bags and bag depth according to field of applications. Synthetic filter media and metal frame can resist difficult operation conditions and perform medium filtering efficiency.

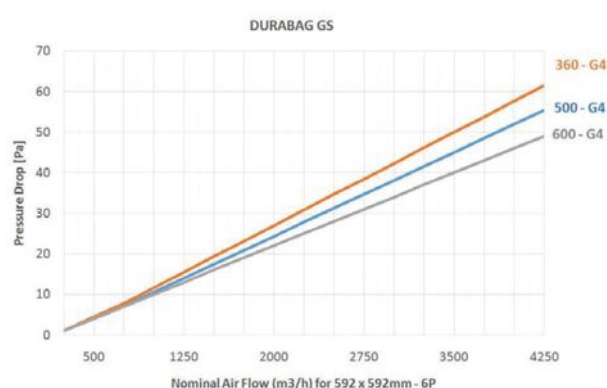

Special Features

Filter Type - Coarse Bag Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel

Filter Class - G4 / Coarse %65

Final Pressure Drop - 250 Pa

Max. Temperature - 80 °C

Applications

→ Primary filter air conditioning and ventilation systems

Product Code

YAFI-VF

Advantages

- Robust construction for reliable operation
- Optimized media surface by conical pocket shape
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Customised sizes can be produced.
- Available with plastic frame

Filter Type	TF	Bag Filter
Frame	G	G: Galvanized P: Plastic
Media	S	Syntetic Fiber
Frame Thickness	H	L:20 mm H:25mm
Dimension	-	WxHxD
Pocket No	6	6 pockets
Efficiency	G4	EN 779
		Coarse 65 % EN 16890

Product Code	Dimensions (WxHxD)	Bags	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
G3- ISO Coarse 50 %							
YAFI-VF-287/592/360-3-G3	287 X 592 X 360	3	G3	Coarse 50 %	1,30	1700/40	1,20
YAFI-VF-490/592/360-5-G3	490 x 592 x 360	5	G3	Coarse 50 %	2,20	2800/40	1,85
YAFI-VF-592/592/360-6-G3	592 x 592 x 360	6	G3	Coarse 50 %	2,70	3400/40	2,00
YAFI-VF-287/592/500-3-G3	287 X 592 X 500	3	G3	Coarse 50 %	1,90	1700/35	1,35
YAFI-VF-490/592/500-5-G3	490 x 592 x 500	5	G3	Coarse 50 %	3,10	2800/35	2,00
YAFI-VF-592/592/500-6-G3	592 x 592 x 500	6	G3	Coarse 50 %	3,70	3400/35	2,25
YAFI-VF-287/592/600-3-G3	287 X 592 X 600	3	G3	Coarse 50 %	2,20	1700/30	1,50
YAFI-VF-490/592/600-5-G3	490 x 592 x 600	5	G3	Coarse 50 %	3,70	2800/30	2,20
YAFI-VF-592/592/600-6-G3	592 x 592 x 600	6	G3	Coarse 50 %	4,50	3400/30	2,50

G4- ISO Coarse 65 %							
YAFI-VF-287/592/360-3-G4	287 X 592 X 360	3	G4	Coarse 65 %	1,30	1700/50	1,20
YAFI-VF-490/592/360-5-G4	490 x 592 x 360	5	G4	Coarse 65 %	2,20	2800/50	1,85
YAFI-VF-592/592/360-6-G4	592 x 592 x 360	6	G4	Coarse 65 %	2,70	3400/50	2,00
YAFI-VF-287/592/500-3-G4	287 X 592 X 500	3	G4	Coarse 65 %	1,90	1700/45	1,35
YAFI-VF-490/592/500-5-G4	490 x 592 x 500	5	G4	Coarse 65 %	3,10	2800/45	2,00
YAFI-VF-592/592/500-6-G4	592 x 592 x 500	6	G4	Coarse 65 %	3,70	3400/45	2,25
YAFI-VF-287/592/600-3-G4	287 X 592 X 600	3	G4	Coarse 65 %	2,20	1700/40	1,50
YAFI-VF-490/592/600-5-G4	490 x 592 x 600	5	G4	Coarse 65 %	3,70	2800/40	2,20
YAFI-VF-592/592/600-6-G4	592 x 592 x 600	6	G4	Coarse 65 %	4,50	3400/40	2,50

M5- ISO Coarse 80 %							
YAFI-VF-287/592/360-3-M5	287 X 592 X 360	3	M5	Coarse 80 %	1,30	1700/ 55	1,20
YAFI-VF-490/592/360-5-M5	490 x 592 x 360	5	M5	Coarse 80 %	2,20	2800/55	1,85
YAFI-VF-592/592/360-6-M5	592 x 592 x 360	6	M5	Coarse 80 %	2,70	3400/55	2,00
YAFI-VF-287/592/500-3-M5	287 X 592 X 500	3	M5	Coarse 80 %	1,90	1700/50	1,35
YAFI-VF-490/592/500-5-M5	490 x 592 x 500	5	M5	Coarse 80 %	3,10	2800/50	2,00
YAFI-VF-592/592/500-6-M5	592 x 592 x 500	6	M5	Coarse 80 %	3,70	3400/50	2,25
YAFI-VF-287/592/600-3-M5	287 X 592 X 600	3	M5	Coarse 80 %	2,20	1700/45	1,50
YAFI-VF-490/592/600-5-M5	490 x 592 x 600	5	M5	Coarse 80 %	3,70	2800/45	2,20
YAFI-VF-592/592/600-6-M5	592 x 592 x 600	6	M5	Coarse 80 %	4,50	3400/45	2,50


BAG FILTERS

Fine Dust Bag Filter Metal Frame



Description

Made of three layer high quality synthetic media as fine and high efficiency filters after first stage filtration. Thermo-welded bags guarantee a perfect seal and durability. The filter media is constructed of a series of sealed bags for gaining high air flow at low pressure drop. Frame can be produced by plastic or galvanized metal.

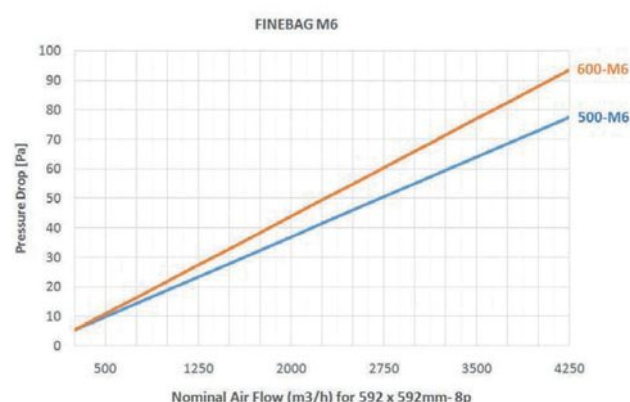

Special Features

Filter Type - High Efficiency Bag Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel

Filter Class - M6 / ePM10 65%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications.

Advantages

- Robust construction for reliable operation
- Optimized media surface by conical pocket shape
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Frame thickness can be 20mm or 25mm
- Available with plastic frame

Product Code

YAFI VF

Filter Type	TF	Bag Filter
Frame	G	G: Galvanized P: Plastic
Media	S	Synthetic Fiber
Frame Thickness	H	L:20mm H:25mm
Dimension	-	WxHxD
Pocket No	8	8 pockets
Efficiency	M6	EN 779
	ePM10 65%	EN 16890

Product Code	Dimensions (WxHxD)	Bags	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 - 500							
YAFI VF-287/287/500-3-M6	287 x 287 x 500	3	M6	ePM10 65%	1,1	560 / 60 Pa	0,65
YAFI VF-287/287/500-4-M6	287 x 287 x 500	4	M6	ePM10 65%	1,4	560 / 50 Pa	0,70
YAFI VF-287/592/500-3-M6	287 x 592 x 500	3	M6	ePM10 65%	2,0	1125 / 60 Pa	1,10
YAFI VF-287/592/500-4-M6	287 x 592 x 500	4	M6	ePM10 65%	2,7	1125 / 50 Pa	1,20
YAFI VF-490/592/500-5-M6	490 x 592 x 500	5	M6	ePM10 65%	3,4	1870 / 60 Pa	1,85
YAFI VF-490/592/500-6-M6	490 x 592 x 500	6	M6	ePM10 65%	4,1	1870 / 50 Pa	2,00
YAFI VF-592/592/500-6-M6	592 x 592 x 500	6	M6	ePM10 65%	4,1	2250 / 60 Pa	2,00
YAFI VF-592/592/500-8-M6	592 x 592 x 500	8	M6	ePM10 65%	5,4	2250 / 50 Pa	2,20

M6 - 600							
YAFI VF-287/287/600-3-M6	287 x 287 x 600	3	M6	ePM10 65%	1,3	640 / 70 Pa	0,70
YAFI VF-287/287/600-4-M6	287 x 287 x 600	4	M6	ePM10 65%	1,7	640 / 60 Pa	0,75
YAFI VF-287/592/600-3-M6	287 x 592 x 600	3	M6	ePM10 65%	2,4	1275 / 70 Pa	1,20
YAFI VF-287/592/600-4-M6	287 x 592 x 600	4	M6	ePM10 65%	3,3	1275 / 60 Pa	1,30
YAFI VF-490/592/600-5-M6	490 x 592 x 600	5	M6	ePM10 65%	4,1	2050 / 70 Pa	2,00
YAFI VF-490/592/600-6-M6	490 x 592 x 600	6	M6	ePM10 65%	4,9	2050 / 60 Pa	2,20
YAFI VF-592/592/600-6-M6	592 x 592 x 600	6	M6	ePM10 65%	4,9	2550 / 70 Pa	2,20
YAFI VF-592/592/600-8-M6	592 x 592 x 600	8	M6	ePM10 65%	6,5	2550 / 60 Pa	2,40


BAG FILTERS

Fine Dust Bag Filter Metal Frame



Description

Made of three layer high quality synthetic media as fine and high efficiency filters after first stage filtration. Thermo-welded bags guarantee a perfect seal and durability. The filter media is constructed of a series of sealed bags for gaining high air flow at low pressure drop. Frame can be produced by plastic or galvanized metal.

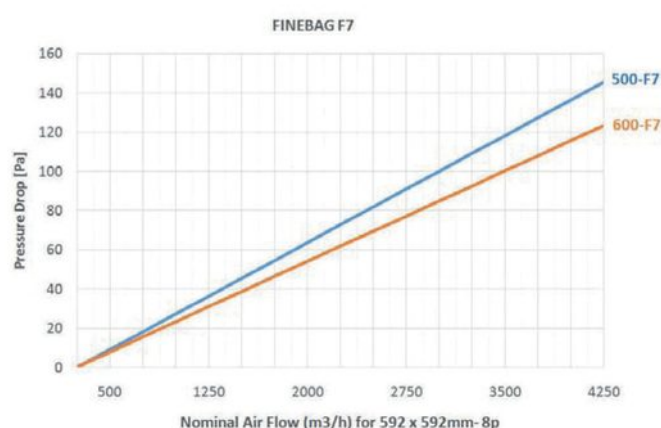

Special Features

Filter Type - High Efficiency Bag Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel

Filter Class - F7 / ePM2,5 65%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications.

Advantages

- Robust construction for reliable operation
- Optimized media surface by conical pocket shape
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Frame thickness can be 20mm or 25mm
- Available with plastic frame

Product Code

YAFI-VF

Filter Type	TF	Bag Filter
Frame	G	Gs Galvanized Ps Plastic
Media	S	Syntetic Fiber Frame
Thickness	H	L:20 mm H:25mm
Dimension	-	WxHxD
Pocket No	8	8 pockets
Efficiency	F7	EN 779:2012 ePM2,5 65% ISO 16890

Product Code	Dimensions (WxHxD)	Bags	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
F7 - 500							
YAFI-VF-287/287/500-3-F7	287 x 287 x 500	3	F7	ePM2,5 65%	1,1	560 / 85 Pa	0,65
YAFI-VF-287/287/500-4-F7	287 x 287 x 500	4	F7	ePM2,5 65%	1,4	560 / 75 Pa	0,70
YAFI-VF-287/592/500-3-F7	287 x 592 x 500	3	F7	ePM2,5 65%	2,0	1125 / 85 Pa	1,10
YAFI-VF-287/592/500-4-F7	287 x 592 x 500	4	F7	ePM2,5 65%	2,7	1125 / 75 Pa	1,20
YAFI-VF-490/592/500-5-F7	490 x 592 x 500	5	F7	ePM2,5 65%	3,4	1870 / 85 Pa	1,85
YAFI-VF-490/592/500-6-F7	490 x 592 x 500	6	F7	ePM2,5 65%	4,1	1870 / 75 Pa	2,00
YAFI-VF-592/592/500-6-F7	592 x 592 x 500	6	F7	ePM2,5 65%	4,1	2250 / 85 Pa	2,00
YAFI-VF-592/592/500-8-F7	592 x 592 x 500	8	F7	ePM2,5 65%	5,4	2250 / 75 Pa	2,20

F7 - 600							
YAFI-VF-287/287/600-3-F7	287 x 287 x 600	3	F7	ePM2,5 65%	1,3	640 / 95 Pa	0,70
YAFI-VF-287/287/600-4-F7	287 x 287 x 600	4	F7	ePM2,5 65%	1,7	640 / 85 Pa	0,75
YAFI-VF-287/592/600-3-F7	287 x 592 x 600	3	F7	ePM2,5 65%	2,4	1275 / 95 Pa	1,20
YAFI-VF-287/592/600-4-F7	287 x 592 x 600	4	F7	ePM2,5 65%	3,3	1275 / 85 Pa	1,30
YAFI-VF-490/592/600-5-F7	490 x 592 x 600	5	F7	ePM2,5 65%	4,1	2050 / 95 Pa	2,00
YAFI-VF-490/592/600-6-F7	490 x 592 x 600	6	F7	ePM2,5 65%	4,9	2050 / 85 Pa	2,20
YAFI-VF-592/592/600-6-F7	592 x 592 x 600	6	F7	ePM2,5 65%	4,9	2550 / 95 Pa	2,20
YAFI-VF-592/592/600-8-F7	592 x 592 x 600	8	F7	ePM2,5 65%	6,5	2550 / 85 Pa	2,40


BAG FILTERS

Fine Dust Bag Filter Metal Frame



Description

Made of three layer high quality synthetic media as fine and high efficiency filters after first stage filtration. Thermo-welded bags guarantee a perfect seal and durability. The filter media is constructed of a series of sealed bags for gaining high air flow at low pressure drop. Frame can be produced by plastic or galvanized metal.

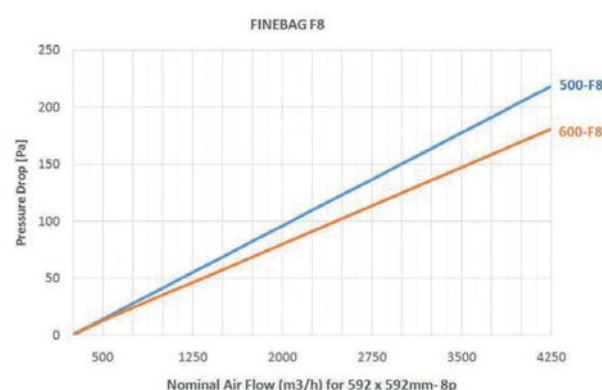

Special Features

Filter Type - High Efficiency Bag Filter

Filter Media - Synthetic Fibre

Frame - Galvanized Steel

Filter Class - F8 / ePM1 70%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications.

Advantages

- Robust construction for reliable operation
- Optimized media surface by conical pocket shape
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Frame thickness can be 20mm or 25mm
- Available with plastic frame

Product Code

YAFI VF

Filter Type	TF	Bag Filter
Frame	G	G: Galvanized P: Plastic
Media	S	Synthetic Fiber
Frame Thickness	H	L:20mm H:25mm
Dimension	-	WxHxD
Pocket No	8	8 pockets
Efficiency	F8	EN 779
	ePM1 70%	ISO 16890

Product Code	Dimensions (WxHxD)	Bags	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
F8 - 500							
YAFI VF-287/287/500-3-F8	287 x 287 x 500	3	F8	ePM1 70%	1,1	560 / 125 Pa	0,65
YAFI VF-287/287/500-4-F8	287 x 287 x 500	4	F8	ePM1 70%	1,4	560 / 115 Pa	0,70
YAFI VF-287/592/500-3-F8	287 x 592 x 500	3	F8	ePM1 70%	2,0	1125 / 125 Pa	1,10
YAFI VF-287/592/500-4-F8	287 x 592 x 500	4	F8	ePM1 70%	2,7	1125 / 115 Pa	1,20
YAFI VF-490/592/500-5-F8	490 x 592 x 500	5	F8	ePM1 70%	3,4	1870 / 125 Pa	1,85
YAFI VF-490/592/500-6-F8	490 x 592 x 500	6	F8	ePM1 70%	4,1	1870 / 115 Pa	2,00
YAFI VF-592/592/500-6-F8	592 x 592 x 500	6	F8	ePM1 70%	4,1	2250 / 125 Pa	2,00
YAFI VF-592/592/500-8-F8	592 x 592 x 500	8	F8	ePM1 70%	5,4	2250 / 115 Pa	2,20

F8 - 600							
YAFI VF-287/287/600-3-F8	287 x 287 x 600	3	F8	ePM1 70%	1,3	640 / 140 Pa	0,70
YAFI VF-287/287/600-4-F8	287 x 287 x 600	4	F8	ePM1 70%	1,7	640 / 125 Pa	0,75
YAFI VF-287/592/600-3-F8	287 x 592 x 600	3	F8	ePM1 70%	2,4	1275 / 140 Pa	1,20
YAFI VF-287/592/600-4-F8	287 x 592 x 600	4	F8	ePM1 70%	3,3	1275 / 125 Pa	1,30
YAFI VF-490/592/600-5-F8	490 x 592 x 600	5	F8	ePM1 70%	4,1	2050 / 140 Pa	2,00
YAFI VF-490/592/600-6-F8	490 x 592 x 600	6	F8	ePM1 70%	4,9	2050 / 125 Pa	2,20
YAFI VF-592/592/600-6-F8	592 x 592 x 600	6	F8	ePM1 70%	4,9	2550 / 140 Pa	2,20
YAFI VF-592/592/600-8-F8	592 x 592 x 600	8	F8	ePM1 70%	6,5	2550 / 125 Pa	2,40


BAG FILTERS

Fine Dust Bag Filter Glass Fiber Filter Media



Description

Made of high quality glass fiber media as fine and high efficiency filters after first stage filtration. Overlooked-welded bags guarantee a perfect seal and durability. The filter media is constructed of a series of sealed bags for gaining high air flow at low pressure drop. Frame is produced by plastic or galvanized frame.

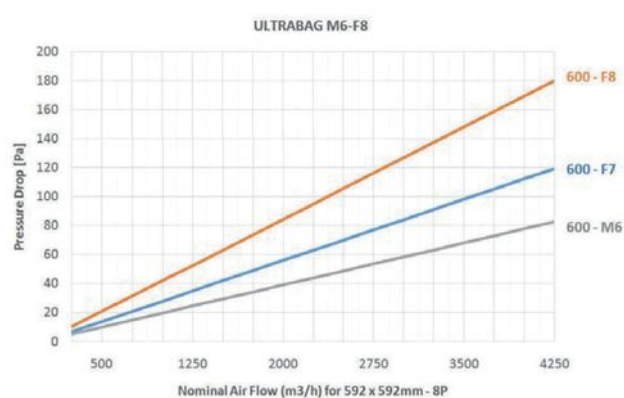

Special Features

Filter Type - High Efficiency Bag Filter

Filter Media - Glass Fiber

Frame - Galvanized Steel

Filter Class - M6 to F8 / ePM10 60%- ePM1 65%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications.

Advantages

- Robust construction for reliable operation
- For the best air distribution new developed pocket design
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation
- Frame thickness can be 20mm or 25mm
- Available with plastic frame

Product Code

YAFI VF-GF

Filter Type	TF	Bag Filter
Frame	G	G: Galvanized P: Plastic
Media	G	Glass Fiber
Frame Thickness	H	L:20mm H:25mm
Dimension	-	WxHxD
Pocket No	8	8 pockets
Efficiency	M6-F9	EN 779
	ePM10 60%- ePM1 80%	EN 16890

Product Code	Dimensions (WxHxD)	Bags	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
M6							
YAFI VF-GF-592/287/500-3-M6	592 X 287 X 500	4	M6	ePM10 65%	2,4	1700/75	1,20
YAFI VF-GF-592/492/500-4-M6	592 x 492 x 500	6	M6	ePM10 65%	3,6	2800/75	2,10
YAFI VF-GF-592/592/500-8-M6	592 x 592 x 500	8	M6	ePM10 65%	4,8	3400/75	2,20
YAFI VF-GF-592/287/600-3-M6	592 X 287 X 600	4	M6	ePM10 65%	2,8	1700/65	1,30
YAFI VF-GF-592/492/600-4-M6	592 x 492 x 600	6	M6	ePM10 65%	4,3	2800/65	2,20
YAFI VF-GF-592/592/600-8-M6	592 x 592 x 600	8	M6	ePM10 65%	5,6	3400/ 65	2,30

F7							
YAFI VF-GF-592/287/500-3-F7	592 X 287 X 500	4	F7	ePM1 55%	2,4	1700/105	1,20
YAFI VF-GF-592/492/500-4-F7	592 x 492 x 500	6	F7	ePM1 55%	3,6	2800/105	2,10
YAFI VF-GF-592/592/500-8-F7	592 x 592 x 500	8	F7	ePM1 55%	4,8	3400/105	2,20
YAFI VF-GF-592/287/600-3-F7	592 X 287 X 600	4	F7	ePM1 55%	2,8	1700 / 95	1,30
YAFI VF-GF-592/492/600-4-F7	592 x 492 x 600	6	F7	ePM1 55%	4,3	2800/95	2,20
YAFI VF-GF-592/592/600-8-F7	592 x 592 x 600	8	F7	ePM1 55%	5,6	3400/95	2,30


F8							
YAFI VF-GF-592/287/500-3-F8	592 X 287 X 500	4	F8	ePMI80%	2,4	1700/160	1,20
YAFI VF-GF-592/492/500-4-F8	592 x 492 x 500	6	F8	ePMI80%	3,6	2800/160	2,10
YAFI VF-GF-592/592/500-8-F8	592 x 592 x 500	8	F8	ePMI80%	4,8	3400/160	2,20
YAFI VF-GF-592/287/600-3-F8	592 X 287 X 600	4	F8	ePMI80%	2,8	1700/145	1,30
YAFI VF-GF-592/492/600-4-F8	592 x 492 x 600	6	F8	ePMI80%	4,3	2800/145	2,20
YAFI VF-GF-592/592/600-8-F8	592 x 592 x 600	8	F8	ePMI80%	5,6	3400/145	2,30



RIGID FILTERS


RIGID FILTERS

Rigid Panel Filter Metal Frame

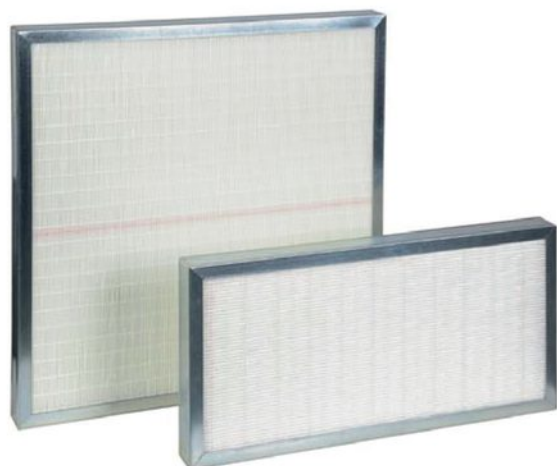

Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. Suitable for an airhandling unit in which space is limited. Can be used as high efficiency filters instead of low efficiency current filters in air conditioning systems. Alternative filters for traditional panel filters which can be used where high efficiency air is needed. Standard and out of standard size can be produced.

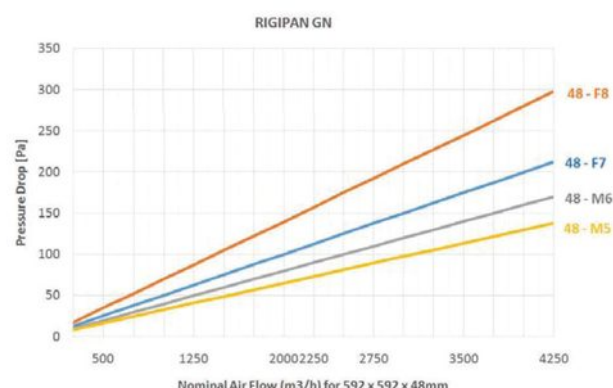

Special Features

Filter Type - Compact Panel Filter

Filter Media - Glass Fiber

Frame - Galvanized Steel

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI PRF

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced.

Filter Type	UK Rigid Panel Filter	
Frame	G	G: Galvanized Steel
Pleat Height	N	N: 50mm L: 100mm
Protection Mesh	X	X: No T: Single D: Double
Gasket	X	X: No E: EPDM P: Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 - 48						
YAFI PRF-287/592/48-M6	287 x 592 x 48	M6	ePM10 65%	3,0	1000 / 65	1,70
YAFI PRF-490/592/48-M6	490 x 592 x 48	M6	ePM10 65%	5,0	1660 / 65	2,80
YAFI PRF-592/592/48-M6	592 x 592 x 48	M6	ePM10 65%	6,0	2000 / 65	3,00
YAFI PRF-287/592/96-M6	287 x 592 x 96	M6	ePM10 65%	6,0	1500 / 75	2,90
YAFI PRF-490/592/96-M6	490 x 592 x 96	M6	ePM10 65%	10,0	2500 / 75	4,80
YAFI PRF-592/592/96-M6	592 x 592 x 96	M6	ePM10 65%	12,0	3000 / 75	5,00

F7 - 48						
YAFI PRF-287/592/48-F7	287 x 592 x 48	F7	ePM1 50 %	3,0	1000 / 80	1,70
YAFI PRF-490/592/48-F7	490 x 592 x 48	F7	ePM1 50 %	5,0	1660 / 80	2,80
YAFI PRF-592/592/48-F7	592 x 592 x 48	F7	ePM1 50 %	6,0	2000 / 80	3,00
YAFI PRF-287/592/96-F7	287 x 592 x 96	F7	ePM1 50 %	6,0	1500 / 85	2,90
YAFI PRF-490/592/96-F7	490 x 592 x 96	F7	ePM1 50 %	10,0	2500 / 85	4,80
YAFI PRF-592/592/96-F7	592 x 592 x 96	F7	ePM1 50 %	12,0	3000 / 85	5,00

F8 - 48						
YAFI PRF-287/592/48-F8	287 x 592 x 48	F8	ePM1 65%	3,0	1000 / 100	1,70
YAFI PRF-490/592/48-F8	490 x 592 x 48	F8	ePM1 65%	5,0	1660 / 100	2,80
YAFI PRF-592/592/48-F8	592 x 592 x 48	F8	ePM1 65%	6,0	2000 / 100	3,00
YAFI PRF-287/592/96-F8	287 x 592 x 96	F8	ePM1 65%	6,0	1500 / 105	2,90
YAFI PRF-490/592/96-F8	490 x 592 x 96	F8	ePM1 65%	10,0	2500 / 105	4,80
YAFI PRF-592/592/96-F8	592 x 592 x 96	F8	ePM1 65%	12,0	3000 / 105	5,00

F9 - 48						
YAFI PRF-287/592/48-F9	287 x 592 x 48	F9	ePM1 80 %	3,0	1000 / 140	1,70
YAFI PRF-490/592/48-F9	490 x 592 x 48	F9	ePM1 80 %	5,0	1660 / 140	2,80
YAFI PRF-592/592/48-F9	592 x 592 x 48	F9	ePM1 80 %	6,0	2000 / 140	3,00
YAFI PRF-287/592/96-F9	287 x 592 x 96	F9	ePM1 80 %	6,0	1500 / 145	2,90
YAFI PRF-490/592/96-F9	490 x 592 x 96	F9	ePM1 80 %	10,0	2500 / 145	4,80
YAFI PRF-592/592/96-F9	592 x 592 x 96	F9	ePM1 80 %	12,0	3000 / 145	5,00


RIGID FILTERS

Rigid Panel Filter Plastic Frame



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. Suitable for an air handling unit in which space is limited. Can be used as high efficiency filters instead of low efficiency current filters in air conditioning systems. Alternative filters for traditional panel filters which can be used where high efficiency air is needed. Standard and out of standard size can be produced.

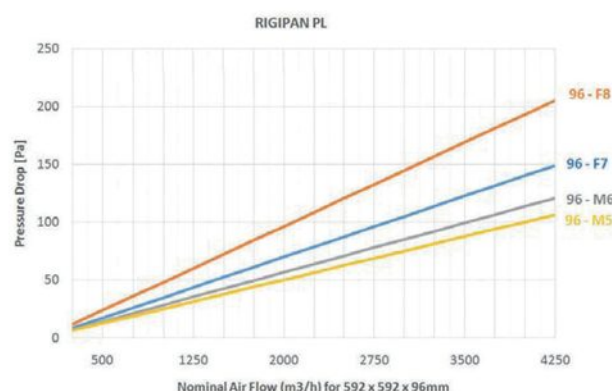

Special Features

Filter Type - Compact Panel Filter

Filter Media - Glass Fiber

Frame - Plastic Frame (Polypropylene)

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI PRF

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced

Filter Type	UK Rigid Panel Filter	
Frame	P	P: Plastic
Pleat Height	N	N: 50mm L: 100mm
Protection Mesh	X	X: No T: Single D: Double
Gasket	X	X: No E: EPDM P: Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
M6 - 48 / 96						
YAFI PRF-287/592/48-M6	287 x 592 x 48	M6	ePM10 65%	3,0	1000 / 65	1,40
YAFI PRF-490/592/48-M6	490 x 592 x 48	M6	ePM10 65%	5,0	1660 / 65	2,20
YAFI PRF-592/592/48-M6	592 x 592 x 48	M6	ePM10 65%	6,0	2000 / 65	2,50
YAFI PRF-287/592/96-M6	287 x 592 x 96	M6	ePM10 65%	6,0	1500 / 75	1,90
YAFI PRF-490/592/96-M6	490 x 592 x 96	M6	ePM10 65%	10,0	2500 / 75	3,20
YAFI PRF-592/592/96-M6	592 x 592 x 96	M6	ePM10 65%	12,0	3000 / 75	3,40

F7 - 48 / 96						
YAFI PRF-287/592/48-F7	287 x 592 x 48	F7	ePM1 50 %	3,0	1000 / 80	1,40
YAFI PRF-490/592/48-F7	490 x 592 x 48	F7	ePM1 50 %	5,0	1660 / 80	2,20
YAFI PRF-592/592/48-F7	592 x 592 x 48	F7	ePM1 50 %	6,0	200 / 80	2,50
YAFI PRF-287/592/96-F7	287 x 592 x 96	F7	ePM1 50 %	6,0	1500 / 85	1,90
YAFI PRF-490/592/96-F7	490 x 592 x 96	F7	ePM1 50 %	10,0	2500 / 85	3,20
YAFI PRF-592/592/96-F7	592 x 592 x 96	F7	ePM1 50 %	12,0	3000 / 85	3,40

F8 - 48 / 96						
YAFI PRF-287/592/48-F8	287 x 592 x 48	F8	ePM1 65%	3,0	1000 / 100	1,40
YAFI PRF-490/592/48-F8	490 x 592 x 48	F8	ePM1 65%	5,0	1660 / 100	2,20
YAFI PRF-592/592/48-F8	592 x 592 x 48	F8	ePM1 65%	6,0	2000 / 100	2,50
YAFI PRF-287/592/96-F8	287 x 592 x 96	F8	ePM1 65%	6,0	1500 / 105	1,90
YAFI PRF-490/592/96-F8	490 x 592 x 96	F8	ePM1 65%	10,0	2500 / 105	3,20
YAFI PRF-592/592/96-F8	592 x 592 x 96	F8	ePM1 65%	12,0	3000 / 105	3,40

F9 - 48 / 96						
YAFI PRF-287/592/48-F9	287 x 592 x 48	F9	ePM1 80 %	3,0	1000 / 140	1,40
YAFI PRF-490/592/48-F9	490 x 592 x 48	F9	ePM1 80 %	5,0	1660 / 140	2,20
YAFI PRF-592/592/48-F9	592 x 592 x 48	F9	ePM1 80 %	6,0	2000 / 140	2,50
YAFI PRF-287/592/96-F9	287 x 592 x 96	F9	ePM1 80 %	6,0	1500 / 145	1,90
YAFI PRF-490/592/96-F9	490 x 592 x 96	F9	ePM1 80 %	10,0	2500 / 145	3,20
YAFI PRF-592/592/96-F9	592 x 592 x 96	F9	ePM1 80 %	12,0	3000 / 145	3,40


RIGID FILTERS

Rigid Panel Filter Plastic Frame with Header



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. Suitable for an air handling unit in which space is limited. Can be used as high efficiency filters instead of low efficiency current filters in air conditioning systems. Alternative filters for traditional panel filters which can be used where high efficiency air is needed. Standard and out of standard size can be produced.

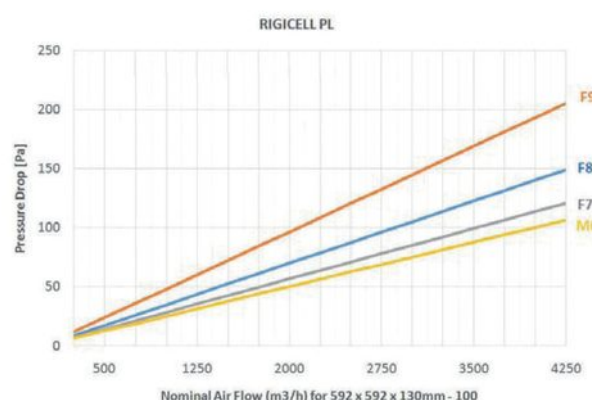

Special Features

Filter Type - Compact Panel Filter

Filter Media - Glass Fiber

Frame - Plastic Frame (Polypropylene)

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Advantages

- ➔ Rigid construction filter used in narrow space
- ➔ Interchangeable with pre-existing filters without the need to modification on existing construction.
- ➔ Large filtration surface, Low pressure drop
- ➔ Long operating life, reduced operating costs
- ➔ Customised sizes can be produced.

Applications

- ➔ Air conditioning applications or industrial processing systems

Product Code

YAFI PRF

Filter Type	LK	Rigid Panel Filter (Header)
Frame	P	P: Plastic
Pleat Height	N	N: 50mm L: 100mm
Protection Mesh	X	X: No T: Single D: Double
Gasket	X	X: No E: EPDM P: Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
M6 - ePM10 65%						
YAFI PRF-287/592/130-M6	287x592x130	M6	ePM10 65%	3,2	1125 / 90	1,80
YAFI PRF-490/592/130-M6	490x592x130	M6	ePM10 65%	5,0	1900 / 90	3,10
YAFI PRF-592/592/130-M6	592x592x130	M6	ePM10 65%	6,5	2250 / 90	3,00
YAFI PRF-287/592/130-M6	287x592x130	M6	ePM10 65%	6,4	1700 / 120	2,00
YAFI PRF-490/592/130-M6	490x592x130	M6	ePM10 65%	10,5	2750 / 120	3,60
YAFI PRF-592/592/130-M6	592x592x130	M6	ePM10 65%	13,0	3400 / 120	3,50

F7 - ePM1 50 %						
YAFI PRF-287/592/130-F7	287x592x130	F7	ePM1 50 %	3,2	1125 / 100	2,50
YAFI PRF-490/592/130-F7	490x592x130	F7	ePM1 50 %	5,0	1900 / 100	3,60
YAFI PRF-592/592/130-F7	592x592x130	F7	ePM1 50 %	6,5	2250 / 100	4,00
YAFI PRF-287/592/130-F7	287x592x130	F7	ePM1 50 %	6,4	1500 / 90	2,50
YAFI PRF-490/592/130-F7	490x592x130	F7	ePM1 50 %	10,5	2500 / 90	4,10
YAFI PRF-592/592/130-F7	592x592x130	F7	ePM1 50 %	13,0	3000 / 90	4,50

F8 - ePM1 65 %						
YAFI PRF-287/592/130-F8	287x592x130	F8	ePM1 65 %	3,2	1125 / 120	1,80
YAFI PRF-490/592/130-F8	490x592x130	F8	ePM1 65 %	5,0	1900 / 120	3,10
YAFI PRF-592/592/130-F8	592x592x130	F8	ePM1 65 %	6,5	2250 / 120	3,00
YAFI PRF-287/592/130-F8	287x592x130	F8	ePM1 65 %	6,4	1700 / 135	2,00
YAFI PRF-490/592/130-F8	490x592x130	F8	ePM1 65 %	10,5	2750 / 135	3,60
YAFI PRF-592/592/130-F8	592x592x130	F8	ePM1 65 %	13,0	3400 / 135	3,50

F9 - ePM1 80 %						
YAFI PRF-287/592/130-F9	287x592x130	F9	ePM1 80 %	3,2	1125 / 145	1,80
YAFI PRF-490/592/130-F9	490x592x130	F9	ePM1 80 %	5,0	1900 / 145	3,10
YAFI PRF-592/592/130-F9	592x592x130	F9	ePM1 80 %	6,5	2250 / 145	3,00
YAFI PRF-287/592/130-F9	287x592x130	F9	ePM1 80 %	6,4	1700 / 150	2,00
YAFI PRF-490/592/130-F9	490x592x130	F9	ePM1 80 %	10,5	2750 / 150	3,60
YAFI PRF-592/592/130-F9	592x592x130	F9	ePM1 80 %	13,0	3400 / 150	3,50


RIGID FILTERS

Rigid Panel Filter Galvanized Frame with Header



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. Suitable for an air handling unit in which space is limited. Can be used as high efficiency filters instead of low efficiency current filters in air conditioning systems. Compact and robust construction and growing efficiency during operation can be used as final filter. Shock proof plastic frame holding a glass micro fiber filter panel; medium is pleated in order to create a rigid filter structure.

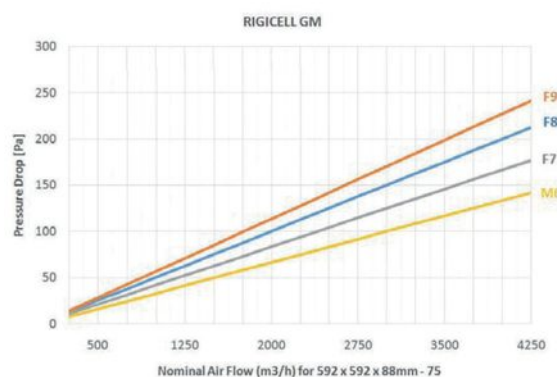

Special Features

Filter Type - Compact Panel Filter

Filter Media - Glass Fiber

Frame - Galvanized Steel

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI PRF

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced.

Filter Type	LK	Rigid Panel Filter (Header)
Frame	G	G: Galvanized steel
Pleat Height	M	M: 75mm
Protection Mesh	T	X: No T: Single D: Double
Gasket	X	X: No E: EPDM P: Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 - ePM10 65%						
YAFI PRF-287/592/88-M6	287x592x88	M6	ePM10 65%	4,5	1500 / 100	3
YAFI PRF-490/592/88-M6	490x592x88	M6	ePM10 65%	7,6	2500 / 100	4,5
YAFI PRF-592/592/88-M6	592x592x88	M6	ePM10 65%	9,0	3000 / 100	5


F7 - ePM1 50 %						
YAFI PRF-287/592/88-F7	287x592x88	F7	ePM1 50 %	6,4	1500 / 125	3
YAFI PRF-490/592/88-F7	490x592x88	F7	ePM1 50 %	10,5	2500 / 125	4,5
YAFI PRF-592/592/88-F7	592x592x88	F7	ePM1 50 %	13,0	3000 / 125	5

F8 - ePM1 65 %						
YAFI PRF-287/592/88-F8	287x592x88	F8	ePM1 65 %	6,4	1500 / 150	3
YAFI PRF-490/592/88-F8	490x592x88	F8	ePM1 65 %	10,5	2500 / 150	4,5
YAFI PRF-592/592/88-F8	592x592x88	F8	ePM1 65 %	13,0	3000 / 150	5

F9 - ePM1 80 %						
YAFI PRF-287/592/88-F9	287x592x88	F9	ePM1 80 %	6,4	1500 / 170	3
YAFI PRF-490/592/88-F9	490x592x88	F9	ePM1 80 %	10,5	2500 / 170	4,5
YAFI PRF-592/592/88-F9	592x592x88	F9	ePM1 80 %	13,0	3000 / 170	5


RIGID FILTERS

Rigid Panel Filter Aluminium Frame

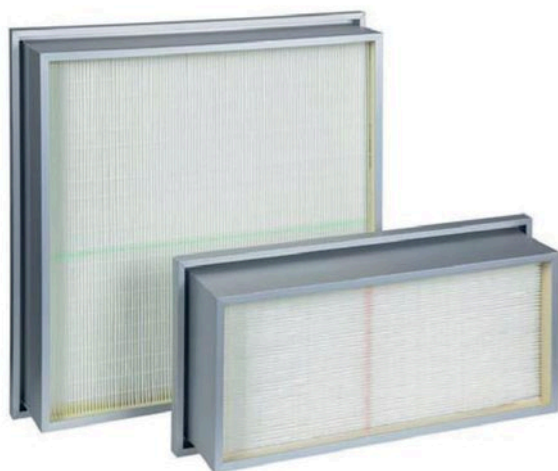

Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. Suitable for an air handling unit in which space is limited. Can be used as high efficiency filters instead of low efficiency current filters in air conditioning systems. Compact and robust construction and growing efficiency during operation can be used as final filter. Extruded aluminium frame holding a glass micro fiber filter panel; medium is pleated in order to create a rigid filter structure.

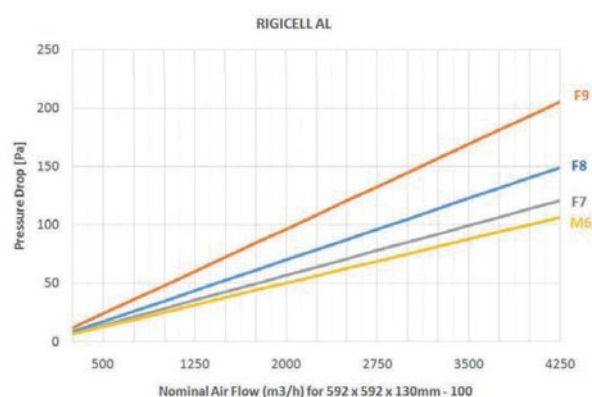

Special Features

Filter Type - Compact Panel Filter

Filter Media - Glass Fiber

Frame - Extruded Aluminium Frame

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI PRF-AL

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced

Filter Type	LK	Rigid Panel Filter (Header)
Frame	A	A:Aluminium
Pleat Height	L	M:75mm L: 100mm
Protection Mesh	T	X:No T:Single D:Double
Gasket	X	X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 - ePM10 65%						
YAFI PRF-AL-287/592/130-M6	287x592x130	M6	ePM10 65%	6,4	1500 / 90	3,2
YAFI PRF-AL-490/592/130-M6	490x592x130	M6	ePM10 65%	10,5	2500 / 90	4,8
YAFI PRF-AL-592/592/130-M6	592x592x130	M6	ePM10 65%	13,0	3000 / 90	5,7


F7 - ePM1 50 %						
YAFI PRF-AL-287/592/130-F7	287x592x130	F7	ePM1 50 %	6,4	1500 / 110	3,2
YAFI PRF-AL-490/592/130-F7	490x592x130	F7	ePM1 50 %	10,5	2500 / 110	4,8
YAFI PRF-AL-592/592/130-F7	592x592x130	F7	ePM1 50 %	13,0	3000 / 110	5,7

F8 - ePM1 65 %						
YAFI PRF-AL-287/592/130-F8	287x592x130	F8	ePM1 65 %	6,4	1500 / 140	3,2
YAFI PRF-AL-490/592/130-F8	490x592x130	F8	ePM1 65 %	10,5	2500 / 140	4,8
YAFI PRF-AL-592/592/130-F8	592x592x130	F8	ePM1 65 %	13,0	3000 / 140	5,7

F9 - ePM1 80 %						
YAFI PRF-AL-287/592/130-F9	287x592x130	F9	ePM1 80 %	6,4	1500 / 175	3,2
YAFI PRF-AL-490/592/130-F9	490x592x130	F9	ePM1 80 %	10,5	2500 / 175	4,8
YAFI PRF-AL-592/592/130-F9	592x592x130	F9	ePM1 80 %	13,0	3000 / 175	5,7


RIGID FILTERS

Rigid Bag Filter Plastic Frame 4V | Standard

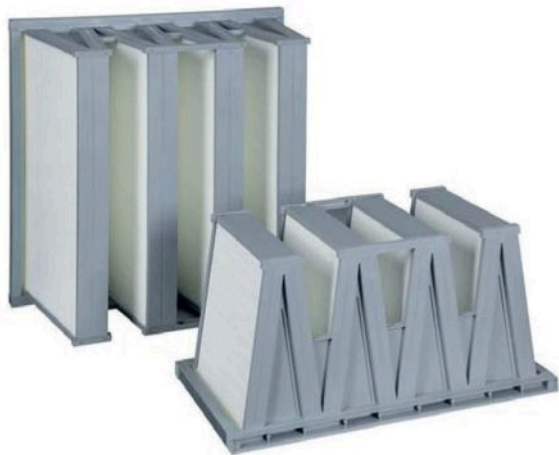

Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermoplastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

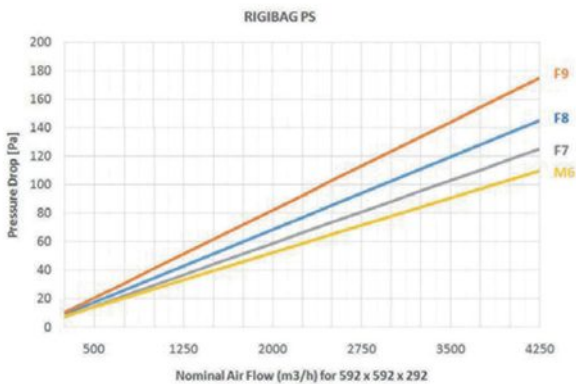

Special Features

- Filter Type** - W Compact Panel Filter
- Filter Media** - Glass Fiber
- Frame** - Plastic Frame (Polypropylene)
- Filter Class** - M6 to F8 / ePM10 65%- ePM1 80%
- Final Pressure Drop** - 450 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Rigid construction filter used in narrow space
- ➔ Excellent performance in difficult conditions with high dust-retention capacity
- ➔ Large filtration surface with latest developed glass fiber media with high water repelancy
- ➔ Light and easy maintenance through handles

Applications

- ➔ Air conditioning applications or industrial processing systems

Product Code

YAFI RBF

Filter Type	WK W bank compact filter	
Frame	P	P:Plastic
Pleat Height	S	S:25mm
Protection Mesh	X	X:No P:Plastic
Gasket	X	X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779	
	ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 ePM10 65%						
YAFI RBF-287/592/292-M6	287x592x292	M6	ePM10 65%	9,0	1750 / 65	3,50
YAFI RBF-490/592/292-M6	490x592x292	M6	ePM10 65%	14,5	2800 / 65	5,40
YAFI RBF-592/592/292-M6	592x592x292	M6	ePM10 65%	18,0	3400 / 65	6,50


F7 ePM1 50 %						
YAFI RBF-287/592/292-F7	287x592x292	F7	ePM1 50 %	9,0	1750 / 80	3,50
YAFI RBF-490/592/292-F7	490x592x292	F7	ePM1 50 %	14,5	2800 / 80	5,40
YAFI RBF-592/592/292-F7	592x592x292	F7	ePM1 50 %	18,0	3400 / 80	6,50

F8 ePM1 65 %						
YAFI RBF-287/592/292-F8	287x592x292	F8	ePM1 65 %	9,0	1750 / 95	3,50
YAFI RBF-490/592/292-F8	490x592x292	F8	ePM1 65 %	14,5	2800 / 95	5,40
YAFI RBF-592/592/292-F8	592x592x292	F8	ePM1 65 %	18,0	3400 / 95	6,50

F9 ePM1 80 %						
YAFI RBF-287/592/292-F9	287x592x292	F9	ePM1 80 %	9,0	1750 / 115	3,50
YAFI RBF-490/592/292-F9	490x592x292	F9	ePM1 80 %	14,5	2800 / 115	5,40
YAFI RBF-592/592/292-F9	592x592x292	F9	ePM1 80 %	18,0	3400 / 115	6,50


RIGID FILTERS

Rigid Bag Filter Plastic Frame 4V | Energy

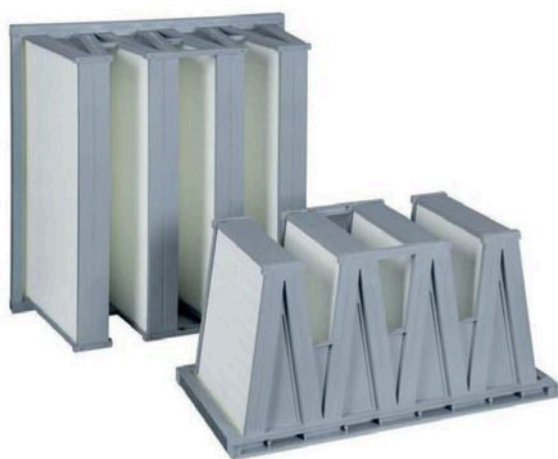

Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermoplastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

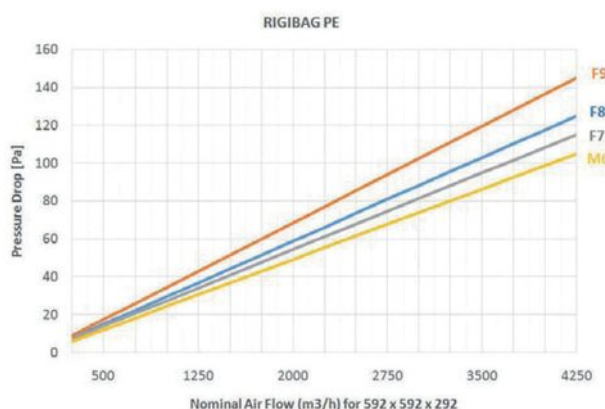

Special Features

Filter Type - W Compact Filter

Filter Media - Glass Fiber

Frame - Plastic Frame (Polypropylene)

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 80 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI RBF

Advantages

- Rigid construction filter used in narrow space
- Excellent performance in difficult conditions
With high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Light and easy maintenance through handles

Filter Type	WK W bank compact filter	
Frame	P	P:Plastic
Pleat Height	E	E:25mm - close pleat
Protection Mesh	X	X:No P:Plastic
Gasket	X	X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
292-M6						
YAFI RBF-287/592/292-M6	287x592x292	M6	ePM10 65%	10,0	1700 / 65	6,50
YAFI RBF-490/592/292-M6	490x592x292	M6	ePM10 65%	16,0	2800 / 65	8,00
YAFI RBF-592/592/292-M6	592x592x292	M6	ePM10 65%	20,0	3400 / 65	9,50

292-F7						
YAFI RBF-287/592/292-F7	287x592x292	F7	ePM1 50 %	10,0	1700 / 75	6,50
YAFI RBF-490/592/292-F7	490x592x292	F7	ePM1 50 %	16,0	2800 / 75	8,00
YAFI RBF-592/592/292-F7	592x592x292	F7	ePM1 50 %	20,0	3400 / 75	9,50

292-F8						
YAFI RBF-287/592/292-F8	287x592x292	F8	ePM1 65 %	10,0	1700 / 85	6,50
YAFI RBF-490/592/292-F8	490x592x292	F8	ePM1 65 %	16,0	2800 / 85	8,00
YAFI RBF-592/592/292-F8	592x592x292	F8	ePM1 65 %	20,0	3400 / 85	9,50

292-F9						
YAFI RBF-287/592/292-F9	287x592x292	F9	ePM1 80 %	10,0	1700 / 95	6,50
YAFI RBF-490/592/292-F9	490x592x292	F9	ePM1 80 %	16,0	2800 / 95	8,00
YAFI RBF-592/592/292-F9	592x592x292	F9	ePM1 80 %	20,0	3400 / 95	9,50


RIGID FILTERS

Rigid Bag Filter Plastic Frame / Max Flow



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermoplastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

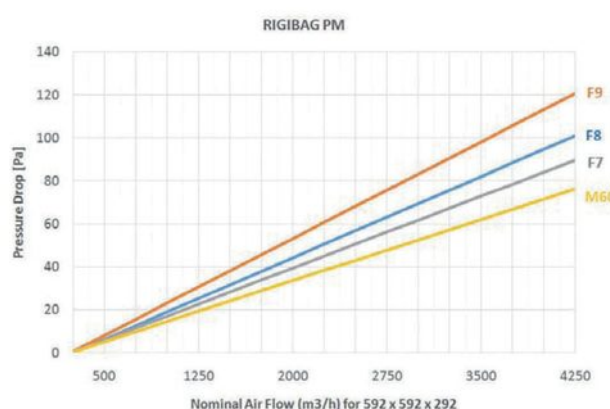

Special Features

Filter Type - W Compact Panel Filter

Filter Media - Glass Fiber

Frame - Plastic Frame (Polypropylene)

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 80 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code YAFI RBF AIR FLOW

Advantages

- Rigid construction filter used in narrow space
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Customised sizes can be produced.

Filter Type	WK W bank compact filter
Frame	P P:Plastic
Pleat Height	M M:25mm - close pleat
Protection Mesh	D D:Double
Gasket	P E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
292-M6						
YAFI RBF AF 287/592/292-M6	287x592x292	M6	ePM10 65%	10,0	1700 / 65	6,50
YAFI RBF AF 490/592/292-M6	490x592x292	M6	ePM10 65%	16,0	2800 / 65	8,00
YAFI RBF AF 592/592/292-M6	592x592x292	M6	ePM10 65%	20,0	3400 / 65	9,50

292-F7						
YAFI RBF AF 287/592/292-F7	287x592x292	F7	ePM1 50 %	10,0	1700 / 75	6,50
YAFI RBF AF 490/592/292-F7	490x592x292	F7	ePM1 50 %	16,0	2800 / 75	8,00
YAFI RBF AF 592/592/292-F7	592x592x292	F7	ePM1 50 %	20,0	3400 / 75	9,50

292-F8						
YAFI RBF AF 287/592/292-F8	287x592x292	F8	ePM1 65 %	10,0	1700 / 85	6,50
YAFI RBF AF 490/592/292-F8	490x592x292	F8	ePM1 65 %	16,0	2800 / 85	8,00
YAFI RBF AF 592/592/292-F8	592x592x292	F8	ePM1 65 %	20,0	3400 / 85	9,50

292-F9						
YAFI RBF AF 287/592/292-F9	287x592x292	F9	ePM1 80 %	10,0	1700 / 95	6,50
YAFI RBF AF 490/592/292-F9	490x592x292	F9	ePM1 80 %	16,0	2800 / 95	8,00
YAFI RBF AF 592/592/292-F9	592x592x292	F9	ePM1 80 %	20,0	3400 / 95	9,50


RIGID FILTERS

Rigid Bag Filter Metal Frame 4V



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermo plastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

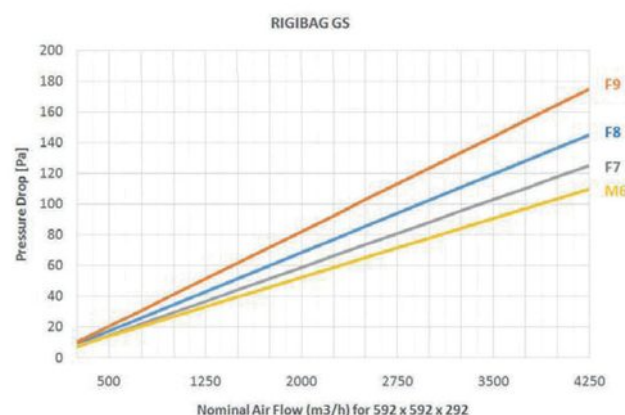

Special Features

Filter Type - W Compact Panel Filter

Filter Media - Glass Fiber

Frame - Galvanized Steel

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 80 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI RBF

Advantages

- Rigid construction filter used in narrow space
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Customised sizes can be produced.

Filter Type	WK W bank compact filter	
Frame	G	G:Galvanized frame
Pleat Height	S	S:25mm
Protection Mesh	X	X:No P:Plastic
Gasket	X	X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
292-M6						
YAFI RBF-287/592/292-M6	287x592x292	M6	ePM10 65%	9,0	1750 / 65	9,00
YAFI RBF-490/592/292-M6	490x592x292	M6	ePM10 65%	14,5	2800 / 65	11,00
YAFI RBF-592/592/292-M6	592x592x292	M6	ePM10 65%	18,0	3400 / 65	12,50

292-F7						
YAFI RBF-287/592/292-F7	287x592x292	F7	ePM1 50 %	9,0	1750 / 80	9,00
YAFI RBF-490/592/292-F7	490x592x292	F7	ePM1 50 %	14,5	2800 / 80	11,00
YAFI RBF-592/592/292-F7	592x592x292	F7	ePM1 50 %	18,0	3400 / 80	12,50

292-F8						
YAFI RBF-287/592/292-F8	287x592x292	F8	ePM1 65 %	9,0	1750 / 95	9,00
YAFI RBF-490/592/292-F8	490x592x292	F8	ePM1 65 %	14,5	2800 / 95	11,00
YAFI RBF-592/592/292-F8	592x592x292	F8	ePM1 65 %	18,0	3400 / 95	12,50

292-F9						
YAFI RBF-287/592/292-F9	287x592x292	F9	ePM1 80 %	9,0	1750 / 115	9,00
YAFI RBF-490/592/292-F9	490x592x292	F9	ePM1 80 %	14,5	2800 / 115	11,00
YAFI RBF-592/592/292-F9	592x592x292	F9	ePM1 80 %	18,0	3400 / 115	12,50


RIGID FILTERS

Aluminium Separator Filters Galvanized Frame - 292mm



Description

Deep pleat filters are designed for high efficiency filtration and high air flow rate for use in hospitals, pharmaceutical industry etc. Instead of traditional mini pleat design corrugated aluminium is used as separator. These separators with doubled edge gives stiffness to the filter and filter can resist to high operation temperature. Made of galvanized sheet with front flange and double flange model is also available on request.

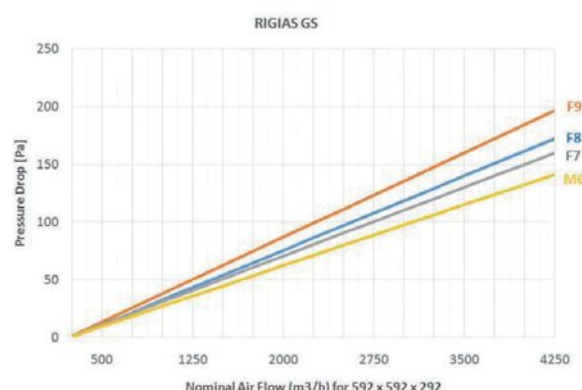

Special Features

Filter Type - Aluminum Separator Panel Filter

Filter Media - Micro Glass

Fibre Frame - Galvanized Steel

Separators - Corrugated Aluminum

Bonding - 2 component polyurethane

Final Pressure Drop - 450 Pa

Max. Temperature - 350 °C

Advantages

- Compact design & robust construction
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Customised sizes can be produced.

Applications

- Air conditioning applications or industrial processing systems

Product Code

YAFI AL SFG

Filter Type	AS Aluminium separator
Frame	G G:Galvanized steel
Model	S S:standard flow H:High flow
Flange	T X:Without T:Single D:Double
Gasket	P X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779
	ePM10 65%_ePM1 80% ISO 16890

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (kg)
M6					
YAFI AL SFG-287/592/292-M6	287 x 592 x 292	ePM10 65%	7,0	1700 / 110 Pa	6,00
YAFI AL SFG-490/592/292-M6	490 x 592 x 292	ePM10 65%	11,0	2500 / 110 Pa	9,00
YAFI AL SFG-592/592/292-M6	592 x 592 x 292	ePM10 65%	14,0	3400 / 110 Pa	10,00
YAFI AL SFG-305/610/292-M6	305 x 610 x 292	ePM10 65%	7,0	2125 / 135 Pa	6,00
YAFI AL SFG-490/610/292-M6	490 x 610 x 292	ePM10 65%	11,0	3400 / 135 Pa	9,00
YAFI AL SFG-610/610/292-M6	610 x 610 x 292	ePM10 65%	14,0	4250 / 135 Pa	10,00

F7					
YAFI AL SFG-287/592/292-F7	287 x 592 x 292	ePM1 55%	7,0	1700 / 125 Pa	6,00
YAFI AL SFG-490/592/292-F7	490 x 592 x 292	ePM1 55%	11,0	2500 / 125 Pa	9,00
YAFI AL SFG-592/592/292-F7	592 x 592 x 292	ePM1 55%	14,0	3400 / 125 Pa	10,00
YAFI AL SFG-305/610/292-F7	305 x 610 x 292	ePM1 55%	7,0	2125 / 145 Pa	6,00
YAFI AL SFG-490/610/292-F7	490 x 610 x 292	ePM1 55%	11,0	3400 / 145 Pa	9,00
YAFI AL SFG-610/610/292-F7	610 x 610 x 292	ePM1 55%	14,0	4250 / 145 Pa	10,00

F8					
YAFI AL SFG-287/592/292-F7	287 x 592 x 292	ePM1 65%	7,0	1700 / 135 Pa	6,00
YAFI AL SFG-490/592/292-F7	490 x 592 x 292	ePM1 65%	11,0	2500 / 135 Pa	9,00
YAFI AL SFG-592/592/292-F7	592 x 592 x 292	ePM1 65%	14,0	3400 / 135 Pa	10,00
YAFI AL SFG-305/610/292-F7	305 x 610 x 292	ePM1 65%	7,0	2125 / 155 Pa	6,00
YAFI AL SFG-490/610/292-F7	490 x 610 x 292	ePM1 65%	11,0	3400 / 155 Pa	9,00
YAFI AL SFG-610/610/292-F7	610 x 610 x 292	ePM1 65%	14,0	4250 / 155 Pa	10,00

F9					
YAFI AL SFG-287/592/292-F7	287 x 592 x 292	ePM1 80%	7,0	1700 / 155 Pa	6,00
YAFI AL SFG-490/592/292-F7	490 x 592 x 292	ePM1 80%	11,0	2500 / 155 Pa	9,00
YAFI AL SFG-592/592/292-F7	592 x 592 x 292	ePM1 80%	14,0	3400 / 155 Pa	10,00
YAFI AL SFG-305/610/292-F7	305 x 610 x 292	ePM1 80%	7,0	2125 / 175 Pa	6,00
YAFI AL SFG-490/610/292-F7	490 x 610 x 292	ePM1 80%	11,0	3400 / 175 Pa	9,00
YAFI AL SFG-610/610/292-F7	610 x 610 x 292	ePM1 80%	14,0	4250 / 175 Pa	10,00


RIGID FILTERS

High Temperature Filters Galvanized Frame - 292mm



Description

Deep pleat filters are designed for high efficiency filtration and high air flow rate for use in hospitals, pharmaceutical industry etc. Instead of traditional mini pleat design corrugated aluminium is used as separator. These separators with doubled edge gives stiffness to the filter and filter can resist to high operation temperature. Made of galvanized sheet with front flange and double flange model is also available on request.

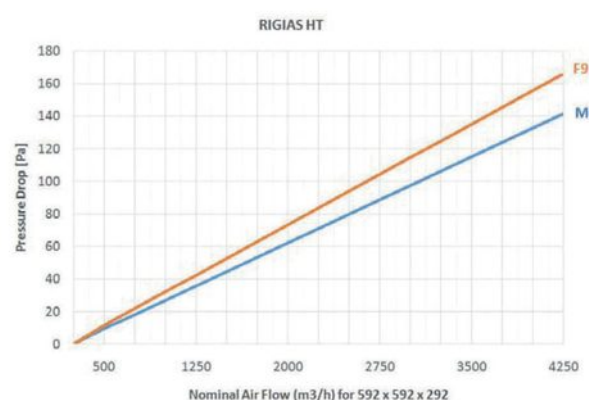

Special Features

Filter Type - Aluminum Separator Panel Filter

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel

Separators - Corrugated Aluminum

Final Pressure Drop - 450 Pa

Max. Temperature - 350 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI RF HTG

Advantages

- Compact design & robust construction
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Customised sizes can be produced.

Filter Type	AS Aluminium separator
Frame	H Metal frame
	T High temperature
Flange	T X:Without T:Single D:Double
Gasket	F F:Fiber Clase Rope
Efficiency	M6 to F9 EN 779
	ePM10 65%_ePM1 80% ISO 16890

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m ²)	Press.Drop (Pa)	Weight (Kg)
M6					
YAFI RF HTG-287/592/292-M6	287 x 592 x 292	ePM10 65%	7,0	1700 / 110 Pa	
YAFI RF HTG-490/592/292-M6	490 x 592 x 292	ePM10 65%	11,0	2500 / 110 Pa	
YAFI RF HTG-592/592/292-M6	592 x 592 x 292	ePM10 65%	14,0	3400 / 110 Pa	
YAFI RF HTG-305/610/292-M6	305 x 610 x 292	ePM10 65%	7,0	2125 / 135 Pa	
YAFI RF HTG-490/610/292-M6	490 x 610 x 292	ePM10 65%	11,0	3400 / 135 Pa	
YAFI RF HTG-610/610/292-M6	610 x 610 x 292	ePM10 65%	14,0	4250 / 135 Pa	


F8					
YAFI RF HTG-287/592/292-F8	287 x 592 x 292	ePM1 65%	7,0	1700 / 135 Pa	
YAFI RF HTG-490/592/292-F8	490 x 592 x 292	ePM1 65%	11,0	2500 / 135 Pa	
YAFI RF HTG-592/592/292-F8	592 x 592 x 292	ePM1 65%	14,0	3400 / 135 Pa	
YAFI RF HTG-305/610/292-F8	305 x 610 x 292	ePM1 65%	7,0	2125 / 155 Pa	
YAFI RF HTG-490/610/292-F8	490 x 610 x 292	ePM1 65%	11,0	3400 / 155 Pa	
YAFI RF HTG-610/610/292-F8	610 x 610 x 292	ePM1 65%	14,0	4250 / 155 Pa	



HEPA FILTERS


HEPA FILTERS

Absolute HEPA Filters MDF Frame - 78mm

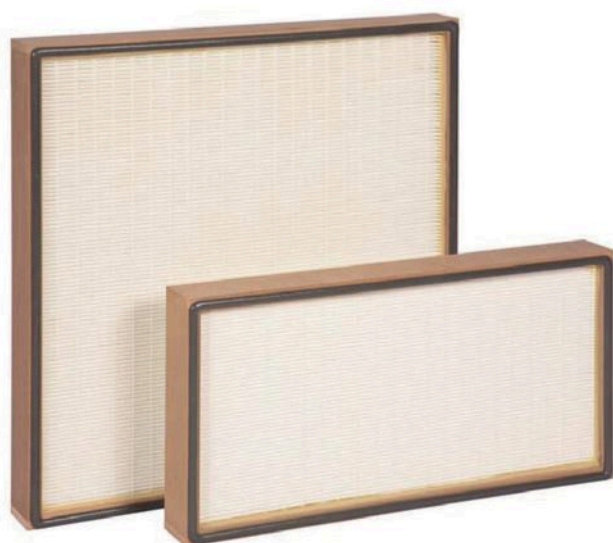

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermo plasticth reads and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

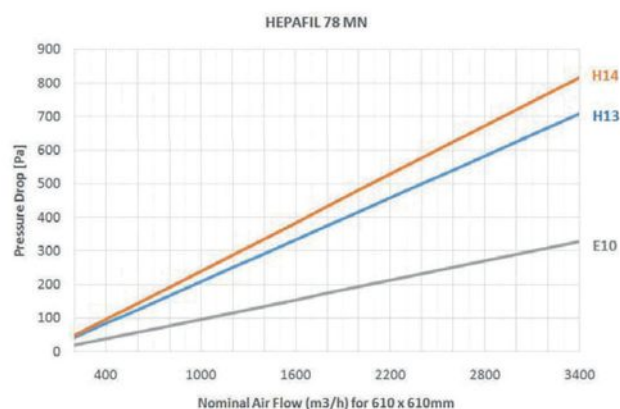

Special Features

Filter Type - Turbulent Flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - MDF (Medium-Density Fibreboard)

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Applications

- Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 78

Filter Type	HF Hepa filter
Frame	M M:Aluminium
Pleat Height	N N:55mm
Protection Mesh	X X:No T:Single D:Double
Gasket	P E:EPDM P:Polyurethane
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 78-305/305/78-E10	305 x 305 x 78	E10 - 85,00 %	2,6	700 / 250 Pa	1,40
YAFI HF 78-305/610/78-E10	305 x 610 x 78	E10 - 85,00 %	5,2	1400 / 250 Pa	2,50
YAFI HF 78-457/457/78-E10	457 x 457 x 78	E10 - 85,00 %	5,8	1570 / 250 Pa	2,90
YAFI HF 78-457/610/78-E10	457 x 610 x 78	E10 - 85,00 %	7,8	2100 / 250 Pa	3,20
YAFI HF 78-535/535/78-E10	535 x 535 x 78	E10 - 85,00 %	7,9	2150 / 250 Pa	3,40
YAFI HF 78-575/575/78-E10	575 x 575 x 78	E10 - 85,00 %	9,2	2490 / 250 Pa	3,80
YAFI HF 78-610/610/78-E10	610 x 610 x 78	E10 - 85,00 %	10,4	2800 / 250 Pa	3,90
YAFI HF 78-610/762/78-E10	610 x 762 x 78	E10 - 85,00 %	13,0	3500 / 250 Pa	5,20
YAFI HF 78-610/915/78-E10	610 x 915 x 78	E10 - 85,00 %	15,6	4200 / 250 Pa	6,20
YAFI HF 78-762/762/78-E10	762 x 762 x 78	E10 - 85,00 %	16,2	4370 / 250 Pa	6,50
YAFI HF 78-915/915/78-E10	915 x 915 x 78	E10 - 85,00 %	23,4	6300 / 250 Pa	9,50
YAFI HF 78-610/1220/78-E10	610 x 1220 x 78	E10 - 85,00 %	20,8	5600 / 250 Pa	8,50

H13					
YAFI HF 78-305/305/78-H13	305 x 305 x 78	H13 - 99,95 %	2,6	310 / 250 Pa	1,40
YAFI HF 78-305/610/78-H13	305 x 610 x 78	H13 - 99,95 %	5,2	625 / 250 Pa	2,50
YAFI HF 78-457/457/78-H13	457 x 457 x 78	H13 - 99,95 %	5,8	700 / 250 Pa	2,90
YAFI HF 78-457/610/78-H13	457 x 610 x 78	H13 - 99,95 %	7,8	930 / 250 Pa	3,20
YAFI HF 78-535/535/78-H13	535 x 535 x 78	H13 - 99,95 %	7,9	960 / 250 Pa	3,40
YAFI HF 78-575/575/78-H13	575 x 575 x 78	H13 - 99,95 %	9,2	1100 / 250 Pa	3,80
YAFI HF 78-610/610/78-H13	610 x 610 x 78	H13 - 99,95 %	10,4	1250 / 250 Pa	3,90
YAFI HF 78-610/762/78-H13	610 x 762 x 78	H13 - 99,95 %	13,0	1550 / 250 Pa	5,20
YAFI HF 78-610/915/78-H13	610 x 915 x 78	H13 - 99,95 %	15,6	1850 / 250 Pa	6,20
YAFI HF 78-762/762/78-H13	762 x 762 x 78	H13 - 99,95 %	16,2	1950 / 250 Pa	6,50
YAFI HF 78-915/915/78-H13	915 x 915 x 78	H13 - 99,95 %	23,4	2800 / 250 Pa	9,50
YAFI HF 78-610/1220/78-H13	610 x 1220 x 78	H13 - 99,95 %	20,8	2500 / 250 Pa	8,50

H14					
YAFI HF 78-305/305/78-H14	305 x 305 x 78	H14 - 99,995 %	2,6	275 / 250 Pa	1,40
YAFI HF 78-305/610/78-H14	305 x 610 x 78	H14 - 99,995 %	5,2	550 / 250 Pa	2,50
YAFI HF 78-457/457/78-H14	457 x 457 x 78	H14 - 99,995 %	5,8	615 / 250 Pa	2,90
YAFI HF 78-457/610/78-H14	457 x 610 x 78	H14 - 99,995 %	7,8	825 / 250 Pa	3,20
YAFI HF 78-535/535/78-H14	535 x 535 x 78	H14 - 99,995 %	7,9	845 / 250 Pa	3,40
YAFI HF 78-575/575/78-H14	575 x 575 x 78	H14 - 99,995 %	9,2	980 / 250 Pa	3,80
YAFI HF 78-610/610/78-H14	610 x 610 x 78	H14 - 99,995 %	10,4	1100 / 250 Pa	3,90
YAFI HF 78-610/762/78-H14	610 x 762 x 78	H14 - 99,995 %	13,0	1375 / 250 Pa	5,20
YAFI HF 78-610/915/78-H14	610 x 915 x 78	H14 - 99,995 %	15,6	1650 / 250 Pa	6,20
YAFI HF 78-762/762/78-H14	762 x 762 x 78	H14 - 99,995 %	16,2	1720 / 250 Pa	6,50
YAFI HF 78-915/915/78-H14	915 x 915 x 78	H14 - 99,995 %	23,4	2475 / 250 Pa	9,50
YAFI HF 78-610/1220/78-H14	610 x 1220 x 78	H14 - 99,995 %	20,8	2200 / 250 Pa	8,50

HEPA FILTERS

Absolute HEPA Filters MDF Frame - 150mm



Special Features


- Filter Type** - Turbulent Flow HEPA Panel
- Filter Media** - Micro Glass Fibre
- Frame** - Extruded Aluminium Frame
- Seperators** - Thermoplastic glue beads
- Bonding** - 2 component polyurethane
- Gasket** - Continuous poured gasket or EPDM
- Final Pressure Drop** - 600 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, labratories and clean-rooms. Glass fibre paper folded with thermo plasticth reads and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on toframein or-der t oguarantee a perfect seal. Each single filter is tested according to EN 1822.

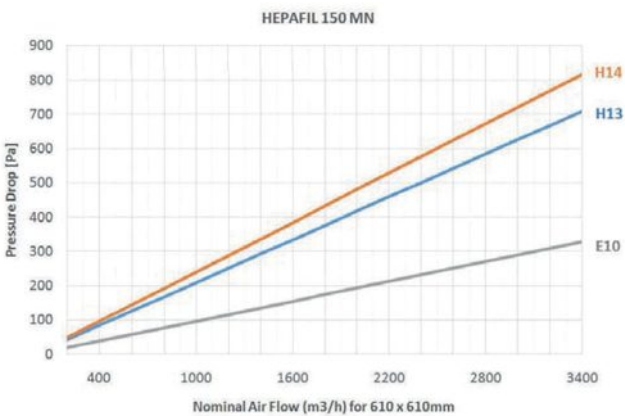

Applications

- ➔ Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 150

Filter Type	HF	Hepa filter
Frame	M	M:MDF Frame
Pleat Height	N	N:55mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 150-305/305/150-E10	305 x 305 x 150	E10 - 85,00 %	2,6	700 / 250 Pa	2,00
YAFI HF 150-305/610/150-E10	305 x 610 x 150	E10 - 85,00 %	5,2	1400 / 250 Pa	4,20
YAFI HF 150-457/457/150-E10	457 x 457 x 150	E10 - 85,00 %	5,8	1570 / 250 Pa	4,30
YAFI HF 150-457/610/150-E10	457 x 610 x 150	E10 - 85,00 %	7,8	2100 / 250 Pa	6,10
YAFI HF 150-535/535/150-E10	535 x 535 x 150	E10 - 85,00 %	7,9	2150 / 250 Pa	6,20
YAFI HF 150-575/575/150-E10	575 x 575 x 150	E10 - 85,00 %	9,2	2490 / 250 Pa	7,20
YAFI HF 150-610/610/150-E10	610 x 610 x 150	E10 - 85,00 %	10,4	2800 / 250 Pa	7,60
YAFI HF 150-610/762/150-E10	610 x 762 x 150	E10 - 85,00 %	13,0	3500 / 250 Pa	9,20
YAFI HF 150-610/915/150-E10	610 x 915 x 150	E10 - 85,00 %	15,6	4200 / 250 Pa	11,20
YAFI HF 150-762/762/150-E10	762 x 762 x 150	E10 - 85,00 %	16,2	4370 / 250 Pa	12,50
YAFI HF 150-915/915/150-E10	915 x 915 x 150	E10 - 85,00 %	23,4	6300 / 250 Pa	18,50
YAFI HF 150-610/1220/150-E10	610 x 1220 x 150	E10 - 85,00 %	20,8	5600 / 250 Pa	16,00

H13					
YAFI HF 150-305/305/150-H13	305 x 305 x 150	H13 - 99,95 %	2,6	310 / 250 Pa	2,00
YAFI HF 150-305/610/150-H13	305 x 610 x 150	H13 - 99,95 %	5,2	625 / 250 Pa	4,20
YAFI HF 150-457/457/150-H13	457 x 457 x 150	H13 - 99,95 %	5,8	700 / 250 Pa	4,30
YAFI HF 150-457/610/150-H13	457 x 610 x 150	H13 - 99,95 %	7,8	930 / 250 Pa	6,10
YAFI HF 150-535/535/150-H13	535 x 535 x 150	H13 - 99,95 %	7,9	960 / 250 Pa	6,20
YAFI HF 150-575/575/150-H13	575 x 575 x 150	H13 - 99,95 %	9,2	1100 / 250 Pa	7,20
YAFI HF 150-610/610/150-H13	610 x 610 x 150	H13 - 99,95 %	10,4	1250 / 250 Pa	7,60
YAFI HF 150-610/762/150-H13	610 x 762 x 150	H13 - 99,95 %	13,0	1550 / 250 Pa	9,20
YAFI HF 150-610/915/150-H13	610 x 915 x 150	H13 - 99,95 %	15,6	1850 / 250 Pa	11,20
YAFI HF 150-762/762/150-H13	762 x 762 x 150	H13 - 99,95 %	16,2	1950 / 250 Pa	12,50
YAFI HF 150-915/915/150-H13	915 x 915 x 150	H13 - 99,95 %	23,4	2800 / 250 Pa	18,50
YAFI HF 150-610/1220/150-H13	610 x 1220 x 150	H13 - 99,95 %	20,8	2500 / 250 Pa	16,00

H14					
YAFI HF 150-305/305/150-H14	305 x 305 x 150	H14 - 99,995 %	2,6	275 / 250 Pa	2,00
YAFI HF 150-305/610/150-H14	305 x 610 x 150	H14 - 99,995 %	5,2	550 / 250 Pa	4,20
YAFI HF 150-457/457/150-H14	457 x 457 x 150	H14 - 99,995 %	5,8	615 / 250 Pa	4,30
YAFI HF 150-457/610/150-H14	457 x 610 x 150	H14 - 99,995 %	7,8	825 / 250 Pa	6,10
YAFI HF 150-535/535/150-H14	535 x 535 x 150	H14 - 99,995 %	7,9	845 / 250 Pa	6,20
YAFI HF 150-575/575/150-H14	575 x 575 x 150	H14 - 99,995 %	9,2	980 / 250 Pa	7,20
YAFI HF 150-610/610/150-H14	610 x 610 x 150	H14 - 99,995 %	10,4	1100 / 250 Pa	7,60
YAFI HF 150-610/762/150-H14	610 x 762 x 150	H14 - 99,995 %	13,0	1375 / 250 Pa	9,20
YAFI HF 150-610/915/150-H14	610 x 915 x 150	H14 - 99,995 %	15,6	1650 / 250 Pa	11,20
YAFI HF 150-762/762/150-H14	762 x 762 x 150	H14 - 99,995 %	16,2	1720 / 250 Pa	12,50
YAFI HF 150-915/915/150-H14	915 x 915 x 150	H14 - 99,995 %	23,4	2475 / 250 Pa	18,50
YAFI HF 150-610/1220/150-H14	610 x 1220 x 150	H14 - 99,995 %	20,8	2200 / 250 Pa	16,00


HEPA FILTERS

Absolute HEPA Filters MDF Frame - 150mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermoplastic resins and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on top of frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

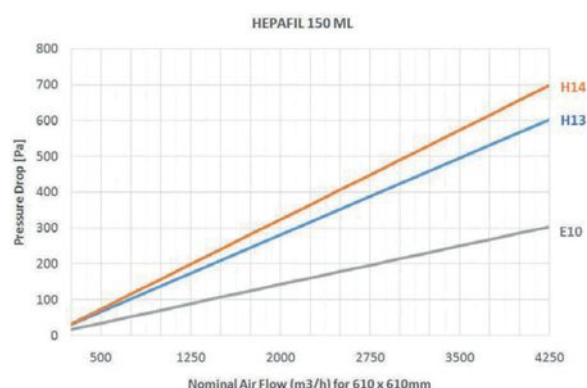

Special Features

Filter Type - Turbulent Flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Applications

- Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 150

Filter Type	HF	Hepa filter
Frame	M	M:MDF Frame
Pleat Height	L	L:100mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	F	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 150-305/305/150-E10	305 x 305 x 150	E10 - 85,00 %	4,5	900 / 250 Pa	2,20
YAFI HF 150-305/610/150-E10	305 x 610 x 150	E10 - 85,00 %	9,0	1800 / 250 Pa	4,40
YAFI HF 150-457/457/150-E10	457 x 457 x 150	E10 - 85,00 %	10,1	2000 / 250 Pa	4,60
YAFI HF 150-457/610/150-E10	457 x 610 x 150	E10 - 85,00 %	13,5	2700 / 250 Pa	6,50
YAFI HF 150-535/535/150-E10	535 x 535 x 150	E10 - 85,00 %	13,9	2770 / 250 Pa	6,40
YAFI HF 150-575/575/150-E10	575 x 575 x 150	E10 - 85,00 %	16,0	3200 / 250 Pa	7,50
YAFI HF 150-610/610/150-E10	610 x 610 x 150	E10 - 85,00 %	18,0	3600 / 250 Pa	7,90
YAFI HF 150-610/762/150-E10	610 x 762 x 150	E10 - 85,00 %	22,5	4500 / 250 Pa	9,60
YAFI HF 150-610/915/150-E10	610 x 915 x 150	E10 - 85,00 %	27,0	5400 / 250 Pa	11,80
YAFI HF 150-762/762/150-E10	762 x 762 x 150	E10 - 85,00 %	28,1	5600 / 250 Pa	13,50
YAFI HF 150-915/915/150-E10	915 x 915 x 150	E10 - 85,00 %	40,5	8100 / 250 Pa	19,40
YAFI HF 150-610/1220/150-E10	610 x 1220 x 150	E10 - 85,00 %	36,0	7200 / 250 Pa	16,80

H13					
YAFI HF 150-305/305/150-H13	305 x 305 x 150	H13 - 99,95 %	4,5	475 / 250 Pa	2,20
YAFI HF 150-305/610/150-H13	305 x 610 x 150	H13 - 99,95 %	9,0	950 / 250 Pa	4,40
YAFI HF 150-457/457/150-H13	457 x 457 x 150	H13 - 99,95 %	10,1	1065 / 250 Pa	4,60
YAFI HF 150-457/610/150-H13	457 x 610 x 150	H13 - 99,95 %	13,5	1420 / 250 Pa	6,50
YAFI HF 150-535/535/150-H13	535 x 535 x 150	H13 - 99,95 %	13,9	1460 / 250 Pa	6,40
YAFI HF 150-575/575/150-H13	575 x 575 x 150	H13 - 99,95 %	16,0	1690 / 250 Pa	7,50
YAFI HF 150-610/610/150-H13	610 x 610 x 150	H13 - 99,95 %	18,0	1900 / 250 Pa	7,90
YAFI HF 150-610/762/150-H13	610 x 762 x 150	H13 - 99,95 %	22,5	2370 / 250 Pa	9,60
YAFI HF 150-610/915/150-H13	610 x 915 x 150	H13 - 99,95 %	27,0	2850 / 250 Pa	11,80
YAFI HF 150-762/762/150-H13	762 x 762 x 150	H13 - 99,95 %	28,1	2960 / 250 Pa	13,50
YAFI HF 150-915/915/150-H13	915 x 915 x 150	H13 - 99,95 %	40,5	4275 / 250 Pa	19,40
YAFI HF 150-610/1220/150-H13	610 x 1220 x 150	H13 - 99,95 %	36,0	3800 / 250 Pa	16,80

H14					
YAFI HF 150-305/305/150-H14	305 x 305 x 150	H14 - 99,995 %	4,5	400 / 250 Pa	2,20
YAFI HF 150-305/610/150-H14	305 x 610 x 150	H14 - 99,995 %	9,0	800 / 250 Pa	4,40
YAFI HF 150-457/457/150-H14	457 x 457 x 150	H14 - 99,995 %	10,1	900 / 250 Pa	4,60
YAFI HF 150-457/610/150-H14	457 x 610 x 150	H14 - 99,995 %	13,5	1200 / 250 Pa	6,50
YAFI HF 150-535/535/150-H14	535 x 535 x 150	H14 - 99,995 %	13,9	1230 / 250 Pa	6,40
YAFI HF 150-575/575/150-H14	575 x 575 x 150	H14 - 99,995 %	16,0	1420 / 250 Pa	7,50
YAFI HF 150-610/610/150-H14	610 x 610 x 150	H14 - 99,995 %	18,0	1600 / 250 Pa	7,90
YAFI HF 150-610/762/150-H14	610 x 762 x 150	H14 - 99,995 %	22,5	2000 / 250 Pa	9,60
YAFI HF 150-610/915/150-H14	610 x 915 x 150	H14 - 99,995 %	27,0	2400 / 250 Pa	11,80
YAFI HF 150-762/762/150-H14	762 x 762 x 150	H14 - 99,995 %	28,1	2500 / 250 Pa	13,50
YAFI HF 150-915/915/150-H14	915 x 915 x 150	H14 - 99,995 %	40,5	3600 / 250 Pa	19,40
YAFI HF 150-610/1220/150-H14	610 x 1220 x 150	H14 - 99,995 %	36,0	3200 / 250 Pa	16,80


HEPA FILTERS

Absolute HEPA Filters MDF Frame - 292mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermoplastic resins and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on top of frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

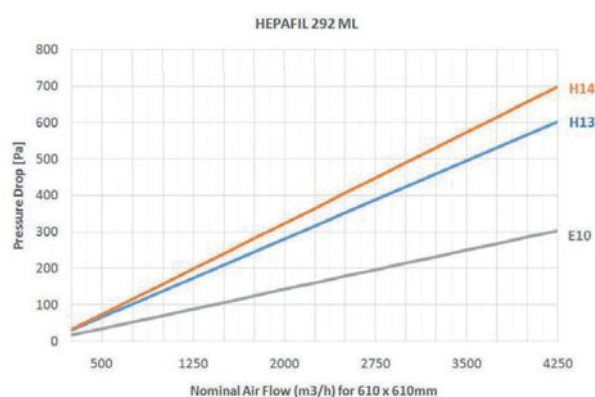

Special Features

Filter Type - HEPA Absolute Filter

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

→ Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	M	M:MDF Frame
Pleat Height	L	L:100mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	F	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	4,5	900 / 250 Pa	3,50
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	9,0	1800 / 250 Pa	7,40
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	10,0	2000 / 250 Pa	8,00
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	13,5	2700 / 250 Pa	10,80
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	18,0	3600 / 250 Pa	11,50
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	22,5	4500 / 250 Pa	12,60
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	27,0	5400 / 250 Pa	18,00

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	4,5	475 / 250 Pa	3,50
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	9,0	950 / 250 Pa	7,40
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	10,0	1065 / 250 Pa	8,00
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	13,5	1420 / 250 Pa	10,80
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	18,0	1900 / 250 Pa	11,50
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	22,5	2370 / 250 Pa	12,60
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	27,0	2850 / 250 Pa	18,00

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	4,5	400 / 250 Pa	3,50
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	9,0	800 / 250 Pa	7,40
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	10,0	900 / 250 Pa	8,00
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	13,5	1200 / 250 Pa	10,80
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	18,0	1600 / 250 Pa	11,50
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	22,5	2000 / 250 Pa	12,60
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	27,0	2400 / 250 Pa	18,00


HEPA FILTERS

Absolute HEPA Filters MDF Frame - 292mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and cleanrooms. Glass fibre paper folded with thermoplastic threads and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on the frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

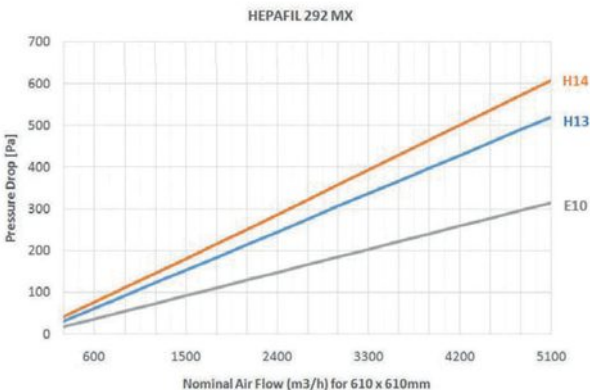

Special Features

- Filter Type** - HEPA Absolute Filter
- Filter Media** - Micro Glass Fibre
- Frame** - Extruded Aluminium Frame
- Separators** - Thermoplastic glue beads
- Bonding** - 2 component polyurethane
- Gasket** - Continuous poured gasket or EPDM
- Final Pressure Drop** - 600 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Applications

- ➔ Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	M	M:MDF Frame
Pleat Height	X	X:135mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	6,2	1100 / 250 Pa	4,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	12,5	2200 / 250 Pa	8,20
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	14,0	2470 / 250 Pa	8,80
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	18,7	3300 / 250 Pa	11,90
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	25,0	4400 / 250 Pa	12,80
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	31,2	5495 / 250 Pa	13,50
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	37,5	6600 / 250 Pa	20,00

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	6,2	630 / 250 Pa	4,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	12,5	1260 / 250 Pa	8,20
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	14,0	1415 / 250 Pa	8,80
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	18,7	1900 / 250 Pa	11,90
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	25,0	2500 / 250 Pa	12,80
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	31,2	3120 / 250 Pa	13,50
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	37,5	3750 / 250 Pa	20,00

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	6,2	565 / 250 Pa	4,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	12,5	1130 / 250 Pa	8,20
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	14,0	1280 / 250 Pa	8,80
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	18,7	1700 / 250 Pa	11,90
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	25,0	2260 / 250 Pa	12,80
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	31,2	2820 / 250 Pa	13,50
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	37,5	3390 / 250 Pa	20,00


HEPA FILTERS

Absolute HEPA Filters MDF Frame - 292mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and cleanrooms. Glass fibre paper folded with thermo plastic glue beads and media pack is placed into MDF frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on top of frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

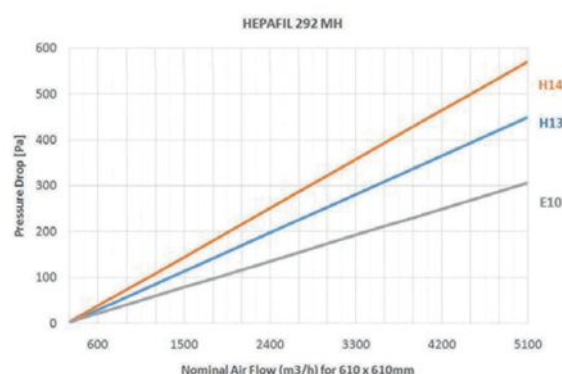

Special Features

Filter Type - HEPA Absolute Filter

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

→ Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	M	M:MDF Frame
Pleat Height	H	H:150mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	6,2	1100 / 250 Pa	4,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	12,5	2200 / 250 Pa	8,20
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	14,0	2470 / 250 Pa	8,80
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	18,7	3300 / 250 Pa	11,90
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	25,0	4400 / 250 Pa	12,80
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	31,2	5495 / 250 Pa	13,50
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	37,5	6600 / 250 Pa	20,00

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	6,2	630 / 250 Pa	4,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	12,5	1260 / 250 Pa	8,20
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	14,0	1415 / 250 Pa	8,80
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	18,7	1900 / 250 Pa	11,90
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	25,0	2500 / 250 Pa	12,80
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	31,2	3120 / 250 Pa	13,50
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	37,5	3750 / 250 Pa	20,00

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	6,2	565 / 250 Pa	4,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	12,5	1130 / 250 Pa	8,20
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	14,0	1280 / 250 Pa	8,80
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	18,7	1700 / 250 Pa	11,90
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	25,0	2260 / 250 Pa	12,80
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	31,2	2820 / 250 Pa	13,50
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	37,5	3390 / 250 Pa	20,00


HEPA FILTERS

Absolute HEPA Filters Galvanized Frame - 292 mm

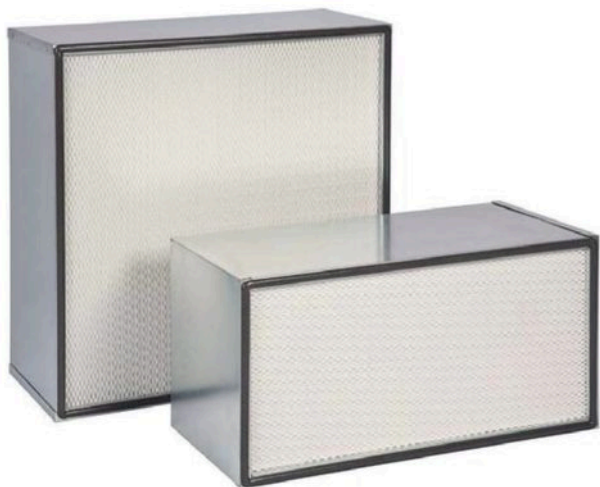

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, labratories and clean-rooms. Glass fibre paper folded with thermo plas-tich reads and media pack is placed into Galva-nized or Aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and fra One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

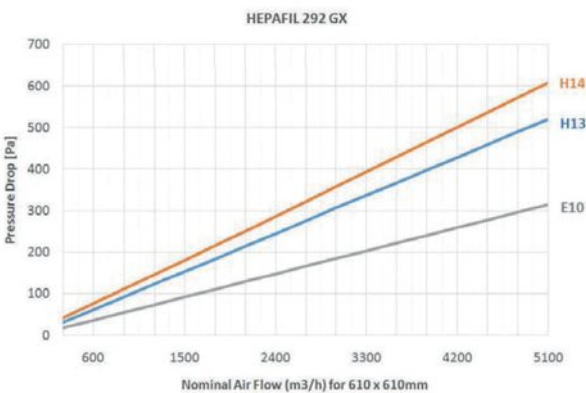

Special Features

- Filter Type** - HEPA Absolute Filter
- Filter Media** - Micro Glass Fibre
- Frame** - Galvanized Steel Frame
- Seperators** - Thermoplastic glue beads
- Bonding** - 2 component polyurethane
- Gasket** - Continuous poured gasket or EPDM
- Final Pressure Drop** - 600 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Applications

- ➔ Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	G	G:Galvanized
Pleat Height	X	X:135mm
Protection Mesh	T	X:No T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	5,5	1050 / 250 Pa	4,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	11,3	2100 / 250 Pa	7,50
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	12,5	2360 / 250 Pa	8,70
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	16,8	3150 / 250 Pa	10,80
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	22,5	4200 / 250 Pa	11,50
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	28,0	5245 / 250 Pa	13,20
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	33,8	6300 / 250 Pa	15,80

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	5,5	600 / 250 Pa	4,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	11,3	1200 / 250 Pa	7,50
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	12,5	1350 / 250 Pa	8,70
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	16,8	1800 / 250 Pa	10,80
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	22,5	2400 / 250 Pa	11,50
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	28,0	3000 / 250 Pa	13,20
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	33,8	3600 / 250 Pa	15,80

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	5,5	550 / 250 Pa	4,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	11,3	1075 / 250 Pa	7,50
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	12,5	1210 / 250 Pa	8,70
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	16,8	1610 / 250 Pa	10,80
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	22,5	2150 / 250 Pa	11,50
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	28,0	2685 / 250 Pa	13,20
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	33,8	3225 / 250 Pa	15,80


HEPA FILTERS

Absolute HEPA Filters Galvanized Frame - 292 mm

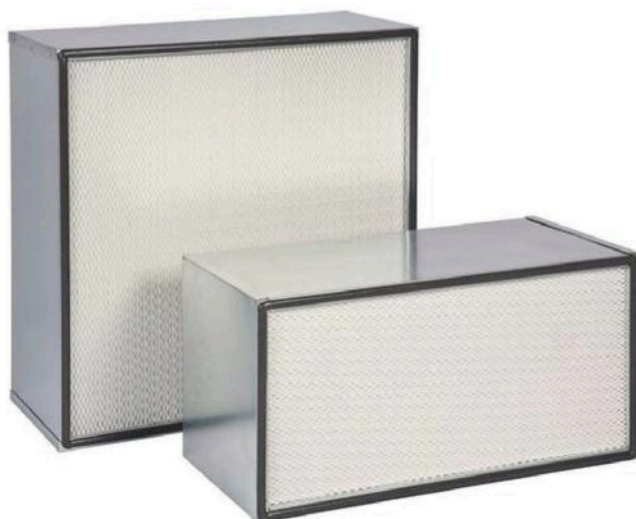

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermo plasticth reads and media pack is placed into Galvanized or Aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

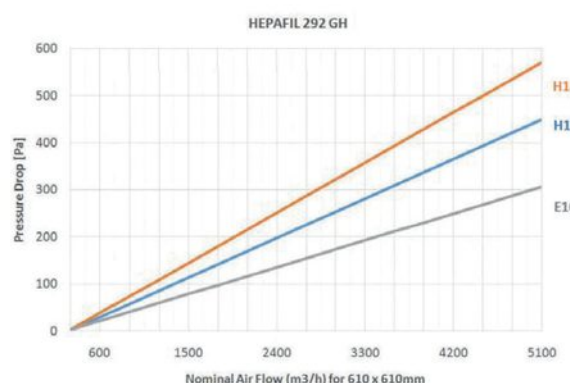

Special Features

Filter Type - HEPA Absolute Filter

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Applications

- Filtration of incoming, outgoing and recirculation air in ventilation systems such as Clean Rooms, Operating Theatres, Laboratories.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	G	G:Galvanized
Pleat Height	H	H:150mm
Protection Mesh	X	X:No T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	6,2	1100 / 250 Pa	4,40
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	12,5	2200 / 250 Pa	8,20
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	14,0	2470 / 250 Pa	9,50
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	18,7	3300 / 250 Pa	11,80
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	25,0	4400 / 250 Pa	12,50
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	31,2	5495 / 250 Pa	14,50
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	37,5	6600 / 250 Pa	17,10

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	6,2	630 / 250 Pa	4,40
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	12,5	1260 / 250 Pa	8,20
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	14,0	1415 / 250 Pa	9,50
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	18,7	1900 / 250 Pa	11,80
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	25,0	2500 / 250 Pa	12,50
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	31,2	3120 / 250 Pa	14,50
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	37,5	3750 / 250 Pa	17,10

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	5,5	565 / 250 Pa	4,40
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	11,3	1130 / 250 Pa	8,20
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	12,5	1280 / 250 Pa	9,50
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	16,8	1700 / 250 Pa	11,80
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	22,5	2260 / 250 Pa	12,50
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	28,0	2820 / 250 Pa	14,50
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	33,8	3390 / 250 Pa	17,10


HEPA FILTERS

Absolute HEPA Filters Aluminium Frame - 292 mm

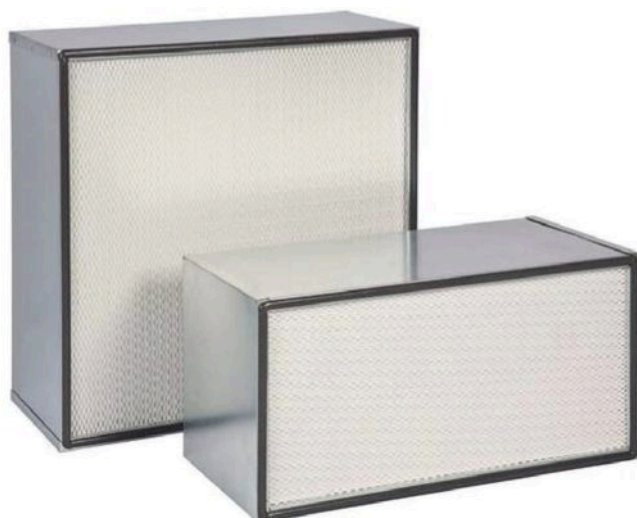

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermoplastic resins and media pack is placed into Galvanized or Aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

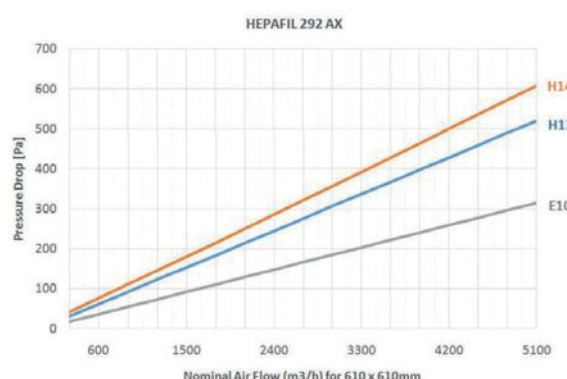

Special Features

Filter Type - Absolute HEPA Filter

Filter Media - Micro Glass Fibre

Frame - Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

➔ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Product Code

YAFI HF 292

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat Height	X	X:135mm
Protection Mesh	T	T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	5,5	1050 / 250 Pa	3,80
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	11,3	2100 / 250 Pa	7,20
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	12,5	2360 / 250 Pa	8,00
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	16,8	3150 / 250 Pa	10,00
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	22,5	4200 / 250 Pa	11,00
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	28,0	5245 / 250 Pa	12,50
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	33,8	6300 / 250 Pa	14,00

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	5,5	600 / 250 Pa	3,80
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	11,3	1200 / 250 Pa	7,20
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	12,5	1350 / 250 Pa	8,00
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	16,8	1800 / 250 Pa	10,00
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	22,5	2400 / 250 Pa	11,00
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	28,0	3000 / 250 Pa	12,50
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	33,8	3600 / 250 Pa	14,00

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	5,5	550 / 250 Pa	3,80
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	11,3	1075 / 250 Pa	7,20
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	12,5	1210 / 250 Pa	8,00
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	16,8	1610 / 250 Pa	10,00
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	22,5	2150 / 250 Pa	11,00
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	28,0	2685 / 250 Pa	12,50
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	33,8	3225 / 250 Pa	14,00


HEPA FILTERS

Absolute HEPA Filters Aluminium Frame - 292 mm

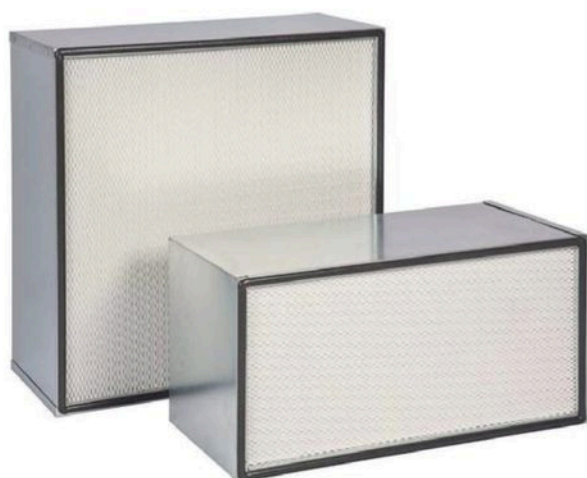

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diff users of hospitals, laboratories and clean-rooms. Glass fibre paper folded with thermoplastic resins and media pack is placed into Galvanized or Aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

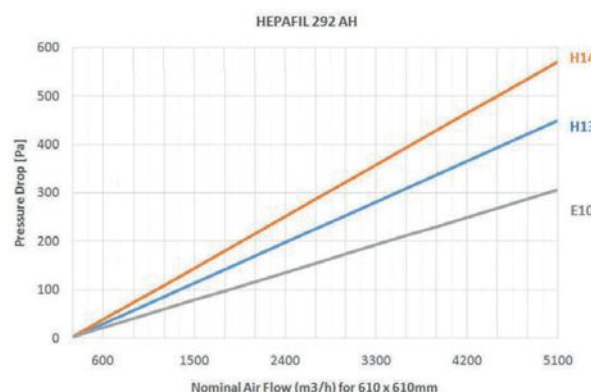

Special Features

Filter Type - Absolute HEPA Filter

Filter Media - Micro Glass

Fibre Frame - Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Applications

- HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Product Code

YAFI HF 292

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat Height	H	H:150mm
Protection Mesh	T	T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	6,2	1100 / 250 Pa	4,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	12,5	2200 / 250 Pa	7,50
YAFI HF 292-457/457/292-E10	457 x 457 x 292	E10 - 85,00 %	14,0	2470 / 250 Pa	8,70
YAFI HF 292-457/610/292-E10	457 x 610 x 292	E10 - 85,00 %	18,7	3300 / 250 Pa	10,80
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	25,0	4400 / 250 Pa	11,50
YAFI HF 292-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	31,2	5495 / 250 Pa	13,20
YAFI HF 292-610/915/292-E10	610 x 915 x 292	E10 - 85,00 %	37,5	6600 / 250 Pa	15,80

H13					
YAFI HF 292-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	6,2	630 / 250 Pa	4,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	12,5	1260 / 250 Pa	7,50
YAFI HF 292-457/457/292-H13	457 x 457 x 292	H13 - 99,95 %	14,0	1415 / 250 Pa	8,70
YAFI HF 292-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	18,7	1900 / 250 Pa	10,80
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	25,0	2500 / 250 Pa	11,50
YAFI HF 292-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	31,2	3120 / 250 Pa	13,20
YAFI HF 292-610/915/292-H13	610 x 915 x 292	H13 - 99,95 %	37,5	3750 / 250 Pa	15,80

H14					
YAFI HF 292-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	6,2	565 / 250 Pa	4,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	12,5	1130 / 250 Pa	7,50
YAFI HF 292-457/457/292-H14	457 x 457 x 292	H14 - 99,995 %	14,0	1280 / 250 Pa	8,70
YAFI HF 292-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	18,7	1700 / 250 Pa	10,80
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	25,0	2260 / 250 Pa	11,50
YAFI HF 292-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	31,2	2820 / 250 Pa	13,20
YAFI HF 292-610/915/292-H14	610 x 915 x 292	H14 - 99,995 %	37,5	3390 / 250 Pa	15,80


HEPA FILTERS

Rigid Bag Filter Plastic Frame 4V | EPA & HEPA



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermoplastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

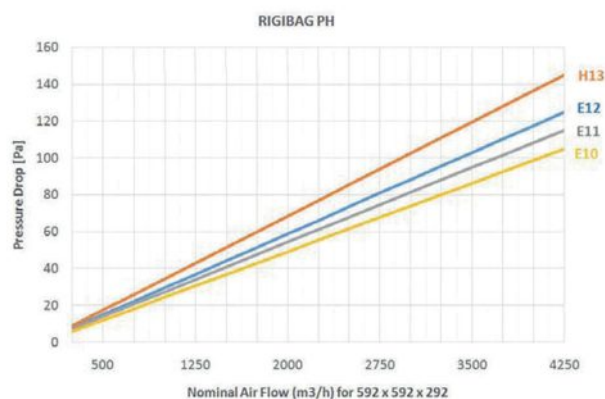

Special Features

- Filter Type** - W Compact Hepa Filter
- Filter Media** - Micro Glass Fibre
- Frame** - Plastic Frame (Polypropylene)
- Seperators** - Thermoplastic glue beads
- Bonding** - 2 component polyurethane
- Final Pressure Drop** - 600 Pa
- Max. Temperature** - 80 °C

Advantages

- Low Energy Consumption with close pleats
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Light and easy maintenance through handles

Applications

- Air conditioning applications or industrial processing systems

Product Code YAFI HRF

Filter Type	WH W Compact Hepa filter	
Frame	P	P:Plastic
Pleat Height	H	H:25mm - hepa grade
Protection Mesh	T	T:Single plastic
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822 E10 to H14	

Product Code	Dimensions (WxHxD)	Class EN 779	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
292-E10					
YAFI HRF-287/592/292-E10	287x592x292	E10	9,0	2000 / 200	5,00
YAFI HRF-490/592/292-E10	490x592x292	E10	14,5	3300 / 200	7,00
YAFI HRF-592/592/292-E10	592x592x292	E10	18,0	4000 / 200	8,00
292-E11					
YAFI HRF-287/592/292-E11	287x592x292	E11	9,0	1700 / 190	5,00
YAFI HRF-490/592/292-E11	490x592x292	E11	14,5	2800 / 190	7,00
YAFI HRF-592/592/292-E11	592x592x292	E11	18,0	3400 / 190	8,00
292-E12					
YAFI HRF-287/592/292-E12	287x592x292	E12	9,0	1500 / 270	5,00
YAFI HRF-490/592/292-E12	490x592x292	E12	14,5	2470 / 270	7,00
YAFI HRF-592/592/292-E12	592x592x292	E12	18,0	3400 / 270	8,00
292-H13					
YAFI HRF-287/592/292-H13	287x592x292	H13	9,0	1250 / 250	5,00
YAFI HRF-490/592/292-H13	490x592x292	H13	14,5	2000 / 250	7,00
YAFI HRF-592/592/292-H13	592x592x292	H13	18,0	2500 / 250	8,00


HEPA FILTERS

Rigid Bag FilterMetal Frame 4V | EPA & HEPA



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermoplastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

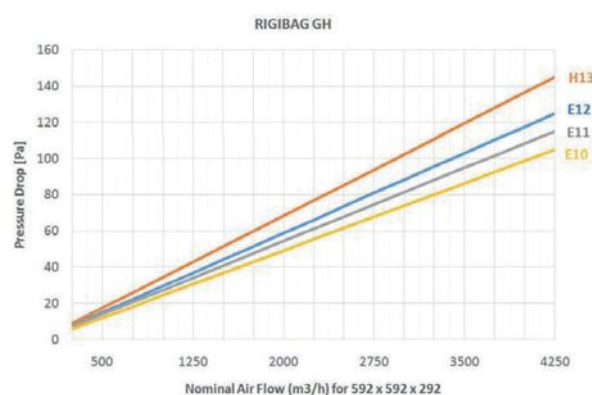

Special Features

Filter Type - W Compact Hepa Filter

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Low Energy Consumption with close pleats
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Customised sizes can be produced.

Applications

- Air conditioning applications or industrial processing systems

Product Code

YAFI HRF

Filter Type	WH W Bank Hepa filter
Frame	G G:Galvanized steel
Pleat Height	H H:25mm - hepa grade
Protection Mesh	T T:Single metal mesh
Gasket	P E:EPDM P:Polyurethane
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Class EN 779	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
292-E10					
YAFI HRF-287/592/292-E10	287x592x292	E10	9,0	2000 / 200	7,00
YAFI HRF-490/592/292-E10	490x592x292	E10	14,5	3300 / 200	11,00
YAFI HRF-592/592/292-E10	592x592x292	E10	18,0	4000 / 200	12,00
292-E11					
YAFI HRF-287/592/292-E11	287x592x292	E11	9,0	3400 / 190	7,00
YAFI HRF-490/592/292-E11	490x592x292	E11	14,5	2800 / 190	11,00
YAFI HRF-592/592/292-E11	592x592x292	E11	18,0	1700 / 190	12,00
292-E12					
YAFI HRF-287/592/292-E12	287x592x292	E12	9,0	1500 / 270	7,00
YAFI HRF-490/592/292-E12	490x592x292	E12	14,5	2470 / 270	11,00
YAFI HRF-592/592/292-E12	592x592x292	E12	18,0	3000 / 270	12,00
292-E13					
YAFI HRF-287/592/292-H13	287x592x292	H13	9,0	1250 / 250	7,00
YAFI HRF-490/592/292-H13	490x592x292	H13	14,5	2000 / 250	11,00
YAFI HRF-592/592/292-H13	592x592x292	H13	18,0	2500 / 250	12,00


HEPA FILTERS

Galvanized Frame Frame Depth 292 mm



Description

Deep pleat filters are designed for high efficiency filtration and high air flow rate for use in hospitals, pharmaceutical industry etc. Instead of traditional mini pleat design corrugated aluminium is used as separator. These separators with doubled edge gives stiffness to the filter and filter can resist to high operation conditions. Made of galvanized sheet with front flange and double flange model is also available on request.

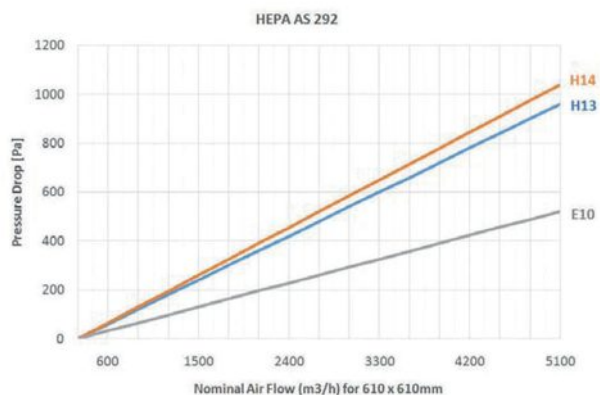

Special Features

Filter Type - Aluminum Separator Panel Filter

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel

Separators - Corrugated Aluminum

Bonding - 2 component polyurethane

Final Pressure Drop - 450 Pa

Max. Temperature - 350 °C

Applications

➔ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Product Code

YAFI HF 292

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter

Filter Type	HS	Aluminium Sep. Hepa filter
Frame	G	G: Galvanized steel
Pleat Height	S	S: Standard H: High air flow
Flange Number	X	X: Without T: Single D: Double
Gasket	P	X: No E: EPDM P: Polyurethane
Efficiency	EN1822	E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF 292-287/592/292-E10	287 x 592 x 292	E10 - 85,00 %	7,0	750 / 130 Pa	7,00
YAFI HF 292-592/592/292-E10	592 x 592 x 292	E10 - 85,00 %	14,0	1500 / 130 Pa	11,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	7,0	750 / 130 Pa	7,50
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	14,0	1500 / 130 Pa	12,00
YAFI HF 292-287/592/292-E10	287 x 592 x 292	E10 - 85,00 %	11,0	1250 / 130 Pa	8,50
YAFI HF 292-592/592/292-E10	592 x 592 x 292	E10 - 85,00 %	22,0	2500 / 130 Pa	13,00
YAFI HF 292-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	11,0	1250 / 130 Pa	9,00
YAFI HF 292-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	22,0	2500 / 130 Pa	13,50

H13					
YAFI HF 292-287/592/292-H13	287 x 592 x 292	H13 - 99,95 %	7,0	750 / 240 Pa	7,00
YAFI HF 292-592/592/292-H13	592 x 592 x 292	H13 - 99,95 %	14,0	1500 / 240 Pa	11,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	7,0	750 / 240 Pa	7,50
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	14,0	1500 / 240 Pa	12,00
YAFI HF 292-287/592/292-H13	287 x 592 x 292	H13 - 99,95 %	11,0	1250 / 240 Pa	8,50
YAFI HF 292-592/592/292-H13	592 x 592 x 292	H13 - 99,95 %	22,0	2500 / 240 Pa	13,00
YAFI HF 292-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	11,0	1250 / 240 Pa	9,00
YAFI HF 292-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	22,0	2500 / 240 Pa	13,50

H14					
YAFI HF 292-287/592/292-H14	287 x 592 x 292	H14 - 99,995 %	7,0	750 / 260 Pa	7,00
YAFI HF 292-592/592/292-H14	592 x 592 x 292	H14 - 99,995 %	14,0	1500 / 260 Pa	11,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	7,0	750 / 260 Pa	7,50
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	14,0	1500 / 260 Pa	12,00
YAFI HF 292-287/592/292-H14	287 x 592 x 292	H14 - 99,995 %	7,0	1250 / 260 Pa	8,50
YAFI HF 292-592/592/292-H14	592 x 592 x 292	H14 - 99,995 %	14,0	2500 / 260 Pa	13,00
YAFI HF 292-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	7,0	1250 / 260 Pa	9,00
YAFI HF 292-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	14,0	2500 / 260 Pa	13,50


HEPA FILTERS

Absolute HEPA Filters High Capacity V Type - Standard



Description

Designed as very high efficiency final filters for very high air flow rate for use in air conditioning systems, housing- ducts or diffusers of hospitals, laboratories and clean rooms. Multi-V panels which allows high media area, low pressure drop and high dust holding capacity in same the same filter dimensions. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

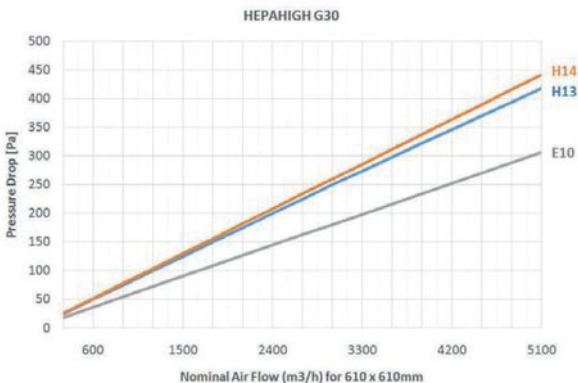

Special Features

- Filter Type** - Absolute HEPA Filter V Type
- Filter Media** - Micro Glass Fibre
- Frame** - Galvanized Steel Frame
- Seperators** - Thermoplastic glue beads
- Bonding** - 2 component polyurethane
- Gasket** - Continuous poured gasket or EPDM
- Final Pressure Drop** - 600 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Compact design suitable for high air flow
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Individual test certificate is provided with filter
- ➔ Ergonomic handle

Applications

- ➔ High efficiency final filtration in air conditioning systems

Product Code

YAFI HF

Filter Type	HH Hepa filter High Capacity
Frame	G G:Galvanized
Gasket	P E:EPDM P:Polyurethane
Air flow capacity	30 Air flow rate: 3400m³/h
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF-30-287/592/292-E10	287 x 592 x 292	E10 - 85 %	17,0	2500 / 250 Pa	6,80
YAFI HF-30-592/592/292-E10	592 x 592 x 292	E10 - 85 %	34,0	5000 / 250 Pa	23,00
YAFI HF-30-305/305/292-E10	305 x 305 x 292	E10 - 85 %	9,0	1250 / 250 Pa	7,00
YAFI HF-30-305/610/292-E10	305 x 610 x 292	E10 - 85 %	17,5	2500 / 250 Pa	12,80
YAFI HF-30-457/610/292-E10	457 x 610 x 292	E10 - 85 %	26,0	3750 / 250 Pa	21,00
YAFI HF-30-610/610/292-E10	610 x 610 x 292	E10 - 85 %	35,0	5000 / 250 Pa	23,50
YAFI HF-30-610/762/292-E10	610 x 762 x 292	E10 - 85 %	45,0	6250 / 250 Pa	25,40

H13					
YAFI HF-30-287/592/292-H13	287 x 592 x 292	H13 - 99,95 %	17,0	1700 / 250 Pa	6,80
YAFI HF-30-592/592/292-H13	592 x 592 x 292	H13 - 99,95 %	34,0	3400 / 250 Pa	23,00
YAFI HF-30-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	9,0	850 / 250 Pa	7,00
YAFI HF-30-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	17,5	1700 / 250 Pa	12,80
YAFI HF-30-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	26,0	2550 / 250 Pa	21,00
YAFI HF-30-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	35,0	3400 / 250 Pa	23,50
YAFI HF-30-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	45,0	4250 / 250 Pa	25,40

H14					
YAFI HF-30-287/592/292-H14	287 x 592 x 292	H14 - 99,995 %	17,0	1400 / 250 Pa	6,80
YAFI HF-30-592/592/292-H14	592 x 592 x 292	H14 - 99,995 %	34,0	2800 / 250 Pa	23,00
YAFI HF-30-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	9,0	700 / 250 Pa	7,00
YAFI HF-30-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	17,5	1400 / 250 Pa	12,80
YAFI HF-30-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	26,0	2100 / 250 Pa	21,00
YAFI HF-30-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	35,0	2800 / 250 Pa	23,50
YAFI HF-30-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	45,0	3600 / 250 Pa	25,40


HEPA FILTERS

Absolute HEPA Filters High Capacity V Type – MAX.Flow



Description

Designed as very high efficiency final filters for very high air flow rate for use in air conditioning systems, housing- ducts or diffusers of hospitals, laboratories and clean rooms. Multi-V panels which allows high media area, low pressure drop and high dust holding capacity in same the same filter dimensions. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

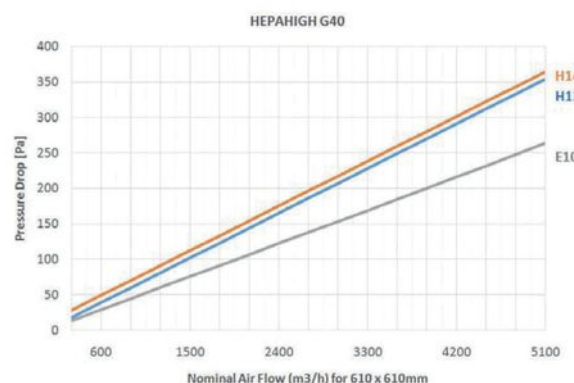

Special Features

Filter Type - Absolute HEPA Filter V Type

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

→ High efficiency final filtration
in air conditioning systems

Product Code

YAFI HF

Filter Type	HH Hepa filter High Capacity
Frame	G G:Galvanized
Gasket	P E:EPDM P:Polyurethane
Air flow capacity	40 Air flow rate: 4000m³/h
Efficiency	EN1822 E10 to H14

Advantages

- Compact design suitable for high air flow
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Individual test certificate is provided with filter
- Ergonomic handle

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF-40-287/592/292-E10	287 x 592 x 292	E10 - 85,00 %	20,0	2750 / 250 Pa	7,00
YAFI HF-40-592/592/292-E10	592 x 592 x 292	E10 - 85,00 %	40,0	5500 / 250 Pa	23,50
YAFI HF-40-305/305/292-E10	305 x 305 x 292	E10 - 85,00 %	10,0	1375 / 250 Pa	7,80
YAFI HF-40-305/610/292-E10	305 x 610 x 292	E10 - 85,00 %	20,0	2750 / 250 Pa	13,50
YAFI HF-40-360/430/292-E10	457 x 610 x 292	E10 - 85,00 %	30,0	4120 / 250 Pa	22,00
YAFI HF-40-610/610/292-E10	610 x 610 x 292	E10 - 85,00 %	40,0	5500 / 250 Pa	24,50
YAFI HF-40-610/762/292-E10	610 x 762 x 292	E10 - 85,00 %	50,0	6800 / 250 Pa	26,80

H13					
YAFI HF-40-287/592/292-H13	287 x 592 x 292	H13 - 99,95 %	20,0	2000 / 250 Pa	7,00
YAFI HF-40-592/592/292-H13	592 x 592 x 292	H13 - 99,95 %	40,0	4000 / 250 Pa	23,50
YAFI HF-40-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	10,0	1000 / 250 Pa	7,80
YAFI HF-40-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	20,0	2000 / 250 Pa	13,50
YAFI HF-40-360/430/292-E10	457 x 610 x 292	H13 - 99,95 %	30,0	3000 / 250 Pa	22,00
YAFI HF-40-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	40,0	4000 / 250 Pa	24,50
YAFI HF-40-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	50,0	5000 / 250 Pa	26,80

H14					
YAFI HF-40-287/592/292-H14	287 x 592 x 292	H14 - 99,995 %	20,0	1600 / 280 Pa	7,00
YAFI HF-40-592/592/292-H14	592 x 592 x 292	H14 - 99,995 %	40,0	3200 / 280 Pa	23,50
YAFI HF-40-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	10,0	800 / 280 Pa	7,80
YAFI HF-40-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	20,0	1600 / 280 Pa	13,50
YAFI HF-40-360/430/292-E10	457 x 610 x 292	H14 - 99,995 %	30,0	2400 / 280 Pa	22,00
YAFI HF-40-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	40,0	3200 / 280 Pa	24,50
YAFI HF-40-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	50,0	4000 / 280 Pa	26,80


HEPA FILTERS

Absolute HEPA Filters High Capacity V Type - Standard Plastic Frame



Description

Designed as very high efficiency final filters for very high air flow rate for use in air conditioning systems, housing- ducts or diffusers of hospitals, laboratories and clean rooms. Multi-V panels which allows high media area, low pressure drop and high dust holding capacity in same the same filter dimensions. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

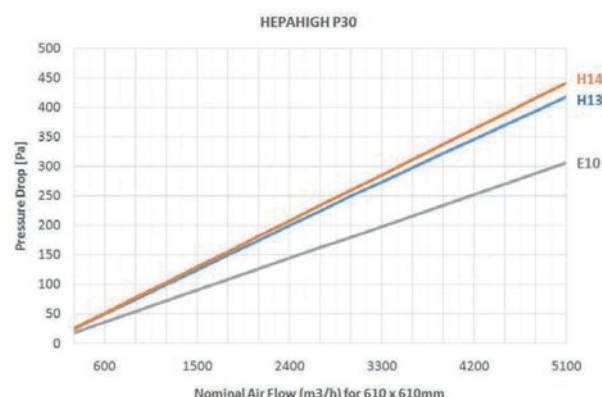

Special Features

Filter Type - Absolute HEPA Filter V Type

Filter Media - Micro Glass Fibre

Frame - Plastic Frame (Polypropylene)

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

→ High efficiency final filtration
in air conditioning systems

Product Code

YAFI HF

Advantages

- Compact design suitable for high air flow
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Individual test certificate is provided with filter
- Ergonomic handle

Filter Type	HH Hepa filter High Capacity
Frame	P P:Plastic
Gasket	P E:EPDM P:Polyurethane
Air flow capacity	30 Air flow rate: 3000m³/h
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF-30-305/305/292-E10	305 x 305 x 292	E10 - 85 %	9,0	1250 / 250 Pa	6,50
YAFI HF-30-305/610/292-E10	305 x 610 x 292	E10 - 85 %	17,5	2500 / 250 Pa	12,00
YAFI HF-30-457/610/292-E10	457 x 610 x 292	E10 - 85 %	26,0	3750 / 250 Pa	19,00
YAFI HF-30-610/610/292-E10	610 x 610 x 292	E10 - 85 %	35,0	5000 / 250 Pa	21,50
YAFI HF-30-610/762/292-E10	610 x 762 x 292	E10 - 85 %	45,0	6250 / 250 Pa	22,40

H13					
YAFI HF-30-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	9,0	850 / 250 Pa	6,50
YAFI HF-30-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	17,5	1700 / 250 Pa	12,00
YAFI HF-30-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	26,0	2550 / 250 Pa	19,00
YAFI HF-30-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	35,0	3400 / 250 Pa	21,50
YAFI HF-30-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	45,0	4250 / 250 Pa	22,40

H14					
YAFI HF-30-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	9,0	700 / 250 Pa	6,50
YAFI HF-30-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	17,5	1400 / 250 Pa	12,00
YAFI HF-30-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	26,0	2100 / 250 Pa	19,00
YAFI HF-30-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	35,0	2800 / 250 Pa	21,50
YAFI HF-30-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	45,0	3600 / 250 Pa	22,40


HEPA FILTERS

Absolute HEPA Filters High Capacity V Type - Max.Flow Plastic Frame



Description

Designed as very high efficiency final filters for very high air flow rate for use in air conditioning systems, housing- ducts or diffusers of hospitals, laboratories and clean rooms. Multi-V panels which allows high media area, low pressure drop and high dust holding capacity in same the same filter dimensions. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

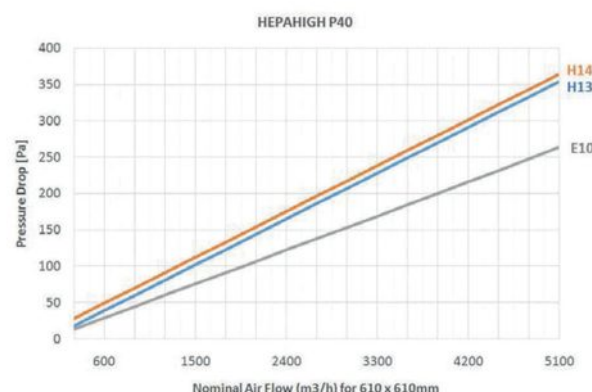

Special Features

Filter Type - Absolute HEPA Filter V Type

Filter Media - Micro Glass Fibre

Frame - Plastic Frame (Polypropylene)

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications

→ High efficiency final filtration in air conditioning systems

Product Code

YAFI HF

Advantages

- Compact design suitable for high air flow
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Individual test certificate is provided with filter
- Ergonomic handle

Filter Type	HH Hepa filter High Capacity
Frame	P P:Plastic
Gasket	P E:EPDM P:Polyurethane
Air flow capacity	40 Air flow rate: 4000m³/h
Efficiency	EN1822 E10 to H14

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
E10					
YAFI HF-40-305/305/292-E10	305 x 305 x 292	E10 - 85 %	9,3	1375 / 250 Pa	6,80
YAFI HF-40-305/610/292-E10	305 x 610 x 292	E10 - 85 %	18,5	2750 / 250 Pa	12,50
YAFI HF-40-457/610/292-E10	457 x 610 x 292	E10 - 85 %	27,5	4120 / 250 Pa	19,80
YAFI HF-40-610/610/292-E10	610 x 610 x 292	E10 - 85 %	37,0	5500 / 250 Pa	22,00
YAFI HF-40-610/762/292-E10	610 x 762 x 292	E10 - 85 %	46,0	6800 / 250 Pa	23,00

H13					
YAFI HF-40-305/305/292-H13	305 x 305 x 292	H13 - 99,95 %	9,3	1000 / 280 Pa	6,80
YAFI HF-40-305/610/292-H13	305 x 610 x 292	H13 - 99,95 %	18,5	2000 / 280 Pa	12,50
YAFI HF-40-457/610/292-H13	457 x 610 x 292	H13 - 99,95 %	27,5	3000 / 280 Pa	19,80
YAFI HF-40-610/610/292-H13	610 x 610 x 292	H13 - 99,95 %	37,0	4000 / 280 Pa	22,00
YAFI HF-40-610/762/292-H13	610 x 762 x 292	H13 - 99,95 %	46,0	5000 / 280 Pa	23,00

H14					
YAFI HF-40-305/305/292-H14	305 x 305 x 292	H14 - 99,995 %	9,3	800 / 280 Pa	6,80
YAFI HF-40-305/610/292-H14	305 x 610 x 292	H14 - 99,995 %	18,5	1600 / 280 Pa	12,50
YAFI HF-40-457/610/292-H14	457 x 610 x 292	H14 - 99,995 %	27,5	2400 / 280 Pa	19,80
YAFI HF-40-610/610/292-H14	610 x 610 x 292	H14 - 99,995 %	37,0	3200 / 280 Pa	22,00
YAFI HF-40-610/762/292-H14	610 x 762 x 292	H14 - 99,995 %	46,0	4000 / 280 Pa	23,00

HEPA FILTERS

Absolute HEPA Filters High Capacity V Type - NBC Grade



Special Features

Filter Type - Absolute HEPA Filter V Type

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Silicon

Final Pressure Drop - 600 Pa

Max. Temperature - 120 °C

Applications


→ Designed for the special systems such as in supply and exhaust air systems in industry and nuclear installations.

Advantages

- Compact design suitable for high air flow
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Individual test certificate is provided with filter
- Ergonomic handle

Description

Designed as very high efficiency final filters for very high air flow rate for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories, clean rooms and nuclear installations. Multi-V panels which allows high media area, low pressure drop and high dust holding capacity in same the same filter dimensions. One piece gasket is used on to frame in order to guarantee a perfect seal. Each single filter is tested according to EN 1822.

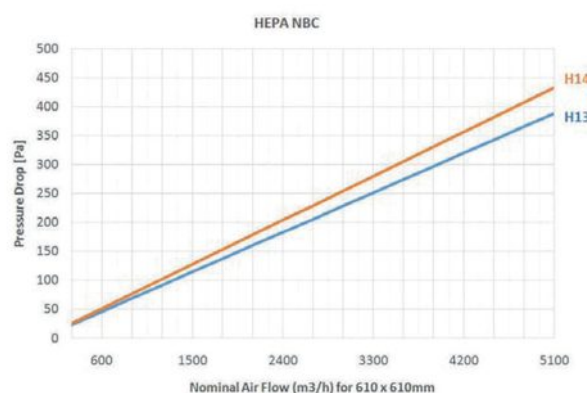

Product Code

YAFI HF

Filter Type	HN Hepa filter NBC grade
Frame	G G:Galvanized
Gasket	S S:Silicone
Air flow capacity	40 Air flow rate: 4000m³/h
Efficiency	EN1822 H13

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
NBC 40					
YAFI HF-40-287/592/292-NBC	287 x 592 x 292	H13 - 99,95 % - NBC	18,5	2000 / 300 Pa	7,00
YAFI HF-40-592/592/292-NBC	592 x 592 x 292	H13 - 99,95 % - NBC	37,0	4000 / 300 Pa	23,00
YAFI HF-40-305/305/292-NBC	305 x 305 x 292	H13 - 99,95 % - NBC	9,3	1000 / 300 Pa	7,80
YAFI HF-40-305/610/292-NBC	305 x 610 x 292	H13 - 99,95 % - NBC	18,5	2000 / 300 Pa	13,50
YAFI HF-40-457/610/292-NBC	457 x 610 x 292	H13 - 99,95 % - NBC	27,5	3000 / 300 Pa	22,00
YAFI HF-40-610/610/292-NBC	610 x 610 x 292	H13 - 99,95 % - NBC	37,0	4000 / 300 Pa	24,50
YAFI HF-40-610/762/292-NBC	610 x 762 x 292	H13 - 99,95 % - NBC	46,0	5000 / 300 Pa	26,80

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 30mm



Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass

Fibre Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications


→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

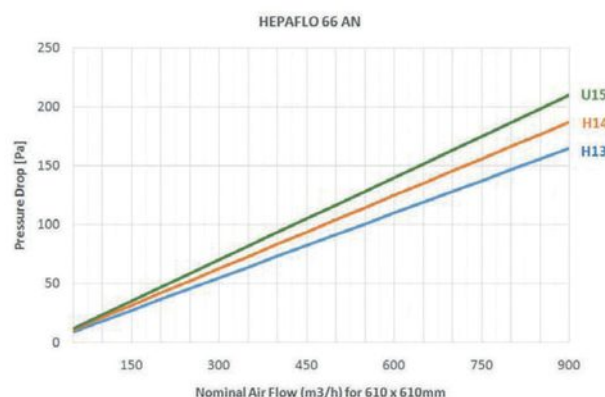

Product Code

YAFI HF 30

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	S	S:25mm
Protektion mesh	D	T:Sinle D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 30-305/305/30-H13	305 x 305 x 30	H13 - 99,95 %	1,3	150 / 155 Pa	1,00
YAFI HF 30-305/610/30-H13	305 x 610 x 30	H13 - 99,95 %	2,4	300 / 155 Pa	1,60
YAFI HF 30-457/457/30-H13	457 x 457 x 30	H13 - 99,95 %	2,7	340 / 155 Pa	1,70
YAFI HF 30-457/610/30-H13	457 x 610 x 30	H13 - 99,95 %	3,6	450 / 155 Pa	1,90
YAFI HF 30-535/535/30-H13	535 x 535 x 30	H13 - 99,95 %	3,7	465 / 155 Pa	2,00
YAFI HF 30-575/575/30-H13	575 x 575 x 30	H13 - 99,95 %	4,2	535 / 155 Pa	2,20
YAFI HF 30-610/610/30-H13	610 x 610 x 30	H13 - 99,95 %	4,7	600 / 155 Pa	2,40
YAFI HF 30-610/762/30-H13	610 x 762 x 30	H13 - 99,95 %	5,8	750 / 155 Pa	3,20
YAFI HF 30-610/915/30-H13	610 x 915 x 30	H13 - 99,95 %	7,1	900 / 155 Pa	3,90
YAFI HF 30-762/762/30-H13	762 x 762 x 30	H13 - 99,95 %	7,4	940 / 155 Pa	4,20
YAFI HF 30-915/915/30-H13	915 x 915 x 30	H13 - 99,95 %	10,7	1350 / 155 Pa	5,60
YAFI HF 30-610/1220/30-H13	610 x 1220 x 30	H13 - 99,95 %	9,5	1200 / 155 Pa	5,20

H14					
YAFI HF 30-305/305/30-H14	305 x 305 x 30	H14 - 99,995 %	1,3	150 / 185 Pa	1,00
YAFI HF 30-305/610/30-H14	305 x 610 x 30	H14 - 99,995 %	2,4	300 / 185 Pa	1,60
YAFI HF 30-457/457/30-H14	457 x 457 x 30	H14 - 99,995 %	2,7	340 / 185 Pa	1,70
YAFI HF 30-457/610/30-H14	457 x 610 x 30	H14 - 99,995 %	3,6	450 / 185 Pa	1,90
YAFI HF 30-535/535/30-H14	535 x 535 x 30	H14 - 99,995 %	3,7	465 / 185 Pa	2,00
YAFI HF 30-575/575/30-H14	575 x 575 x 30	H14 - 99,995 %	4,2	535 / 185 Pa	2,20
YAFI HF 30-610/610/30-H14	610 x 610 x 30	H14 - 99,995 %	4,7	600 / 185 Pa	2,40
YAFI HF 30-610/762/30-H14	610 x 762 x 30	H14 - 99,995 %	5,8	750 / 185 Pa	3,20
YAFI HF 30-610/915/30-H14	610 x 915 x 30	H14 - 99,995 %	7,1	900 / 185 Pa	3,90
YAFI HF 30-762/762/30-H14	762 x 762 x 30	H14 - 99,995 %	7,4	940 / 185 Pa	4,20
YAFI HF 30-915/915/30-H14	915 x 915 x 30	H14 - 99,995 %	10,7	1350 / 185 Pa	5,60
YAFI HF 30-610/1220/30-H14	610 x 1220 x 30	H14 - 99,995 %	9,5	1200 / 185 Pa	5,20

U15					
YAFI HF 30-305/305/30-U15	305 x 305 x 30	U15 - 99,9995 %	1,3	150 / 215 Pa	1,00
YAFI HF 30-305/610/30-U15	305 x 610 x 30	U15 - 99,9995 %	2,4	300 / 215 Pa	1,60
YAFI HF 30-457/457/30-U15	457 x 457 x 30	U15 - 99,9995 %	2,7	340 / 215 Pa	1,70
YAFI HF 30-457/610/30-U15	457 x 610 x 30	U15 - 99,9995 %	3,6	450 / 215 Pa	1,90
YAFI HF 30-535/535/30-U15	535 x 535 x 30	U15 - 99,9995 %	3,7	465 / 215 Pa	2,00
YAFI HF 30-575/575/30-U15	575 x 575 x 30	U15 - 99,9995 %	4,2	535 / 215 Pa	2,20
YAFI HF 30-610/610/30-U15	610 x 610 x 30	U15 - 99,9995 %	4,7	600 / 215 Pa	2,40
YAFI HF 30-610/762/30-U15	610 x 762 x 30	U15 - 99,9995 %	5,8	750 / 215 Pa	3,20
YAFI HF 30-610/915/30-U15	610 x 915 x 30	U15 - 99,9995 %	7,1	900 / 215 Pa	3,90
YAFI HF 30-762/762/30-U15	762 x 762 x 30	U15 - 99,9995 %	7,4	940 / 215 Pa	4,20
YAFI HF 30-915/915/30-U15	915 x 915 x 30	U15 - 99,9995 %	10,7	1350 / 215 Pa	5,60
YAFI HF 30-610/1220/30-U15	610 x 1220 x 30	U15 - 99,9995 %	9,5	1200 / 215 Pa	5,20

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 66mm



Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications


→ HEPA-/WLPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

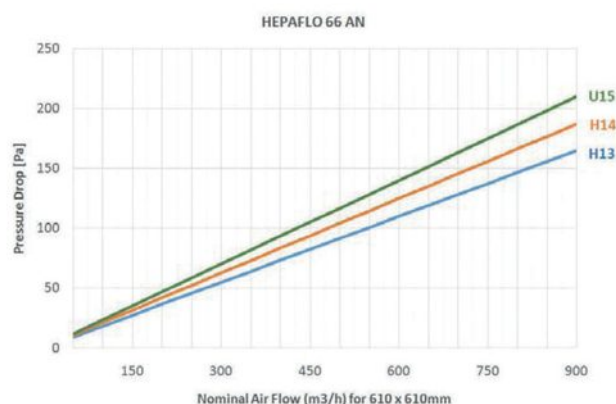

Product Code

YAFI HF 66

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:50mm
Protektion mesh	D	T:Sinle D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 66-305/305/66-H13	305 x 305 x 66	H13 - 99,95 %	2,4	150 / 100 Pa	1,80
YAFI HF 66-305/610/66-H13	305 x 610 x 66	H13 - 99,95 %	4,6	300 / 100 Pa	3,10
YAFI HF 66-457/457/66-H13	457 x 457 x 66	H13 - 99,95 %	5,2	340 / 100 Pa	3,30
YAFI HF 66-457/610/66-H13	457 x 610 x 66	H13 - 99,95 %	6,8	450 / 100 Pa	3,60
YAFI HF 66-535/535/66-H13	535 x 535 x 66	H13 - 99,95 %	7,0	465 / 100 Pa	3,70
YAFI HF 66-575/575/66-H13	575 x 575 x 66	H13 - 99,95 %	8,0	535 / 100 Pa	4,00
YAFI HF 66-610/610/66-H13	610 x 610 x 66	H13 - 99,95 %	9,0	600 / 100 Pa	4,20
YAFI HF 66-610/762/66-H13	610 x 762 x 66	H13 - 99,95 %	11,2	750 / 100 Pa	5,20
YAFI HF 66-610/915/66-H13	610 x 915 x 66	H13 - 99,95 %	13,5	900 / 100 Pa	6,60
YAFI HF 66-762/762/66-H13	762 x 762 x 66	H13 - 99,95 %	14,0	940 / 100 Pa	7,00
YAFI HF 66-915/915/66-H13	915 x 915 x 66	H13 - 99,95 %	20,3	1350 / 100 Pa	9,60
YAFI HF 66-610/1220/66-H13	610 x 1220 x 66	H13 - 99,95 %	18,0	1200 / 100 Pa	8,80

H14					
YAFI HF 66-305/305/66-H14	305 x 305 x 66	H14 - 99,995 %	2,4	150 / 125 Pa	1,80
YAFI HF 66-305/610/66-H14	305 x 610 x 66	H14 - 99,995 %	4,6	300 / 125 Pa	3,10
YAFI HF 66-457/457/66-H14	457 x 457 x 66	H14 - 99,995 %	5,2	340 / 125 Pa	3,30
YAFI HF 66-457/610/66-H14	457 x 610 x 66	H14 - 99,995 %	6,8	450 / 125 Pa	3,60
YAFI HF 66-535/535/66-H14	535 x 535 x 66	H14 - 99,995 %	7,0	465 / 125 Pa	3,70
YAFI HF 66-575/575/66-H14	575 x 575 x 66	H14 - 99,995 %	8,0	535 / 125 Pa	4,00
YAFI HF 66-610/610/66-H14	610 x 610 x 66	H14 - 99,995 %	9,0	600 / 125 Pa	4,20
YAFI HF 66-610/762/66-H14	610 x 762 x 66	H14 - 99,995 %	11,2	750 / 125 Pa	5,20
YAFI HF 66-610/915/66-H14	610 x 915 x 66	H14 - 99,995 %	13,5	900 / 125 Pa	6,60
YAFI HF 66-762/762/66-H14	762 x 762 x 66	H14 - 99,995 %	14,0	940 / 125 Pa	7,00
YAFI HF 66-915/915/66-H14	915 x 915 x 66	H14 - 99,995 %	20,3	1350 / 125 Pa	9,60
YAFI HF 66-610/1220/66-H14	610 x 1220 x 66	H14 - 99,995 %	18,0	1200 / 125 Pa	8,80

U15					
YAFI HF 66-305/305/66-U15	305 x 305 x 66	U15 - 99,9995 %	2,4	150 / 140 Pa	1,80
YAFI HF 66-305/610/66-U15	305 x 610 x 66	U15 - 99,9995 %	4,6	300 / 140 Pa	3,10
YAFI HF 66-457/457/66-U15	457 x 457 x 66	U15 - 99,9995 %	5,2	340 / 140 Pa	3,30
YAFI HF 66-457/610/66-U15	457 x 610 x 66	U15 - 99,9995 %	6,8	450 / 140 Pa	3,60
YAFI HF 66-535/535/66-U15	535 x 535 x 66	U15 - 99,9995 %	7,0	465 / 140 Pa	3,70
YAFI HF 66-575/575/66-U15	575 x 575 x 66	U15 - 99,9995 %	8,0	535 / 140 Pa	4,00
YAFI HF 66-610/610/66-U15	610 x 610 x 66	U15 - 99,9995 %	9,0	600 / 140 Pa	4,20
YAFI HF 66-610/762/66-U15	610 x 762 x 66	U15 - 99,9995 %	11,2	750 / 140 Pa	5,20
YAFI HF 66-610/915/66-U15	610 x 915 x 66	U15 - 99,9995 %	13,5	900 / 140 Pa	6,60
YAFI HF 66-762/762/66-U15	762 x 762 x 66	U15 - 99,9995 %	14,0	940 / 140 Pa	7,00
YAFI HF 66-915/915/66-U15	915 x 915 x 66	U15 - 99,9995 %	20,3	1350 / 140 Pa	9,60
YAFI HF 66-610/1220/66-U15	610 x 1220 x 66	U15 - 99,9995 %	18,0	1200 / 140 Pa	8,80

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 69mm

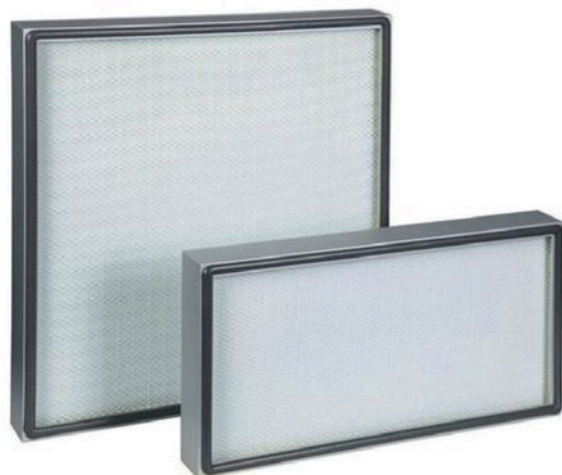

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass

Fibre Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications


→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

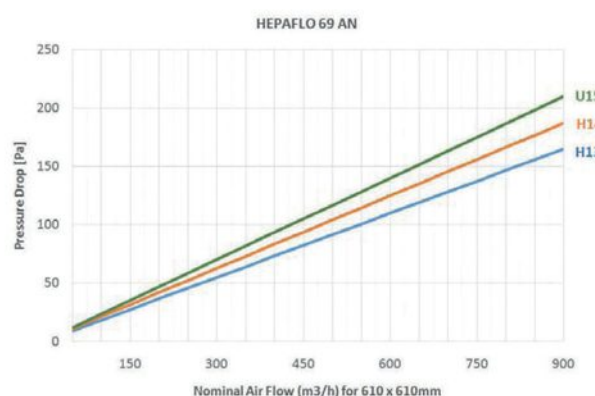

Product Code

YAFI HF 69

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:50mm
Protektion mesh	D	T:Sinle D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 69-305/305/69-H13	305 x 305 x 69	H13 - 99,95 %	2,4	150 / 100 Pa	2,00
YAFI HF 69-305/610/69-H13	305 x 610 x 69	H13 - 99,95 %	4,6	300 / 100 Pa	3,30
YAFI HF 69-457/457/69-H13	457 x 457 x 69	H13 - 99,95 %	5,2	340 / 100 Pa	3,50
YAFI HF 69-457/610/69-H13	457 x 610 x 69	H13 - 99,95 %	6,8	450 / 100 Pa	3,80
YAFI HF 69-535/535/69-H13	535 x 535 x 69	H13 - 99,95 %	7,0	465 / 100 Pa	4,00
YAFI HF 69-575/575/69-H13	575 x 575 x 69	H13 - 99,95 %	8,0	535 / 100 Pa	4,20
YAFI HF 69-610/610/69-H13	610 x 610 x 69	H13 - 99,95 %	9,0	600 / 100 Pa	4,60
YAFI HF 69-610/762/69-H13	610 x 762 x 69	H13 - 99,95 %	11,2	750 / 100 Pa	5,40
YAFI HF 69-610/915/69-H13	610 x 915 x 69	H13 - 99,95 %	13,5	900 / 100 Pa	7,00
YAFI HF 69-762/762/69-H13	762 x 762 x 69	H13 - 99,95 %	14,0	940 / 100 Pa	7,40
YAFI HF 69-915/915/69-H13	915 x 915 x 69	H13 - 99,95 %	20,3	1350 / 100 Pa	10,20
YAFI HF 69-610/1220/69-H13	610 x 1220 x 69	H13 - 99,95 %	18,0	1200 / 100 Pa	9,20

H14					
YAFI HF 69-305/305/69-H14	305 x 305 x 69	H14 - 99,995 %	2,4	150 / 125 Pa	2,00
YAFI HF 69-305/610/69-H14	305 x 610 x 69	H14 - 99,995 %	4,6	300 / 125 Pa	3,30
YAFI HF 69-457/457/69-H14	457 x 457 x 69	H14 - 99,995 %	5,2	340 / 125 Pa	3,50
YAFI HF 69-457/610/69-H14	457 x 610 x 69	H14 - 99,995 %	6,8	450 / 125 Pa	3,80
YAFI HF 69-535/535/69-H14	535 x 535 x 69	H14 - 99,995 %	7,0	465 / 125 Pa	4,00
YAFI HF 69-575/575/69-H14	575 x 575 x 69	H14 - 99,995 %	8,0	535 / 125 Pa	4,20
YAFI HF 69-610/610/69-H14	610 x 610 x 69	H14 - 99,995 %	9,0	600 / 125 Pa	4,60
YAFI HF 69-610/762/69-H14	610 x 762 x 69	H14 - 99,995 %	11,2	750 / 125 Pa	5,40
YAFI HF 69-610/915/69-H14	610 x 915 x 69	H14 - 99,995 %	13,5	900 / 125 Pa	7,00
YAFI HF 69-762/762/69-H14	762 x 762 x 69	H14 - 99,995 %	14,0	940 / 125 Pa	7,40
YAFI HF 69-915/915/69-H14	915 x 915 x 69	H14 - 99,995 %	20,3	1350 / 125 Pa	10,20
YAFI HF 69-610/1220/69-H14	610 x 1220 x 69	H14 - 99,995 %	18,0	1200 / 125 Pa	9,20

U15					
YAFI HF 69-305/305/69-U15	305 x 305 x 69	U15 - 99,9995 %	2,4	150 / 140 Pa	2,00
YAFI HF 69-305/610/69-U15	305 x 610 x 69	U15 - 99,9995 %	4,6	300 / 140 Pa	3,30
YAFI HF 69-457/457/69-U15	457 x 457 x 69	U15 - 99,9995 %	5,2	340 / 140 Pa	3,50
YAFI HF 69-457/610/69-U15	457 x 610 x 69	U15 - 99,9995 %	6,8	450 / 140 Pa	3,80
YAFI HF 69-535/535/69-U15	535 x 535 x 69	U15 - 99,9995 %	7,0	465 / 140 Pa	4,00
YAFI HF 69-575/575/69-U15	575 x 575 x 69	U15 - 99,9995 %	8,0	535 / 140 Pa	4,20
YAFI HF 69-610/610/69-U15	610 x 610 x 69	U15 - 99,9995 %	9,0	600 / 140 Pa	4,60
YAFI HF 69-610/762/69-U15	610 x 762 x 69	U15 - 99,9995 %	11,2	750 / 140 Pa	5,40
YAFI HF 69-610/915/69-U15	610 x 915 x 69	U15 - 99,9995 %	13,5	900 / 140 Pa	7,00
YAFI HF 69-762/762/69-U15	762 x 762 x 69	U15 - 99,9995 %	14,0	940 / 140 Pa	7,40
YAFI HF 69-915/915/69-U15	915 x 915 x 69	U15 - 99,9995 %	20,3	1350 / 140 Pa	10,20
YAFI HF 69-610/1220/69-U15	610 x 1220 x 69	U15 - 99,9995 %	18,0	1200 / 140 Pa	9,20

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 78mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can be used on to frame in order to guarantee a perfect seal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame


Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

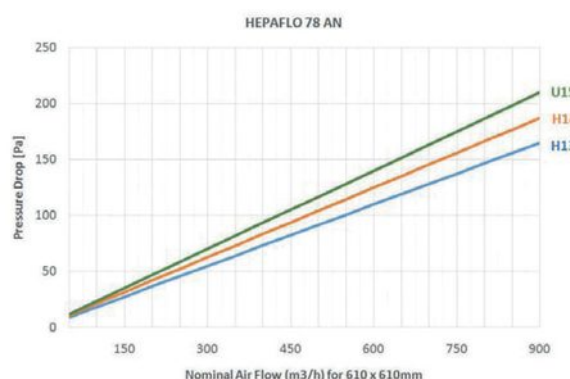

Applications

→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Product Code

YAFI HF

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:50mm
Protection mesh	D	T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF-305/305/78-H13	305 x 305 x 78	H13 - 99,95 %	2,4	150 / 100 Pa	2,20
YAFI HF-305/610/78-H13	305 x 610 x 78	H13 - 99,95 %	4,6	300 / 100 Pa	3,50
YAFI HF-457/457/78-H13	457 x 457 x 78	H13 - 99,95 %	5,2	340 / 100 Pa	3,80
YAFI HF-457/610/78-H13	457 x 610 x 78	H13 - 99,95 %	6,8	450 / 100 Pa	3,90
YAFI HF-535/535/78-H13	535 x 535 x 78	H13 - 99,95 %	7,0	465 / 100 Pa	4,20
YAFI HF-575/575/78-H13	575 x 575 x 78	H13 - 99,95 %	8,0	535 / 100 Pa	4,60
YAFI HF-610/610/78-H13	610 x 610 x 78	H13 - 99,95 %	9,0	600 / 100 Pa	4,90
YAFI HF-610/762/78-H13	610 x 762 x 78	H13 - 99,95 %	11,2	750 / 100 Pa	5,80
YAFI HF-610/915/78-H13	610 x 915 x 78	H13 - 99,95 %	13,5	900 / 100 Pa	7,20
YAFI HF-762/762/78-H13	762 x 762 x 78	H13 - 99,95 %	14,0	940 / 100 Pa	7,70
YAFI HF-915/915/78-H13	915 x 915 x 78	H13 - 99,95 %	20,3	1350 / 100 Pa	10,80
YAFI HF-610/1220/78-H13	610 x 1220 x 78	H13 - 99,95 %	18,0	1200 / 100 Pa	9,60

H14					
YAFI HF-305/305/78-H14	305 x 305 x 78	H14 - 99,995 %	2,4	150 / 125 Pa	2,20
YAFI HF-305/610/78-H14	305 x 610 x 78	H14 - 99,995 %	4,6	300 / 125 Pa	3,50
YAFI HF-457/457/78-H14	457 x 457 x 78	H14 - 99,995 %	5,2	340 / 125 Pa	3,80
YAFI HF-457/610/78-H14	457 x 610 x 78	H14 - 99,995 %	6,8	450 / 125 Pa	3,90
YAFI HF-535/535/78-H14	535 x 535 x 78	H14 - 99,995 %	7,0	465 / 125 Pa	4,20
YAFI HF-575/575/78-H14	575 x 575 x 78	H14 - 99,995 %	8,0	535 / 125 Pa	4,60
YAFI HF-610/610/78-H14	610 x 610 x 78	H14 - 99,995 %	9,0	600 / 125 Pa	4,90
YAFI HF-610/762/78-H14	610 x 762 x 78	H14 - 99,995 %	11,2	750 / 125 Pa	5,80
YAFI HF-610/915/78-H14	610 x 915 x 78	H14 - 99,995 %	13,5	900 / 125 Pa	7,20
YAFI HF-762/762/78-H14	762 x 762 x 78	H14 - 99,995 %	14,0	940 / 125 Pa	7,70
YAFI HF-915/915/78-H14	915 x 915 x 78	H14 - 99,995 %	20,3	1350 / 125 Pa	10,80
YAFI HF-610/1220/78-H14	610 x 1220 x 78	H14 - 99,995 %	18,0	1200 / 125 Pa	9,60

U15					
YAFI HF-305/305/78-W15	305 x 305 x 78	U15 - 99,9995 %	2,4	150 / 140 Pa	2,20
YAFI HF-305/610/78-W15	305 x 610 x 78	U15 - 99,9995 %	4,6	300 / 140 Pa	3,50
YAFI HF-457/457/78-W15	457 x 457 x 78	U15 - 99,9995 %	5,2	340 / 140 Pa	3,80
YAFI HF-457/610/78-W15	457 x 610 x 78	U15 - 99,9995 %	6,8	450 / 140 Pa	3,90
YAFI HF-535/535/78-W15	535 x 535 x 78	U15 - 99,9995 %	7,0	465 / 140 Pa	4,20
YAFI HF-575/575/78-W15	575 x 575 x 78	U15 - 99,9995 %	8,0	535 / 140 Pa	4,60
YAFI HF-610/610/78-W15	610 x 610 x 78	U15 - 99,9995 %	9,0	600 / 140 Pa	4,90
YAFI HF-610/762/78-W15	610 x 762 x 78	U15 - 99,9995 %	11,2	750 / 140 Pa	5,80
YAFI HF-610/915/78-W15	610 x 915 x 78	U15 - 99,9995 %	13,5	900 / 140 Pa	7,20
YAFI HF-762/762/78-W15	762 x 762 x 78	U15 - 99,9995 %	14,0	940 / 140 Pa	7,70
YAFI HF-915/915/78-W15	915 x 915 x 78	U15 - 99,9995 %	20,3	1350 / 140 Pa	10,80
YAFI HF-610/1220/78-W15	610 x 1220 x 78	U15 - 99,9995 %	18,0	1200 / 140 Pa	9,60

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 110mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can be used on to frame in order to guarantee a perfect seal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame


Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

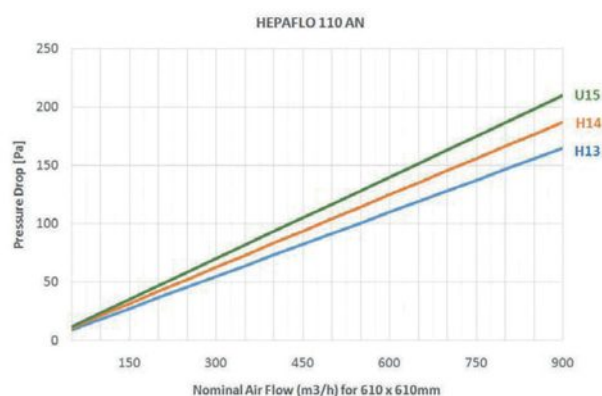

Applications

- ➔ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Product Code

YAFI HF 110

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:50mm
Protection mesh	D	X:no T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 110-305/305/110-H13	305 x 305 x 110	H13 - 99,95 %	2,4	150 / 100 Pa	2,80
YAFI HF 110-305/610/110-H13	305 x 610 x 110	H13 - 99,95 %	4,6	300 / 100 Pa	4,50
YAFI HF 110-457/457/110-H13	457 x 457 x 110	H13 - 99,95 %	5,2	340 / 100 Pa	4,80
YAFI HF 110-457/610/110-H13	457 x 610 x 110	H13 - 99,95 %	6,8	450 / 100 Pa	5,40
YAFI HF 110-535/535/110-H13	535 x 535 x 110	H13 - 99,95 %	7,0	465 / 100 Pa	5,70
YAFI HF 110-575/575/110-H13	575 x 575 x 110	H13 - 99,95 %	8,0	535 / 100 Pa	5,92
YAFI HF 110-610/610/110-H13	610 x 610 x 110	H13 - 99,95 %	9,0	600 / 100 Pa	6,00
YAFI HF 110-610/762/110-H13	610 x 762 x 110	H13 - 99,95 %	11,2	750 / 100 Pa	7,70
YAFI HF 110-610/915/110-H13	610 x 915 x 110	H13 - 99,95 %	13,5	900 / 100 Pa	9,20
YAFI HF 110-762/762/110-H13	762 x 762 x 110	H13 - 99,95 %	14,0	940 / 100 Pa	10,00
YAFI HF 110-915/915/110-H13	915 x 915 x 110	H13 - 99,95 %	20,3	1350 / 100 Pa	13,80
YAFI HF 110-610/1220/110-H13	610 x 1220 x 110	H13 - 99,95 %	18,0	1200 / 100 Pa	13,10

H14					
YAFI HF 110-305/305/110-H14	305 x 305 x 110	H14 - 99,995 %	2,4	150 / 125 Pa	2,80
YAFI HF 110-305/610/110-H14	305 x 610 x 110	H14 - 99,995 %	4,6	300 / 125 Pa	4,50
YAFI HF 110-457/457/110-H14	457 x 457 x 110	H14 - 99,995 %	5,2	340 / 125 Pa	4,80
YAFI HF 110-457/610/110-H14	457 x 610 x 110	H14 - 99,995 %	6,8	450 / 125 Pa	5,40
YAFI HF 110-535/535/110-H14	535 x 535 x 110	H14 - 99,995 %	7,0	465 / 125 Pa	5,70
YAFI HF 110-575/575/110-H14	575 x 575 x 110	H14 - 99,995 %	8,0	535 / 125 Pa	5,92
YAFI HF 110-610/610/110-H14	610 x 610 x 110	H14 - 99,995 %	9,0	600 / 125 Pa	6,00
YAFI HF 110-610/762/110-H14	610 x 762 x 110	H14 - 99,995 %	11,2	750 / 125 Pa	7,70
YAFI HF 110-610/915/110-H14	610 x 915 x 110	H14 - 99,995 %	13,5	900 / 125 Pa	9,20
YAFI HF 110-762/762/110-H14	762 x 762 x 110	H14 - 99,995 %	14,0	940 / 125 Pa	10,00
YAFI HF 110-915/915/110-H14	915 x 915 x 110	H14 - 99,995 %	20,3	1350 / 125 Pa	13,80
YAFI HF 110-610/1220/110-H14	610 x 1220 x 110	H14 - 99,995 %	18,0	1200 / 125 Pa	13,10

U15					
YAFI HF 110-305/305/110-U15	305 x 305 x 110	U15 - 99,9995 %	2,4	150 / 140 Pa	2,80
YAFI HF 110-305/610/110-U15	305 x 610 x 110	U15 - 99,9995 %	4,6	300 / 140 Pa	4,50
YAFI HF 110-457/457/110-U15	457 x 457 x 110	U15 - 99,9995 %	5,2	340 / 140 Pa	4,80
YAFI HF 110-457/610/110-U15	457 x 610 x 110	U15 - 99,9995 %	6,8	450 / 140 Pa	5,40
YAFI HF 110-535/535/110-U15	535 x 535 x 110	U15 - 99,9995 %	7,0	465 / 140 Pa	5,70
YAFI HF 110-575/575/110-U15	575 x 575 x 110	U15 - 99,9995 %	8,0	535 / 140 Pa	5,92
YAFI HF 110-610/610/110-U15	610 x 610 x 110	U15 - 99,9995 %	9,0	600 / 140 Pa	6,00
YAFI HF 110-610/762/110-U15	610 x 762 x 110	U15 - 99,9995 %	11,2	750 / 140 Pa	7,70
YAFI HF 110-610/915/110-U15	610 x 915 x 110	U15 - 99,9995 %	13,5	900 / 140 Pa	9,20
YAFI HF 110-762/762/110-U15	762 x 762 x 110	U15 - 99,9995 %	14,0	940 / 140 Pa	10,00
YAFI HF 110-915/915/110-U15	915 x 915 x 110	U15 - 99,9995 %	20,3	1350 / 140 Pa	13,80
YAFI HF 110-610/1220/110-U15	610 x 1220 x 110	U15 - 99,9995 %	18,0	1200 / 140 Pa	13,10

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 110mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can be used on to frame in order to guarantee a perfect seal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Applications

→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane


Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

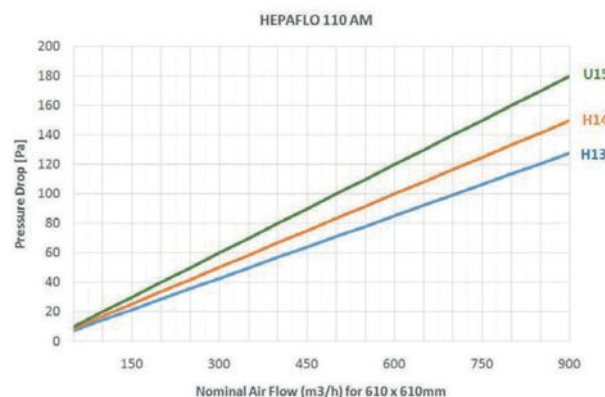

Product Code

YAFI HF 110

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	M	M:75mm
Protection mesh	D	X:no T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 110-305/305/110-H13	305 x 305 x 110	H13 - 99,95 %	3,1	150 / 85 Pa	3,00
YAFI HF 110-305/610/110-H13	305 x 610 x 110	H13 - 99,95 %	6,2	300 / 85 Pa	4,70
YAFI HF 110-457/457/110-H13	457 x 457 x 110	H13 - 99,95 %	7,0	340 / 85 Pa	5,00
YAFI HF 110-457/610/110-H13	457 x 610 x 110	H13 - 99,95 %	9,4	450 / 85 Pa	5,60
YAFI HF 110-535/535/110-H13	535 x 535 x 110	H13 - 99,95 %	9,6	465 / 85 Pa	5,90
YAFI HF 110-575/575/110-H13	575 x 575 x 110	H13 - 99,95 %	11,0	535 / 85 Pa	6,10
YAFI HF 110-610/610/110-H13	610 x 610 x 110	H13 - 99,95 %	12,4	600 / 85 Pa	6,30
YAFI HF 110-610/762/110-H13	610 x 762 x 110	H13 - 99,95 %	15,5	750 / 85 Pa	8,00
YAFI HF 110-610/915/110-H13	610 x 915 x 110	H13 - 99,95 %	18,6	900 / 85 Pa	9,80
YAFI HF 110-762/762/110-H13	762 x 762 x 110	H13 - 99,95 %	19,2	940 / 85 Pa	10,20
YAFI HF 110-915/915/110-H13	915 x 915 x 110	H13 - 99,95 %	28,0	1350 / 85 Pa	14,20
YAFI HF 110-610/1220/110-H13	610 x 1220 x 110	H13 - 99,95 %	24,8	1200 / 85 Pa	13,80

H14					
HF-AM-DP-305/305/110-H14	305 x 305 x 110	H14 - 99,995 %	3,1	150 / 100 Pa	3,00
HF-AM-DP-305/610/110-H14	305 x 610 x 110	H14 - 99,995 %	6,2	300 / 100 Pa	4,70
YAFI HF 110-457/457/110-H14	457 x 457 x 110	H14 - 99,995 %	7,0	340 / 100 Pa	5,00
YAFI HF 110-457/610/110-H14	457 x 610 x 110	H14 - 99,995 %	9,4	450 / 100 Pa	5,60
YAFI HF 110-535/535/110-H14	535 x 535 x 110	H14 - 99,995 %	9,6	465 / 100 Pa	5,90
YAFI HF 110-575/575/110-H14	575 x 575 x 110	H14 - 99,995 %	11,0	535 / 100 Pa	6,10
YAFI HF 110-610/610/110-H14	610 x 610 x 110	H14 - 99,995 %	12,4	600 / 100 Pa	6,30
YAFI HF 110-610/762/110-H14	610 x 762 x 110	H14 - 99,995 %	15,5	750 / 100 Pa	8,00
YAFI HF 110-610/915/110-H14	610 x 915 x 110	H14 - 99,995 %	18,6	900 / 100 Pa	9,80
YAFI HF 110-762/762/110-H14	762 x 762 x 110	H14 - 99,995 %	19,2	940 / 100 Pa	10,20
YAFI HF 110-915/915/110-H14	915 x 915 x 110	H14 - 99,995 %	28,0	1350 / 100 Pa	14,20
YAFI HF 110-610/1220/110-H14	610 x 1220 x 110	H14 - 99,995 %	24,8	1200 / 100 Pa	13,80

U15					
YAFI HF 110-305/305/110-U15	305 x 305 x 110	U15 - 99,9995 %	3,1	150 / 120 Pa	3,00
YAFI HF 110-305/610/110-U15	305 x 610 x 110	U15 - 99,9995 %	6,2	300 / 120 Pa	4,70
YAFI HF 110-457/457/110-U15	457 x 457 x 110	U15 - 99,9995 %	7,0	340 / 120 Pa	5,00
YAFI HF 110-457/610/110-U15	457 x 610 x 110	U15 - 99,9995 %	9,4	450 / 120 Pa	5,60
YAFI HF 110-535/535/110-U15	535 x 535 x 110	U15 - 99,9995 %	9,6	465 / 120 Pa	5,90
YAFI HF 110-575/575/110-U15	575 x 575 x 110	U15 - 99,9995 %	11,0	535 / 120 Pa	6,10
YAFI HF 110-610/610/110-U15	610 x 610 x 110	U15 - 99,9995 %	12,4	600 / 120 Pa	6,30
YAFI HF 110-610/762/110-U15	610 x 762 x 110	U15 - 99,9995 %	15,5	750 / 120 Pa	8,00
YAFI HF 110-610/915/110-U15	610 x 915 x 110	U15 - 99,9995 %	18,6	900 / 120 Pa	9,80
YAFI HF 110-762/762/110-U15	762 x 762 x 110	U15 - 99,9995 %	19,2	940 / 120 Pa	10,20
YAFI HF 110-915/915/110-U15	915 x 915 x 110	U15 - 99,9995 %	28,0	1350 / 120 Pa	14,20
YAFI HF 110-610/1220/110-U15	610 x 1220 x 110	U15 - 99,9995 %	24,8	1200 / 120 Pa	13,80

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 125mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can be used on to frame in order to guarantee a perfect seal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame


Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

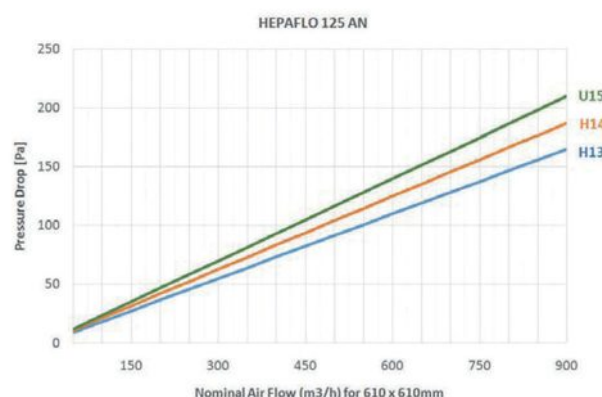

Applications

→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Product Code

YAFI HF 125

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:75mm
Protection mesh	D	X:no T:Single D:Double
Gasket	P	X:no E:EPDM P:Polyurethane
Efficiency	EN1822 E10 to U15	

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 125-305/305/125-H13	305 x 305 x 125	H13 - 99,95 %	2,4	150 / 100 Pa	3,20
YAFI HF 125-305/610/125-H13	305 x 610 x 125	H13 - 99,95 %	4,6	300 / 100 Pa	4,90
YAFI HF 125-457/457/125-H13	457 x 457 x 125	H13 - 99,95 %	5,2	340 / 100 Pa	5,20
YAFI HF 125-457/610/125-H13	457 x 610 x 125	H13 - 99,95 %	6,8	450 / 100 Pa	5,80
YAFI HF 125-535/535/125-H13	535 x 535 x 125	H13 - 99,95 %	7,0	465 / 100 Pa	6,20
YAFI HF 125-575/575/125-H13	575 x 575 x 125	H13 - 99,95 %	8,0	535 / 100 Pa	6,40
YAFI HF 125-610/610/125-H13	610 x 610 x 125	H13 - 99,95 %	9,0	600 / 100 Pa	6,50
YAFI HF 125-610/762/125-H13	610 x 762 x 125	H13 - 99,95 %	11,2	750 / 100 Pa	8,30
YAFI HF 125-610/915/125-H13	610 x 915 x 125	H13 - 99,95 %	13,5	900 / 100 Pa	10,20
YAFI HF 125-762/762/125-H13	762 x 762 x 125	H13 - 99,95 %	14,0	940 / 100 Pa	11,00
YAFI HF 125-915/915/125-H13	915 x 915 x 125	H13 - 99,95 %	20,3	1350 / 100 Pa	15,00
YAFI HF 125-610/1220/125-H13	610 x 1220 x 125	H13 - 99,95 %	18,0	1200 / 100 Pa	14,50

H14					
YAFI HF 125-305/305/125-H14	305 x 305 x 125	H14 - 99,995 %	2,4	150 / 125 Pa	3,20
YAFI HF 125-305/610/125-H14	305 x 610 x 125	H14 - 99,995 %	4,6	300 / 125 Pa	4,90
YAFI HF 125-457/457/125-H14	457 x 457 x 125	H14 - 99,995 %	5,2	340 / 125 Pa	5,20
YAFI HF 125-457/610/125-H14	457 x 610 x 125	H14 - 99,995 %	6,8	450 / 125 Pa	5,80
YAFI HF 125-535/535/125-H14	535 x 535 x 125	H14 - 99,995 %	7,0	465 / 125 Pa	6,20
YAFI HF 125-575/575/125-H14	575 x 575 x 125	H14 - 99,995 %	8,0	535 / 125 Pa	6,40
YAFI HF 125-610/610/125-H14	610 x 610 x 125	H14 - 99,995 %	9,0	600 / 125 Pa	6,50
YAFI HF 125-610/762/125-H14	610 x 762 x 125	H14 - 99,995 %	11,2	750 / 125 Pa	8,30
YAFI HF 125-610/915/125-H14	610 x 915 x 125	H14 - 99,995 %	13,5	900 / 125 Pa	10,20
YAFI HF 125-762/762/125-H14	762 x 762 x 125	H14 - 99,995 %	14,0	940 / 125 Pa	11,00
YAFI HF 125-915/915/125-H14	915 x 915 x 125	H14 - 99,995 %	20,3	1350 / 125 Pa	15,00
YAFI HF 125-610/1220/125-H14	610 x 1220 x 125	H14 - 99,995 %	18,0	1200 / 125 Pa	14,50

U15					
YAFI HF 125-305/305/125-U15	305 x 305 x 125	U15 - 99,9995 %	2,4	150 / 140 Pa	3,20
YAFI HF 125-305/610/125-U15	305 x 610 x 125	U15 - 99,9995 %	4,6	300 / 140 Pa	4,90
YAFI HF 125-457/457/125-U15	457 x 457 x 125	U15 - 99,9995 %	5,2	340 / 140 Pa	5,20
YAFI HF 125-457/610/125-U15	457 x 610 x 125	U15 - 99,9995 %	6,8	450 / 140 Pa	5,80
YAFI HF 125-535/535/125-U15	535 x 535 x 125	U15 - 99,9995 %	7,0	465 / 140 Pa	6,20
YAFI HF 125-575/575/125-U15	575 x 575 x 125	U15 - 99,9995 %	8,0	535 / 140 Pa	6,40
YAFI HF 125-610/610/125-U15	610 x 610 x 125	U15 - 99,9995 %	9,0	600 / 140 Pa	6,50
YAFI HF 125-610/762/125-U15	610 x 762 x 125	U15 - 99,9995 %	11,2	750 / 140 Pa	8,30
YAFI HF 125-610/915/125-U15	610 x 915 x 125	U15 - 99,9995 %	13,5	900 / 140 Pa	10,20
YAFI HF 125-762/762/125-U15	762 x 762 x 125	U15 - 99,9995 %	14,0	940 / 140 Pa	11,00
YAFI HF 125-915/915/125-U15	915 x 915 x 125	U15 - 99,9995 %	20,3	1350 / 140 Pa	15,00
YAFI HF 125-610/1220/125-U15	610 x 1220 x 125	U15 - 99,9995 %	18,0	1200 / 140 Pa	14,50

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 125mm



Special Features

Filter Type - Laminar flow HEPA Panel Filter

Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications


→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

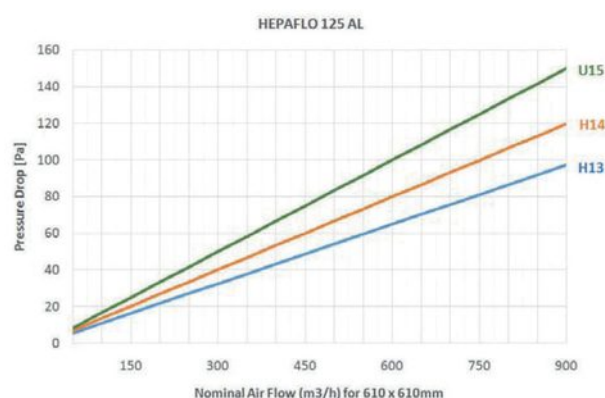

Product Code

YAFI HF 125

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	L	L:75mm
Protektion mesh	D	T:Sinle D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (Kg)
H13					
YAFI HF 125-305/305/125-H13	305 x 305 x 125	H13 - 99,95 %	4,5	150 / 65 Pa	3,30
YAFI HF 125-305/610/125-H13	305 x 610 x 125	H13 - 99,95 %	9,0	300 / 65 Pa	5,00
YAFI HF 125-457/457/125-H13	457 x 457 x 125	H13 - 99,95 %	10,2	340 / 65 Pa	5,40
YAFI HF 125-457/610/125-H13	457 x 610 x 125	H13 - 99,95 %	13,5	450 / 65 Pa	6,10
YAFI HF 125-535/535/125-H13	535 x 535 x 125	H13 - 99,95 %	14,0	465 / 65 Pa	6,40
YAFI HF 125-575/575/125-H13	575 x 575 x 125	H13 - 99,95 %	16,0	535 / 65 Pa	6,60
YAFI HF 125-610/610/125-H13	610 x 610 x 125	H13 - 99,95 %	18,0	600 / 65 Pa	6,80
YAFI HF 125-610/762/125-H13	610 x 762 x 125	H13 - 99,95 %	22,5	750 / 65 Pa	8,70
YAFI HF 125-610/915/125-H13	610 x 915 x 125	H13 - 99,95 %	27,0	900 / 65 Pa	10,80
YAFI HF 125-762/762/125-H13	762 x 762 x 125	H13 - 99,95 %	28,2	940 / 65 Pa	11,60
YAFI HF 125-915/915/125-H13	915 x 915 x 125	H13 - 99,95 %	40,5	1350 / 65 Pa	16,00
YAFI HF 125-610/1220/125-H13	610 x 1220 x 125	H13 - 99,95 %	36,0	1200 / 65 Pa	15,50

H14					
YAFI HF 125-305/305/125-H14	305 x 305 x 125	H14 - 99,995 %	4,5	150 / 80 Pa	3,30
YAFI HF 125-305/610/125-H14	305 x 610 x 125	H14 - 99,995 %	9,0	300 / 80 Pa	5,00
YAFI HF 125-457/457/125-H14	457 x 457 x 125	H14 - 99,995 %	10,2	340 / 80 Pa	5,40
YAFI HF 125-457/610/125-H14	457 x 610 x 125	H14 - 99,995 %	13,5	450 / 80 Pa	6,10
YAFI HF 125-535/535/125-H14	535 x 535 x 125	H14 - 99,995 %	14,0	465 / 80 Pa	6,40
YAFI HF 125-575/575/125-H14	575 x 575 x 125	H14 - 99,995 %	16,0	535 / 80 Pa	6,60
YAFI HF 125-610/610/125-H14	610 x 610 x 125	H14 - 99,995 %	18,0	600 / 80 Pa	6,80
YAFI HF 125-610/762/125-H14	610 x 762 x 125	H14 - 99,995 %	22,5	750 / 80 Pa	8,70
YAFI HF 125-610/915/125-H14	610 x 915 x 125	H14 - 99,995 %	27,0	900 / 80 Pa	10,80
YAFI HF 125-762/762/125-H14	762 x 762 x 125	H14 - 99,995 %	28,2	940 / 80 Pa	11,60
YAFI HF 125-915/915/125-H14	915 x 915 x 125	H14 - 99,995 %	40,5	1350 / 80 Pa	16,00
YAFI HF 125-610/1220/125-H14	610 x 1220 x 125	H14 - 99,995 %	36,0	1200 / 80 Pa	15,50

U15					
YAFI HF 125-305/305/125-U15	305 x 305 x 125	U15 - 99,9995 %	4,5	150 / 100 Pa	3,30
YAFI HF 125-305/610/125-U15	305 x 610 x 125	U15 - 99,9995 %	9,0	300 / 100 Pa	5,00
YAFI HF 125-457/457/125-U15	457 x 457 x 125	U15 - 99,9995 %	10,2	340 / 100 Pa	5,40
YAFI HF 125-457/610/125-U15	457 x 610 x 125	U15 - 99,9995 %	13,5	450 / 100 Pa	6,10
YAFI HF 125-535/535/125-U15	535 x 535 x 125	U15 - 99,9995 %	14,0	465 / 100 Pa	6,40
YAFI HF 125-575/575/125-U15	575 x 575 x 125	U15 - 99,9995 %	16,0	535 / 100 Pa	6,60
YAFI HF 125-610/610/125-U15	610 x 610 x 125	U15 - 99,9995 %	18,0	600 / 100 Pa	6,80
YAFI HF 125-610/762/125-U15	610 x 762 x 125	U15 - 99,9995 %	22,5	750 / 100 Pa	8,70
YAFI HF 125-610/915/125-U15	610 x 915 x 125	U15 - 99,9995 %	27,0	900 / 100 Pa	10,80
YAFI HF 125-762/762/125-U15	762 x 762 x 125	U15 - 99,9995 %	28,2	940 / 100 Pa	11,60
YAFI HF 125-915/915/125-U15	915 x 915 x 125	U15 - 99,9995 %	40,5	1350 / 100 Pa	16,00
YAFI HF 125-610/1220/125-U15	610 x 1220 x 125	U15 - 99,9995 %	36,0	1200 / 100 Pa	15,50

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 150mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can be used on to frame in order to guarantee a perfect seal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame


Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

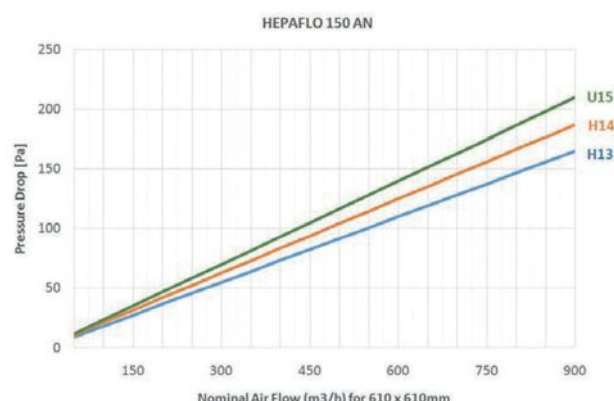

Applications

→ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Product Code

YAFI HF 150

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	N	N:50mm
Protection mesh	D	T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
H13					
YAFI HF 150-305/305/150-H13	305 x 305 x 150	H13 - 99,95 %	2,4	150 / 100 Pa	3,60
YAFI HF 150-305/610/150-H13	305 x 610 x 150	H13 - 99,95 %	4,6	300 / 100 Pa	5,30
YAFI HF 150-457/457/150-H13	457 x 457 x 150	H13 - 99,95 %	5,2	340 / 100 Pa	5,70
YAFI HF 150-457/610/150-H13	457 x 610 x 150	H13 - 99,95 %	6,8	450 / 100 Pa	6,40
YAFI HF 150-535/535/150-H13	535 x 535 x 150	H13 - 99,95 %	7,0	465 / 100 Pa	6,80
YAFI HF 150-575/575/150-H13	575 x 575 x 150	H13 - 99,95 %	8,0	535 / 100 Pa	7,00
YAFI HF 150-610/610/150-H13	610 x 610 x 150	H13 - 99,95 %	9,0	600 / 100 Pa	7,20
YAFI HF 150-610/762/150-H13	610 x 762 x 150	H13 - 99,95 %	11,2	750 / 100 Pa	9,00
YAFI HF 150-610/915/150-H13	610 x 915 x 150	H13 - 99,95 %	13,5	900 / 100 Pa	11,20
YAFI HF 150-762/762/150-H13	762 x 762 x 150	H13 - 99,95 %	14,0	940 / 100 Pa	12,10
YAFI HF 150-915/915/150-H13	915 x 915 x 150	H13 - 99,95 %	20,3	1350 / 100 Pa	16,80
YAFI HF 150-610/1220/150-H13	610 x 1220 x 150	H13 - 99,95 %	18,0	1200 / 100 Pa	16,00

H14					
YAFI HF 150-305/305/150-H14	305 x 305 x 150	H14 - 99,995 %	2,4	150 / 125 Pa	3,60
YAFI HF 150-305/610/150-H14	305 x 610 x 150	H14 - 99,995 %	4,6	300 / 125 Pa	5,30
YAFI HF 150-457/457/150-H14	457 x 457 x 150	H14 - 99,995 %	5,2	340 / 125 Pa	5,70
YAFI HF 150-457/610/150-H14	457 x 610 x 150	H14 - 99,995 %	6,8	450 / 125 Pa	6,40
YAFI HF 150-535/535/150-H14	535 x 535 x 150	H14 - 99,995 %	7,0	465 / 125 Pa	6,80
YAFI HF 150-575/575/150-H14	575 x 575 x 150	H14 - 99,995 %	8,0	535 / 125 Pa	7,00
YAFI HF 150-610/610/150-H14	610 x 610 x 150	H14 - 99,995 %	9,0	600 / 125 Pa	7,20
YAFI HF 150-610/762/150-H14	610 x 762 x 150	H14 - 99,995 %	11,2	750 / 125 Pa	9,00
YAFI HF 150-610/915/150-H14	610 x 915 x 150	H14 - 99,995 %	13,5	900 / 125 Pa	11,20
YAFI HF 150-762/762/150-H14	762 x 762 x 150	H14 - 99,995 %	14,0	940 / 125 Pa	12,10
YAFI HF 150-915/915/150-H14	915 x 915 x 150	H14 - 99,995 %	20,3	1350 / 125 Pa	16,80
YAFI HF 150-610/1220/150-H14	610 x 1220 x 150	H14 - 99,995 %	18,0	1200 / 125 Pa	16,00

U15					
YAFI HF 150-305/305/150-U15	305 x 305 x 150	U15 - 99,9995 %	2,4	150 / 140 Pa	3,60
YAFI HF 150-305/610/150-U15	305 x 610 x 150	U15 - 99,9995 %	4,6	300 / 140 Pa	5,30
YAFI HF 150-457/457/150-U15	457 x 457 x 150	U15 - 99,9995 %	5,2	340 / 140 Pa	5,70
YAFI HF 150-457/610/150-U15	457 x 610 x 150	U15 - 99,9995 %	6,8	450 / 140 Pa	6,40
YAFI HF 150-535/535/150-U15	535 x 535 x 150	U15 - 99,9995 %	7,0	465 / 140 Pa	6,80
YAFI HF 150-575/575/150-U15	575 x 575 x 150	U15 - 99,9995 %	8,0	535 / 140 Pa	7,00
YAFI HF 150-610/610/150-U15	610 x 610 x 150	U15 - 99,9995 %	9,0	600 / 140 Pa	7,20
YAFI HF 150-610/762/150-U15	610 x 762 x 150	U15 - 99,9995 %	11,2	750 / 140 Pa	9,00
YAFI HF 150-610/915/150-U15	610 x 915 x 150	U15 - 99,9995 %	13,5	900 / 140 Pa	11,20
YAFI HF 150-762/762/150-U15	762 x 762 x 150	U15 - 99,9995 %	14,0	940 / 140 Pa	12,10
YAFI HF 150-915/915/150-U15	915 x 915 x 150	U15 - 99,9995 %	20,3	1350 / 140 Pa	16,80
YAFI HF 150-610/1220/150-U15	610 x 1220 x 150	U15 - 99,9995 %	18,0	1200 / 140 Pa	16,00

HEPA FILTERS

Laminar Flow HEPA Filters Aluminium Frame - 150mm

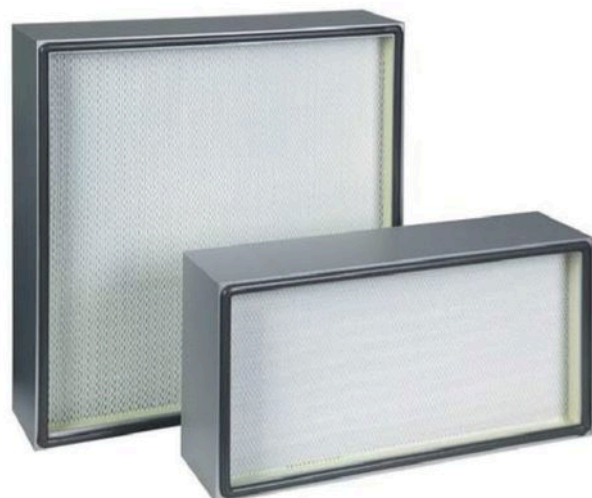

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

Applications


→ HEPA-/WLPA filter for clean rooms and Laminar Air Flow benches.

Advantages

- Compact design & robust construction
- Very high efficiency with optimum air flow rate
- Different gasket model for leak free installation
- Easy to use with extended metal faceguard
- Individual test certificate is provided with filter
- Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms. Glass fibre paper folded with thermo plastic threads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. One piece polyurethane gasket or EPDM Flat gasket can used on to frame in order to guarantee a perfectseal. Epoxy painted protection grids are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

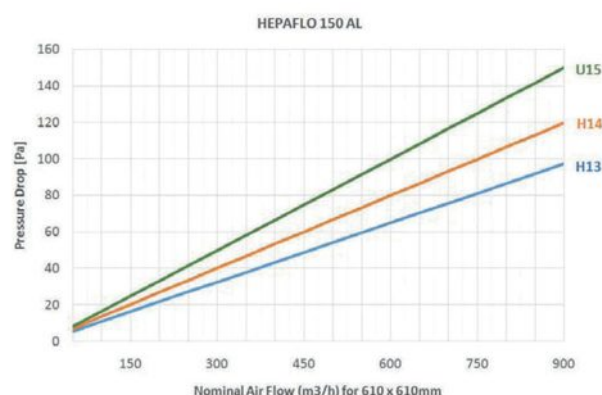

Product Code

YAFI HF 150

Filter Type	HF	Hepa filter
Frame	A	A:Aluminium
Pleat height	L	L:100mm
Protektion mesh	D	T:Single D:Double
Gasket	P	E:EPDM P:Polyurethane
Efficiency	EN1822	E10 to U15


Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
H13					
YAFI HF 150-305/305/150-H13	305 x 305 x 150	H13 - 99,95 %	4,5	150 / 65 Pa	3,80
YAFI HF 150-305/610/150-H13	305 x 610 x 150	H13 - 99,95 %	9,0	300 / 65 Pa	5,50
YAFI HF 150-457/457/150-H13	457 x 457 x 150	H13 - 99,95 %	10,2	340 / 65 Pa	5,90
YAFI HF 150-457/610/150-H13	457 x 610 x 150	H13 - 99,95 %	13,5	450 / 65 Pa	6,60
YAFI HF 150-535/535/150-H13	535 x 535 x 150	H13 - 99,95 %	14,0	465 / 65 Pa	7,00
YAFI HF 150-575/575/150-H13	575 x 575 x 150	H13 - 99,95 %	16,0	535 / 65 Pa	7,20
YAFI HF 150-610/610/150-H13	610 x 610 x 150	H13 - 99,95 %	18,0	600 / 65 Pa	7,50
YAFI HF 150-610/762/150-H13	610 x 762 x 150	H13 - 99,95 %	22,5	750 / 65 Pa	9,40
YAFI HF 150-610/915/150-H13	610 x 915 x 150	H13 - 99,95 %	27,0	900 / 65 Pa	11,90
YAFI HF 150-762/762/150-H13	762 x 762 x 150	H13 - 99,95 %	28,2	940 / 65 Pa	12,80
YAFI HF 150-915/915/150-H13	915 x 915 x 150	H13 - 99,95 %	40,5	1350 / 65 Pa	17,20
YAFI HF 150-610/1220/150-H13	610 x 1220 x 150	H13 - 99,95 %	36,0	1200 / 65 Pa	16,50

H14					
YAFI HF 150-305/305/150-H14	305 x 305 x 150	H14 - 99,995 %	4,5	150 / 80 Pa	3,80
YAFI HF 150-305/610/150-H14	305 x 610 x 150	H14 - 99,995 %	9,0	300 / 80 Pa	5,50
YAFI HF 150-457/457/150-H14	457 x 457 x 150	H14 - 99,995 %	10,2	340 / 80 Pa	5,90
YAFI HF 150-457/610/150-H14	457 x 610 x 150	H14 - 99,995 %	13,5	450 / 80 Pa	6,60
YAFI HF 150-535/535/150-H14	535 x 535 x 150	H14 - 99,995 %	14,0	465 / 80 Pa	7,00
YAFI HF 150-575/575/150-H14	575 x 575 x 150	H14 - 99,995 %	16,0	535 / 80 Pa	7,20
YAFI HF 150-610/610/150-H14	610 x 610 x 150	H14 - 99,995 %	18,0	600 / 80 Pa	7,50
YAFI HF 150-610/762/150-H14	610 x 762 x 150	H14 - 99,995 %	22,5	750 / 80 Pa	9,40
YAFI HF 150-610/915/150-H14	610 x 915 x 150	H14 - 99,995 %	27,0	900 / 80 Pa	11,90
YAFI HF 150-762/762/150-H14	762 x 762 x 150	H14 - 99,995 %	28,2	940 / 80 Pa	12,80
YAFI HF 150-915/915/150-H14	915 x 915 x 150	H14 - 99,995 %	40,5	1350 / 80 Pa	17,20
YAFI HF 150-610/1220/150-H14	610 x 1220 x 150	H14 - 99,995 %	36,0	1200 / 80 Pa	16,50

U15					
YAFI HF 150-305/305/150-U15	305 x 305 x 150	U15 - 99,9995 %	4,5	150 / 100 Pa	3,80
YAFI HF 150-305/610/150-U15	305 x 610 x 150	U15 - 99,9995 %	9,0	300 / 100 Pa	5,50
YAFI HF 150-457/457/150-U15	457 x 457 x 150	U15 - 99,9995 %	10,2	340 / 100 Pa	5,90
YAFI HF 150-457/610/150-U15	457 x 610 x 150	U15 - 99,9995 %	13,5	450 / 100 Pa	6,60
YAFI HF 150-535/535/150-U15	535 x 535 x 150	U15 - 99,9995 %	14,0	465 / 100 Pa	7,00
YAFI HF 150-575/575/150-U15	575 x 575 x 150	U15 - 99,9995 %	16,0	535 / 100 Pa	7,20
YAFI HF 150-610/610/150-U15	610 x 610 x 150	U15 - 99,9995 %	18,0	600 / 100 Pa	7,50
YAFI HF 150-610/762/150-U15	610 x 762 x 150	U15 - 99,9995 %	22,5	750 / 100 Pa	9,40
YAFI HF 150-610/915/150-U15	610 x 915 x 150	U15 - 99,9995 %	27,0	900 / 100 Pa	11,90
YAFI HF 150-762/762/150-U15	762 x 762 x 150	U15 - 99,9995 %	28,2	940 / 100 Pa	12,80
YAFI HF 150-915/915/150-U15	915 x 915 x 150	U15 - 99,9995 %	40,5	1350 / 100 Pa	17,20
YAFI HF 150-610/1220/150-U15	610 x 1220 x 150	U15 - 99,9995 %	36,0	1200 / 100 Pa	16,50

HEPA FILTERS

Gel Seal HEPA Filters Aluminium Frame - 80mm

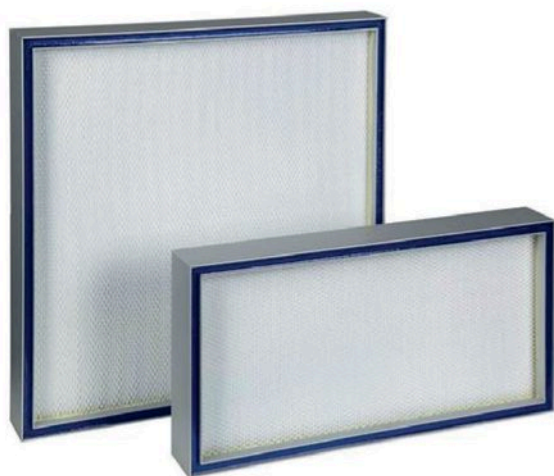

Applications

- ➔ HEPA-/WLEPA filter for clean rooms and Laminar Air Flow benches.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame

Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa


Max. Temperature - 80 °C

Advantages

- ➔ Compact design & robust construction
- ➔ Very high efficiency with optimum air flow rate
- ➔ Different gasket model for leak free installation
- ➔ Easy to use with extended metal faceguard
- ➔ Individual test certificate is provided with filter
- ➔ Customised sizes can be produced.

Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, labratories and clean rooms in order to provide laminar flow. Glass fi-bre paper folded with thermo plasticth reads and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best seal-ing between filter medium and frame. Gel Seal is used on to frame in order to guarantee a perfect seal. Epoxy painted protection grid sare used both at up stream and down stream side. Each single filter is tested according to EN 1822.

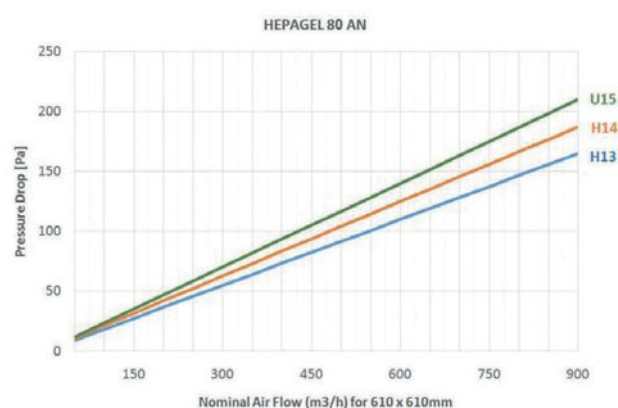

Product Code

YAFI HF 80

Filter Type	HG Hepa filter with Gel seal
Frame	A A:Aluminium
Pleat height	N N:55mm
Protektion mesh	D T:Single D:Double
Gasket	G G:Gel seal
Efficiency	EN1822 E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	--------------------------	--------------------	--------------------------	----------------

H13					
YAFI HF 80-305/305/80-H13	305 x 305 x 80	H13 - 99,95 %	2,4	150 / 100 Pa	3,10
YAFI HF 80-305/610/80-H13	305 x 610 x 80	H13 - 99,95 %	4,6	300 / 100 Pa	4,90
YAFI HF 80-457/457/80-H13	457 x 457 x 80	H13 - 99,95 %	5,2	340 / 100 Pa	5,30
YAFI HF 80-457/610/80-H13	457 x 610 x 80	H13 - 99,95 %	6,8	450 / 100 Pa	5,50
YAFI HF 80-535/535/80-H13	535 x 535 x 80	H13 - 99,95 %	7,0	465 / 100 Pa	5,90
YAFI HF 80-575/575/80-H13	575 x 575 x 80	H13 - 99,95 %	8,0	535 / 100 Pa	6,40
YAFI HF 80-610/610/80-H13	610 x 610 x 80	H13 - 99,95 %	9,0	600 / 100 Pa	6,90
YAFI HF 80-610/762/80-H13	610 x 762 x 80	H13 - 99,95 %	11,2	750 / 100 Pa	8,10
YAFI HF 80-610/915/80-H13	610 x 915 x 80	H13 - 99,95 %	13,5	900 / 100 Pa	10,10
YAFI HF 80-762/762/80-H13	762 x 762 x 80	H13 - 99,95 %	14,0	940 / 100 Pa	10,80
YAFI HF 80-915/915/80-H13	915 x 915 x 80	H13 - 99,95 %	20,3	1350 / 100 Pa	15,20
YAFI HF 80-610/1220/80-H13	610 x 1220 x 80	H13 - 99,95 %	18,0	1200 / 100 Pa	13,50

H14					
YAFI HF 80305/305/80-H14	305 x 305 x 80	H14 - 99,995 %	2,4	150 / 125 Pa	3,10
YAFI HF 80-305/610/80-H14	305 x 610 x 80	H14 - 99,995 %	4,6	300 / 125 Pa	4,90
YAFI HF 80-457/457/80-H14	457 x 457 x 80	H14 - 99,995 %	5,2	340 / 125 Pa	5,30
YAFI HF 80-457/610/80-H14	457 x 610 x 80	H14 - 99,995 %	6,8	450 / 125 Pa	5,50
YAFI HF 80-535/535/80-H14	535 x 535 x 80	H14 - 99,995 %	7,0	465 / 125 Pa	5,90
YAFI HF 80-575/575/80-H14	575 x 575 x 80	H14 - 99,995 %	8,0	535 / 125 Pa	6,40
YAFI HF 80-610/610/80-H14	610 x 610 x 80	H14 - 99,995 %	9,0	600 / 125 Pa	6,90
YAFI HF 80-610/762/80-H14	610 x 762 x 80	H14 - 99,995 %	11,2	750 / 125 Pa	8,10
YAFI HF 80-610/915/80-H14	610 x 915 x 80	H14 - 99,995 %	13,5	900 / 125 Pa	10,10
YAFI HF 80-762/762/80-H14	762 x 762 x 80	H14 - 99,995 %	14,0	940 / 125 Pa	10,80
YAFI HF 80-915/915/80-H14	915 x 915 x 80	H14 - 99,995 %	20,3	1350 / 125 Pa	15,20
YAFI HF 80-610/1220/80-H14	610 x 1220 x 80	H14 - 99,995 %	18,0	1200 / 125 Pa	13,50

U15					
YAFI HF 80-305/305/80-W15	305 x 305 x 80	U15 - 99,9995 %	2,4	150 / 140 Pa	3,10
YAFI HF 80-305/610/80-W15	305 x 610 x 80	U15 - 99,9995 %	4,6	300 / 140 Pa	4,90
YAFI HF 80-457/457/80-W15	457 x 457 x 80	U15 - 99,9995 %	5,2	340 / 140 Pa	5,30
YAFI HF 80-457/610/80-W15	457 x 610 x 80	U15 - 99,9995 %	6,8	450 / 140 Pa	5,50
YAFI HF 80-535/535/80-W15	535 x 535 x 80	U15 - 99,9995 %	7,0	465 / 140 Pa	5,90
YAFI HF 80-575/575/80-W15	575 x 575 x 80	U15 - 99,9995 %	8,0	535 / 140 Pa	6,40
YAFI HF 80-610/610/80-W15	610 x 610 x 80	U15 - 99,9995 %	9,0	600 / 140 Pa	6,90
YAFI HF 80-610/762/80-W15	610 x 762 x 80	U15 - 99,9995 %	11,2	750 / 140 Pa	8,10
YAFI HF 80-610/915/80-W15	610 x 915 x 80	U15 - 99,9995 %	13,5	900 / 140 Pa	10,10
YAFI HF 80-762/762/80-W15	762 x 762 x 80	U15 - 99,9995 %	14,0	940 / 140 Pa	10,80
YAFI HF 80-915/915/80-W15	915 x 915 x 80	U15 - 99,9995 %	20,3	1350 / 140 Pa	15,20
YAFI HF 80-610/1220/80-W15	610 x 1220 x 80	U15 - 99,9995 %	18,0	1200 / 140 Pa	13,50

HEPA FILTERS

Gel Seal HEPA Filters Aluminium Frame - 91mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms in order to provide laminar flow. Glass fibre paper folded with thermoplastic glue and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. Gel Seal is used on to frame in order to guarantee a perfect seal. Epoxy painted protection grid are used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium


Frame Separators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

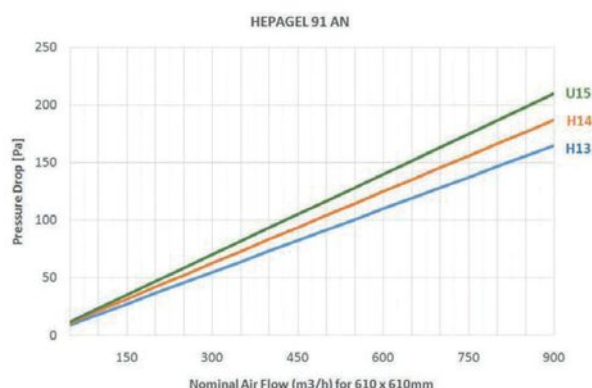

Applications

→ Air conditioning applications or industrial processing systems

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced.

Product Code

YAFI HF 91

Filter Type	HG Hepa filter with Gel seal
Frame	A A:Aluminium
Pleat height	N N:55mm
Protektion mesh	D T:Single D:Double
Gasket	G G:Gel seal
Efficiency	EN1822 E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	--------------------------	--------------------	--------------------------	----------------

H13					
YAFI HF 91-305/305/91-H13	305 x 305 x 91	H13 - 99,95 %	2,4	150 / 100 Pa	3,40
YAFI HF 91-305/610/91-H13	305 x 610 x 91	H13 - 99,95 %	4,6	300 / 100 Pa	5,30
YAFI HF 91-457/457/91-H13	457 x 457 x 91	H13 - 99,95 %	5,2	340 / 100 Pa	5,80
YAFI HF 91-457/610/91-H13	457 x 610 x 91	H13 - 99,95 %	6,8	450 / 100 Pa	5,90
YAFI HF 91-535/535/91-H13	535 x 535 x 91	H13 - 99,95 %	7,0	465 / 100 Pa	6,40
YAFI HF 91-575/575/91-H13	575 x 575 x 91	H13 - 99,95 %	8,0	535 / 100 Pa	6,80
YAFI HF 91-610/610/91-H13	610 x 610 x 91	H13 - 99,95 %	9,0	600 / 100 Pa	7,30
YAFI HF 91-610/762/91-H13	610 x 762 x 91	H13 - 99,95 %	11,2	750 / 100 Pa	8,50
YAFI HF 91-610/915/91-H13	610 x 915 x 91	H13 - 99,95 %	13,5	900 / 100 Pa	10,70
YAFI HF 91-762/762/91-H13	762 x 762 x 91	H13 - 99,95 %	14,0	940 / 100 Pa	11,50
YAFI HF 91-915/915/91-H13	915 x 915 x 91	H13 - 99,95 %	20,3	1350 / 100 Pa	16,20
YAFI HF 91-610/1220/91-H13	610 x 1220 x 91	H13 - 99,95 %	18,0	1200 / 100 Pa	14,30

H14					
YAFI HF 91-305/305/91-H14	305 x 305 x 91	H14 - 99,995 %	2,4	150 / 125 Pa	3,40
YAFI HF 91-305/610/91-H14	305 x 610 x 91	H14 - 99,995 %	4,6	300 / 125 Pa	5,30
YAFI HF 91-457/457/91-H14	457 x 457 x 91	H14 - 99,995 %	5,2	340 / 125 Pa	5,80
YAFI HF 91-457/610/91-H14	457 x 610 x 91	H14 - 99,995 %	6,8	450 / 125 Pa	5,90
YAFI HF 91-535/535/91-H14	535 x 535 x 91	H14 - 99,995 %	7,0	465 / 125 Pa	6,40
YAFI HF 91-575/575/91-H14	575 x 575 x 91	H14 - 99,995 %	8,0	535 / 125 Pa	6,80
YAFI HF 91-610/610/91-H14	610 x 610 x 91	H14 - 99,995 %	9,0	600 / 125 Pa	7,30
YAFI HF 91-610/762/91-H14	610 x 762 x 91	H14 - 99,995 %	11,2	750 / 125 Pa	8,50
YAFI HF 91-610/915/91-H14	610 x 915 x 91	H14 - 99,995 %	13,5	900 / 125 Pa	10,70
YAFI HF 91-762/762/91-H14	762 x 762 x 91	H14 - 99,995 %	14,0	940 / 125 Pa	11,50
YAFI HF 91-915/915/91-H14	915 x 915 x 91	H14 - 99,995 %	20,3	1350 / 125 Pa	16,20
YAFI HF 91-610/1220/91-H14	610 x 1220 x 91	H14 - 99,995 %	18,0	1200 / 125 Pa	14,30

U15					
YAFI HF 91-305/305/91-U15	305 x 305 x 91	U15 - 99,9995 %	2,4	150 / 140 Pa	3,40
YAFI HF 91-305/610/91-U15	305 x 610 x 91	U15 - 99,9995 %	4,6	300 / 140 Pa	5,30
YAFI HF 91-457/457/91-U15	457 x 457 x 91	U15 - 99,9995 %	5,2	340 / 140 Pa	5,80
YAFI HF 91-457/610/91-U15	457 x 610 x 91	U15 - 99,9995 %	6,8	450 / 140 Pa	5,90
YAFI HF 91-535/535/91-U15	535 x 535 x 91	U15 - 99,9995 %	7,0	465 / 140 Pa	6,40
YAFI HF 91-575/575/91-U15	575 x 575 x 91	U15 - 99,9995 %	8,0	535 / 140 Pa	6,80
YAFI HF 91-610/610/91-U15	610 x 610 x 91	U15 - 99,9995 %	9,0	600 / 140 Pa	7,30
YAFI HF 91-610/762/91-U15	610 x 762 x 91	U15 - 99,9995 %	11,2	750 / 140 Pa	8,50
YAFI HF 91-610/915/91-U15	610 x 915 x 91	U15 - 99,9995 %	13,5	900 / 140 Pa	10,70
YAFI HF 91-762/762/91-U15	762 x 762 x 91	U15 - 99,9995 %	14,0	940 / 140 Pa	11,50
YAFI HF 91-915/915/91-U15	915 x 915 x 91	U15 - 99,9995 %	20,3	1350 / 140 Pa	16,20
YAFI HF 91-610/1220/91-U15	610 x 1220 x 91	U15 - 99,9995 %	18,0	1200 / 140 Pa	14,30

HEPA FILTERS

Gel Seal HEPA Filters Aluminium Frame - 104mm



Description

Designed as very high efficiency final filters for use in air conditioning systems, housing-ducts or diffusers of hospitals, laboratories and clean rooms in order to provide laminar flow. Glass fibre paper folded with thermo plastic glue and media pack is placed in to aluminum frame and polyurethane glue is obtained for the best sealing between filter medium and frame. Gel Seal is used on to frame in order to guarantee a perfect seal. Epoxy painted protection grid sare used both at up stream and down stream side. Each single filter is tested according to EN 1822.

Special Features

Filter Type - Laminar flow HEPA Panel

Filter Media - Micro Glass Fibre

Frame - Extruded Aluminium Frame


Seperators - Thermoplastic glue beads

Bonding - 2 component polyurethane

Gasket - Continuous poured gasket or EPDM

Final Pressure Drop - 600 Pa

Max. Temperature - 80 °C

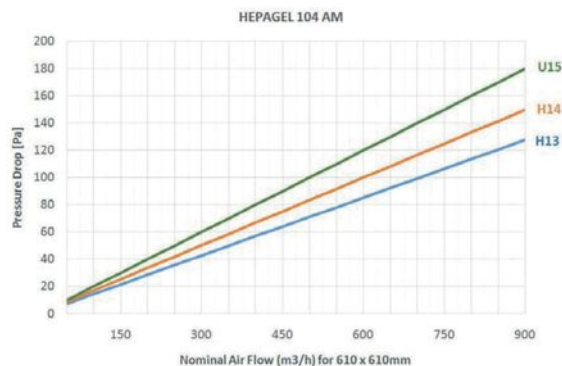

Applications

→ Air conditioning applications or industrial processing systems

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced.

Product Code

YAFI HF 104

Filter Type	HG Hepa filter with Gel seal
Frame	A A:Aluminium
Pleat height	M M:80mm
Protektion mesh	D T:Single D:Double
Gasket	G G:Gel seal
Efficiency	EN1822 E10 to U15

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Rated Air Flow (m3/h)	Weight (Kg)
--------------	-----------------------	--------------------------	--------------------	--------------------------	----------------

H13					
YAFI HF 104-305/305/104-H13	305 x 305 x 104	H13 - 99,95 %	3,1	150 / 85 Pa	3,80
YAFI HF 104-305/610/104-H13	305 x 610 x 104	H13 - 99,95 %	6,2	300 / 85 Pa	5,90
YAFI HF 104-457/457/104-H13	457 x 457 x 104	H13 - 99,95 %	7,0	340 / 85 Pa	6,40
YAFI HF 104-457/610/104-H13	457 x 610 x 104	H13 - 99,95 %	9,4	450 / 85 Pa	6,50
YAFI HF 104-535/535/104-H13	535 x 535 x 104	H13 - 99,95 %	9,6	465 / 85 Pa	6,90
YAFI HF 104-575/575/104-H13	575 x 575 x 104	H13 - 99,95 %	11,0	535 / 85 Pa	7,40
YAFI HF 104-610/610/104-H13	610 x 610 x 104	H13 - 99,95 %	12,4	600 / 85 Pa	8,80
YAFI HF 104-610/762/104-H13	610 x 762 x 104	H13 - 99,95 %	15,5	750 / 85 Pa	9,70
YAFI HF 104-610/915/104-H13	610 x 915 x 104	H13 - 99,95 %	18,6	900 / 85 Pa	11,70
YAFI HF 104-762/762/104-H13	762 x 762 x 104	H13 - 99,95 %	19,2	940 / 85 Pa	12,80
YAFI HF 104-915/915/104-H13	915 x 915 x 104	H13 - 99,95 %	28,0	1350 / 85 Pa	17,20
YAFI HF 104-610/1220/104-H13	610 x 1220 x 104	H13 - 99,95 %	24,8	1200 / 85 Pa	15,30

H14					
YAFI HF 104-305/305/104-H14	305 x 305 x 104	H14 - 99,995 %	3,1	150 / 100 Pa	3,80
YAFI HF 104-305/610/104-H14	305 x 610 x 104	H14 - 99,995 %	6,2	300 / 100 Pa	5,90
YAFI HF 104-457/457/104-H14	457 x 457 x 104	H14 - 99,995 %	7,0	340 / 100 Pa	6,40
YAFI HF 104-457/610/104-H14	457 x 610 x 104	H14 - 99,995 %	9,4	450 / 100 Pa	6,50
YAFI HF 104-535/535/104-H14	535 x 535 x 104	H14 - 99,995 %	9,6	465 / 100 Pa	6,90
YAFI HF 104-575/575/104-H14	575 x 575 x 104	H14 - 99,995 %	11,0	535 / 100 Pa	7,40
YAFI HF 104-610/610/104-H14	610 x 610 x 104	H14 - 99,995 %	12,4	600 / 100 Pa	8,80
YAFI HF 104-610/762/104-H14	610 x 762 x 104	H14 - 99,995 %	15,5	750 / 100 Pa	9,70
YAFI HF 104-610/915/104-H14	610 x 915 x 104	H14 - 99,995 %	18,6	900 / 100 Pa	11,70
YAFI HF 104-762/762/104-H14	762 x 762 x 104	H14 - 99,995 %	19,2	940 / 100 Pa	12,80
YAFI HF 104-915/915/104-H14	915 x 915 x 104	H14 - 99,995 %	28,0	1350 / 100 Pa	17,20
YAFI HF 104-610/1220/104-H14	610 x 1220 x 104	H14 - 99,995 %	24,8	1200 / 100 Pa	15,30

U15					
YAFI HF 104-305/305/104-U15	305 x 305 x 104	U15 - 99,9995 %	3,1	150 / 120 Pa	3,80
YAFI HF 104-305/610/104-U15	305 x 610 x 104	U15 - 99,9995 %	6,2	300 / 120 Pa	5,90
YAFI HF 104-457/457/104-U15	457 x 457 x 104	U15 - 99,9995 %	7,0	340 / 120 Pa	6,40
YAFI HF 104-457/610/104-U15	457 x 610 x 104	U15 - 99,9995 %	9,4	450 / 120 Pa	6,50
YAFI HF 104-535/535/104-U15	535 x 535 x 104	U15 - 99,9995 %	9,6	465 / 120 Pa	6,90
YAFI HF 104-575/575/104-U15	575 x 575 x 104	U15 - 99,9995 %	11,0	535 / 120 Pa	7,40
YAFI HF 104-610/610/104-U15	610 x 610 x 104	U15 - 99,9995 %	12,4	600 / 120 Pa	8,80
YAFI HF 104-610/762/104-U15	610 x 762 x 104	U15 - 99,9995 %	15,5	750 / 120 Pa	9,70
YAFI HF 104-610/915/104-U15	610 x 915 x 104	U15 - 99,9995 %	18,6	900 / 120 Pa	11,70
YAFI HF 104-762/762/104-U15	762 x 762 x 104	U15 - 99,9995 %	19,2	940 / 120 Pa	12,80
YAFI HF 104-915/915/104-U15	915 x 915 x 104	U15 - 99,9995 %	28,0	1350 / 120 Pa	17,20
YAFI HF 104-610/1220/104-U15	610 x 1220 x 104	U15 - 99,9995 %	24,8	1200 / 120 Pa	15,30



FILTERS FOR ODORS AND FATTY VAPORS


FILTERS FOR ODORS AND FATTY VAPORS

Extended Surface Activated Carbon Panel Filter



Description

Designed for adsorption of odours and gasses in air conditioning application in industrial and commercial air handling units. Activated carbon impregnated synthetic media is pleated and placed in to water resistant card board frame. Synthetic media is supported with metal mesh and pleated for high filtration area. Available at standard and out of standard size. Ideal solution to improve indoor air quality for light industrial applications.

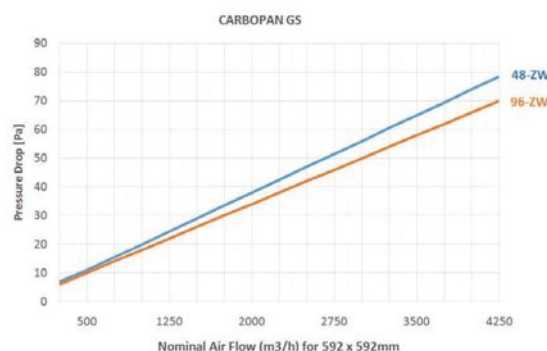

Special Features

Filter Type - Extended Surface Panel Filter

Filter Media - Synthetic Fiber Impregnated with Activated Carbon

Frame - Galvanized Steel

Filter Class - Odour Filtration

Final Pressure Drop - 250 Pa

Max. Temperature - 80 °C

Applications

→ Primary filter for odor and fumes filtration

Product Code

YAFI AU-KF

Advantages

- Robust Construction for rapid installation
- Fully supported media between two wire grid
- Economic operation and high filtration surface
- Synthetic Fiber Media impregnated with finely ground activated carbon.
- Customised sizes are available on request.


Filter Type	KK	Activated carbon panel filter
Frame	G	G: Galvanized steel
Media	S	Sintethic fiber media
Pleat Type	Z	ZigZag
Gasket	X	Without
Dimension	—	WxHxD
Efficiency	ZW	Activated carbon

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
48-ZW						
YAFI AU-KF-287/287/48-ZW	287 x 287 x 48	G4	Coarse 65 %	0,17	850 / 55	0,70
YAFI AU-KF-392/492/48-ZW	392 x 492 x 48	G4	Coarse 65 %	0,40	1950 / 55	1,30
YAFI AU-KF-492/492/48-ZW	492 x 492 x 48	G4	Coarse 65 %	0,50	2600 / 55	1,60
YAFI AU-KF-492/625/48-ZW	492 x 625 x 48	G4	Coarse 65 %	0,62	3000 / 55	2,00
YAFI AU-KF-287/592/48-ZW	287 x 592 x 48	G4	Coarse 65 %	0,34	1700 / 55	1,20
YAFI AU-KF-492/592/48-ZW	492 x 592 x 48	G4	Coarse 65 %	0,60	2820 / 55	1,80
YAFI AU-KF-592/592/48-ZW	592 x 592 x 48	G4	Coarse 65 %	0,70	3400 / 55	2,10

96-ZW						
YAFI AU-KF-287/287/96-ZW	287 x 287 x 96	G4	Coarse 65 %	0,25	1060 / 40	1,20
YAFI AU-KF-392/492/96-ZW	392 x 492 x 96	G4	Coarse 65 %	0,60	2400 / 40	2,30
YAFI AU-KF-492/492/96-ZW	492 x 492 x 96	G4	Coarse 65 %	0,75	3000 / 40	2,60
YAFI AU-KF-492/625/96-ZW	492 x 625 x 96	G4	Coarse 65 %	0,95	3600 / 40	3,20
YAFI AU-KF-287/592/96-ZW	287 x 592 x 96	G4	Coarse 65 %	0,50	2125 / 40	2,00
YAFI AU-KF-492/592/96-ZW	492 x 592 x 96	G4	Coarse 65 %	0,90	3500 / 40	3,20
YAFI AU-KF-592/592/96-ZW	592 x 592 x 96	G4	Coarse 65 %	1,10	4250 / 40	3,90


FILTERS FOR ODORS AND FATTY VAPORS

Activated Carbon Panel Filter Filled With Carbon Pellet

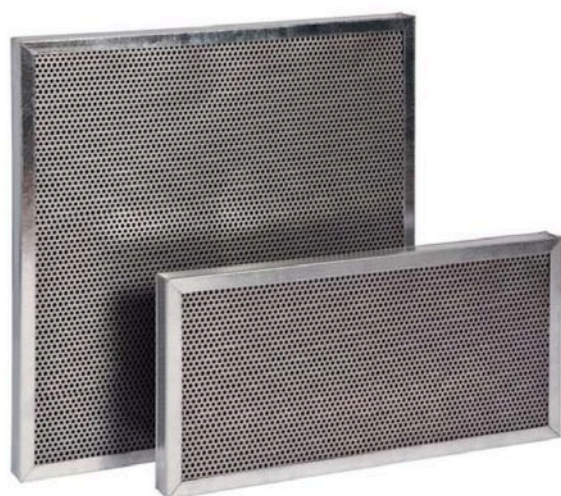

Description

Designed for adsorption of odours and gasses in air conditioning application in industrial and commercial air handling units. Plastic frame is filled with loose granular or extruded activated carbon media which allows very long service life. Suitable for heavy industrial application with high performance.

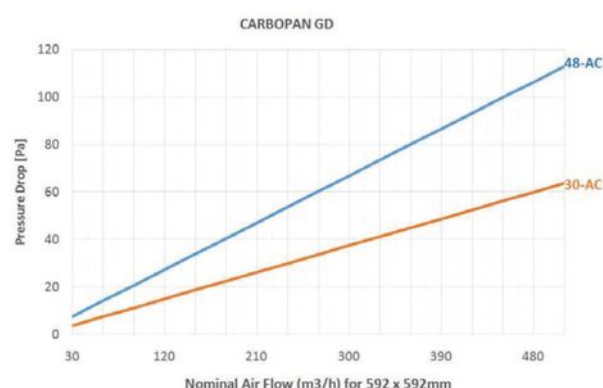

Special Features

Filter Type - AC Filled Panel Filter

Filter Media - Activated Carbon Pellet

Frame - Galvanized Steel / Stainless Steel

Filter Class - Odour Filtration

Max. Temperature - 80 °C

RH Max. - 70%

Applications

➔ Adsorption of odours and gases in air conditioning applications.

Product Code

YAFI AU PF

Advantages

- ➔ Robust Construction for rapid installation
- ➔ Vibrated fill technique to prevent media settlement
- ➔ Available in gas adsorption and chemisorption
- ➔ Robust construction allows easy mounting and removal
- ➔ Customised sizes can be produced.

Filter Type	KD	Activated carbon panel filter
Frame	G	G: Galvanized steel
Media	K	Pellet carbon media
Pleat Type	D	Filled
Gasket	X	Without
Dimension	—	WxHxD
Efficiency	AC	Activated carbon

Product Code	Dimensions (WxHxD)	Media	Carbon (Weight)	Rated Air Flow (m3/h)	Initial Pressure Drop (Pa)	Weight (Kg)
30-AC						
YAFI AU PF-287/287/30-AC	287 x 287 x 30	AC	1,35	85	45	2,80
YAFI AU PF-392/492/30-AC	392 x 492 x 30	AC	3,20	200	45	5,40
YAFI AU PF-492/492/30-AC	492 x 492 x 30	AC	4,00	240	45	8,00
YAFI AU PF-492/625/30-AC	492 x 625 x 30	AC	5,00	310	45	9,00
YAFI AU PF-287/592/30-AC	287 x 592 x 30	AC	2,80	175	45	5,50
YAFI AU PF-492/592/30-AC	492 x 592 x 30	AC	4,80	290	45	9,80
YAFI AU PF-592/592/30-AC	592 x 592 x 30	AC	5,80	350	45	11,50

48-AC						
YAFI AU PF-287/287/48-AC	287 x 287 x 48	AC	2,2	85	80	3,50
YAFI AU PF-392/492/48-AC	392 x 492 x 48	AC	5	200	80	6,75
YAFI AU PF-492/492/48-AC	492 x 492 x 48	AC	6,4	240	80	10,00
YAFI AU PF-492/625/48-AC	492 x 625 x 48	AC	8	310	80	11,20
YAFI AU PF-287/592/48-AC	287 x 592 x 48	AC	4,5	175	80	6,90
YAFI AU PF-492/592/48-AC	492 x 592 x 48	AC	7,7	290	80	12,00
YAFI AU PF-592/592/48-AC	592 x 592 x 48	AC	9	350	80	14,50

Weight calculated with a bulk density of ab. 500 kg/m3.

FILTERS FOR ODORS AND FATTY VAPORS

Activated Carbon Cartridges



Description

Designed for adsorption of odours (deodorization), adsorption of VOC and low toxicity gases for use in industrial and commercial air handling units. Best smell and contaminants adsorption is assured by the possibility of choosing the most suitable adsorption medium for each request. Cartridges are made with galvanized expanded sheet and filled with activated carbon which are connected with a quick fastening system to the supporting plate for 8 or 16 cartridges and gasket gives maximum air tightness. Special design of the cartridge makes maintenance and carbon change very easy.

Special Features

Filter Type - Activated Carbon Filled Cylinder

Filter Media - Activated Carbon, Impregnated Activated Carbon, Activated Alumina

Frame - Galvanized Steel / Stainless Steel

Filter Class - Odour Filtration

Max. Temperature - 40 °C

RH Max. - 70%

Applications

➔ Molecular filter for high efficiency and long-term control of molecular contaminants in

Product Code

YAFI AU-PA4

Advantages

- ➔ Robust construction for reliable operation
- ➔ Rapid bayonet fitting system
- ➔ Lower pressure drop with high performance
- ➔ Leak-free installation ensures maximum possible efficiency
- ➔ Re-Filable with new carbon media

Filter Type	SK	Carbon cartridges filter
Frame	G	G: Galvanized steel
	S	S: Stainless steel
Media	AC	AC: Activated carbon
Model	A	Model A
Dimension	–	WxHxD

Product Code	Dimensions (WxHxD)	Media	Carbon (Weight)	Rated Air Flow (m3/h)	Initial Pressure Drop (Pa)	Weight (Kg)
COMPLETE SET						
YAFI AU-PA4 - GA450 - 1/4	305 x 305 x 40	AC	9,60	850	150	11,00
YAFI AU-PA4 -GA450 - 1/2	305 x 610 x 40	AC	19,20	1700	150	22,50
YAFI AU-PA4 - GA450 - 3/4	508 x 610 x 40	AC	29,00	2550	150	34,00
YAFI AU-PA4 - GA450 - 1/1	610 x 610 x 40	AC	39,00	3400	150	44,50

Product Code	Diameter OD / ID Ø mm	Length	Rated Air Flow (m3/h)	Initial Pressure Drop (Pa)	Carbon (Weight)	Weight (total)
SPARE CARTRIDGE						
YAFI AU-PA4-145/250	145 / 88	250	85	80	1,40	2,20
YAFI AU-PA4-145/450	145 / 88	450	210	270	2,40	3,90
YAFI AU-PA4-145/600	145 / 88	600	210	145	3,40	5,50



Product Code	Dimensions	Cartridge No	Weight
SUPPORTING FRAME			
YAFI AU-PA4-04-305/305/40	305 x 305 x 70	4	1,5
YAFI AU-PA4-08-305/305/40	305 x 610 x 70	8	3,0
YAFI AU-PA4-12-305/305/40	508 x 610 x 70	12	5,0
YAFI AU-PA4-16-305/305/40	610 x 610 x 70	16	5,5



FILTERS FOR ODORS AND FATTY VAPORS

Activated Carbon Cartridges



Description

Designed for adsorption of odours (deodorization), adsorption of VOC and low toxicity gases for use in industrial and commercial air handling units. Best smell and contaminants adsorption is assured by the possibility of choosing the most suitable adsorption medium for each request. Cartridges are made with painted expanded sheet and filled with activated carbon which are connected with a quick fastening system to the supporting plate for 8 or 16 cartridges and gasket gives maximum air tightness. Special design of the cartridge makes maintenance and carbon change very easy.

Special Features

Filter Type - Activated Carbon Filled Cylinder

Filter Media - Activated Carbon, Impregnated Activated Carbon, Activated Alumina

Frame - Galvanized Steel / Stainless Steel

Filter Class - Odour Filtration

Max. Temperature - 40 °C

RH Max. - 70%

Applications

➔ Molecular filter for high efficiency and long-term control of molecular contaminants in

Product Code

YAFI AU PAU

Advantages

- ➔ Robust construction for reliable operation
- ➔ Rapid bayonet fitting system
- ➔ Lower pressure drop with high performance
- ➔ Leak-free installation ensures maximum possible efficiency
- ➔ Re-Filable with new carbon media

Filter Type	SK	Carbon cartridges filter
Frame	G	G:Galvanized steel
Media	AC	AC:Activated carbon
Model	B	Model B
Dimension	—	WxHxD

Product Code	Dimensions (WxHxD)	Media	Carbon (Weight)	Rated Air Flow (m3/h)	Initial Pressure Drop (Pa)	Weight (Kg)
COMPLETE SET						
YAFI AU PAU - GB400 - 1/4	305 x 305 x 40	AC	1,20	850	270	13,80
YAFI AU PAU -GB400 - 1/2	305 x 610 x 40	AC	24,0	1700	270	27,50
YAFI AU PAU - GB400 - 3/4	508 x 610 x 40	AC	36,0	2250	270	41,50
YAFI AU PAU - GB400 - 1/1	610 x 610 x 40	AC	48,0	3400	270	54,00

Product Code	Diameter OD / ID Ø mm	Length	Rated Air Flow (m3/h)	Initial Pressure Drop (Pa)	Carbon (Weight)	Weight (total)
SPARE CARTRIDGE						
YAFI AU PAU-140/250	140 / 68	250	85	80	1,90	2,60
YAFI AU PAU-140/400	140 / 68	400	210	270	3,00	4,10
YAFI AU PAU-140/600	140 / 68	600	210	145	4,50	6,10



Product Code	Dimensions	Cartridge No	Weight
SUPPORTING FRAME			
YAFI AU PAU-04-305/305/40	305 x 305 x 70	4	1,8
YAFI AU PAU-08-305/610/40	305 x 610 x 70	8	3,5
YAFI AU PAU-12-508/610/40	508 x 610 x 70	12	5,5
YAFI AU PAU-16-610/610/40	610 x 610 x 70	16	6,0



FILTERS FOR ODORS AND FATTY VAPORS

Rigid Bag Activated Carbon Filter



Special Features

- Filter Type** - W Compact AC Filter
- Filter Media** - AC Between Sythetic Layer
400 gr/m2
- Frame** - Plastic Frame (Polypropylene)
- Filter Class** - F7 / ePM1 55%
- Final Pressure Drop** - 450 Pa
- Max. Temperature** - 75 °C

Applications


- ➔ Molecular filter for high efficiency and long-term control of molecular contaminants in

Advantages

- ➔ Rigid construction filter used in narrow space
- ➔ Lower pressure drop with high performance with high contamination removal capacities
- ➔ Small granules of activated carbon in two layers of nonwoven fabric, no dust release and regeneration
- ➔ Light and easy maintenance through handles

Description

Designed for adsorption of odours and gasses with dust filtration efficiency in air conditioning application in industrial and commercial air handling units. F7 efficiency integrated non woven media which has two layers containing small granules of activated carbon is pleated and placed in to plastic frame. A polyurethane resin guarantee the seal between the filter pack and the frame. In order to extend the service life of the filter it is advised to use of G4-F5 prefilters before Rigicarb filters.

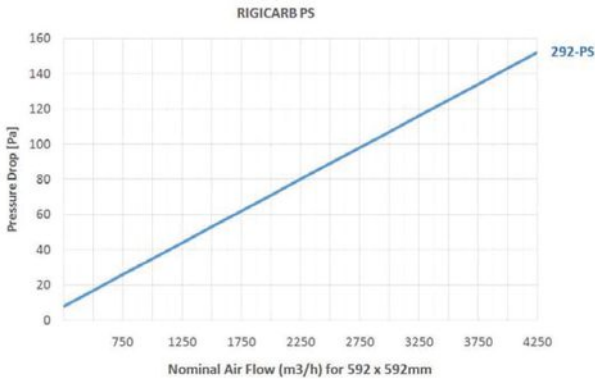


Product Code

YAFI AU RF

Filter Type	KW	V Bank AC filter
Frame	P	P:Plasticic
Filter Media	C	C:25mm
Protection Mesh	X	X:No P:Plastic
Gasket	X	X:No E:EPDM P:Polyurethane
Efficiency	EN779 F7	
	ePM2,5 65%	ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
F7						
YAFI AU RF-287/592/292-CF7	287x592x292	F7	ePM1 55%	4,5	1700 / 120	4,50
YAFI AU RF-490/592/292-CF7	490x592x292	F7	ePM1 55%	7,2	2800 / 120	7,50
YAFI AU RF-592/592/292-CF7	592x592x292	F7	ePM1 55%	9,0	3400 / 120	8,20

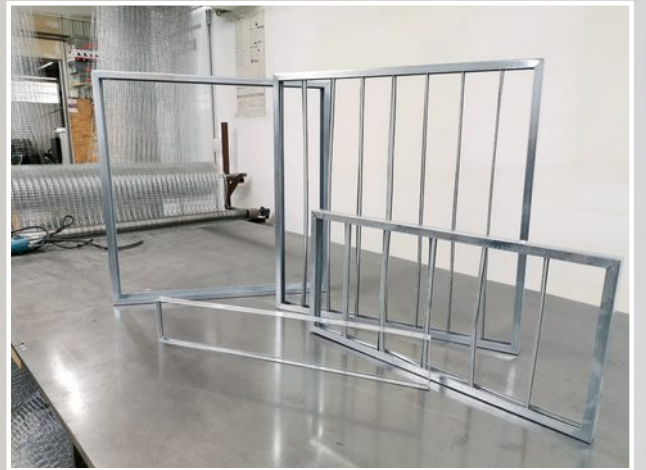

FILTER FRAMES

FILTER FRAMES

Filter Housing Frame For Pre Pre-Filters and Fine Filters



Description

Designed as terminal housing for Hepa/Wlpa filters which is used in clean areas in hospitals, pharmaceutical and food industries. It allows easy and quick installation of filters using pivoting clamps fitted with compression limiter. Made of galvanized steel, fully welded seams, white epoxy painted and oven baked. Can be produced with connection from top or side. All boxes are tested according to DIN 1946/4 and guarantee the tightness of the box through a leak test.

Special Features

Product Type - Filter Housing Frame

Metal Type - Galvanized Steel / Stainless Steel

Gasket - Polyurethane / EPDM Flat

Remarks - Safe-holding with 4 clips

Filter Models - Panel / Pocket / Compact Filters

Applications

→ Helps to install the filters easily and safely

Product Code

YAFI LFP

Advantages

- Modular concept for all installations
- Robust Construction for rapid installation
- Available for several filters in a single frame
- Customised sizes are available on request.

Model	FK	Housing frame
Frame	G	G:Galvanized steel
	S	S:stainless steel
Media	75	Depth: 75/100/125
Dimension	–	WxHxD

Product Code	Dimensions (WxHxD)	ISO 16890	Media Area (m2)
75mm			
YAFI LFP-G75-XX-305/305/75	305 x 305 x 75	287 x 287	25 , 48
YAFI LFP-G75-XX-305/610/75	305 x 610 x 75	287 x 592	25 , 48
YAFI LFP-G75-XX-508/610/75	508 x 610 x 75	490 x 592	25 , 48
YAFI LFP-G75-XX-610/610/75	610 x 610 x 75	592 x 592	25 , 48

100mm			
YAFI LFP-G100-XX-305/305/100	305 x 305 x 100	287 x 287	25 , 48 , 75 / 25 + 48
YAFI LFP-G100-XX-305/610/100	305 x 610 x 100	287 x 592	25 , 48 , 75 / 25 + 48
YAFI LFP-G100-XX-508/610/100	508 x 610 x 100	490 x 592	25 , 48 , 75 / 25 + 48
YAFI LFP-G100-XX-610/610/100	610 x 610 x 100	592 x 592	25 , 48 , 75 / 25 + 48

125mm			
YAFI LFP-G125-XX-305/305/125	305 x 305 x 125	287 x 287	25 , 48 , 75 , 96 / 25 + 48 / 25 + 75
YAFI LFP-G125-XX-305/610/125	305 x 610 x 125	287 x 592	25 , 48 , 75 , 96 / 25 + 48 / 25 + 75
YAFI LFP-G125-XX-508/610/125	508 x 610 x 125	490 x 592	25 , 48 , 75 , 96 / 25 + 48 / 25 + 75
YAFI LFP-G125-XX-610/610/125	610 x 610 x 125	592 x 592	25 , 48 , 75 , 96 / 25 + 48 / 25 + 75



Frames for all types of filters
20/25/28/98 mm made
of galvanized steel.

Inner frames for all types
of bag filters, from 287-892mm.

All products are made of galvanized
steel with a thickness of 0.45-0.50mm



Peščarska 10,
11070 Novi Beograd,
Srbija



office@yafifilteri.co.rs



+381 11 2144 940
+381 11 2147 600