


RIGID FILTERS


RIGID FILTERS

Rigid Panel Filter Metal Frame

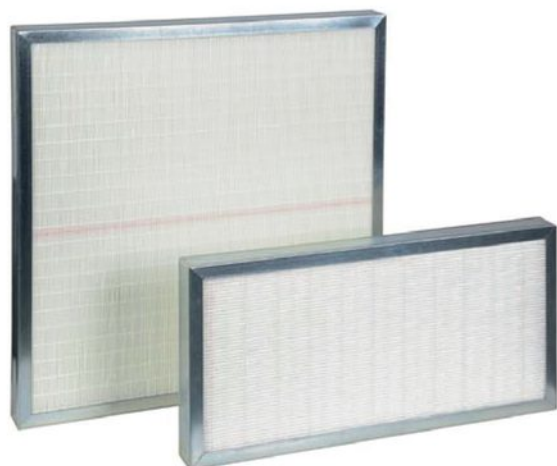

Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. Suitable for an airhandling unit in which space is limited. Can be used as high efficiency filters instead of low efficiency current filters in air conditioning systems. Alternative filters for traditional panel filters which can be used where high efficiency air is needed. Standard and out of standard size can be produced.

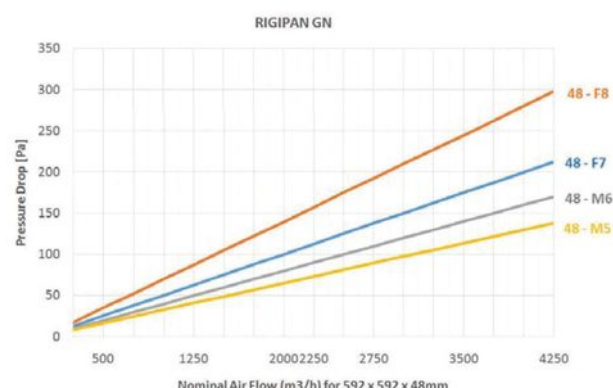

Special Features

Filter Type - Compact Panel Filter

Filter Media - Glass Fiber

Frame - Galvanized Steel

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI PRF

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced.

Filter Type	UK Rigid Panel Filter
Frame	G G:Galvanized Steel
Pleat Height	N N:50mm L:100mm
Protection Mesh	X X:No T:Single D:Double
Gasket	X X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 - 48						
YAFI PRF-287/592/48-M6	287 x 592 x 48	M6	ePM10 65%	3,0	1000 / 65	1,70
YAFI PRF-490/592/48-M6	490 x 592 x 48	M6	ePM10 65%	5,0	1660 / 65	2,80
YAFI PRF-592/592/48-M6	592 x 592 x 48	M6	ePM10 65%	6,0	2000 / 65	3,00
YAFI PRF-287/592/96-M6	287 x 592 x 96	M6	ePM10 65%	6,0	1500 / 75	2,90
YAFI PRF-490/592/96-M6	490 x 592 x 96	M6	ePM10 65%	10,0	2500 / 75	4,80
YAFI PRF-592/592/96-M6	592 x 592 x 96	M6	ePM10 65%	12,0	3000 / 75	5,00

F7 - 48						
YAFI PRF-287/592/48-F7	287 x 592 x 48	F7	ePM1 50 %	3,0	1000 / 80	1,70
YAFI PRF-490/592/48-F7	490 x 592 x 48	F7	ePM1 50 %	5,0	1660 / 80	2,80
YAFI PRF-592/592/48-F7	592 x 592 x 48	F7	ePM1 50 %	6,0	2000 / 80	3,00
YAFI PRF-287/592/96-F7	287 x 592 x 96	F7	ePM1 50 %	6,0	1500 / 85	2,90
YAFI PRF-490/592/96-F7	490 x 592 x 96	F7	ePM1 50 %	10,0	2500 / 85	4,80
YAFI PRF-592/592/96-F7	592 x 592 x 96	F7	ePM1 50 %	12,0	3000 / 85	5,00

F8 - 48						
YAFI PRF-287/592/48-F8	287 x 592 x 48	F8	ePM1 65%	3,0	1000 / 100	1,70
YAFI PRF-490/592/48-F8	490 x 592 x 48	F8	ePM1 65%	5,0	1660 / 100	2,80
YAFI PRF-592/592/48-F8	592 x 592 x 48	F8	ePM1 65%	6,0	2000 / 100	3,00
YAFI PRF-287/592/96-F8	287 x 592 x 96	F8	ePM1 65%	6,0	1500 / 105	2,90
YAFI PRF-490/592/96-F8	490 x 592 x 96	F8	ePM1 65%	10,0	2500 / 105	4,80
YAFI PRF-592/592/96-F8	592 x 592 x 96	F8	ePM1 65%	12,0	3000 / 105	5,00

F9 - 48						
YAFI PRF-287/592/48-F9	287 x 592 x 48	F9	ePM1 80 %	3,0	1000 / 140	1,70
YAFI PRF-490/592/48-F9	490 x 592 x 48	F9	ePM1 80 %	5,0	1660 / 140	2,80
YAFI PRF-592/592/48-F9	592 x 592 x 48	F9	ePM1 80 %	6,0	2000 / 140	3,00
YAFI PRF-287/592/96-F9	287 x 592 x 96	F9	ePM1 80 %	6,0	1500 / 145	2,90
YAFI PRF-490/592/96-F9	490 x 592 x 96	F9	ePM1 80 %	10,0	2500 / 145	4,80
YAFI PRF-592/592/96-F9	592 x 592 x 96	F9	ePM1 80 %	12,0	3000 / 145	5,00


RIGID FILTERS

Rigid Panel Filter Plastic Frame



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. Suitable for an air handling unit in which space is limited. Can be used as high efficiency filters instead of low efficiency current filters in air conditioning systems. Alternative filters for traditional panel filters which can be used where high efficiency air is needed. Standard and out of standard size can be produced.

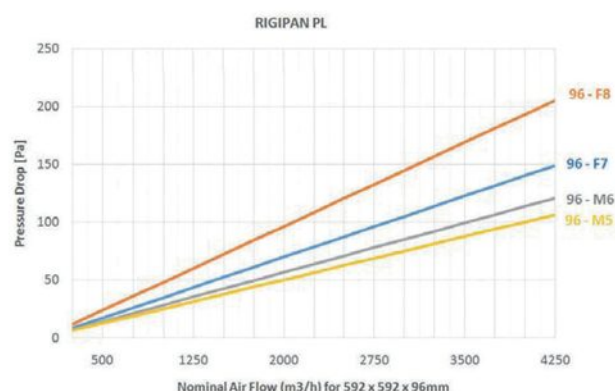

Special Features

Filter Type - Compact Panel Filter

Filter Media - Glass Fiber

Frame - Plastic Frame (Polypropylene)

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI PRF

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced

Filter Type	UK Rigid Panel Filter	
Frame	P	P: Plastic
Pleat Height	N	N: 50mm L: 100mm
Protection Mesh	X	X: No T: Single D: Double
Gasket	X	X: No E: EPDM P: Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 - 48 / 96						
YAFI PRF-287/592/48-M6	287 x 592 x 48	M6	ePM10 65%	3,0	1000 / 65	1,40
YAFI PRF-490/592/48-M6	490 x 592 x 48	M6	ePM10 65%	5,0	1660 / 65	2,20
YAFI PRF-592/592/48-M6	592 x 592 x 48	M6	ePM10 65%	6,0	2000 / 65	2,50
YAFI PRF-287/592/96-M6	287 x 592 x 96	M6	ePM10 65%	6,0	1500 / 75	1,90
YAFI PRF-490/592/96-M6	490 x 592 x 96	M6	ePM10 65%	10,0	2500 / 75	3,20
YAFI PRF-592/592/96-M6	592 x 592 x 96	M6	ePM10 65%	12,0	3000 / 75	3,40

F7 - 48 / 96						
YAFI PRF-287/592/48-F7	287 x 592 x 48	F7	ePM1 50 %	3,0	1000 / 80	1,40
YAFI PRF-490/592/48-F7	490 x 592 x 48	F7	ePM1 50 %	5,0	1660 / 80	2,20
YAFI PRF-592/592/48-F7	592 x 592 x 48	F7	ePM1 50 %	6,0	200 / 80	2,50
YAFI PRF-287/592/96-F7	287 x 592 x 96	F7	ePM1 50 %	6,0	1500 / 85	1,90
YAFI PRF-490/592/96-F7	490 x 592 x 96	F7	ePM1 50 %	10,0	2500 / 85	3,20
YAFI PRF-592/592/96-F7	592 x 592 x 96	F7	ePM1 50 %	12,0	3000 / 85	3,40

F8 - 48 / 96						
YAFI PRF-287/592/48-F8	287 x 592 x 48	F8	ePM1 65%	3,0	1000 / 100	1,40
YAFI PRF-490/592/48-F8	490 x 592 x 48	F8	ePM1 65%	5,0	1660 / 100	2,20
YAFI PRF-592/592/48-F8	592 x 592 x 48	F8	ePM1 65%	6,0	2000 / 100	2,50
YAFI PRF-287/592/96-F8	287 x 592 x 96	F8	ePM1 65%	6,0	1500 / 105	1,90
YAFI PRF-490/592/96-F8	490 x 592 x 96	F8	ePM1 65%	10,0	2500 / 105	3,20
YAFI PRF-592/592/96-F8	592 x 592 x 96	F8	ePM1 65%	12,0	3000 / 105	3,40

F9 - 48 / 96						
YAFI PRF-287/592/48-F9	287 x 592 x 48	F9	ePM1 80 %	3,0	1000 / 140	1,40
YAFI PRF-490/592/48-F9	490 x 592 x 48	F9	ePM1 80 %	5,0	1660 / 140	2,20
YAFI PRF-592/592/48-F9	592 x 592 x 48	F9	ePM1 80 %	6,0	2000 / 140	2,50
YAFI PRF-287/592/96-F9	287 x 592 x 96	F9	ePM1 80 %	6,0	1500 / 145	1,90
YAFI PRF-490/592/96-F9	490 x 592 x 96	F9	ePM1 80 %	10,0	2500 / 145	3,20
YAFI PRF-592/592/96-F9	592 x 592 x 96	F9	ePM1 80 %	12,0	3000 / 145	3,40


RIGID FILTERS

Rigid Panel Filter Plastic Frame with Header



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. Suitable for an air handling unit in which space is limited. Can be used as high efficiency filters instead of low efficiency current filters in air conditioning systems. Alternative filters for traditional panel filters which can be used where high efficiency air is needed. Standard and out of standard size can be produced.

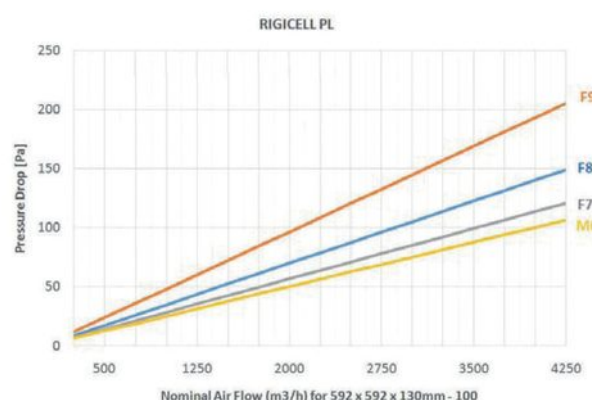

Special Features

Filter Type - Compact Panel Filter

Filter Media - Glass Fiber

Frame - Plastic Frame (Polypropylene)

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Advantages

- ➔ Rigid construction filter used in narrow space
- ➔ Interchangeable with pre-existing filters without the need to modification on existing construction.
- ➔ Large filtration surface, Low pressure drop
- ➔ Long operating life, reduced operating costs
- ➔ Customised sizes can be produced.

Applications

- ➔ Air conditioning applications or industrial processing systems

Product Code

YAFI PRF

Filter Type	LK	Rigid Panel Filter (Header)
Frame	P	P: Plastic
Pleat Height	N	N: 50mm L: 100mm
Protection Mesh	X	X: No T: Single D: Double
Gasket	X	X: No E: EPDM P: Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 - ePM10 65%						
YAFI PRF-287/592/130-M6	287x592x130	M6	ePM10 65%	3,2	1125 / 90	1,80
YAFI PRF-490/592/130-M6	490x592x130	M6	ePM10 65%	5,0	1900 / 90	3,10
YAFI PRF-592/592/130-M6	592x592x130	M6	ePM10 65%	6,5	2250 / 90	3,00
YAFI PRF-287/592/130-M6	287x592x130	M6	ePM10 65%	6,4	1700 / 120	2,00
YAFI PRF-490/592/130-M6	490x592x130	M6	ePM10 65%	10,5	2750 / 120	3,60
YAFI PRF-592/592/130-M6	592x592x130	M6	ePM10 65%	13,0	3400 / 120	3,50

F7 - ePM1 50 %						
YAFI PRF-287/592/130-F7	287x592x130	F7	ePM1 50 %	3,2	1125 / 100	2,50
YAFI PRF-490/592/130-F7	490x592x130	F7	ePM1 50 %	5,0	1900 / 100	3,60
YAFI PRF-592/592/130-F7	592x592x130	F7	ePM1 50 %	6,5	2250 / 100	4,00
YAFI PRF-287/592/130-F7	287x592x130	F7	ePM1 50 %	6,4	1500 / 90	2,50
YAFI PRF-490/592/130-F7	490x592x130	F7	ePM1 50 %	10,5	2500 / 90	4,10
YAFI PRF-592/592/130-F7	592x592x130	F7	ePM1 50 %	13,0	3000 / 90	4,50

F8 - ePM1 65 %						
YAFI PRF-287/592/130-F8	287x592x130	F8	ePM1 65 %	3,2	1125 / 120	1,80
YAFI PRF-490/592/130-F8	490x592x130	F8	ePM1 65 %	5,0	1900 / 120	3,10
YAFI PRF-592/592/130-F8	592x592x130	F8	ePM1 65 %	6,5	2250 / 120	3,00
YAFI PRF-287/592/130-F8	287x592x130	F8	ePM1 65 %	6,4	1700 / 135	2,00
YAFI PRF-490/592/130-F8	490x592x130	F8	ePM1 65 %	10,5	2750 / 135	3,60
YAFI PRF-592/592/130-F8	592x592x130	F8	ePM1 65 %	13,0	3400 / 135	3,50

F9 - ePM1 80 %						
YAFI PRF-287/592/130-F9	287x592x130	F9	ePM1 80 %	3,2	1125 / 145	1,80
YAFI PRF-490/592/130-F9	490x592x130	F9	ePM1 80 %	5,0	1900 / 145	3,10
YAFI PRF-592/592/130-F9	592x592x130	F9	ePM1 80 %	6,5	2250 / 145	3,00
YAFI PRF-287/592/130-F9	287x592x130	F9	ePM1 80 %	6,4	1700 / 150	2,00
YAFI PRF-490/592/130-F9	490x592x130	F9	ePM1 80 %	10,5	2750 / 150	3,60
YAFI PRF-592/592/130-F9	592x592x130	F9	ePM1 80 %	13,0	3400 / 150	3,50


RIGID FILTERS

Rigid Panel Filter Galvanized Frame with Header



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. Suitable for an air handling unit in which space is limited. Can be used as high efficiency filters instead of low efficiency current filters in air conditioning systems. Compact and robust construction and growing efficiency during operation can be used as final filter. Shock proof plastic frame holding a glass micro fiber filter panel; medium is pleated in order to create a rigid filter structure.

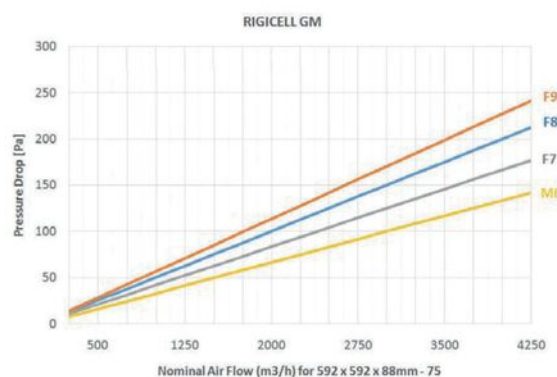

Special Features

Filter Type - Compact Panel Filter

Filter Media - Glass Fiber

Frame - Galvanized Steel

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI PRF

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced.

Filter Type	LK	Rigid Panel Filter (Header)
Frame	G	G: Galvanized steel
Pleat Height	M	M: 75mm
Protection Mesh	T	X: No T: Single D: Double
Gasket	X	X: No E: EPDM P: Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 - ePM10 65%						
YAFI PRF-287/592/88-M6	287x592x88	M6	ePM10 65%	4,5	1500 / 100	3
YAFI PRF-490/592/88-M6	490x592x88	M6	ePM10 65%	7,6	2500 / 100	4,5
YAFI PRF-592/592/88-M6	592x592x88	M6	ePM10 65%	9,0	3000 / 100	5


F7 - ePM1 50 %						
YAFI PRF-287/592/88-F7	287x592x88	F7	ePM1 50 %	6,4	1500 / 125	3
YAFI PRF-490/592/88-F7	490x592x88	F7	ePM1 50 %	10,5	2500 / 125	4,5
YAFI PRF-592/592/88-F7	592x592x88	F7	ePM1 50 %	13,0	3000 / 125	5

F8 - ePM1 65 %						
YAFI PRF-287/592/88-F8	287x592x88	F8	ePM1 65 %	6,4	1500 / 150	3
YAFI PRF-490/592/88-F8	490x592x88	F8	ePM1 65 %	10,5	2500 / 150	4,5
YAFI PRF-592/592/88-F8	592x592x88	F8	ePM1 65 %	13,0	3000 / 150	5

F9 - ePM1 80 %						
YAFI PRF-287/592/88-F9	287x592x88	F9	ePM1 80 %	6,4	1500 / 170	3
YAFI PRF-490/592/88-F9	490x592x88	F9	ePM1 80 %	10,5	2500 / 170	4,5
YAFI PRF-592/592/88-F9	592x592x88	F9	ePM1 80 %	13,0	3000 / 170	5


RIGID FILTERS

Rigid Panel Filter Aluminium Frame

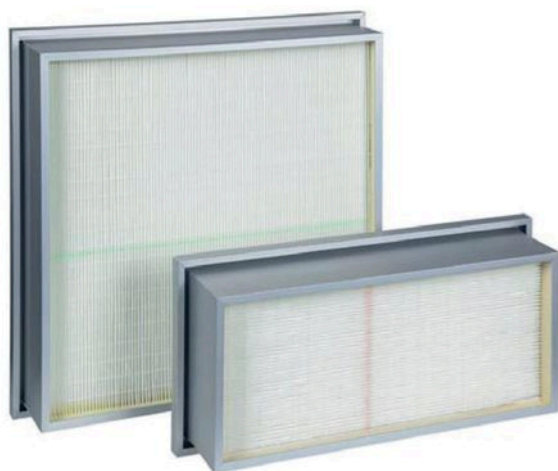

Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. Suitable for an air handling unit in which space is limited. Can be used as high efficiency filters instead of low efficiency current filters in air conditioning systems. Compact and robust construction and growing efficiency during operation can be used as final filter. Extruded aluminium frame holding a glass micro fiber filter panel; medium is pleated in order to create a rigid filter structure.

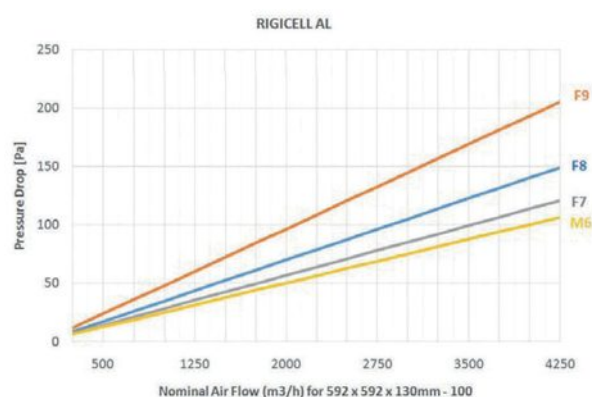

Special Features

Filter Type - Compact Panel Filter

Filter Media - Glass Fiber

Frame - Extruded Aluminium Frame

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 90 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI PRF-AL

Advantages

- Rigid construction filter used in narrow space
- Interchangeable with pre-existing filters without the need to modification on existing construction.
- Large filtration surface, Low pressure drop
- Long operating life, reduced operating costs
- Customised sizes can be produced

Filter Type	LK	Rigid Panel Filter (Header)
Frame	A	A:Aluminium
Pleat Height	L	M:75mm L: 100mm
Protection Mesh	T	X:No T:Single D:Double
Gasket	X	X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 - ePM10 65%						
YAFI PRF-AL-287/592/130-M6	287x592x130	M6	ePM10 65%	6,4	1500 / 90	3,2
YAFI PRF-AL-490/592/130-M6	490x592x130	M6	ePM10 65%	10,5	2500 / 90	4,8
YAFI PRF-AL-592/592/130-M6	592x592x130	M6	ePM10 65%	13,0	3000 / 90	5,7


F7 - ePM1 50 %						
YAFI PRF-AL-287/592/130-F7	287x592x130	F7	ePM1 50 %	6,4	1500 / 110	3,2
YAFI PRF-AL-490/592/130-F7	490x592x130	F7	ePM1 50 %	10,5	2500 / 110	4,8
YAFI PRF-AL-592/592/130-F7	592x592x130	F7	ePM1 50 %	13,0	3000 / 110	5,7

F8 - ePM1 65 %						
YAFI PRF-AL-287/592/130-F8	287x592x130	F8	ePM1 65 %	6,4	1500 / 140	3,2
YAFI PRF-AL-490/592/130-F8	490x592x130	F8	ePM1 65 %	10,5	2500 / 140	4,8
YAFI PRF-AL-592/592/130-F8	592x592x130	F8	ePM1 65 %	13,0	3000 / 140	5,7

F9 - ePM1 80 %						
YAFI PRF-AL-287/592/130-F9	287x592x130	F9	ePM1 80 %	6,4	1500 / 175	3,2
YAFI PRF-AL-490/592/130-F9	490x592x130	F9	ePM1 80 %	10,5	2500 / 175	4,8
YAFI PRF-AL-592/592/130-F9	592x592x130	F9	ePM1 80 %	13,0	3000 / 175	5,7


RIGID FILTERS

Rigid Bag Filter Plastic Frame 4V | Standard

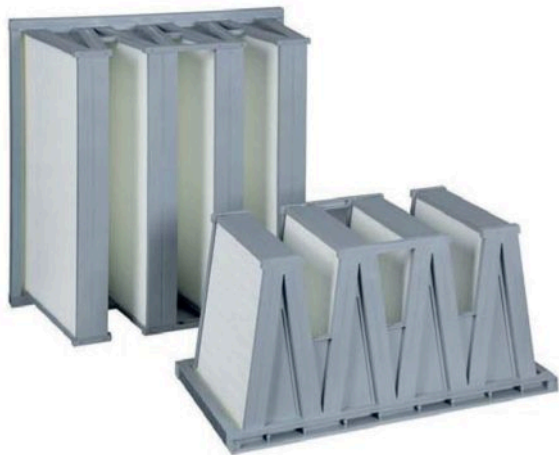

Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermoplastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

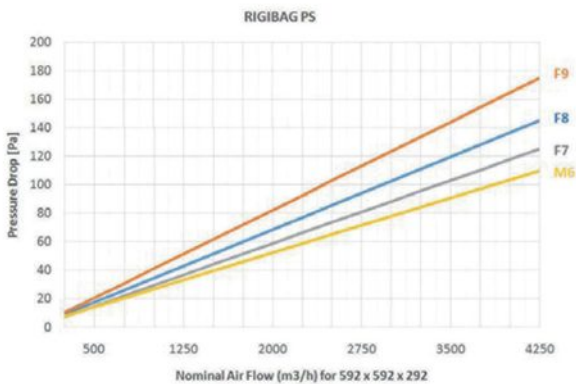

Special Features

- Filter Type** - W Compact Panel Filter
- Filter Media** - Glass Fiber
- Frame** - Plastic Frame (Polypropylene)
- Filter Class** - M6 to F8 / ePM10 65%- ePM1 80%
- Final Pressure Drop** - 450 Pa
- Max. Temperature** - 80 °C

Applications

- ➔ Air conditioning applications or industrial processing systems

Product Code

YAFI RBF

Advantages

- ➔ Rigid construction filter used in narrow space
- ➔ Excellent performance in difficult conditions with high dust-retention capacity
- ➔ Large filtration surface with latest developed glass fiber media with high water repelancy
- ➔ Light and easy maintenance through handles

Filter Type	WK W bank compact filter	
Frame	P	P:Plastic
Pleat Height	S	S:25mm
Protection Mesh	X	X:No P:Plastic
Gasket	X	X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779	
	ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
M6 ePM10 65%						
YAFI RBF-287/592/292-M6	287x592x292	M6	ePM10 65%	9,0	1750 / 65	3,50
YAFI RBF-490/592/292-M6	490x592x292	M6	ePM10 65%	14,5	2800 / 65	5,40
YAFI RBF-592/592/292-M6	592x592x292	M6	ePM10 65%	18,0	3400 / 65	6,50


F7 ePM1 50 %						
YAFI RBF-287/592/292-F7	287x592x292	F7	ePM1 50 %	9,0	1750 / 80	3,50
YAFI RBF-490/592/292-F7	490x592x292	F7	ePM1 50 %	14,5	2800 / 80	5,40
YAFI RBF-592/592/292-F7	592x592x292	F7	ePM1 50 %	18,0	3400 / 80	6,50

F8 ePM1 65 %						
YAFI RBF-287/592/292-F8	287x592x292	F8	ePM1 65 %	9,0	1750 / 95	3,50
YAFI RBF-490/592/292-F8	490x592x292	F8	ePM1 65 %	14,5	2800 / 95	5,40
YAFI RBF-592/592/292-F8	592x592x292	F8	ePM1 65 %	18,0	3400 / 95	6,50

F9 ePM1 80 %						
YAFI RBF-287/592/292-F9	287x592x292	F9	ePM1 80 %	9,0	1750 / 115	3,50
YAFI RBF-490/592/292-F9	490x592x292	F9	ePM1 80 %	14,5	2800 / 115	5,40
YAFI RBF-592/592/292-F9	592x592x292	F9	ePM1 80 %	18,0	3400 / 115	6,50


RIGID FILTERS

Rigid Bag Filter Plastic Frame 4V | Energy

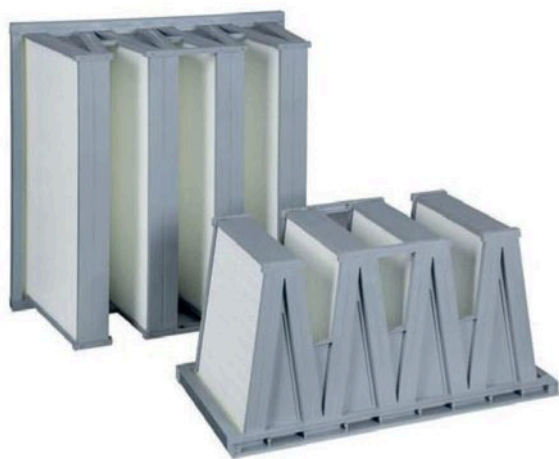

Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermoplastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

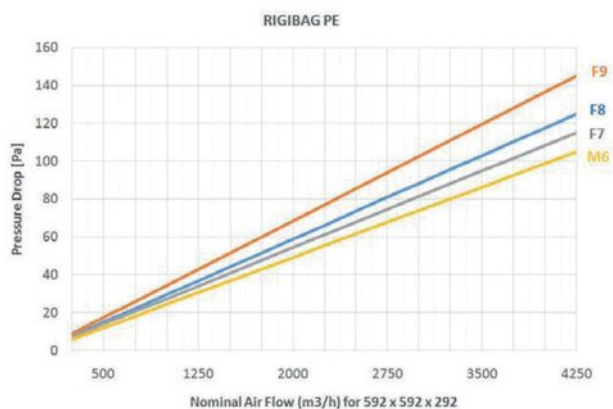

Special Features

- Filter Type** - W Compact Filter
- Filter Media** - Glass Fiber
- Frame** - Plastic Frame (Polypropylene)
- Filter Class** - M6 to F8 / ePM10 65%- ePM1 80%
- Final Pressure Drop** - 450 Pa
- Max. Temperature** - 80 °C

Advantages

- ➔ Rigid construction filter used in narrow space
- ➔ Excellent performance in difficult conditions With high dust-retention capacity
- ➔ Large filtration surface with latest developed glass fiber media with high water repelancy
- ➔ Light and easy maintenance through handles

Applications

- ➔ Air conditioning applications or industrial processing systems

Product Code

YAFI RBF

Filter Type	WK W bank compact filter	
Frame	P	P:Plastic
Pleat Height	E	E:25mm - close pleat
Protection Mesh	X	X:No P:Plastic
Gasket	X	X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779	
	ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
292-M6						
YAFI RBF-287/592/292-M6	287x592x292	M6	ePM10 65%	10,0	1700 / 65	6,50
YAFI RBF-490/592/292-M6	490x592x292	M6	ePM10 65%	16,0	2800 / 65	8,00
YAFI RBF-592/592/292-M6	592x592x292	M6	ePM10 65%	20,0	3400 / 65	9,50

292-F7						
YAFI RBF-287/592/292-F7	287x592x292	F7	ePM1 50 %	10,0	1700 / 75	6,50
YAFI RBF-490/592/292-F7	490x592x292	F7	ePM1 50 %	16,0	2800 / 75	8,00
YAFI RBF-592/592/292-F7	592x592x292	F7	ePM1 50 %	20,0	3400 / 75	9,50

292-F8						
YAFI RBF-287/592/292-F8	287x592x292	F8	ePM1 65 %	10,0	1700 / 85	6,50
YAFI RBF-490/592/292-F8	490x592x292	F8	ePM1 65 %	16,0	2800 / 85	8,00
YAFI RBF-592/592/292-F8	592x592x292	F8	ePM1 65 %	20,0	3400 / 85	9,50

292-F9						
YAFI RBF-287/592/292-F9	287x592x292	F9	ePM1 80 %	10,0	1700 / 95	6,50
YAFI RBF-490/592/292-F9	490x592x292	F9	ePM1 80 %	16,0	2800 / 95	8,00
YAFI RBF-592/592/292-F9	592x592x292	F9	ePM1 80 %	20,0	3400 / 95	9,50


RIGID FILTERS

Rigid Bag Filter Plastic Frame / Max Flow



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermoplastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

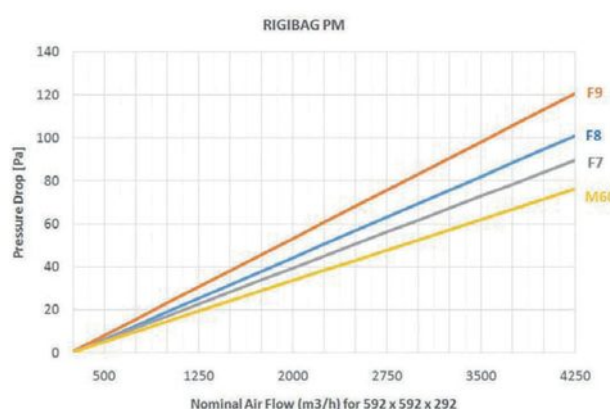

Special Features

Filter Type - W Compact Panel Filter

Filter Media - Glass Fiber

Frame - Plastic Frame (Polypropylene)

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 80 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code YAFI RBF AIR FLOW

Advantages

- Rigid construction filter used in narrow space
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Customised sizes can be produced.

Filter Type	WK W bank compact filter
Frame	P P:Plastic
Pleat Height	M M:25mm - close pleat
Protection Mesh	D D:Double
Gasket	P E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
292-M6						
YAFI RBF AF 287/592/292-M6	287x592x292	M6	ePM10 65%	10,0	1700 / 65	6,50
YAFI RBF AF 490/592/292-M6	490x592x292	M6	ePM10 65%	16,0	2800 / 65	8,00
YAFI RBF AF 592/592/292-M6	592x592x292	M6	ePM10 65%	20,0	3400 / 65	9,50

292-F7						
YAFI RBF AF 287/592/292-F7	287x592x292	F7	ePM1 50 %	10,0	1700 / 75	6,50
YAFI RBF AF 490/592/292-F7	490x592x292	F7	ePM1 50 %	16,0	2800 / 75	8,00
YAFI RBF AF 592/592/292-F7	592x592x292	F7	ePM1 50 %	20,0	3400 / 75	9,50

292-F8						
YAFI RBF AF 287/592/292-F8	287x592x292	F8	ePM1 65 %	10,0	1700 / 85	6,50
YAFI RBF AF 490/592/292-F8	490x592x292	F8	ePM1 65 %	16,0	2800 / 85	8,00
YAFI RBF AF 592/592/292-F8	592x592x292	F8	ePM1 65 %	20,0	3400 / 85	9,50

292-F9						
YAFI RBF AF 287/592/292-F9	287x592x292	F9	ePM1 80 %	10,0	1700 / 95	6,50
YAFI RBF AF 490/592/292-F9	490x592x292	F9	ePM1 80 %	16,0	2800 / 95	8,00
YAFI RBF AF 592/592/292-F9	592x592x292	F9	ePM1 80 %	20,0	3400 / 95	9,50


RIGID FILTERS

Rigid Bag Filter Metal Frame 4V



Description

Designed for high efficiency filtration for use in hospitals, pharmaceutical industry etc. In order to use high filtration surface glass fiber paper folded with constantly calibrated spacing using thermo plastic threads. High filtration surface enables high air flow rate at low pressure drop and high dust holding capacity compared to the traditional bag filters. Compact design and light construction gives the filter superior mechanical resistance and easy installation.

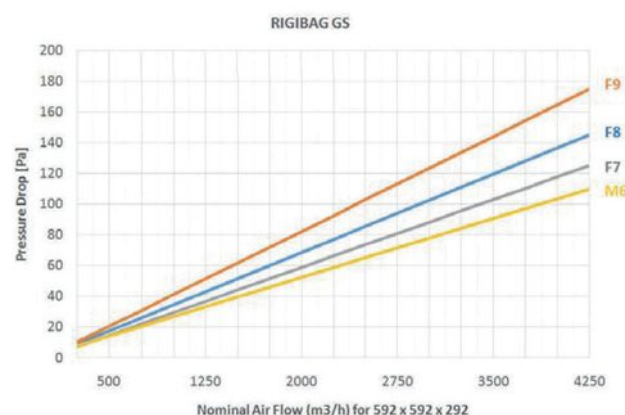

Special Features

Filter Type - W Compact Panel Filter

Filter Media - Glass Fiber

Frame - Galvanized Steel

Filter Class - M6 to F8 / ePM10 65%- ePM1 80%

Final Pressure Drop - 450 Pa

Max. Temperature - 80 °C

Applications

→ Air conditioning applications or industrial processing systems

Product Code

YAFI RBF

Advantages

- Rigid construction filter used in narrow space
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Customised sizes can be produced.

Filter Type	WK W bank compact filter	
Frame	G	G:Galvanized frame
Pleat Height	S	S:25mm
Protection Mesh	X	X:No P:Plastic
Gasket	X	X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779 ePM10 65%_ePM1 80% ISO 16890	

Product Code	Dimensions (WxHxD)	Class EN 779	ISO 16890	Media Area (m ²)	Rated Air Flow (m ³ /h)	Weight (Kg)
292-M6						
YAFI RBF-287/592/292-M6	287x592x292	M6	ePM10 65%	9,0	1750 / 65	9,00
YAFI RBF-490/592/292-M6	490x592x292	M6	ePM10 65%	14,5	2800 / 65	11,00
YAFI RBF-592/592/292-M6	592x592x292	M6	ePM10 65%	18,0	3400 / 65	12,50

292-F7						
YAFI RBF-287/592/292-F7	287x592x292	F7	ePM1 50 %	9,0	1750 / 80	9,00
YAFI RBF-490/592/292-F7	490x592x292	F7	ePM1 50 %	14,5	2800 / 80	11,00
YAFI RBF-592/592/292-F7	592x592x292	F7	ePM1 50 %	18,0	3400 / 80	12,50

292-F8						
YAFI RBF-287/592/292-F8	287x592x292	F8	ePM1 65 %	9,0	1750 / 95	9,00
YAFI RBF-490/592/292-F8	490x592x292	F8	ePM1 65 %	14,5	2800 / 95	11,00
YAFI RBF-592/592/292-F8	592x592x292	F8	ePM1 65 %	18,0	3400 / 95	12,50

292-F9						
YAFI RBF-287/592/292-F9	287x592x292	F9	ePM1 80 %	9,0	1750 / 115	9,00
YAFI RBF-490/592/292-F9	490x592x292	F9	ePM1 80 %	14,5	2800 / 115	11,00
YAFI RBF-592/592/292-F9	592x592x292	F9	ePM1 80 %	18,0	3400 / 115	12,50


RIGID FILTERS

Aluminium Separator Filters Galvanized Frame - 292mm



Description

Deep pleat filters are designed for high efficiency filtration and high air flow rate for use in hospitals, pharmaceutical industry etc. Instead of traditional mini pleat design corrugated aluminium is used as separator. These separators with doubled edge gives stiffness to the filter and filter can resist to high operation temperature. Made of galvanized sheet with front flange and double flange model is also available on request.

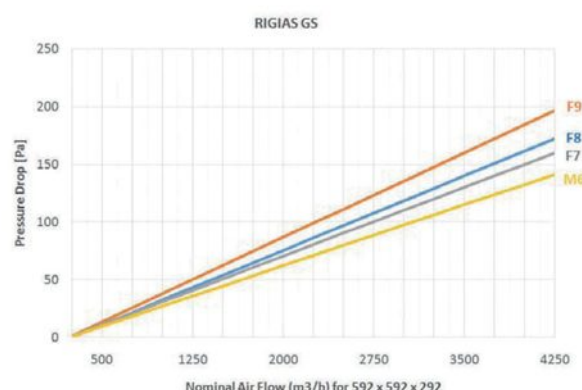

Special Features

Filter Type - Aluminum Separator Panel Filter

Filter Media - Micro Glass

Fibre Frame - Galvanized Steel

Separators - Corrugated Aluminum

Bonding - 2 component polyurethane

Final Pressure Drop - 450 Pa

Max. Temperature - 350 °C

Advantages

- Compact design & robust construction
- Excellent performance in difficult conditions with high dust-retention capacity
- Large filtration surface with latest developed glass fiber media with high water repelancy
- Customised sizes can be produced.

Applications

- Air conditioning applications or industrial processing systems

Product Code

YAFI AL SFG

Filter Type	AS Aluminium separator
Frame	G G:Galvanized steel
Model	S S:standard flow H:High flow
Flange	T X:Without T:Single D:Double
Gasket	P X:No E:EPDM P:Polyurethane
Efficiency	M6 to F9 EN 779
	ePM10 65%_ePM1 80% ISO 16890

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m2)	Press.Drop (Pa)	Weight (kg)
M6					
YAFI AL SFG-287/592/292-M6	287 x 592 x 292	ePM10 65%	7,0	1700 / 110 Pa	6,00
YAFI AL SFG-490/592/292-M6	490 x 592 x 292	ePM10 65%	11,0	2500 / 110 Pa	9,00
YAFI AL SFG-592/592/292-M6	592 x 592 x 292	ePM10 65%	14,0	3400 / 110 Pa	10,00
YAFI AL SFG-305/610/292-M6	305 x 610 x 292	ePM10 65%	7,0	2125 / 135 Pa	6,00
YAFI AL SFG-490/610/292-M6	490 x 610 x 292	ePM10 65%	11,0	3400 / 135 Pa	9,00
YAFI AL SFG-610/610/292-M6	610 x 610 x 292	ePM10 65%	14,0	4250 / 135 Pa	10,00

F7					
YAFI AL SFG-287/592/292-F7	287 x 592 x 292	ePM1 55%	7,0	1700 / 125 Pa	6,00
YAFI AL SFG-490/592/292-F7	490 x 592 x 292	ePM1 55%	11,0	2500 / 125 Pa	9,00
YAFI AL SFG-592/592/292-F7	592 x 592 x 292	ePM1 55%	14,0	3400 / 125 Pa	10,00
YAFI AL SFG-305/610/292-F7	305 x 610 x 292	ePM1 55%	7,0	2125 / 145 Pa	6,00
YAFI AL SFG-490/610/292-F7	490 x 610 x 292	ePM1 55%	11,0	3400 / 145 Pa	9,00
YAFI AL SFG-610/610/292-F7	610 x 610 x 292	ePM1 55%	14,0	4250 / 145 Pa	10,00

F8					
YAFI AL SFG-287/592/292-F7	287 x 592 x 292	ePM1 65%	7,0	1700 / 135 Pa	6,00
YAFI AL SFG-490/592/292-F7	490 x 592 x 292	ePM1 65%	11,0	2500 / 135 Pa	9,00
YAFI AL SFG-592/592/292-F7	592 x 592 x 292	ePM1 65%	14,0	3400 / 135 Pa	10,00
YAFI AL SFG-305/610/292-F7	305 x 610 x 292	ePM1 65%	7,0	2125 / 155 Pa	6,00
YAFI AL SFG-490/610/292-F7	490 x 610 x 292	ePM1 65%	11,0	3400 / 155 Pa	9,00
YAFI AL SFG-610/610/292-F7	610 x 610 x 292	ePM1 65%	14,0	4250 / 155 Pa	10,00

F9					
YAFI AL SFG-287/592/292-F7	287 x 592 x 292	ePM1 80%	7,0	1700 / 155 Pa	6,00
YAFI AL SFG-490/592/292-F7	490 x 592 x 292	ePM1 80%	11,0	2500 / 155 Pa	9,00
YAFI AL SFG-592/592/292-F7	592 x 592 x 292	ePM1 80%	14,0	3400 / 155 Pa	10,00
YAFI AL SFG-305/610/292-F7	305 x 610 x 292	ePM1 80%	7,0	2125 / 175 Pa	6,00
YAFI AL SFG-490/610/292-F7	490 x 610 x 292	ePM1 80%	11,0	3400 / 175 Pa	9,00
YAFI AL SFG-610/610/292-F7	610 x 610 x 292	ePM1 80%	14,0	4250 / 175 Pa	10,00


RIGID FILTERS

High Temperature Filters Galvanized Frame - 292mm



Description

Deep pleat filters are designed for high efficiency filtration and high air flow rate for use in hospitals, pharmaceutical industry etc. Instead of traditional mini pleat design corrugated aluminium is used as separator. These separators with doubled edge gives stiffness to the filter and filter can resist to high operation temperature. Made of galvanized sheet with front flange and double flange model is also available on request.

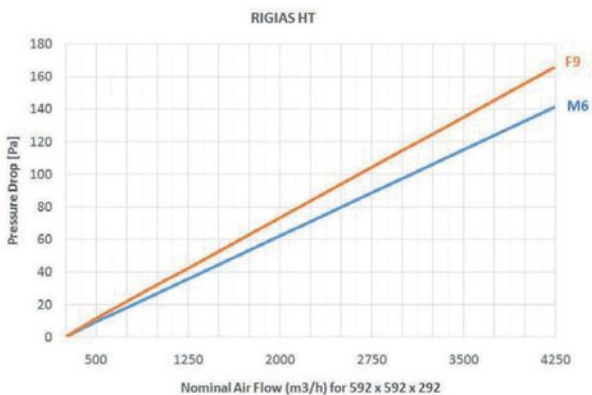

Special Features

Filter Type - Aluminum Separator Panel Filter

Filter Media - Micro Glass Fibre

Frame - Galvanized Steel

Separators - Corrugated Aluminum

Final Pressure Drop - 450 Pa

Max. Temperature - 350 °C

Applications

➔ Air conditioning applications or industrial processing systems

Product Code

YAFI RF HTG

Advantages

- ➔ Compact design & robust construction
- ➔ Excellent performance in difficult conditions with high dust-retention capacity
- ➔ Large filtration surface with latest developed glass fiber media with high water repelancy
- ➔ Customised sizes can be produced.

Filter Type	AS Aluminium separator
Frame	H Metal frame
	T High temperature
Flange	T X:Without T:Single D:Double
Gasket	F F:Fiber Clase Rope
Efficiency	M6 to F9 EN 779
	ePM10 65%_ePM1 80% ISO 16890

Product Code	Dimensions (WxHxD)	Efficiency (MPPS E %)	Media Area (m ²)	Press.Drop (Pa)	Weight (Kg)
M6					
YAFI RF HTG-287/592/292-M6	287 x 592 x 292	ePM10 65%	7,0	1700 / 110 Pa	
YAFI RF HTG-490/592/292-M6	490 x 592 x 292	ePM10 65%	11,0	2500 / 110 Pa	
YAFI RF HTG-592/592/292-M6	592 x 592 x 292	ePM10 65%	14,0	3400 / 110 Pa	
YAFI RF HTG-305/610/292-M6	305 x 610 x 292	ePM10 65%	7,0	2125 / 135 Pa	
YAFI RF HTG-490/610/292-M6	490 x 610 x 292	ePM10 65%	11,0	3400 / 135 Pa	
YAFI RF HTG-610/610/292-M6	610 x 610 x 292	ePM10 65%	14,0	4250 / 135 Pa	

F8					
YAFI RF HTG-287/592/292-F8	287 x 592 x 292	ePM1 65%	7,0	1700 / 135 Pa	
YAFI RF HTG-490/592/292-F8	490 x 592 x 292	ePM1 65%	11,0	2500 / 135 Pa	
YAFI RF HTG-592/592/292-F8	592 x 592 x 292	ePM1 65%	14,0	3400 / 135 Pa	
YAFI RF HTG-305/610/292-F8	305 x 610 x 292	ePM1 65%	7,0	2125 / 155 Pa	
YAFI RF HTG-490/610/292-F8	490 x 610 x 292	ePM1 65%	11,0	3400 / 155 Pa	
YAFI RF HTG-610/610/292-F8	610 x 610 x 292	ePM1 65%	14,0	4250 / 155 Pa	