

2026

Filtration, solutions and products.



A company in tune with the times.

**Our motivation... to guarantee
the purity of the air you breathe.**

At Deltrian, we understand the crucial importance of clean and healthy air in every area of life. That is why we put our exceptional expertise and our passion at the service of creating high-quality filters, capable of effectively removing contaminants and ensuring a safe and healthy environment.

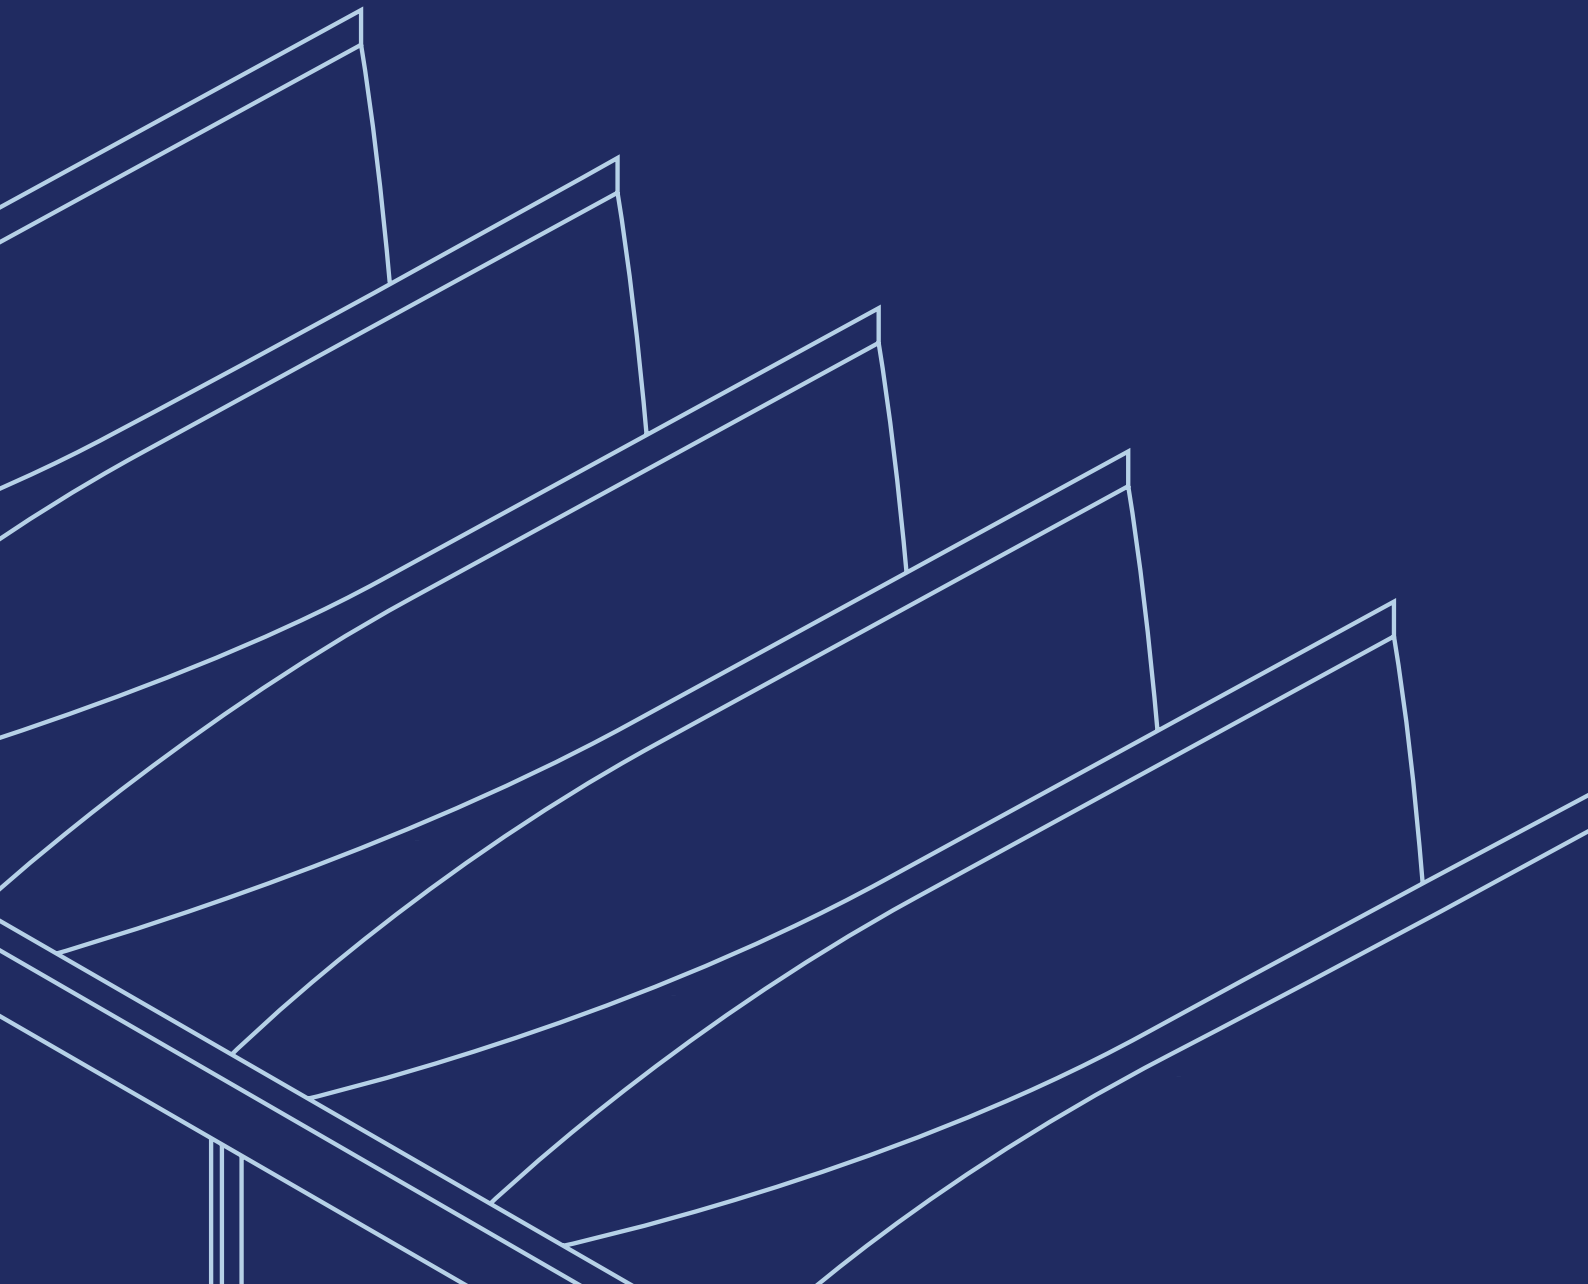


Table of contents.

OVERVIEW

About us	5
Productions	6
Logistics	6
Filtration Certifications	9
Q1 & VQE Certification	10
Guides to Our Labels and Certifications.....	11
Eurovent.....	12
Energy Concept	13
Sustainable Growth	14
LCA - EPD.....	15
EcoVadis	16
ODA - SUP - PM	18
ISO 16890.....	20
Virucidal Process	22
LFC Filter.....	23

OUR SERVICES

Total Filtration Management®.....	26
Total Dedusting Management®	28
Total Cost of Ownership (TCO)	30
Smart Filtering.....	32
Deltrian Academy	34

OUR BUSINESS SECTORS

HVAC.....	38
Biopharma	40
Autotive	42
Molecularare filtration	44
Cleanroom.....	46
Food industry	48
Energy : gas turbines	50
Energy : wind turbines	52
Transport: aviation	54
Transport: railway	56
Liquid Filtration.....	58
Air purifiers.....	60
Air Filter Classification.....	62

PRODUCTS

ISO COARSE prefilter.....	64
Fine filtration.....	91
Absolute filtration	136
Molecularare filtration	167
Boxes and mounting system.....	184
Air flow regulators	189
ATEX filter.....	191
Filters for gas turbines.....	197



At Deltrian, we purify the air you breathe at every moment.

We firmly believe that air quality has a direct impact on our health, our comfort and our productivity.



Rudolf Svrčina

Chief Executive Officer

We are driven by a clear mission: to give everyone the opportunity to breathe clean and healthy air.

It is with this deep commitment that we have established ourselves as the undisputed challenger in the field of air filtration, and we are proud to put our more than 55 years of expertise at the service of your well-being.

Endowed with a profound sense of responsibility, Rudolf designs and implements policies that promote a dynamic corporate culture in line with our collective vision.

Since 2023, Rudolf has held the position of Chief Executive Officer. For him, excellence begins with people. The team is the driving force behind every innovation, every tailor-made solution and every satisfied customer we serve. They bring their passion, their dedication and their expertise, day after day.

« Alone we can do so little ; together we can do so much. »

Helen Keller

Our production sites are designed to meet all your needs.

Deltrian relies on a clever geographical strategy to optimise its customer service. This multi-site approach is a considerable asset.

The dispersion of our production sites across Europe gives us geographical flexibility that reduces transport costs and delivery times, while allowing us to better serve our local customers with products tailored to their specific needs.



BELGIUM

In the heart of Belgium, our headquarters houses both a state-of-the-art production site and our innovative research and development initiatives.

SPAIN

A company within the Deltrian group with facilities in Madrid, dedicated to the manufacture and distribution of materials for air filtration and control dampers; we incorporate the latest technologies into our processes at the service of our customers.

FRANCE

Our French subsidiary, dedicated to the production and distribution of high-quality filtration solutions, is committed to providing innovative and high-performance products that meet the specific needs of our customers.

LITHUANIA

A replication of the Slovak success story that brings us closer to our Nordic customers and allows us to better respect the environment and align with our CSR policy.

THE NETHERLANDS

Thanks to our own production department in the Netherlands, our Dutch customers quickly receive their bag filters or panel filters in non-standard dimensions. If a customer has an urgent request, we will ensure that custom-made filters are delivered the next day.

SLOVAKIA

Our leading production site in Slovakia is the cornerstone of our expertise. Equipped with a state-of-the-art technology centre and high-precision test benches, we guarantee excellent air filters for optimal air quality.

Our logistics centres positioned at the heart of Europe.



The main mission of the logistics department is to ensure the availability of our products. We take great care of them so that they are delivered to our customers as efficiently and sustainably as possible.

With 10,000 references in the catalogue, this is a complex process that requires rigour and flawless organisation. At every stage of our supply chain, logistics intervenes: from the unloading of raw materials, through the resupply of production, to the delivery of the finished product to the customer. This requires great flexibility and a strong talent for organisation in a constantly changing environment.

Efficiency and safety

Our commitment to safety remains paramount, ensuring a safe and reliable working environment. In addition, the continuous training of production and logistics operators strengthens our ability to maintain high quality standards and respond effectively to operational challenges.




A recognised company.

Deltrian, certifications for our products and our company.

We have rigorously tested and certified our products to guarantee high standards of performance and safety. In addition, our company has been subjected to thorough evaluations by renowned certification bodies, demonstrating our commitment to excellence and compliance with the strictest industry standards.

These certifications attest to our dedication to providing top-tier filtration solutions and maintaining transparent and responsible business practices, thereby helping to create healthy and safe environments for our customers.

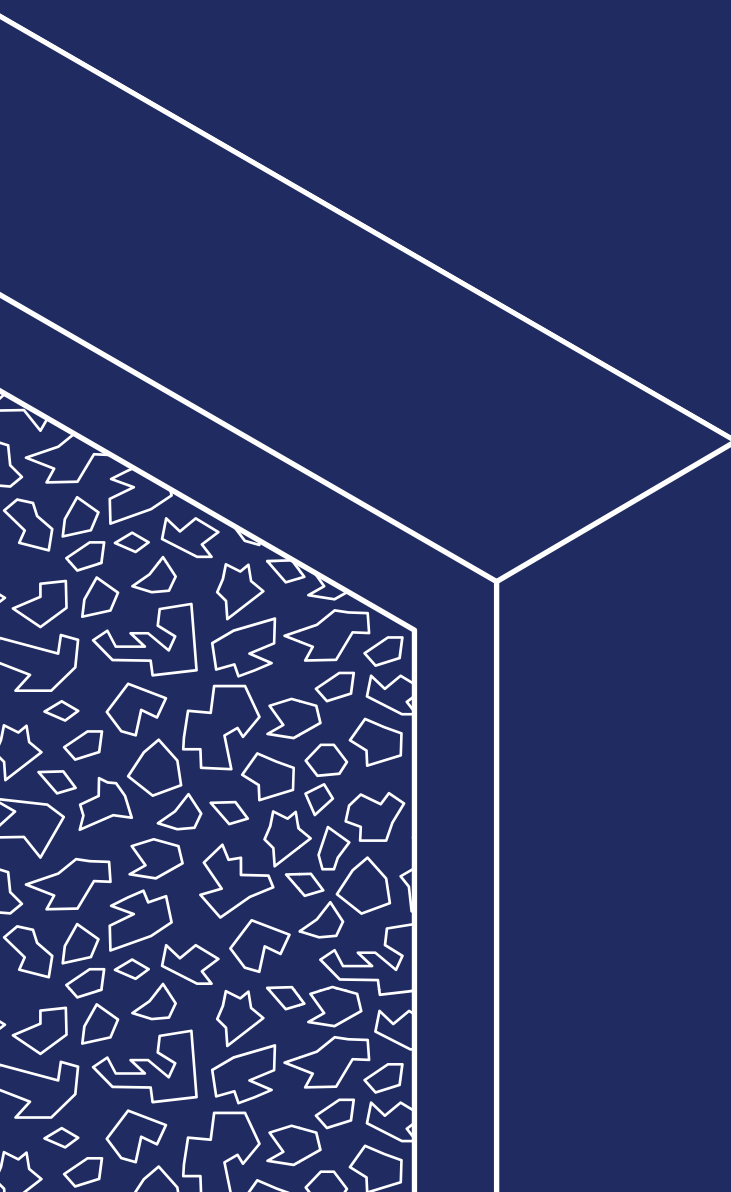

Certifications...

Our commitment to quality.



ISO 9001

Our company has been audited and certified according to the requirements of ISO 9001:2015 for the following activities:

The production and sale of medium, high and very high efficiency air filters, as well as air filtration systems in the tertiary, industrial and ultra-clean fields. Comprehensive management and control of air cleanliness, named TFM® (Total Filtration Management®). Comprehensive cleaning management of industrial installations, named TDM (Total Dedusting Management). The upgrading of air filtration installations, including assembly.



ISO 14001

Our company has been audited and certified according to the requirements of ISO 14001:2015 for the following activities:

The sale of medium, high and very high efficiency air filters, as well as air filtration systems in the tertiary, industrial and ultra-clean fields.



Service activity - TFM®

Our company has established and maintains a Safety Management system in compliance with LSC requirements for:

Assembly, replacement and maintenance of any filtration system to support our customers in industry and TFM®.



Automotive awards: our experience in the automotive industry.

Q1

On 12 May 2006, our company officially received the Q1 award from FORD MOTORS, and in 2014 we won the Volvo Quality Through Excellence Award. These two recognitions celebrate the quality of products and services provided by a supplier to the automotive giants.



For our company, this award is the fruit of a long collaboration with FORD, of relentless teamwork and continuous self-questioning in the search for solutions best suited to the technological advances of the

automotive industry. Indeed, Deltrian has been investing for many years in air quality management on paint lines.

Through its experience and action, our company helped FORD ensure that all vehicles coming off the manufacturer's production lines were aligned with the brand's inherent quality criteria.

Deltrian has thus become one of the few companies in Europe to obtain this certification. The Volvo Quality Through Excellence Award (VQE Award) recognises it as a privileged partner in the field of air filters for the automotive industry.



Guide to our labels and certifications.



Atex: European certification covering electrical and non-electrical equipment, attesting that a product can be used in an explosive atmosphere.



DIN EN 1822: The first European standard to translate filtration knowledge. This standard guarantees individual tests for HEPA filters, including leak tests.

EN 14476 +A2:07-2019

EN 14476: European standard for determining a product's ability to inactivate viruses. Products meeting EN 14476 are effective against naked or enveloped viruses, such as COVID-19, PRV, BVDV, Herpes virus, Rotavirus, Coronavirus, Influenza A HxNy virus, Vaccinia virus, HIV-1, Norovirus. This type of product is often combined with fungicidal and bactericidal products.



Eurovent Certified Performance: Quality label awarded by Eurovent, an independent provider of performance certification programmes.



F1 Classification: Indicates fire resistance according to the DIN 53438 standard.



ISO 10705: Specifies a method for the detection and enumeration of F-specific RNA bacteriophages by incubating the sample with a suitable host strain.



ISO 16890: Concerns general ventilation air filters and validates their efficiency on PM1, PM2.5 and PM10 particles, including in particular ultrafine particles (PM1), which are very dangerous to health.



ISO 18184: Designates test methods aiming to determine the antiviral activity of textile products against specified viruses.



ISO 29461: The ISO 29461-1 and ISO 29461-2 standards establish uniform evaluation criteria for air filters, particularly for gas turbines, ensuring their efficiency and performance in capturing atmospheric contaminants.



Sans silicone: Filters free of substances that could cause defects in paint; these filters effectively reduce all types of contamination in premises and make it possible to achieve a high level of air purity.



Technologie plasma virucide: Plasma grafting of the filter media. Viruses, including COVID-19, are neutralised by 99%. The treated surface of the filter is activated on contact with droplets carrying the viruses. After the contact time, the viruses are deactivated and are no longer infectious.

Eurovent, brands you can trust.



Five good reasons to choose air filters certified by Eurovent

1 No certification without verification

Eurovent Certification offers a certification programme in Europe in which filters are regularly verified by independent testing laboratories in accordance with European and international standards.

2 Eurovent website

Searching for the right filter for your equipment confronts you with numerous selection criteria. To choose the filter you need and that complies with the standards applicable to you, you can rely on the reliability of the Eurovent website **www.eurovent-certification.com** and select products based on their certified performance characteristics.

3 International recognition

The Eurovent certification programme constitutes an internationally recognised guarantee of the reliability and accuracy of manufacturers' product performance data.

4 Excellent value for money

You get exactly what you pay for. Reliable and accurate data allows you to choose the product with complete confidence.

5 Fair competition

By using the same testing standards for all manufacturers participating in the Eurovent certification programme, Eurovent Certification guarantees fair competition between manufacturers and facilitates the buyer's choice with the assurance that the characteristics announced in the catalogues are reliable.

Energy concept: save energy and protect the environment.



Determine the energy class of a filter using the formula below as well as the classification tables according to particle size.

$$E = \frac{q \times Dp \times t}{\Pi \times 1000} = \text{kWh}$$

q = airflow

Dp = pressure drop (Pa)

t = operating time (hours)

Π = ventilation system efficiency

MX = 200 g (AC Fine)	AEC kWh/an for ePM1					
	ePM1 and ePM1 _{min} ≥ 50%					
	A+	A	B	C	D	E
50 - 55%	800	900	1050	1400	2000	>2000
60 - 65%	850	950	1100	1450	2050	>2050
70 - 75%	950	1100	1250	1550	2150	>2150
80 - 85%	1050	1250	1450	1800	2400	>2400
>90%	1200	1400	1550	1900	2500	>2500

MX = 250 g (AC Fine)	AEC kWh/an for ePM2.5					
	ePM2.5 and ePM2.5 _{min} ≥ 50%					
	A+	A	B	C	D	E
50 - 55%	700	800	950	1300	1900	>1900
60 - 65%	750	850	1000	1350	1950	>1950
70 - 75%	800	900	1050	1400	2000	>2000
80 - 85%	900	1000	1200	1500	2100	>2100
>90%	1000	1100	1300	1600	2200	>2200

MX = 400 g (AC Fine)	AEC kWh/an for ePM10					
	ePM10 _{min} ≥ 50%					
	A+	A	B	C	D	E
50 - 55%	450	550	650	750	1100	>1100
60 - 65%	500	600	700	850	1200	>1200
70 - 75%	600	700	800	900	1300	>1300
80 - 85%	700	800	900	1000	1400	>1400
>90%	800	900	1050	1400	1500	>1500



- 1 Filter class
- 2 Nominal airflow in m³/h
- 3 Initial efficiency (%)
- 4 Minimum efficiency (%)
- 5 Annual energy consumption in kWh/year
- 6 Energy efficiency class

Sustainable growth: corporate social responsibility.

**Sustainability
is at the heart
of our identity
and our daily
actions.**



We understand that progress rests on the balance between protecting the environment, social responsibility and economic growth.

Our commitment to sustainable growth is reflected in tangible actions that demonstrate our responsibility for Deltrian's overall impact. We work to improve the quality and efficiency of our operations while minimising our environmental impact.

In partnership with our suppliers and subsidiaries, we integrate business processes aimed at preventing waste, improving the quality of our products and promoting the efficient use of resources at every stage of the value chain.

Environmental management is integrated cross-functionally, from suppliers to our customers.

Environmental management is integrated cross-functionally, from suppliers to our customers. This 360° approach extends to active collaboration with our partners to strengthen the processes and systems related to the manufacture and delivery of our products, thereby reducing our overall ecological footprint.

This collaboration includes strict compliance with environmental laws and regulations, reflecting our shared responsibility for sustainability.

At Deltrian, we actively engage in rigorous evaluation by EcoVadis to ensure transparency in our practices. We aim for a sustainable future, seeking to balance economic development with the protection of our planet.

Keys to improving our environmental impact.


At Deltrian, we have a strong commitment to being transparent about our production chain and our values. We work daily to implement actions (notably LCA and EPD) that align with our commitment.



LCA - Life Cycle Assessment

From its production to its end of life, including its use, a product can have direct or indirect impacts on the environment.

Life cycle analysis of a product reveals its overall impact on the planet throughout its existence. The analysis allows us to see areas for improvement and gives us the opportunity to act concretely. The idea is to encourage the manufacture of eco-responsible and therefore the least polluting products possible.

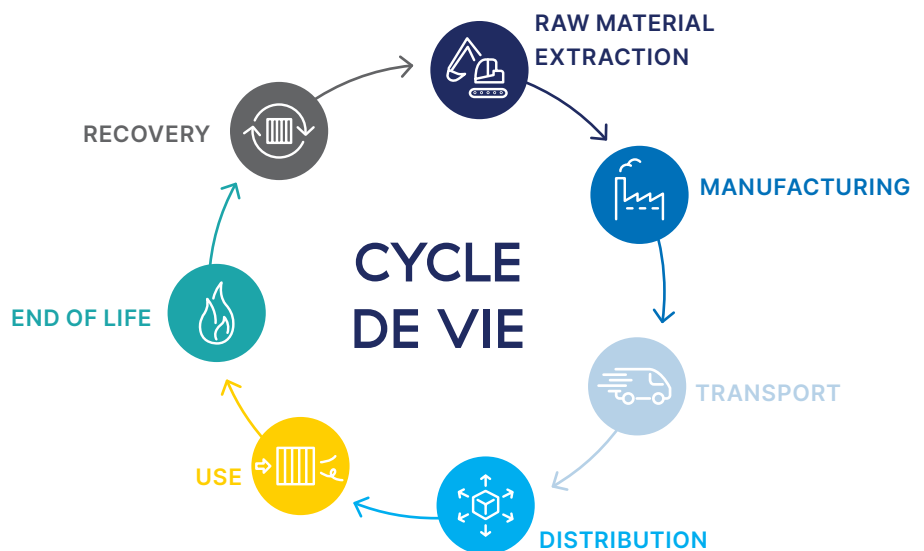

EPD - Environmental Product Declaration

This declaration presents essential data on the environmental impact of a product in a standard format.

The issued EPD is an independently verified document. This document reliably communicates transparent and comparable information about environmental effects, for a complete range of filters throughout their life. They currently provide a numerical representation of the environmental impact of a product, which is why EPDs are mainly used in B2B relationships.



In pursuit of optimal environmental impact.

ecovadis



77/100

Our overall CSR score

EcoVadis, a global platform for evaluating the sustainability performance of companies, uses international corporate social responsibility (CSR) and sustainability standards to assign ratings. At Deltrian, these ratings are an essential pillar of our commitment to CSR, helping us to continuously evaluate and refine our sustainable practices.

Collective commitment

We actively raise our team's awareness of social and environmental issues, involving each member in the evaluation process and encouraging them to integrate responsible practices into their daily lives.

Responsibility at all levels

Each member of our team plays a crucial role in our sustainable approach. The EcoVadis evaluation process thus becomes a catalyst for meaningful action at all levels of our company.

Pursuit of excellence

Continuous evaluation of our sustainable performance is a practice rooted in our corporate culture. Thanks to tools such as EcoVadis, specific feedback guides concrete action plans. At Deltrian, we strive not only to meet standards but to exceed them, thereby demonstrating our commitment to a sustainable future.



FIRST PILLAR

Environment

Actively reduce the carbon footprint and integrate waste prevention into the value chain, strictly require compliance with environmental laws by our suppliers and dealers. This reinforces a shared responsibility for a sustainable future.



SECOND PILLAR

Labour and human rights

Aiming to meet essential needs, the vision is centred on a world where housing, drinking water, education and reliable energy are accessible to all, thus guiding social impact. Adopting an integrated approach, the provision of solutions aims to favour the efficient use of resources, demonstrating an awareness of global impact.



THIRD PILLAR

Ethics

Adopting an ethical perspective, the approach focuses on integrity and accountability in all actions. The goal is to create a positive impact by prioritising ethical practices in the supply of products, services and solutions, thereby illustrating a commitment to high ethical standards and responsible conduct.



Purpose of the framework

The primary purpose of the framework on the EcoVadis platform is to simplify global comparisons, ensuring fair evaluation between companies while encouraging continuous improvement in CSR.

By rewarding outstanding performance and motivating companies to surpass minimum standards, this framework aspires to create a more responsible business environment, fostering a positive impact on society and the environment on a global scale.



FOURTH PILLAR

Sustainable purchasing

Oriented towards sustainable purchasing, our choices are based on responsibility, minimising environmental impact and promoting ethical practices throughout the supply chain. Our commitment: responsible resource management and environmental awareness.



Reading keys for air quality: ODA, SUP and PM.



OUTDOOR AIR QUALITY

ODA

Outdoor air quality is defined on the basis of the World Health Organization's regulations on air quality.

Thanks to the 3 air quality levels defined by ODA 1, ODA 2 and ODA 3, identifying the type of outdoor environment of a building provides simple guidance on the level of filtration required in an installation.



ODA 1

Outdoor air that is only temporarily dusty.



ODA 2

Outdoor air with high concentrations of particles.



ODA 3

Outdoor air with very high concentrations of particles.



DESIRED INDOOR AIR QUALITY

SUP

To understand a building's air quality needs, it is necessary to consider the type of activities that take place there.

The clean indoor air requirements of a building must be classified into one of the five SUP categories represented below.



SUP 1

Supplied air with a **very low** concentration of fine particles.



SUP 2

Supplied air with a **low** concentration of fine particles.



SUP 3

Supplied air with **moderate** concentrations of fine particles



SUP 4

Supplied air with **high** concentrations of fine particles.



SUP 5

Supplied air with **very high** concentrations of fine particles.




FINE PARTICLE SIZE

PM_x

Filtration efficiencies are determined according to the different sizes of fine particles PM1, PM2.5 and PM10, which are also used as evaluation parameters by the WHO and other authorities.

→ The more efficient a filter is against PM1, the more optimal the indoor air quality will be.



PM₅₀₋₇₀ - 50-70 µm
Diameter of a human hair.



PM₁₀ - <10 µm
Dust, pollen, mould, etc.



PM_{2.5} - <2,5 µm
Exhaust gases, organic particles, etc.



PM₁ - <1 µm
Soot, tobacco smoke, atmospheric dust, etc.

7 millions deaths every year.

AIR POLLUTION: A SILENT KILLER.

La pollution de l'air est un risque environnemental majeur pour la santé. En la réduisant, les pays peuvent faire baisser le nombre d'AVC, de cardiopathies, de cancers du poumons mais aussi des maladies respiratoires aiguës et chroniques.

>2 million
deaths in South-East Asia

>2 million
deaths in the Western Pacific

>1 million
deaths in Africa

+/-500.000
deaths in the Eastern Mediterranean

+/-500.000
deaths in Europe

+/-500.000
deaths in the Americas

→ Source: World Health Organization (WHO), 17 November 2021
<https://www.who.int/multi-media/details/air-pollution-silent-killer>

ISO 16890, a standard that tells you more about particles harmful to health.

Fine particles?

The ISO 16890 standard defines suspended particles as fine solid and/or liquid particles transported by air, commonly referred to as dust.



5-10 μm

Nasal cavity and larynx

1-5 μm

Respiratory tract

<1 μm

Pulmonary alveoli,
possibly bloodstream




Fine particles often result from incomplete combustion linked to human activities such as heating, road traffic or industrial processes. They can penetrate deep into the lungs, causing inflammation and aggravating cardio-pulmonary health problems. In addition, they can carry carcinogenic compounds absorbed on their surface, introducing them directly into the lungs.

«A quantitative relationship can be established between the level of pollution and certain health criteria. This provides valuable indications of the health gains that can be expected if air pollution is reduced.» → Air Quality Guidelines for Europe, WHO Regional Publications, European Series, No. 23, 1987

Deltrian helps you guarantee indoor air quality.

Size of PMx compared to a human hair (70 µm):

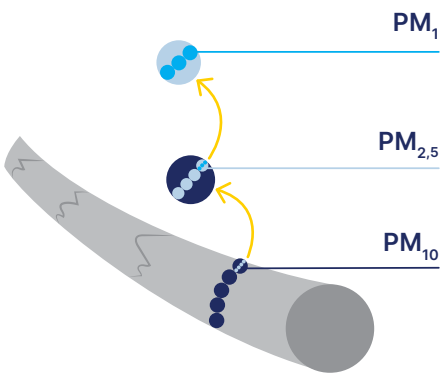

To guarantee optimal indoor air quality, it is crucial to choose the filter wisely based on two key parameters.

First, evaluate the outdoor air quality (ODA) around the building to determine the level of pollution to be treated. Then, define the desired indoor air quality (SUP) to assess the efficiency of the filtration process indoors.

The choice of filter varies according to these two parameters. As outdoor pollution increases and you aim for higher indoor air quality, the filter's efficiency must be adapted accordingly. Our filtration solutions are used worldwide to protect the health of people, but also processes, equipment and the environment.

Recommended minimum efficiencies according to ODA and SUP categories.

OUTDOOR AIR			AIRFLOW				
			SUP 1 PM _{2.5} ≤ 1.25 PM ₁₀ ≤ 3.75	SUP 2 PM _{2.5} ≤ 2.5 PM ₁₀ ≤ 7.5	SUP 3 PM _{2.5} ≤ 3.75 PM ₁₀ ≤ 11.25	SUP 4 PM _{2.5} ≤ 5 PM ₁₀ ≤ 15	SUP 5 PM _{2.5} ≤ 7.5 PM ₁₀ ≤ 22.5
CATEGORY	PM _{2.5}	PM ₁₀	PM ₁	PM ₁	PM _{2.5}	PM _{2.5}	PM ₁₀
ODA 1	≤ 5	≤ 15	70%	50%	50%	50%	50%
ODA 2	≤ 7.5	≤ 22.5	80%	70%	70%	80%	60%
ODA 3	≤ 7.5	≤ 22.5	90%	80%	80%	90%	80%

A virucidal process to reduce the spread of viruses.

NEW VIRUCIDE COATING

Inactivates


> 99%

Of viruses
On its surface

With Deltrian,
breathe clean and
decontaminated
air.

Virucide Coating — Inactivates >99% of viruses on its surface.

Deltrian has developed an antiviral process that acts as a shield against viruses and bacteria. This shield consists of plasma grafting of the sterilising virucide. Viruses, including COVID-19, are neutralised by 99% in 10 minutes. The treated surface of the filter is activated on contact with the droplets carrying the viruses. After the contact time, the viruses are deactivated and are no longer infectious.

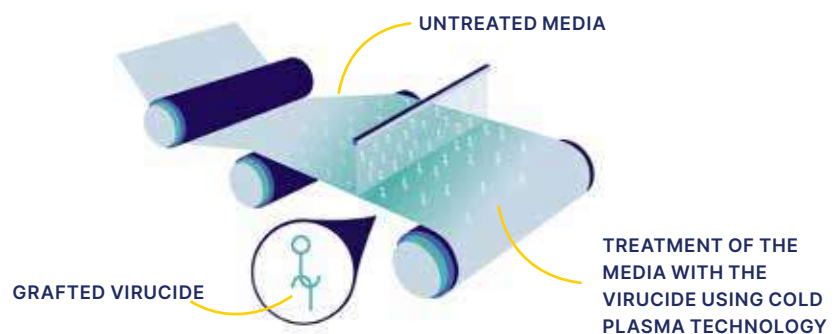

NW98 ES




FP40



RPV



FPZ

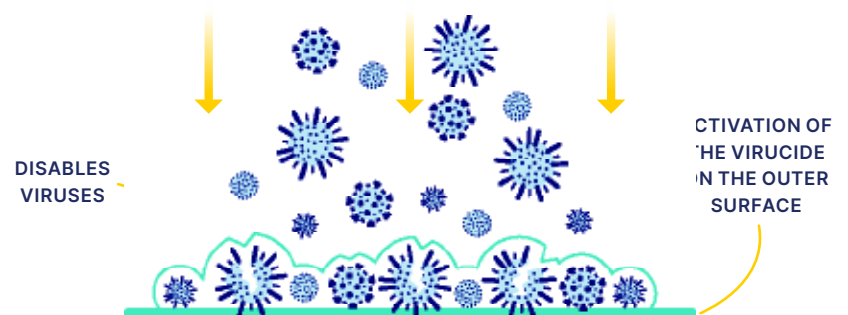

Protect your environment and your teams thanks to our filters treated with virucidal plasma. The viruses present in the filtered air are inactivated.

- Effective in dry and/or humid environments (open or closed circuit)
- 99% effective for 1 month
- Reduces the risk of transmission and proliferation of viruses and bacteria in the air



The LFC filter is part of a circular economy approach.

Our new solution for clean and environmentally friendly air.

Over the years, we have advanced in the market in the supply and development of sustainable products. Every day we are committed to making our customers' buildings and facilities closer to the environment. Air filters are used to purify the air of various particles, which makes them inherently healthy and environmentally friendly. Bag filters are the most commonly used in air handling systems and must be replaced when saturated.

LFC bag filter — the cleanest choice

- Same filtration surface
- Same efficiency
- Carefully sewn
- Less waste
- Less weight
- Better tightness
- Ergonomics for technicians



Maintenance benefits.

Thanks to the LFC bag filter, transport, storage, waste and ergonomics for technicians are improved impressively!

Example: for 16 filters, you go from 8 cardboard boxes to 2 vacuum-packed bags.



87% lighter



75% less volume



39% time saved



Our services.


Total Filtration Management®


Total Dedusting Management®

Total Cost of Ownership

Smart Filtering

Deltrian Academy

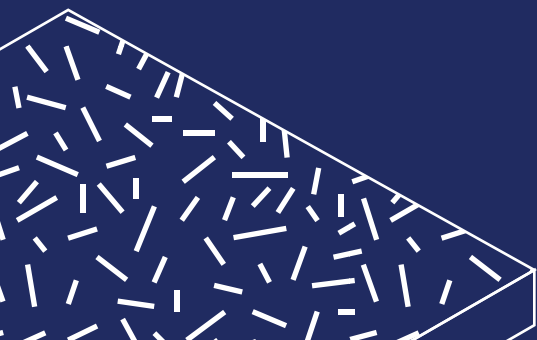

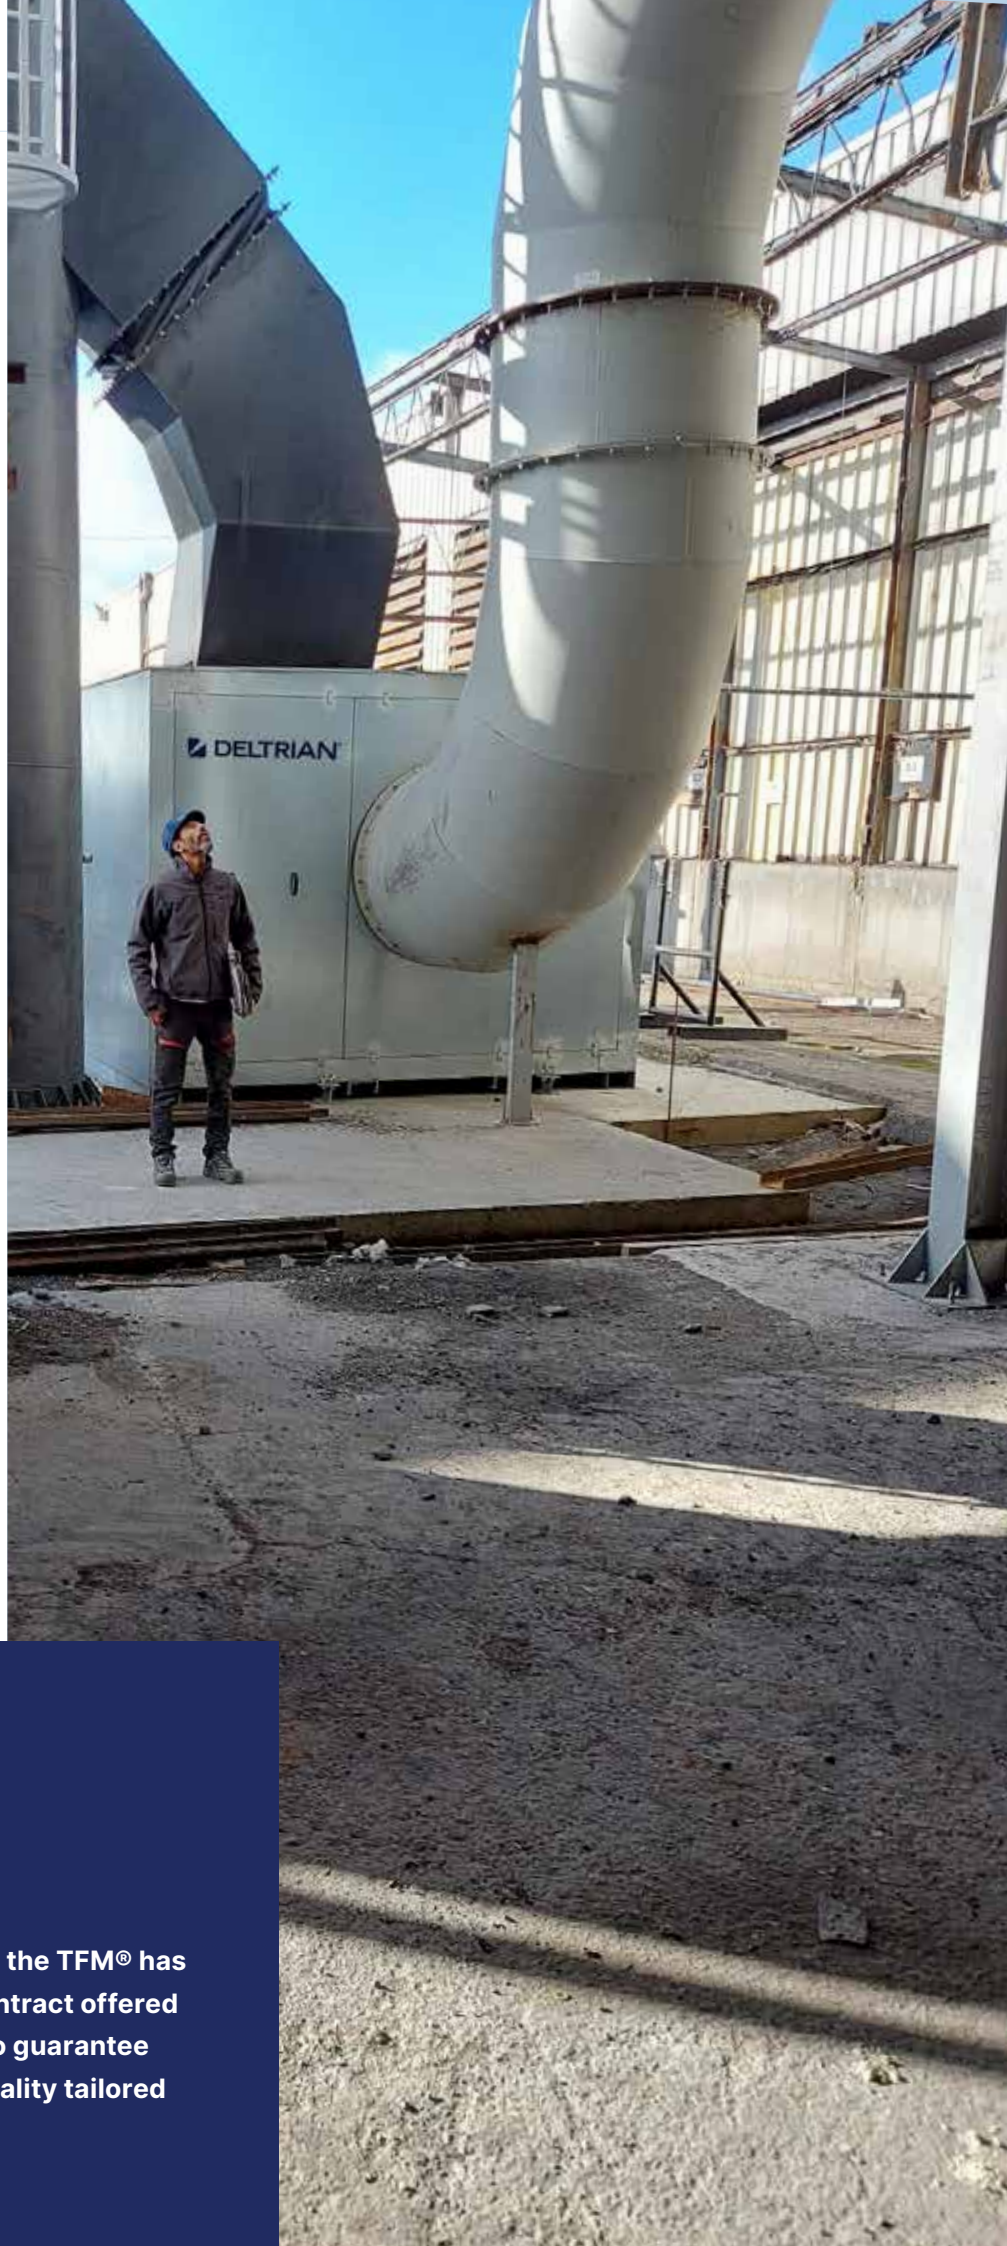

TFM®

For over 30 years, the TFM® has been a service contract offered by our company to guarantee you turnkey air quality tailored to your process.

Total Filtration Management®.

Optimize the air quality in your filtration system.

Options are built around a core set of essential services, making the system flexible and scalable to meet your current and future needs.

TFM® offers scalable services tailored to your needs, clearly defined warranties over an appropriate term, and technical support from a company with extensive experience in your industry.

MANAGE

The TFM® demonstrates our comprehensive approach to your air filtration needs. From planning to implementation, our team ensures impeccable air quality.

EXECUTION

The TFM® ensures meticulous execution. Our experts handle installation, monitoring, and adjustments, providing a hassle-free, turnkey solution.

GUIDANCE


The TFM® symbolizes our ongoing support. Our experienced team ensures that your air quality is perfectly tailored to the needs of your business.

COMMUNICATION

Communication is crucial at TFM®. We encourage open dialogue, sharing vital data on air quality and optimization efforts, thereby strengthening trust among our partners.

KNOWLEDGE

The TFM® is based on a deep understanding of your processes, tailoring our filtration solutions to deliver customized air quality and optimize your industrial operations.

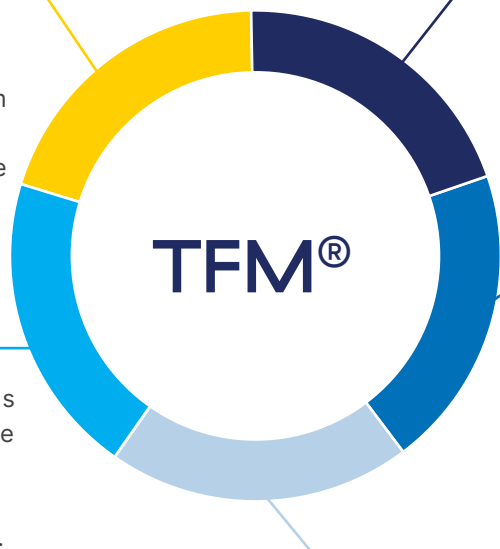



TDM[®]

Total Dedusting Management[®] is Deltrian's service that offers dust control contracts to ensure turnkey air quality tailored to your specific process and industry.

Industrial dust removal maintenance using TDM®.

Our support for clean air.

Industrial dust collection maintenance is crucial for maintaining equipment performance and ensuring product quality. By regularly maintaining dust collection systems, you promote a healthy work environment, reduce the risk of incidents, minimize repair costs, and extend the service life of the equipment.

Maintenance Contracts

- Inspection/Audit Contract
- Comprehensive Maintenance Contract
- Maintenance and Technical Support Contract

Services:

- Complete or partial refurbishment
- System inspection and adjustment
- Emergency repair
- Supply of replacement parts
- Upgrades and/or modifications
- Supply of consumables (handles, filters, etc.)
- Reduction of energy consumption

As part of all these services, Deltrian's TDM® service can supply all types of replacement parts to restore your system to working order with the most suitable equipment.



Deltrian has developed a program that allows its clients to monitor the progress of work on-site in real time via a connected tablet. This program enables users to manage inventory, follow a schedule that can be adjusted as needed, and prioritize tasks based on importance.

TCO

The goal of this program is to consider the cost of the filter over its entire life cycle, not just its initial value.



Total Cost of Ownership, reduce your energy consumption with TCO.


Ventilation has a significant impact on energy consumption in modern buildings.

As a general rule, a 1 Pa drop in pressure in a conventional ventilation system can save up to €2 per filter in energy costs. Deltrian has developed software that calculates and optimizes the annual energy consumption of different types of filters based on the specific data of your installation. Savings achieved through our program:

- 20% over 3 years thanks to our longer-lasting filters
- 50% over 3 years thanks to improved performance
- 50% over 3 years on labor and service calls

Deltrian's TCO program considers the cost of the filter over its entire lifecycle—not just its initial value—and is based on three pillars:

- More energy-efficient filters
- A longer service life
- A reduced carbon footprint

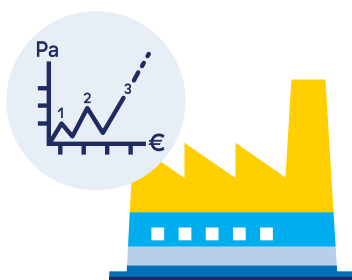

70% energy cost

15% filter cost

8% cleaning cost

5% labor cost


2% waste disposal cost

$$E = \frac{q \times Dp \times t}{\Pi \times 1000} = \text{kWh}$$


The conical pockets developed by Deltrian offer additional energy savings.

To keep pressure drop as low as possible and save on energy costs, filter design is crucial. Increasing the amount of filter media, selecting the right media, and optimizing the shape of the filter pockets

help reduce pressure drop. The conical seam inside the bags prevents them from “sticking” together when they expand (which reduces the filtering surface area), promoting airflow and thereby reducing energy consumption—all without compromising the filter’s efficiency.



STANDARD
POCKETS



CONICAL
POCKETS

Smart Filtering

By analyzing the data generated by our sensors, we can anticipate maintenance needs before any failures occur.





Reduce your carbon footprint with Smart Filtering.

Smart Filtering, predictive maintenance for optimal management.



ANALYSIS

Smart Filtering provides intelligent filter analysis by recommending the optimal choice based on key parameters such as outdoor and indoor environments and occupancy levels.



COST
OPTIMIZATION

This approach ensures optimal air quality while extending the service life of the filters.



REAL-TIME
MONITORING

With real-time monitoring of your filters, our devices detect anomalies and ensure increasingly efficient maintenance. By simulating optimizations, Smart Filtering reduces costs while maximizing the efficiency of the filtration system.



CARBON FOOTPRINT
AND ENERGY

This proactive approach significantly reduces costs associated with corrective maintenance, while maximizing equipment lifespan. Optimal management that ensures the continuity of industrial processes without compromising air quality.



PREDICTIVE MAIN-
TENANCE

The benefits of Smart Filtering:

- Plug-and-play system
- Real-time dashboard monitoring
- Solution approved for indoor and outdoor use
- Customizable to meet your specifications
- ROI in less than a year



CUSTOMIZATION



Deltrian Academy

Our training department is dedicated to our customers, providing them with an in-depth understanding of air quality issues and our filtration products.

Understand the importance of air quality with Deltrian Academy.

We firmly believe that knowledge is the key to improving air quality in all environments.

We offer a dedicated training service for our customers, providing them with in-depth knowledge and solutions tailored to their specific needs.

Through our training service, Deltrian not only provides high-quality products but is also committed to supporting our customers with ongoing, personalized assistance, ensuring complete and lasting satisfaction.


RAISING AWARENESS OF AIR QUALITY AND ITS IMPORTANCE

Our training sessions begin by familiarizing our customers with the fundamentals of air quality. We explain the importance of clean air for health, productivity, and equipment protection. By understanding the sources of pollution and their impacts, our customers are better equipped to identify the specific needs of their environments.

PRACTICAL SOLUTIONS THROUGH OUR INNOVATIVE PRODUCTS

After establishing a solid foundation of knowledge, we present our air filtration solutions. Our experts demonstrate how to use our products to solve specific problems, improve air quality, and ensure a healthy environment. We provide practical advice on selecting, installing, and maintaining our filters, thereby ensuring optimal performance and extended system lifespan.



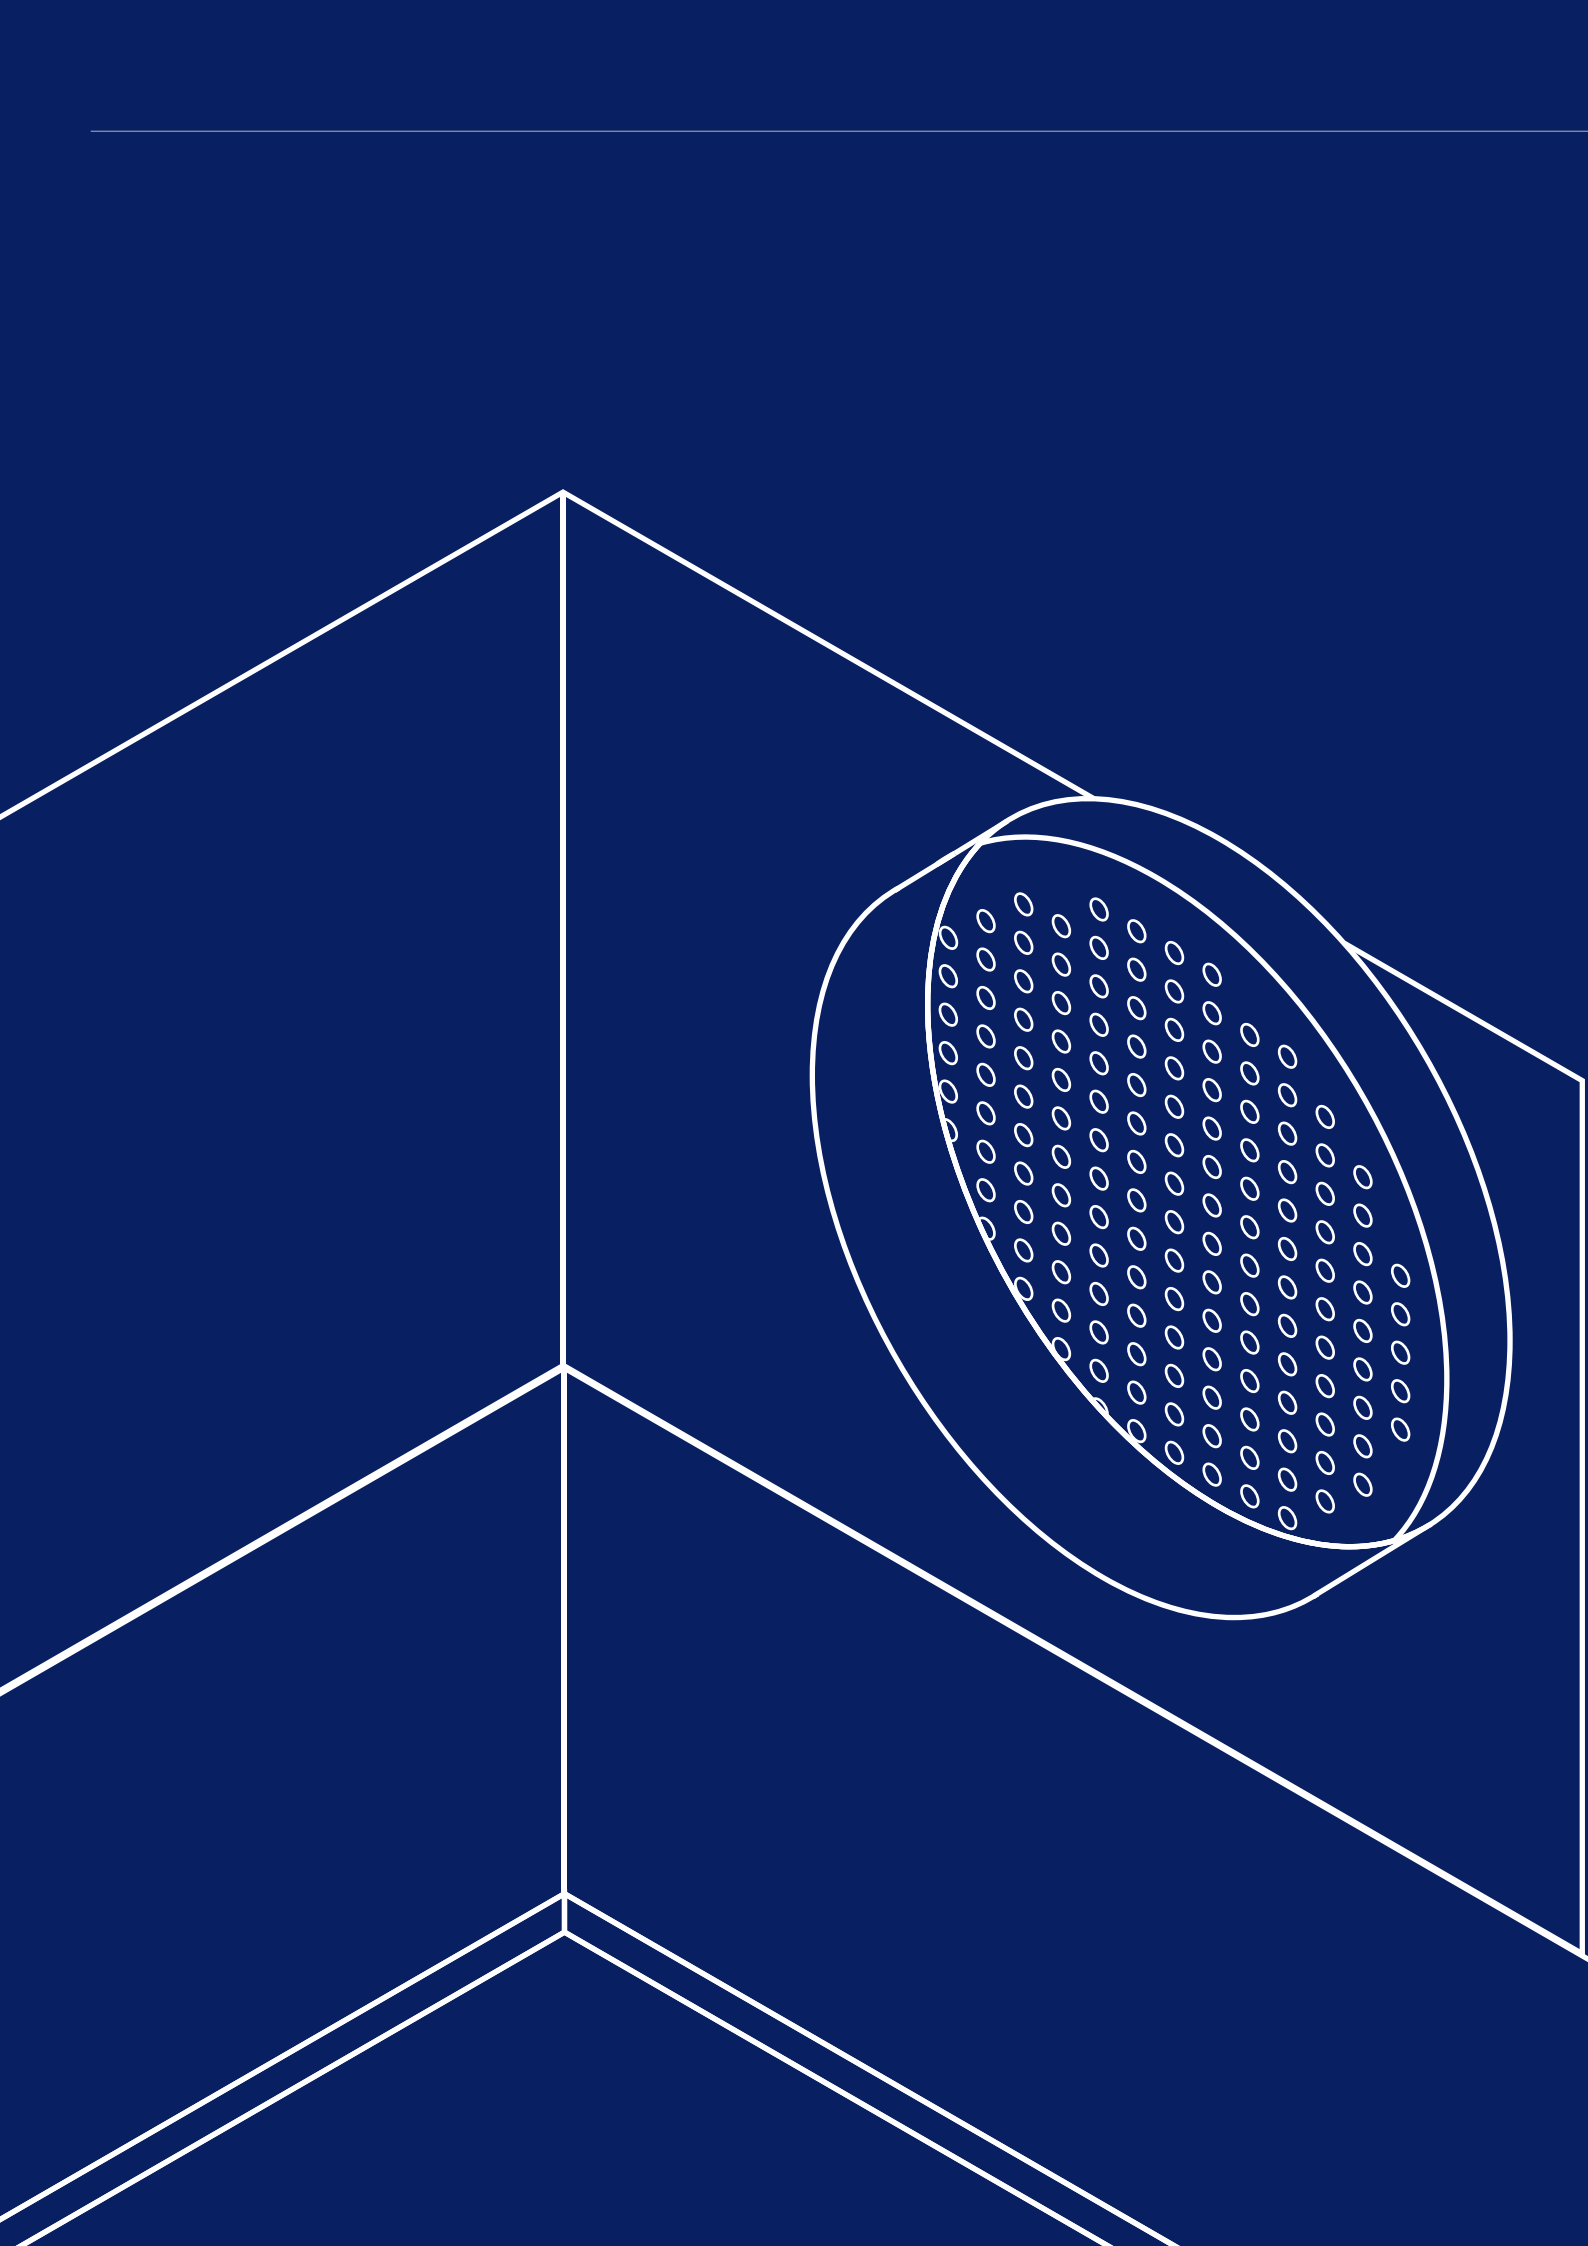

Our Business Segments.

HVAC

Biopharma

Automotive

Molecular filtration

Cleanroom

Food industry

ENERGY

Gas turbines

Wind turbines

TRANSPORT

Aviation

Railway

Liquid filtration

Air purifiers



HVAC

Air filters play a crucial role in heating, ventilation, and air conditioning (HVAC) systems by ensuring indoor air quality and the proper functioning of the system.

Heating, Ventilation, and Air Conditioning.

Their primary importance lies in their ability to capture airborne particles and contaminants, such as dust, pollen, allergens, bacteria, and viruses, thereby helping to maintain a healthy indoor environment.

Regular maintenance of air filters also helps optimize the system's energy efficiency, thereby reducing operating costs.

In short, air filters are an essential component in ensuring a healthy, comfortable, and energy-efficient indoor environment, while extending the service life of HVAC equipment.



FZ GALVA




FZGMP SC & ES



TNWES



RPV



STITCHED ON STEEL WIRE



Biopharma

The manufacturing processes for pharmaceutical, biopharmaceutical, and medical products are governed by a set of guidelines issued by the World Health Organization (WHO) regarding Good Manufacturing Practices (GMP).

Ensure safety in your laboratories with clean air.

Good manufacturing practices require continuous monitoring of product contamination throughout the production and packaging cycle.

To this end, Deltrian offers a range of filters designed to effectively combat external contaminants. Filters in a laboratory do more than just filter airborne particles. They act as sentinels, protecting against contaminants, allergens, and even potentially dangerous pathogens.

The accuracy of analyses and the validity of results depend entirely on the purity of the air inside the laboratory. Filters specifically designed for laboratories play a vital role in this equation. They help maintain optimal conditions by removing unwanted particles that could compromise the integrity of the experiments being conducted.



TNWES



RPV



THE-VF GALVA



THE-VF PLASTIC



THE-LA



CDR



Automotive

Surface treatment in the automotive industry requires an environment free of aerosols larger than 10 microns. Our guarantee: no aerosols larger than 5 microns, combined with lower operating costs!

Ensure a healthy work environment in the automotive industry.

Reducing operating costs and improving overall quality are essential priorities today.

Leveraging its partnerships with automotive manufacturers, Deltrian has given free rein to the creativity of its employees and experts to develop products that meet the industry's expectations.

Whether for fresh air or recirculation systems, Deltrian will meet your requirements by offering products that reduce your filtration budget while improving your competitiveness!

We offer products that ensure low in-line pressure drop, extended service life, and high retention capacity at competitive prices.



PPL-PTL-PFL



RPV ES



RPV HT 350



Poly 560-600-660



DPA BOX



DPA GREEN



Molecular Filtration

We live today in a world of constant industrialization, where air pollution has increased alongside human activity and the global population.

Gas and odor filtration by adsorption.

Deltrian offers filters based on activated carbon or other specialized molecular media that remove molecules, gases, and vapors from the air through effective molecular filtration.

For each pollutant, we can select the adsorbent(s) that will remove them in a targeted and effective manner, ensuring you have clean air to breathe.

Deltrian also offers an extensive range of molecular filters capable of accommodating these adsorbents in various forms (powders, granules, or pellets), allowing us to provide you with the most suitable solution for each of your applications.



DELTRICARB FZ



DELTRICARB RPV CA



DELTRICARB GCA



DELTRISORB VN



DELTRISORB



DELTRISORB DMM



Cleanroom

A cleanroom is a room or a series of rooms where particle concentration is controlled to minimize the introduction, generation, and retention of particles inside, typically for a specific industrial or research purpose.

Our filters work to protect your health.

Cleanrooms, which are vital in industries such as pharmaceuticals, electronics, and biotechnology, rely on the critical selection of air filters.

By effectively removing particles, contaminants, and pathogens, these filters are the backbone of maintaining the air purity essential for the manufacture of pharmaceuticals, electronic components, and biotechnology products. In the pharmaceutical industry, they ensure product safety, while in the electronics sector, they minimize the risk of contamination, thereby preserving the integrity of devices.

Air filters are essential for maintaining ultra-clean conditions, ensuring the quality, safety, and effectiveness of the processes and products at the heart of these strictly controlled environments.



TNWES



NWES98PLUS



THE-VF PLASTIC



THE-LA



CDLA



CDR



Food industry

The food industry is subject to strict controls designed to ensure that consumers receive high-quality food products.

Freshness and quality on your plate.

Deltrian air filters, which are essential in the food industry, guarantee product quality by providing protection against contaminants.

Our filters optimize equipment performance by reducing dust buildup, thereby extending machine lifespan and improving operational efficiency. In an industry where consumer trust is crucial, the use of reliable filters is essential to ensuring food safety.

In addition, Deltrian offers an added benefit by providing an EC1935:2004 food-grade certification, thereby enhancing transparency and compliance with the highest quality standards in the food industry.

Deltrian also offers a cleaning, disinfection, and maintenance service for your fabric filters to help you save money and extend the lifespan of your equipment.



FCM INOX



FZ SS



TNWES



RPV



THE-VF PLASTIC



CDR



Energy: gas turbines

The primary function of a gas turbine is to generate electricity. The infrastructure and civil engineering required for this type of facility are minimal, making it possible to build a power plant near the point of energy use in just a few months.

Optimal filtration under extreme conditions.

Clean air: the key to gas turbine performance and longevity.

Gas turbine facilities are found in a wide variety of locations, including deserts, offshore sites, and even Arctic regions. The drawback of these highly diverse environments lies in the pollutants present in the outside air, which can cause erosion or fouling of the turbines' internal components.

Deltrian offers a range of filters designed to effectively capture airborne contaminants, thereby ensuring cost-effective and sustainable operation of the facility for users. Our range complies with the ISO 29461 standard, which consists of two parts:

- ISO 29461-1: relating to filter efficiency and particulate retention capacity for gas turbines, and the hydrophobicity standard
- ISO 29461-2: relating to filter performance under mist and fog conditions

These standards provide a uniform testing method for evaluating air filters, thereby helping operators effectively select filters suited to their needs, particularly for gas turbines.



FZPL GTWR



DROP SAFE
T4 to T7



RPV GT



RPV GT XL
T6 to T13



RPV GT XXL
T6 to T13



REVERSE 2 EN 1
T4/T7 to T13



CARTOUCHE
T6 to T13

Energy: wind turbines

Wind turbines operate under extreme conditions, and to ensure optimal performance, their air intake filters must be of the highest quality.



Our air filters for wind turbine operation.

Wind turbines must operate under extremely challenging conditions, and their air intake filters must be of the highest quality to optimize performance, ensure longevity, keep the nacelle clean, and protect the generator and electrical equipment.

This is especially true for offshore wind turbines, which must withstand salt, water, and humidity. All these factors can increase the risk of corrosion and, consequently, equipment degradation. Furthermore, the turbines inside a wind turbine are also exposed to dust, pollen, and other particles that can cause breakdowns and production losses. Air filters therefore help maintain a clean airflow, ensuring a longer service life and reduced energy costs.

The benefits of our filters:

- Extended service life
- Reduced environmental footprint
- Optimized operation
- Improved energy efficiency
- Protected equipment
- Lower energy costs



FZPL GTWR



FZGMP SC & ES



RPV GT




RPV XL



ECOVYL



REVERSE HSP500

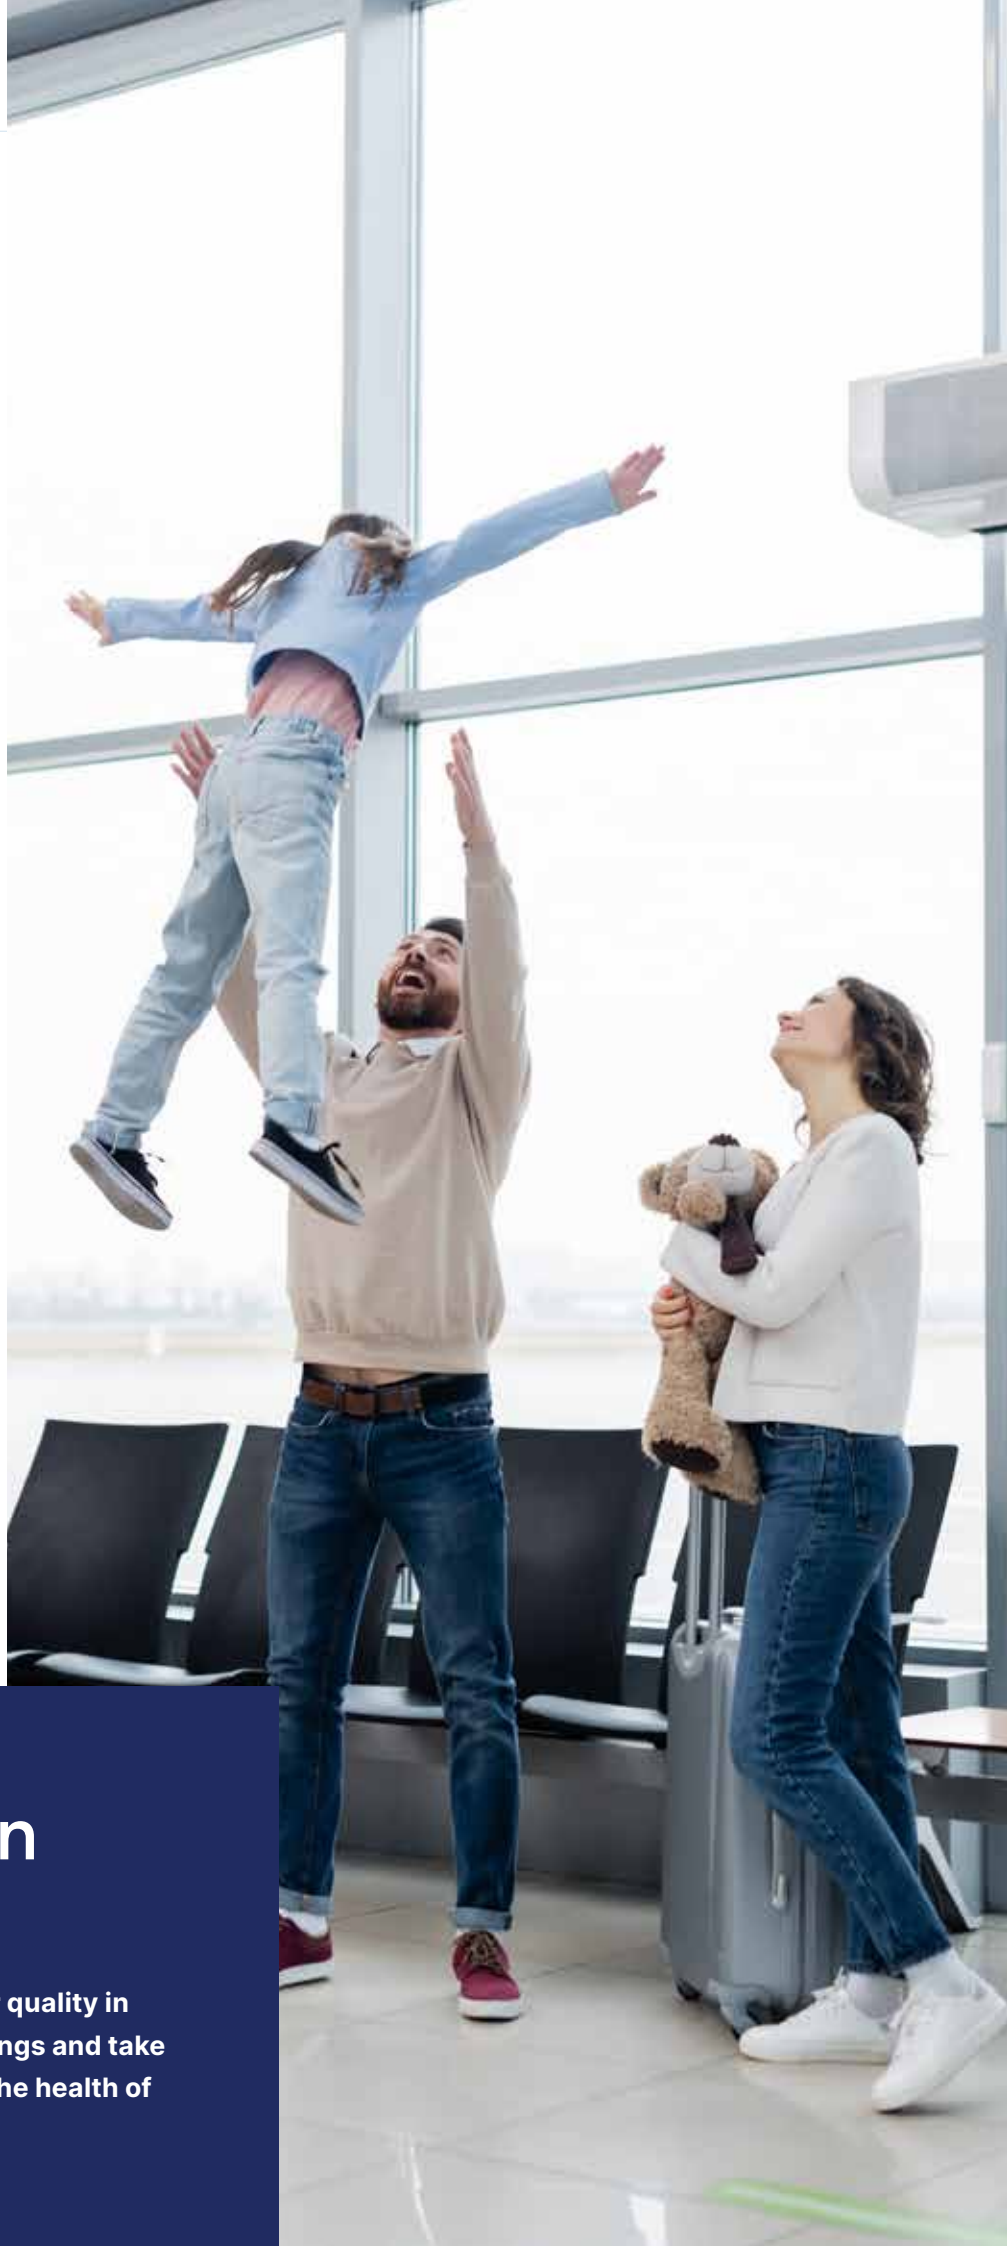

Aviation

Improve indoor air quality in your airport buildings and take action to protect the health of your passengers.

Fresh air even while traveling.

Airports, as major hubs for various sources of pollution, require special attention when it comes to air quality.

Volatile organic compounds (VOCs) from aircraft engines, transport vehicles, and food service areas contribute to an atmosphere that is potentially harmful to the health of passengers and airport staff. Fine particles emitted by these various activities can spread across the tarmac, into terminals, and surrounding areas, compromising indoor air quality.

Air filters, such as those offered by Deltrian, are essential in this context. They act as a first line of defense by capturing fine particles, VOCs, and other airborne contaminants. By filtering the ambient air, these devices help significantly reduce the concentration of harmful substances, thereby protecting airport occupants from the risks associated with prolonged exposure to these pollutants.



GK



TNWES



RPV ES



DELTRICARB GCA



DELTRISORB



DELTRISORB VN



Railway

Learn how our expertise helps maintain a healthy and high-performance indoor environment at the heart of the rail transport sector.

Top-quality air filtration right at your fingertips.

The rail transport sector, which is constantly evolving, relies on sophisticated infrastructure and cutting-edge technology. In this dynamic environment, indoor air quality within rail vehicles and facilities is of critical importance. It is in this demanding field that Deltrian excels as a manufacturer, installer, and maintenance specialist for air filters.

The electric motors that power locomotives, the air conditioning systems ensuring passenger comfort, as well as service centers dedicated to operations such as spraying and sanding—all depend on effective filtration of the intake air. Deltrian filters play a key role in pre-filtering the air, ensuring the cleanliness and optimal performance of vital components.

The reliability of Deltrian air filters not only ensures the longevity of railway equipment but also contributes to the safety of passengers and staff. By focusing on innovation and quality, Deltrian is committed to supporting the railway industry in its constant pursuit of efficiency, sustainability, and comfort, while meeting the strictest environmental standards

Benefits for operators:

- Quick installation requiring no additional training, as the replacement process is identical to that of standard filters.
- Adjustable filter dimensions to fit all types of installations.
- Replacement intervals up to five times longer compared to standard filters.



ECOVYL



FZ SS



DAMPER



Liquid filtration

Liquid filtration is a process used to separate solids suspended in a liquid. By using a filter, impurities and unwanted particles can be removed from the liquid, resulting in a purer and cleaner final product.

A complete range of filters designed for liquids.

Our expertise in liquid filtration to meet the needs of industry.

Deltrian has over 25 years of expertise in the field of liquid filtration. Our wide range of filters offers a comprehensive solution for filtering and clarifying various types of liquids, primarily in the automotive, metallurgy, and paint and surface treatment industries.

Deltrian offers liquid filters designed according to the type of liquid (composition, viscosity, etc.), the required filtration efficiency, and the volume to be treated. Thus, Deltrian ensures a solution tailored to any filtration challenge, ranging from simple particle retention to complete filtration.

Applications for our filters and tanks:

- Automotive industry
- Paint and coatings
- Metal processing
- Water and wastewater
- Filling stations
- Pump protection



No matter what type of filter cartridges or filter bags you need for liquid filtration, Deltrian supplies and installs filtration tanks tailored to your industry and the specific requirements of your business sector.





Air purifiers

Whether you need to purify the indoor air in your facilities or provide virus-killing protection for your employees, we have the solution you need. Rely on our cutting-edge technology to ensure clean air in professional settings and in everyday life.

Refresh and purify your indoor air.

Our solutions for purifying your living spaces with a minimal carbon footprint.

Choosing our air purification systems means opting for optimal efficiency with solutions designed to improve indoor air quality.

Over time, indoor air gradually becomes laden with fine particles and elements harmful to health. To achieve optimal air quality at home, at work, or in recreational spaces, it is essential to purify the environment. At Deltrian, we offer a wide range of products to purify the air and control indoor air quality.

With indoor air 10 times more polluted than outdoor air, air purification is a major daily concern. Our air purifiers are designed with environmental sensitivity in mind; they improve air quality and are effective against fine particles such as:

- Pollen
- Tobacco odors
- Microorganisms
- Dust
- Chemical vapors

Our air purifiers filter out up to 99.99% of fine particles.



Classification of Air Filters.



DESCRIPTION

PREFILTERS

FINE FILTERS

ISO 16890 Correspondence Guide for reference only		ISO COARSE			ePM1	ePM2,5	ePM10	ePM1	ePM2,5	ePM10	ePM1	ePM2,5
		40 %	50 %	> 60 %	< 20 %	< 40 %	> 50 %	< 40 %	50-60 %	> 60 %	50-70 %	>65%
EN 779: 2012	G1	G2	G3	G4	M5			M6			F7	
	Am% versus synthetic dust				Medium eff. versus 0,4 µm particles							
DPf F5 < F9 = 450 Pa	50 < 65	65 < 80	80 < 90	90 < Am	40 < 60			60 < 80			80 < 90	
EN1822:2011 (DEHS)												
INITIAL eff. MPPS (DEHS) (Most Penetrating Particle Size)	n/a	n/a	n/a	n/a	n/a			n/a			n/a	
EUROVENT 4/5 DPf F5 < F9 = 600 Pa	EU1	EU2	EU3	EU4	EU5			EU6			EU7	
ASHRAE MERV Values	1	2-3-4	5-6	7-8	9-10			11-12			13	
ASHRAE 52-76 (Weight arr.)	n/a	G70	G85	G95	n/a			n/a			n/a	
(Réten. Poids) % (Abscheidegrad)	m > 65	65< 80	85 < 90	> 90	> 97			> 98			> 98	
ASHRAE52-76 (Dust spot)	n/a	n/a	n/a	n/a	n/a			F60			F85	
(Opacim.) % (Wirkungsgrad)	< 20	< 20	< 20	< 20	40 < 60			60 < 80			80 < 90	
NBN X 44 001	n/a	G70	G85	G95	F50			F70			F85	
DIN 24185 E	A	B1	B2	B2	B2			C1			C2	
US. Fed. 209 (0,3 µm DOP) Initial eff.	n/a	n/a	n/a	0 - 5	5 - 15			10 - 25			45 - 60	
Initial eff. vs particle size												
0,12 µm	--	--	--	--	0 - 10			5 - 15			25 - 35	
0,3 µm	--	--	--	0 - 5	5 - 15			10 - 25			45 - 60	
0,4 µm	--	--	--	0 - 7	10 - 20			20 - 35			50 - 70	
0,5 µm	--	--	0 - 5	5 - 15	15 - 30			20 - 40			60 - 75	
1 µm	--	0 - 5	5 - 15	15 - 35	30 - 50			50 - 65			85 - 95	
3 µm	0 - 5	5 - 15	15 - 35	30 - 55	70 - 90			85 - 95			>98	
5 µm	5 - 15	15 - 35	35 - 70	60 - 90	90 - 99			95 - 99			>99	
10 µm	40 - 50	50 - 70	70 - 85	85 - 98	>98			>99			>99	
Decontamination factor on MPPS	1	1	1	1	1			1			2	




FINE FILTERS							HEPA FILTERS					ULPA FILTERS		
ePM10	ePM1	ePM2,5	ePM10	ePM1	ePM2,5	ePM10								
>80 %	70-80 %	> 80%	> 90 %	> 80 %	> 90 %	> 95 %								
		F8			F9									
Medium eff. versus 0,4 µm particles														
		90 < 95			95 < Em									
							E10	E11	E12	H13	H14	U15	U16	U17
		n/a			n/a		> 85	> 95	> 99,5	> 99,95	> 99,995	> 99,9995	> 99,99995	> 99,999995
		EU8			EU9		EU10	EU11	EU12	EU13	EU14	EU15	EU16	EU17
		14			15		~ 16	~ 17	~ 18	~ 19	~ 20			
		n/a			n/a		n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		> 99,5			> 99,5									
		F95			n/a		n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		90 < 95			> 95									
		n/a			F95			U95	U99,5	U99,99				
		C3			C3		Q	R	S		ST	T	U	V
		65 - 75			75 - 85		> 85	> 95	> 99,5	> 99,99	> 99,999	> 99,9999	> 99,99999	> 99,999999
		35 - 45			45 - 60							> 99,9999	> 99,99999	> 99,999999
		65 - 75			75 - 85		> 85	> 95	> 99,5	> 99,99	> 99,999			
		70 - 80			80 - 90									
		80 - 90			90 - 95									
		95 - 98			>98									
		>99			>99									
		>99			>99									
		>99			>99									
		3			5		7	20	200	2.000	20.000	200.000	2.000.000	20.000.000

ISO COARSE Prefilter.

The first line of defense in air filtration systems.

Pre-filtration uses mesh filters to protect the finer filtration stages from large particles such as leaves or coarse dust. This extends the service life of the fine filters and maintains the overall efficiency of the system. This simple yet effective method is essential for preserving indoor air quality and protecting equipment in ventilation and air conditioning systems.

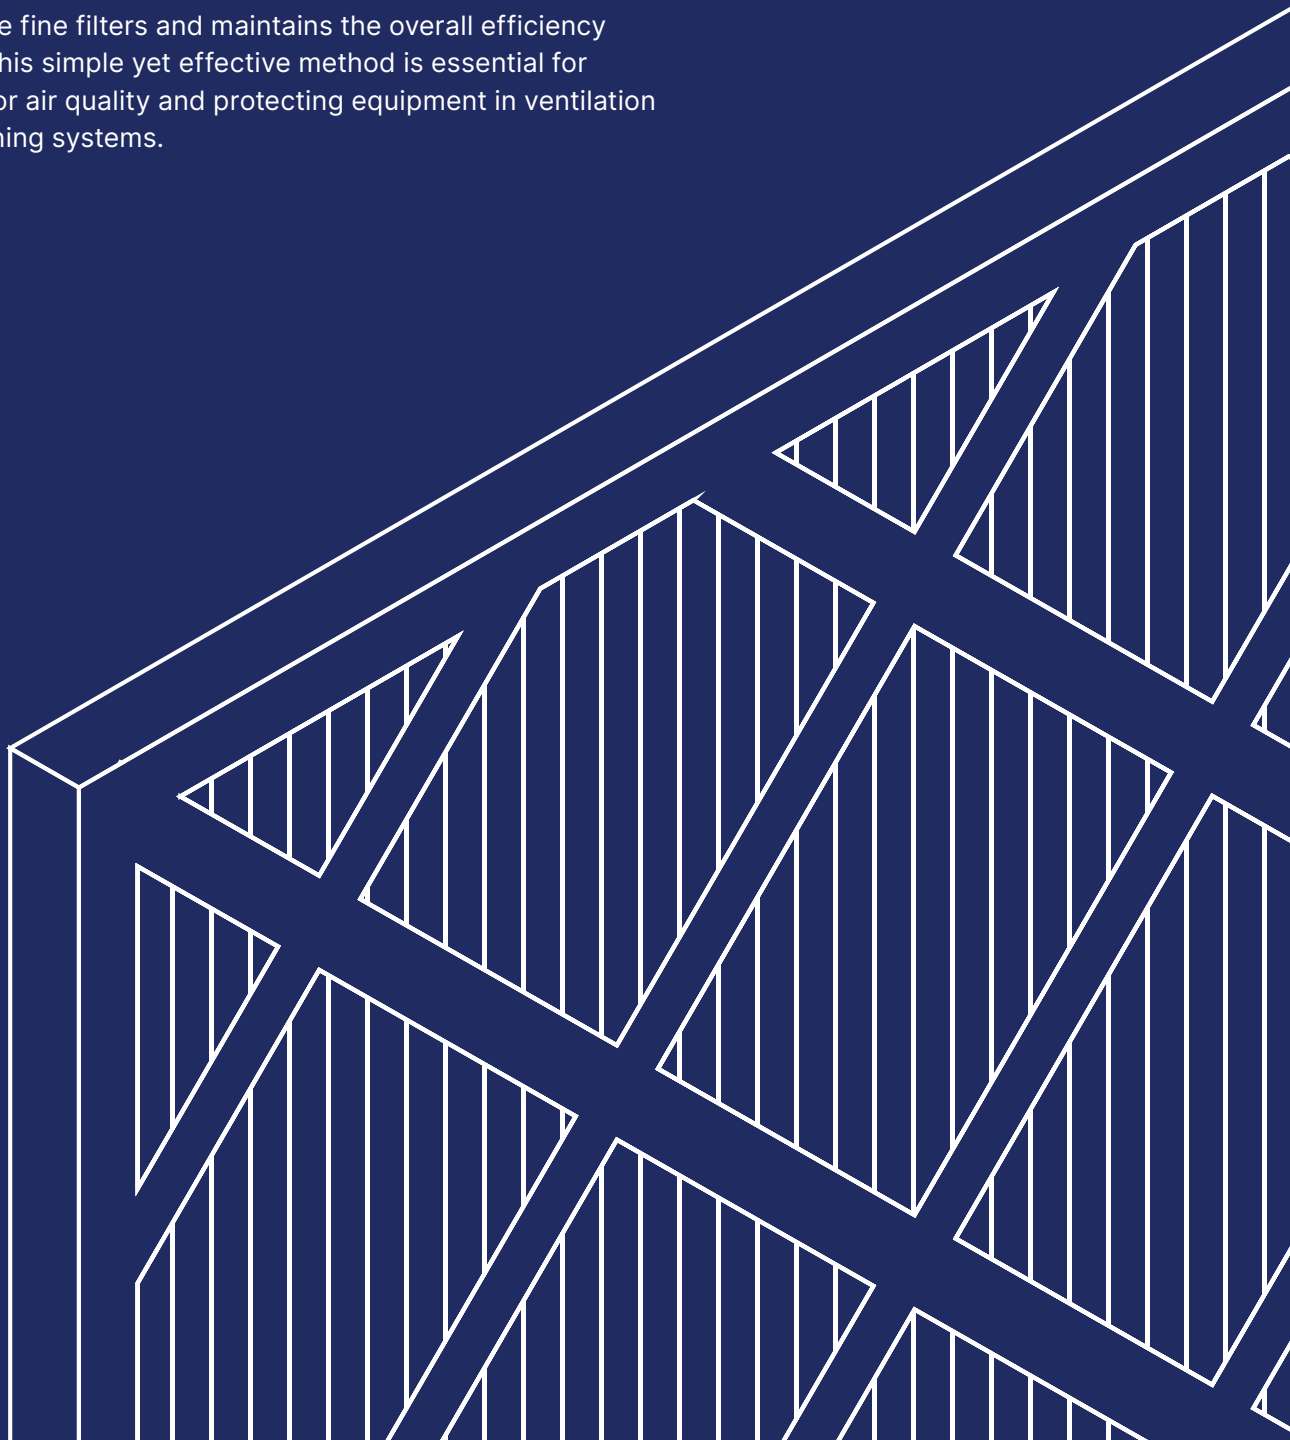

CUTTING ROLLS

Poly


Used for pre-filtration in air treatment for ventilation and conditioning.

APPLICATION AREAS


- Deltrian cutting service
- Low pressure drop
- Mechanical resistance
- Progressive density
- High retention capacity

GENERAL CHARACTERISTICS

- Filtration class EN779:2012: G2 - G4
- Media: synthetic
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80°C
- Maximum temperature allowed for short periods: 110°C
- Relative humidity: 100%

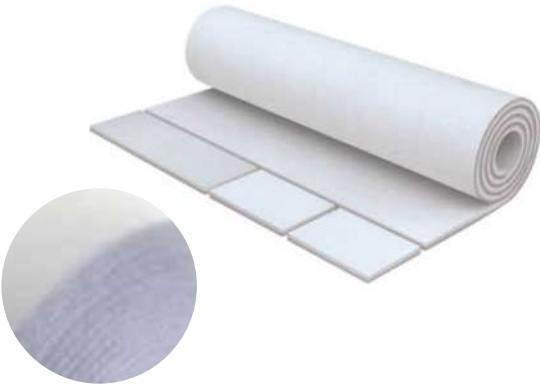


Details and variations



DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 40% ISO 16890 - (G2)					
POLY100	2000	20	6	40	5400 / 20
DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 50% ISO 16890 - (G3)					
POLY 150	2000	20	16	40	5400 / 22
POLY 80 M1	2000	40	8	80	5400 / 19
POLY 200	2000	20	20	40	5400 / 27
DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 60% ISO 16890 - (G4)					
POLY 290	2000	20	20	40	5400 / 35
POLY 350	2000	20	20	40	5400 / 40
POLY 500	2000	20	22	40	5400 / 76

CUTTING ROLLS

Andreae

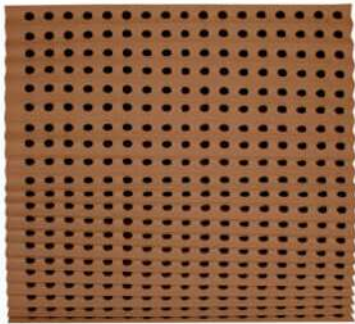

Andreae media were developed to stop particles by inertia (paint pigments, varnish).

APPLICATION AREAS


This media is especially effective on drier and less sticky covering products, providing effective protection for extraction ducts and fans.

- High retention capacity
- Available in high capacity version
- 100% incinerable

GENERAL CHARACTERISTICS

- Media: 100% cardboard
 - Recommended final pressure drop: 128 / max. 256 Pa
- Continuous service temperature: 70°C
 - Relative humidity: 100%

Details and variations



BASE A (MM)	LENGTH B (M)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)	AIRFLOW (M3/H/M2)/DELTA P (PA)	DUST RETENTION CAPACITY (KG/M2)
STD					
750	13400	10	1800 / 20	3600 / 40	18
900	9300	8,35	1800 / 20	3600 / 40	18
900	11100	10	1800 / 20	3600 / 18	18
1000	10000	10	1800 / 20	3600 / 40	18
750	10700	8	1800 / 21	3600 / 42	28
900	8900	8	1800 / 21	3600 / 42	28
1000	8000	8	1800 / 21	3600 / 42	28
750	10700	8	1800 / 21	3600 / 42	20
900	8900	8	1800 / 21	3600 / 42	20
1000	8000	8	1800 / 21	3600 / 42	20
750	10000	8	1800 / 21	3600 / 42	29
900	10000	8	1800 / 21	3600 / 42	29
1000	10000	8	1800 / 21	3600 / 42	29
750	13400	10	1800 / 20	3600 / 42	18
900	9300	8,35	1800 / 20	3600 / 40	18
900	11100	10	1800 / 20	3600 / 40	18
1000	10000	10	1800 / 20	3600 / 40	18

CUTTING ROLLS

Colombus



Colombus filter media have been developed to ensure the capture of particles by inertia (paint pigments, varnish).

APPLICATION AREAS

This media is especially effective on drier and less sticky covering products, providing efficient protection for extraction ducts and fans.

- Deltrian cutting service
- High retention capacity
- Available in high capacity version
- 100% incinerable

GENERAL CHARACTERISTICS

- Media: Kraft (+ Synthetic)
 - Recommended final pressure drop: 150 Pa
- Continuous service temperature: 70 °C
 - Relative humidity: 100%

Details and variations



BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)	DUST RETENTION CAPACITY (KG/M2)	FIRE RESISTANCE	NUMBER OF LAYERS
PREFILTER							
500	12	16	6	2700 / 7,5	8-9	M2 (*)	5
1070	12	16	12,8	2700 / 7,5	8-9	M2 (*)	5

BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)	DUST RETENTION CAPACITY (KG/M2)	FIRE RESISTANCE	NUMBER OF LAYERS
STANDARD							
500	10/12	16	6	2700 / 8	4-6	M1 (*)	6
700	10/12	16	8,4	2700 / 8	4-6	M1 (*)	6
800	10/12	16	9,6	2700 / 8	4-6	M1 (*)	6
1000	10/12	16	12	2700 / 8	4-6	M1 (*)	6
1070	10/12	16	12,8	2700 / 8	4-6	M1 (*)	6

BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)	DUST RETENTION CAPACITY (KG/M2)	FIRE RESISTANCE	NUMBER OF LAYERS
HIGH CAPACITY							
500	12	25	6	2700 / 8	12 - 15	M2 (*)	8
700	12	25	8,4	2700 / 8	12-15	M2 (*)	8
750	12	25	9	2700 / 8	12-15	M2 (*)	9
800	12	25	9,6	2700 / 8	12 - 15	M2 (*)	8
1150	12	25	12,8	2700 / 8	12-15	M2 (*)	8

BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)	DUST RETENTION CAPACITY (KG/M2)	FIRE RESISTANCE	NUMBER OF LAYERS
EUROSUPRA HC							
500	12	25	6	2700 / 23	12-15	M2 (*)	7+1 SYNTH
700	12	25	8,4	2700 / 23	12-15	M2 (*)	7+1 SYNTH
800	12	25	9,6	2700 / 23	12-15	M2 (*)	7+1 SYNTH
1150	12	25	13,8	2700 / 23	12-15	M2 (*)	7+1 SYNTH
BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)	DUST RETENTION CAPACITY (KG/M2)	FIRE RESISTANCE	NUMBER OF LAYERS
EUROSUPRA II							
500	12	16	6	2700 / 23	6-8	M1 (*)	5+1 SYNTH
1150	12	16	13,8	2700 / 23	6-8	M1 (*)	5+1 SYNTH
BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)	DUST RETENTION CAPACITY (KG/M2)	FIRE RESISTANCE	NUMBER OF LAYERS
FC PANEL							
495	0,595	24-48	(**)	2700 / 30	3-4	M3	(***)
295	0,595	24-48	(**)	2700 / 30	M3	(***)	

CUTTING ROLLS

DG

Pre-filtration for general ventilation and air conditioning systems

APPLICATION AREAS

Pre-filtration for gas turbines


- Deltrian cutting service
- Increasing density
- Multiple efficiencies
- Range of impregnated media 'Oiled series'
- High retention power
- Filtration direction indicated by yellow/white coloring

GENERAL CHARACTERISTICS

- Media: impregnated glass fibers
- Yellow color on the dirty air side
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 120 °C
- Relative Humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 50% ISO 16890 - (G3)					
DG 1"	2000	20	25	40	5400 / 25
DG 2"	2000	20	50	40	5400 / 35
DG 4"	2000	20	100	40	9000 / 75
DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 60% ISO 16890 - (G4)					
DGGT 4" *	2000	20	100	40	9720 / 90
DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 50% ISO 16890 - (G3)					
DGMC 3"	1000	20	75	20	9000 / 45

CUTTING ROLLS

DGPS

Paint mist separator for lacquering installations and paint booths, suitable filter for dry extraction and surface treatment by spraying.



APPLICATION AREAS

- Deltrian cutting service
- Increasing density of the media
- High retention power
- Filtering direction marked by green/white coloring

GENERAL CHARACTERISTICS

- Media: glass fibers
- Green coloring on the dirty air side
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 120 °C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 50% ISO 16890 - (G3)					
DG 1"	2000	20	25	40	5400 / 25
DG 2"	2000	20	50	40	5400 / 35
DG 4"	2000	20	100	40	9000 / 75
DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 60% ISO 16890 - (G4)					
DGGT 4" *	2000	20	100	40	9720 / 90
DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 50% ISO 16890 - (G3)					
DGMC 3"	1000	20	75	20	9000 / 45
DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 50% ISO 16890 - (G3)					
DGPS 3"	2000	20	70	40	6300 / 32
DGPS 2,5"	2000	20	65	40	6300 / 32
DGPS 4"	2000	20	100	40	6300 / 40

DELTRIAN PAINT ARRESTOR

DPA-G



High-quality filtration for the exhaust air of paint booths.

APPLICATION AREAS

DPA floor filter mats are preferably used for separating paint mist in repair and paint booths with an air evacuation system.

- DPAs are made from 100% synthetic raw materials.
- Premature surface blockage is prevented by the diamond-shaped, three-dimensional material structure.
- This structure doubles the filter surface, thereby increasing the filter's capacity to absorb paint mist, while the integrated mesh makes the mats stable and tear-resistant.
- The fully synthetic paint mist separators are easy to remove and 100% thermally recyclable.
- 99.43% spray efficiency

GENERAL CHARACTERISTICS

- | | |
|--|--|
| • Recommended face velocity: 0.5 m/s | • Approximate thickness: 25 mm |
| • Initial pressure drop: 10 Pa | • Approximate weight per unit area: 440 g/m ² |
| • Average paint retention: >99% | • Temperature stability: 50°C |
| • Recommended final pressure drop: 250 Pa | • Moisture resistance: 100% |
| • Paint storage capacity: up to 25 kg/m ² | • Surface area: 1 m ² |
| • Material: polyester fibres | |

DELTRIAN PAINT ARRESTOR

DPA-W



High-quality filtration for paint booth exhaust air.

APPLICATION AREAS

DPA floor filters are preferred for separating paint mist in repair and spray painting booths with an air exhaust system.

- DPAs are made from 100% synthetic raw materials.
- The premature blocking of the surface is prevented by the diamond-shaped, three-dimensional material structure.
- This structure doubles the filter surface area, increasing the filter's capacity to absorb paint mist, while the integrated mesh makes the mats stable and tear-resistant.
- The fully synthetic paint mist separators are easy to remove and 100% thermally recyclable.
- 99,84% spray efficiency

GENERAL CHARACTERISTICS

- | | |
|--|--|
| • Recommended face velocity: 0.5 m/s | • Approximate thickness: 30 mm |
| • Initial pressure drop: 15 Pa | • Approximate weight per unit area: 500 g/m ² |
| • Average paint retention: >99.5% | • Temperature stability: 50°C |
| • Recommended final pressure drop: 250 Pa | • Moisture resistance: 100% |
| • Paint storage capacity: up to 30 kg/m ² | • Surface area: 1 m ² |
| • Material: polyester fibres | |

DELTRIAN PAINT ARRESTOR

DPA-Box



Surface treatment in the automotive industry requires an environment free of aerosols larger than 10 microns.

APPLICATION AREAS

Our guarantee: the absence of aerosols larger than 5 microns combined with reduced operating costs!

- The DPA is the most efficient single-stage overspray collector, without a doubt.
- The DPA excels in stopping liquid and powder paint overspray generated in industrial, automotive, and aerospace applications.
- The DPA destroys and retains more overspray than any other overspray collector.
- The unique design of the DPA, which uses Paint Pockets® media, captures up to five times more overspray than other filters, allowing the user to reduce filter changes by up to 80%.
- The three-dimensional system of pockets embedded in the front face of the DPA more than doubles the effective surface area. This allows the device to capture and retain very large amounts of overspray.

In most cases, the filtration efficiency in paint booths is insufficient, paint residues directly affect equipment performance, and result in more frequent changes to the facilities.

GENERAL CHARACTERISTICS

- | | |
|---|--|
| • Dimensions: 485/485/500 - 500×500×500 | • Paint capture volume: up to 25 kg per box |
| • Media: 3D synthetic | • Temperature stability: 50°C |
| • Frame: cardboard | • Humidity resistance: 100% |
| • Filtration surface area: 1m ² | • 84.5% efficiency for particles larger than 5μ |
| • Filtration efficiency: 99.9% | • 99.8% efficiency for particles larger than 10μ |
| • Nominal air flow: 1000 - 1800 m ³ /h | |

CUTTING ROLLS

Roll Filters

Prefiltration for air treatment in industrial ventilation.

APPLICATION AREAS


- Complete range of compatible replacements with AAF (Roll-o-Mat), Trox (Trox-o-Mat), Delbag (Fibroband) and other manufacturers' systems.
- Increasing density
- Increased retention capacity through the addition of a physiological binder
- Rolls available in different widths

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890:2016
- Media: glass or synthetic fibers
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Continuous service temperature: 120°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 50% ISO 16890 - (G3)					
FD 3'/A	836	20	50	16,7	9000 / 45
FD 3'/T	860	20	50	17,2	9000 / 45
FD 4'/A	1141	20	50	22,8	9000 / 45
FD 4'/T	1160	20	50	23,2	9000 / 45
FD 4'/D	1110	20	50	22,2	9000 / 45
FD 5'/A	1446	20	50	28,9	9000 / 45
FD 5'/T	1460	20	50	29,2	9000 / 45
FD 5'/D	1410	20	50	28,2	9000 / 45
FD 6'/A	1751	20	50	35	9000 / 45
FD 6'/T	1760	20	50	35,2	9000 / 45
FD 6'/F	1710	20	50	34,2	9000 / 45
FD 7'/A	2056	20	50	41,1	9000 / 45
FD 7'/T	2060	20	50	41,2	9000 / 45
FD 7'/F	2010	20	50	40,2	9000 / 45

CUTTING ROLLS

Polyfil

Used as filters on fan-coils, air heaters or electrical cabinets.



APPLICATION AREAS


- Robust and neat execution
- Manufactured in all dimensions upon request
- M1 fire classification of the media upon request
- Validated by major fan-coil manufacturers
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890: 2016
- Media: synthetic
- Frame: galvanized steel wire 4 mm in diameter
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80 °C
- Maximum admitted temperature for short periods: 110°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 40% ISO 16890 - (G2)					
FA POLY 100	185	445	6	0,08	445 / 20
FA POLY 100	185	595	6	0,11	595 / 20
FA POLY 100	185	795	6	0,15	795 / 20
FA POLY 100	185	995	6	0,18	995 / 20
FA POLY 100	185	1195	6	0,22	1195 / 20
FA POLY 100	175	650	6	0,11	610 / 20
FA POLY 100	175	850	6	0,15	800 / 20
FA POLY 100	175	1050	6	0,18	990 / 20
FA POLY 100	175	1250	6	0,22	1180 / 20
FA POLY 100	175	1450	6	0,25	1370 / 20
FA POLY 100	205	335	6	0,07	370 / 20
FA POLY 100	205	475	6	0,1	530 / 20
FA POLY 100	205	660	6	0,14	730 / 20
FA POLY 100	205	845	6	0,17	930 / 20
FA POLY 100	205	1030	6	0,21	1140 / 20

FA POLY 100	205	1215	6	0,25	1345 / 20
FA POLY 100	210	465	6	0,1	530 / 20
FA POLY 100	210	665	6	0,14	750 / 20
FA POLY 100	210	865	6	0,18	980 / 20
FA POLY 100	210	1065	6	0,22	1210 / 20
FA POLY 100	245	480	6	0,12	635 / 20
FA POLY 100	245	730	6	0,18	970 / 20
FA POLY 100	245	1030	6	0,25	1360 / 20
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 50% ISO 16890 - (G3)					
FA POLY 150	185	445	15	0,08	445 / 22
FA POLY 150	185	595	15	0,11	595 / 22
FA POLY 150	185	795	15	0,15	795 / 22
FA POLY 150	185	995	15	0,18	995 / 22
FA POLY 150	185	1195	15	0,22	1195 / 22
FA POLY 150	175	650	15	0,11	610 / 22
FA POLY 150	175	850	15	0,15	800 / 22
FA POLY 150	175	1050	15	0,18	990 / 22
FA POLY 150	175	1250	15	0,22	1180 / 22
FA POLY 150	175	1450	15	0,25	1370 / 22
FA POLY 150	205	335	15	0,07	370 / 22
FA POLY 150	205	475	15	0,1	530 / 22
FA POLY 150	205	660	15	0,14	730 / 22
FA POLY 150	205	845	15	0,17	930 / 22
FA POLY 150	205	1030	15	0,21	1140 / 22
FA POLY 150	205	1215	15	0,25	1345 / 22
FA POLY 150	210	465	15	0,1	530 / 22
FA POLY 150	210	665	15	0,14	750 / 22
FA POLY 150	210	865	15	0,18	980 / 22
FA POLY 150	210	1065	15	0,22	1210 / 22
FA POLY 150	245	480	15	0,12	635 / 22
FA POLY 150	245	730	15	0,18	970 / 22
FA POLY 150	245	1030	15	0,25	1360 / 22

FILTER CELLS

Ecovyl – Cylindrical



These filters are suitable for industrial applications such as: motors and compressors, rotating machines and electrical cabinets, air breathers, etc.

APPLICATION AREAS


These filters are suitable for industrial applications such as ...:

- Engines and compressors: air filtration, power supply for heat engines (diesels, generators, blowers, vacuum pumps, etc.)
- Rotating machines and electrical cabinets: protection of motors, alternators and forced-ventilation electrical switchgear cabinets operating in dusty environments: mines, steelworks, cement works, etc.
- Breathers: on storage tanks for granular, powdered or liquid products.

GENERAL CHARACTERISTICS

- Filtration class G3 in accordance with standard EN779-2012
- Multi-layer polyvinyl chloride
- Two-component seal cast on both sides
- Maximum recommended operating temperature: 60°C
- Bracket mounting
- An ECOVAL version (aluminium or stainless steel) is also available for a maximum operating temperature of 90°.
- M1 certification

Details and variations




DESCRIPTION	HEIGHT A (MM)	DIAMETER (MM)	THICKNESS C (MM)	AIRFLOW (M3/H)/DELTA P (PA)	DUST RETENTION CAPACITY (KG/M2)
ECOVYL					
70 ECOVYL 30	34	68	20	25	0,025
70 ECOVYL 70	74	68	20	40	0,050
100 ECOVYL 57	61	98	20	90	0,065
100 ECOVYL 70	74	98	20	120	0,090
100 ECOVYL 97	101	132	25	140	0,110
133 ECOVYL 57	61	132	25	110	0,105
133 ECOVYL 70	74	132	25	150	0,125
133 ECOVYL 97	101	132	25	200	0,170
133 ECOVYL 150	154	132	25	270	0,260
175 ECOVYL 70	74	174	30	200	0,150
175 ECOVYL 97	101	174	30	260	0,205
175 ECOVYL 150	154	174	30	410	0,315
210 ECOVYL 57	61	204,5	30	350	0,165
210 ECOVYL 97	101	204,5	30	400	0,275

210 ECOVYL 150	154	204,5	30	600	0,420
275 ECOVYL 97	106	272	35	650	0,320
275 ECOVYL 150	159	272	35	1000	0,535
275 ECOVYL 276	285	272	35	1500	1,055
275 ECOVYL 330	339	272	35	1800	1265
350 ECOVYL 330	339	348	35	2000	1855
406 ECOVYL 330	339	409	35	3000	2,045

FILTER CELLS

Ecovyl – Flat filter

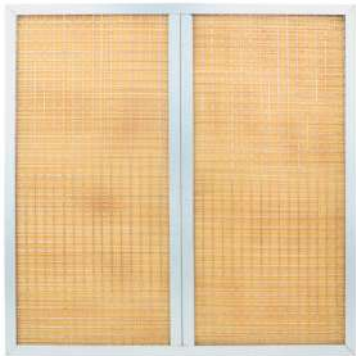

Ecovyl flat filters are mainly used to pre-filter inlet air in air conditioning and industrial ventilation systems.

APPLICATION AREAS


Pre-filtering inlet air :

- 1. electrical rooms
- 2. compressor rooms
 - Rigid cells with long reinforcements
 - High dust holding capacity
 - Washable media
 - High resistance to acids

GENERAL CHARACTERISTICS

- Filter class G
- Media: layers of PVC media
- Frame: stainless steel, plastic, galvanised, aluminium
- Recommended final pressure: 450 Pa
- Maximum continuous operating temperature: 60°C
- Relative humidity: 100%.

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 30% - ISO 16890 (G2)					
G2	592	592	47	0,35	1700 / 51
G2	287	592	47	0,17	850 / 51
G2	592	592	97	0,35	1700 / 98
G2	287	592	97	0,17	850 / 98

FILTER CELLS

FC Carton

Used in paint booths and air recovery in hospitals.

APPLICATION AREAS


- 100% incinerable
- High retention capacity thanks to the addition of a non-volatile and odorless viscose binder
- Lightweight, rigid and compactable filter
- Moisture resistant cardboard
- Grid secured to frame, glued to the media
- Wide range of standard dimensions, non-standard dimensions on request
- Tested for food contact
- According to CE 1935/2004

GENERAL CHARACTERISTICS

- Filtration class EN779:2012: G3
- Media: glass fibers
- Frame: cardboard
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Continuous service temperature: 70 °C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 50% ISO 16890 - (G3)					
FC CARTON H	595	595	23	0,35	1900 / 49
FC CARTON H	287	595	23	0,17	1530 / 49
FC CARTON H	595	595	47	0,35	3150 / 68
FC CARTON H	287	595	47	0,17	1530 / 68

FILTER CELLS

FC Galva



Coarse pre-filtration for air treatment systems or return grilles.

APPLICATION AREAS


- M1 media fire classification on demand
- Galvanized upstream/downstream mesh
- Available in thicknesses of 10 to 47 mm
- Available in rechargeable version
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- Filtration class EN779:2012: G2-G4
- Media: synthetic
- Frame: galvanized (available with stainless steel frame and mesh)
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80 °C
- Maximum temperature allowed for short periods: 110 °C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 60% ISO 16890 - (G4)					
FC GALVA	592	592	23	0,35	1890 / 35
FC GALVA	287	592	23	0,17	920 / 35
FC GALVA	592	592	15	0,35	1890 / 25
FC GALVA	287	592	15	0,17	920 / 25

FILTER CELLS

FZ Carton

Coarse pre-filtration for air handling units.



APPLICATION AREAS


- Rigid cells with reinforcement of pleat support on long lengths
- Improved sealing thanks to dynamic lut at the bottom of the frame
- Lightweight, rigid and collapsible filter
- Moisture-resistant cardboard
- Grid fixed to the frame, glued to the Media. Large range of standard sizes, custom sizes available on request
- 100% incinerable
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- EN779:2012 filtration class: G4
- Media: thermally pleated synthetic
- Frame: cardboard
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous operating temperature: 70°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 65% ISO16890 - (G4)					
FZ CA SC	595	595	23	0,44	3000 / 100
FZ CA SC	495	624	23	0,38	2600 / 100
FZ CA SC	495	595	23	0,36	2500 / 100
FZ CA SC	395	495	23	0,24	1650 / 100
FZ CA SC	287	595	23	0,21	1500 / 100
FZ CA SC	287	287	23	0,1	750 / 100
FZ CA SC	595	595	47	0,9	3400 / 90
FZ CA SC	495	624	47	0,78	2975 / 90
FZ CA SC	495	595	47	0,75	2850 / 90
FZ CA SC	395	495	47	0,49	1870 / 90
FZ CA SC	287	595	47	0,43	1700 / 90
FZ CA SC	287	287	47	0,2	825 / 90
FZ CA SC	595	595	97	1,85	3400 / 60
FZ CA SC	495	624	97	1,61	2975 / 60
FZ CA SC	495	595	97	1,54	2850 / 60
FZ CA SC	395	595	97	1,23	2325 / 60

FZ CA SC	395	495	97	0,54	1870 / 60
FZ CA SC	287	595	97	0,5	1700 / 60
FZ CA SC	287	287	97	0,26	825 / 60
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 65% ISO16890 - (G4)					
FZ CA ES	595	595	23	0,65	2500 / 55
FZ CA ES	495	495	23	0,53	1750 / 55
FZ CA ES	395	495	23	0,44	1400 / 55
FZ CA ES	287	595	23	0,32	625 / 55
FZ CA ES	595	595	47	1,3	3400 / 77
FZ CA ES	495	495	47	0,9	2800 / 77
FZ CA ES	395	495	47	0,8	1900 / 77
FZ CA ES	287	595	47	0,7	1700 / 77
FZ CA ES	595	595	97	2,2	3400 / 50
FZ CA ES	495	495	97	1,5	2800 / 50
FZ CA ES	395	495	97	1,3	1900 / 50
FZ CA ES	287	595	97	1,2	1700 / 50

FILTER CELLS

FZ Galva

Coarse pre-filtration for air treatment units or intake grilles.



APPLICATION AREAS


- Filtration surface adapted to your needs
- Thick synthetic media with high retention power, pleated between 2 rigid grids
- Available in rechargeable FZGA R version
- Media fire rating M1 on request
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- Filtration class according to EN779:2012: G4
- Media: synthetic
- Frame: galvanized, plastic frame available on request
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 90°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
FZGA STANDARD ISO COARSE 65% ISO 16890 - (G4)					
FZGA	592	592	47	0,65	3400/65
FZGA	287	592	47	0,32	1700/65
FZGA	592	592	97	1,30	3400/45
FZGA	287	592	97	0,65	1700/45

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
FZGA ECO ISO COARSE 65% ISO 16890 - (G4)					
FZGA A2	592	592	47	0,53	3400/65
FZGA A2	287	592	47	0,25	1700/65
FZGA A2	592	592	97	1,03	3400/45
FZGA A2	287	592	97	0,51	1700/45

FILTER CELLS

FS Galva


Filtration for air handling units fitted with a pre-filter upstream.

APPLICATION AREAS

Washable and regenerable filter for fancoils with PPI or Poly130 media.

GENERAL CHARACTERISTICS

- Media : Poly 130 or PPI
- Thickness : 5 mm
- Washable and regenerable
- Dimensions: made to measure

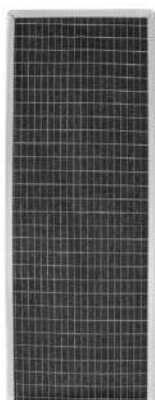

5mm

FILTER CELLS

FCM

Grease or oil mist filters for kitchen hoods



APPLICATION AREAS


Thermal screen near hot batteries.

- Droplet separator on air treatment units
- Rigid cells with reinforcements on long lengths
- Superposition of layers of metal mesh
- Available with evacuation holes at an angle, handling grip

GENERAL CHARACTERISTICS

- Filtration class EN779: 2012: G2
- Media: layers of galvanized, stainless steel or aluminum mesh
- Frame: galvanized, stainless steel or aluminum
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 150 °C
- Relative humidity: 100%
- Handle available on request

Details and variations



EFFICIENCY EN779:2012	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 30% ISO16890 - (G2)					
G2	592	592	23	0,35	3400 / 12
G2	287	592	23	0,17	1700 / 12
G2	592	592	47	0,35	3400 / 17
G2	287	592	47	0,17	1700 / 17

FILTER CELLS

FZ SS – SC & ES

Coarse pre-filtration for air treatment units.




APPLICATION AREAS

- High filtration surface
- Lightweight, rigid, and foldable filter
- 100% incinerable
- Highly resistant to humidity
- Wide range of standard and non-standard dimensions available
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- GA frame: Galvanized, Plastic, Cardboard, FiberPlast
- Media: Thermally pleated synthetic material
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 70 °C
- Relative humidity: 100%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
ISO COARSE 65% ISO16890 - (G4)					
FZ SS SC	592	592	47	0,82	3400 / 65
FZ SS SC	492	592	47	0,67	2800 / 65
FZ SS SC	492	492	47	0,56	2400 / 65
FZ SS SC	392	492	47	0,47	1900 / 65
FZ SS SC	287	592	47	0,41	1700 / 65
FZ SS SC	592	592	97	1,68	3400 / 40
FZ SS SC	492	592	97	1,37	2800 / 40
FZ SS SC	492	492	97	1,14	2400 / 40
FZ SS SC	392	492	97	0,96	1900 / 40
FZ SS SC	287	592	97	0,84	1700 / 40
ISO COARSE 65% - ISO16890 - (G4)					
FZ SS ES	592	592	47	1,09	3400 / 55
FZ SS ES	492	592	47	0,89	2800 / 55
FZ SS ES	492	492	47	0,74	2400 / 55
FZ SS ES	392	492	47	0,58	1900 / 55

FZ SS ES	287	592	47	0,55	1700 / 55
FZ SS ES	592	592	97	2,2	3400 / 38
FZ SS ES	492	592	97	1,87	2800 / 38
FZ SS ES	492	492	97	1,5	2400 / 38
FZ SS ES	392	492	97	1,3	1900 / 38
FZ SS ES	287	592	97	1,2	1700 / 38

BAG FILTERS

FP40



Prefiltration in air handling units.

APPLICATION AREAS


- High retention capacity
- Low pressure drop
- Self-supporting conical pockets
- Rigid plastic frame variant (SECURE) available on request
- Cost-effective
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Media: thick synthetic with increasing density
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80 °C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 65% ISO16890 - (G4)						
FP40-6/600/06	592	592	600	6	4,3	3400 / 30
FP40-5/600/05	490	592	600	5	3,9	2800 / 30
FP40-3/600/03	287	592	600	3	2,3	1700 / 30
FP40-6/360/06	592	592	360	6	2,6	3400 / 37
FP40-5/360/05	490	592	360	5	2,4	2800 / 37
FP40-3/360/03	287	592	360	3	1,4	1700 / 37
FP40-6/320/06	592	592	320	6	2,5	3400 / 35

BAG FILTERS

Plusair – ISO COARSE 65%

Can be used as pre-filters and fine filters

APPLICATION AREAS

Final filters in general ventilation and air conditioning systems in offices, shopping centers, theaters, hotels, industrial sites, food industry, laboratories, etc.

Pre-filter for paint booth air intakes, electrical rooms, and in front of any fine or absolute filter


- Economical
- Low pressure drop
- Self-supporting conical pockets (100% synthetic)
- High retention capacity
- Very good mechanical resistance
- 100% incinerable

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890:2016
- Frame: thermo-molded plastic
- Media: synthetic
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 70°C
- Relative humidity: 100%



Details and variations




DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 65% - ISO 16890 - (G4)						
PA40-6/600/06	592	592	625	6	4,2	3400 / 35
PA40-5/600/05	490	592	625	5	3,5	2800 / 35
PA40-3/600/03	287	592	625	3	2,1	1700 / 35

Fine filtration.

Essential for capturing fine particles such as smoke, bacteria, etc.

Filtering fine particles through air filters is crucial for capturing particles as small as 2.5 micrometers, such as smoke, bacteria, and air pollutants. These filters significantly improve indoor air quality, reducing health risks associated with inhaling harmful particles. They play an essential role in sensitive environments, such as hospitals and laboratories, by maintaining clean and safe air. Additionally, they help protect HVAC systems by preventing the accumulation of fine particles that can reduce the efficiency and lifespan of these systems.

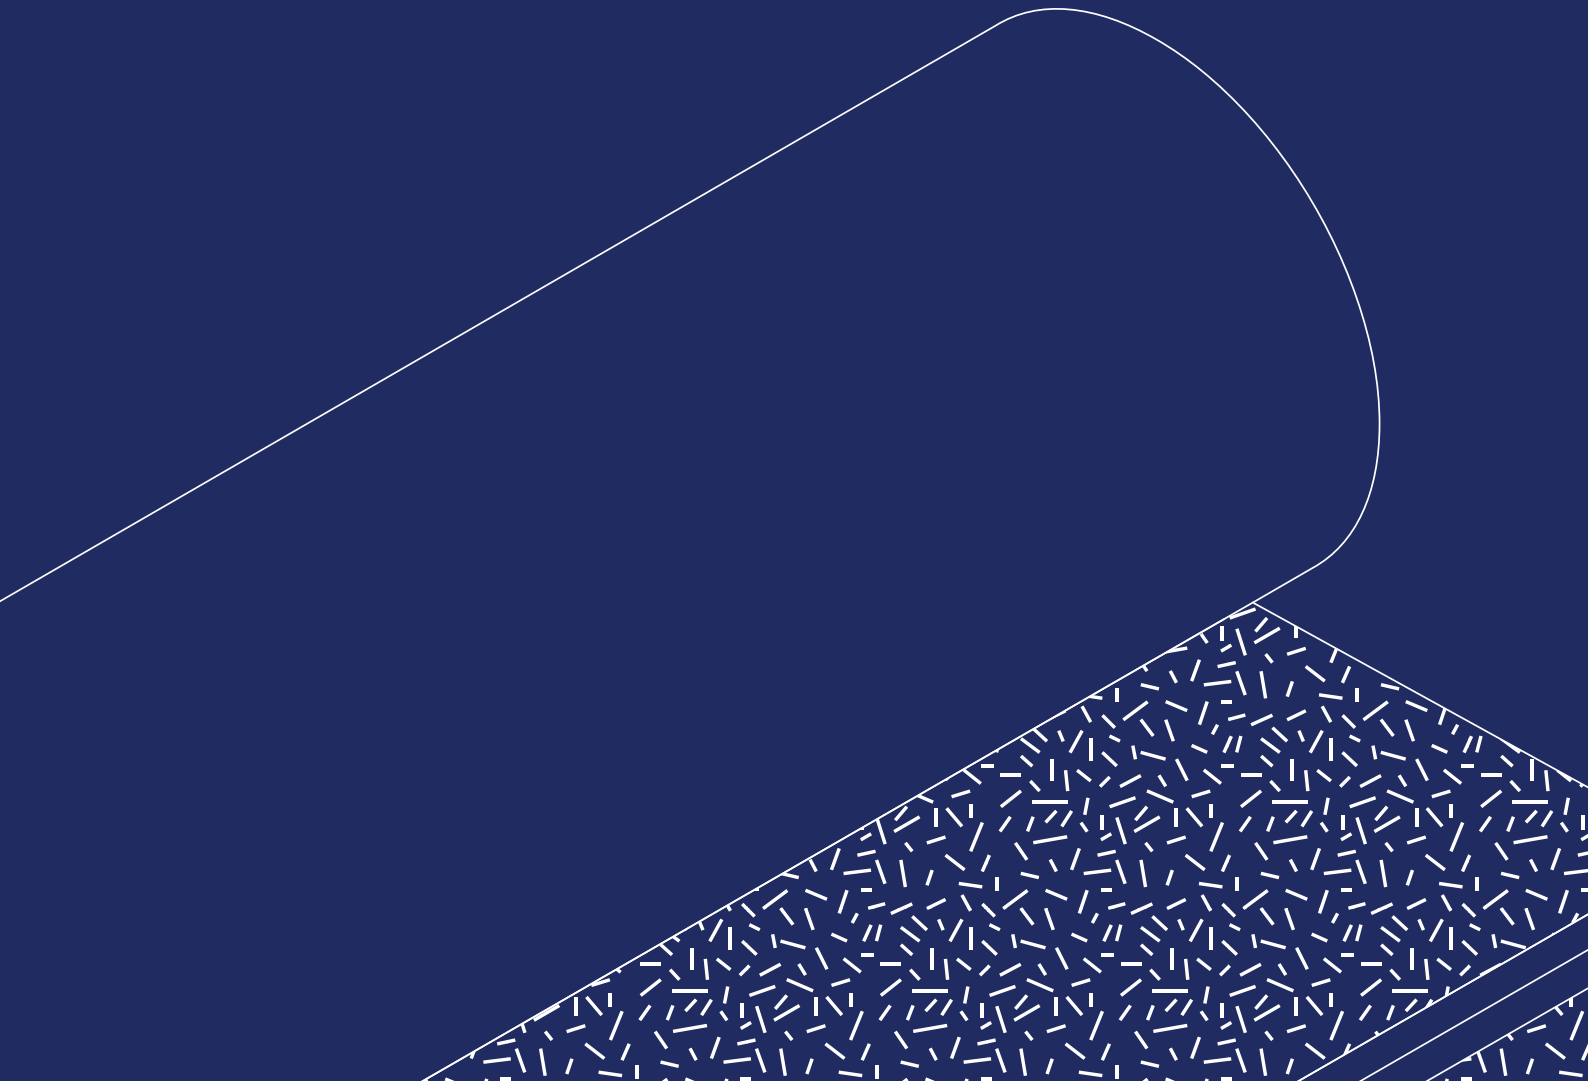

CUTTING ROLLS

Poly 600-660

Rolled and cut Poly 600-660 filter media is used for air prefiltration in ventilation and air conditioning.




APPLICATION AREAS

- Surface treatment
- Automotive industry
- Bodywork
- Paint booths
- Deltrian cut service
- Long service life
- Low pressure drop
- High mechanical resistance
- Impregnation in the core of the media prevents detachment of particles > 5 microns
- Reinforcement webbing at the air outlet ensuring the media's stability over time
- Auto-extinguishing media according to European classification DIN 53438-F1 and US UL900-Class 1
- Validated by major automotive manufacturers

GENERAL CHARACTERISTICS

- EN779:2012 filtration class: M5-M6
- Media: synthetic
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 100°C
- Relative humidity: 100% RH

Details and variations



DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	NOMINAL VELOCITY (M/S)	DELTA P (PA)
ISO ePM10 60% - (M5)						
POLYCC600	2000	20	22	40	0.25	28
POLYCC600	2000	20	22	40	0.50	65
DESCRIPTION	BASE A (MM)	LENGTH B (M)	THICKNESS C (MM)	SURFACE (M2)	NOMINAL VELOCITY (M/S)	DELTA P (PA)
ePM10 70% ISO 16890 - (M6)						
POLYCC660	2000	20	25	40	0.25	51
POLYCC660	2000	20	25	40	0.50	115

BAG FILTERS

FP50



Filtration for air handling units equipped with a pre-filter upstream and in air conditioning cabinets.

APPLICATION AREAS


- Compact and economical
- Large filtration surface
- High efficiency
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890: 2016
- Media: thick synthetic with increasing density
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80°C
- Relative humidity: 100% RH



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 70% ISO 16890 - (M5)						
FP50-6/635/08	592	592	635	8	6	3400 / 35
FP50-5/635/06	490	592	635	6	4,5	2800 / 35
FP50-3/635/04	287	592	635	4	3	1700 / 35
FP50-6/600/06	592	592	600	6	4,3	3400 / 40
FP50-5/600/05	490	592	600	5	3,6	2800 / 40
FP50-3/600/03	287	592	600	3	2,3	1700 / 40
FP50-6/500/06	592	592	500	6	3,6	3400 / 45
FP50-5/500/05	490	592	500	5	3	2800 / 45
FP50-3/500/03	287	592	500	3	1,8	1700 / 45
FP50-6/360/06	592	592	360	6	2,6	3400 / 43
FP50-5/360/05	490	592	360	5	2,1	2800 / 43
FP50-3/360/03	287	592	360	3	1,3	1700 / 43

BAG FILTERS

FPS50



Dust filter, particularly for capturing paint mist in spray booths in the automotive and mechanical industries.

APPLICATION AREAS


- 2 media in 1 filters: synthetic + glass fibre
- High retention capacity
- Useful for collecting particles such as varnish, lacquer, paint and powders
- High filtration efficiency for other residues.

GENERAL CHARACTERISTICS

- Media: high-efficiency synthetic (pre-filtration) + glass fibre (fine filtration)
- Frame: wood
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous operating temperature: 70°C
- Relative humidity: 90%.



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)	ENERGY CLASS
ePM10 50% ISO16890								
FPS50-6/360/02	592	592	325	2	0.6	3400 / 92	>1100	E

BAG FILTERS

KS

Filtration for air handling units.

APPLICATION AREAS

- HI-TECH aerodynamic profile limiting turbulence at air outlet
- Sewn conical pockets
- Low pressure drop
- Low energy consumption
- Rigid plastic frame variant (SECURE) available on request
- M1 media fire classification
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial development (ISO 846-VDI 6022)
- Option: Bacteriostatic and virucidal treatment available upon request.

Certificates available upon request.

GENERAL CHARACTERISTICS

- EN779:2012 filtration class: M6-F8
- Media: synthetic
- Frame: galvanized
- Final pressure drop: 300 Pa
- Pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (the smallest value applies).
- Maximum continuous service temperature: 70°C
- Relative humidity: 100%
- Frame option: steel, wood, plastic, or reusable frame for LFC



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 60% ISO 16890 - (M5)								
KS50-6/600/08	592	592	600	8	5.70	3400 / 40	>1200	E
KS50-6/600/06	592	592	600	6	4.30	3400 / 45	>1200	E
KS50-6/500/06	592	592	500	6	3.60	3400 / 53	>1200	E
KS50-6/360/06	592	592	360	6	2.86	3400 / 67	>1200	E
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 70% ISO 16890 - (M6)								
KS65-6/600/08	592	592	600	8	5,7	3400 / 50	>1300	E
KS65-5/600/06	490	592	600	6	4,3	2800 / 50		
KS65-3/600/04	287	592	600	4	2,8	1700 / 50		
KS65-6/600/06	592	592	600	6	4,3	3400 / 54	>1300	E
KS65-5/600/05	490	592	600	5	3,6	2800 / 54		

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

KS65-3/600/03	287	592	600	3	2,1	1700 / 54		
KS65-6/500/08	592	592	500	8	4,7	3400 / 63	>1300	E
KS65-5/500/06	490	592	500	6	3,6	2800 / 63		
KS65-3/500/04	287	592	500	4	2,4	1700 / 63		
KS65-6/380/08	592	592	380	8	3,6	3400 / 58	>1300	E
KS65-5/380/06	490	592	380	6	2,6	2800 / 58		
KS65-3/380/04	287	592	380	4	1,7	1700 / 58		
KS65-6/380/06	592	592	380	6	2,7	3400 / 72	>1300	E
KS65-5/380/05	490	592	380	5	2,2	2800 / 72		
KS65-3/380/03	287	592	380	3	1,3	1700 / 72		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM2,5 70% ISO 16890 - (F7)								
KS85-6/600/08	592	592	600	8	5,7	3400 / 103	>2000	E
KS85-5/600/06	490	592	600	6	4,3	2800 / 103		
KS85-3/600/04	287	592	600	4	2,8	1700 / 103		
KS85-6/500/08	592	592	500	8	4,7	3400 / 115	>2000	E
KS85-5/500/06	490	592	500	6	3,6	2800 / 115		
KS85-3/500/04	287	592	500	4	2,4	1700 / 115		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890 - (F8)								
KS95-6/600/08	592	592	600	8	5,7	2000 / 86		
KS95-5/600/06	490	592	600	6	4,3	1650 / 86		
KS95-3/600/04	287	592	600	4	2,8	1000 / 86		
KS95-6/500/08	592	592	500	8	4,7	2000 / 106		
KS95-5/500/06	490	592	500	6	3,6	1650 / 106		
KS95-3/500/04	287	592	500	4	2,4	1000 / 106		


BAG FILTERS

K+**Filtration for air handling units.****APPLICATION AREAS**

- HIGH-TECH aerodynamic profile limiting air outlet turbulence
- Sewn conical pockets
- Low pressure drop
- Tested for food contact in accordance with CE 1935/2004

GENERAL FEATURES

- Filtration class according to ISO16890: 2016
- Media: synthetic
- Final pressure drop: 300 Pa
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Continuous operating temperature: 70°C
- Relative humidity: 100% RH
- Frame option: steel, wood, plastic, or reusable frame for LFC

**Details and variations**

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR) *	ENERGY CLASS**
ePM1 60% ISO 16890 - (F7)								
K+85-6/635/10	592	592	635	10	7,5	3400 / 96	1325	C
K+85-5/635/08	490	592	635	8	6	2800 / 96		
K+85-3/635/05	287	592	635	5	3,8	1700 / 96		
K+85-6/635/08	592	592	635	8	6	3400 / 105	1708	D
K+85-5/635/06	490	592	635	6	4,5	2800 / 105		
K+85-3/635/04	287	592	635	4	3	1700 / 105		
K+85-6/635/06	592	592	635	6	4,5	3400 / 138	1995	D
K+85-5/635/05	490	592	625	5	3,8	2800 / 138		
K+85-3/635/03	287	592	635	3	2,3	1700 / 138		
K+85-6/535/08	592	592	535	8	5,1	3400 / 125	>2050	E
K+85-5/535/06	490	592	535	6	3,8	2800 / 125		
K+85-3/535/04	287	592	535	4	2,5	1700 / 125		
K+85-6/535/06	592	592	535	6	3,8	3400 / 157	>2050	E
K+85-5/535/05	490	592	535	5	3,2	2800 / 157		
K+85-3/535/03	287	592	535	3	1,9	1700 / 157		

BAG FILTERS

NW



Air filtration in ventilation systems.

APPLICATION AREAS


- Low pressure drop
- Excellent dust retention capacity
- Self-supporting pockets
- Conical pockets designed to maximize performance
- Easy installation
- Tested for food contact according to CE 1935/2004
- **OPTION:** bacteriostatic and virucidal treatment on request

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890: 2016
- Media: Nanowave
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80 °C
- Relative humidity: 100% RH
- Frame option: steel, wood, plastic, or reusable frame for LFC



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	EFFECTIVE AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 55% ISO16890 - (M6)									
NW65-6/535/10	592	592	535	10	6,3	15,75	3400 / 51	631	B
NW65-6/535/08	592	592	535	8	5,1	12,75	3400 / 50	650	B
NW65-6/635/10	592	592	635	10	7,5	18,75	3400 / 47	582	B
NW65-6/635/08	592	592	635	8	6	15	3400 / 47	590	B
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	EFFECTIVE AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 60% ISO16890 - (F7)									
NW80-6/350/06	592	592	292	6	2,48	6,21	2800 / 135	>2050	E
NW80-6/350/06	490	592	292	5	2,07	5,18	2230 / 135		
NW80-6/350/06	287	592	292	3	1,24	3,1	1350 / 135		
NW80-6/360/06	592	592	360	6	2,5	6,25	3400 / 182	>2050	E
NW80-5/360/05	490	592	360	5	2,1	5,25	2800 / 182		
NW80-3/360/03	287	592	360	3	1,3	3,25	1700 / 182		
NW80-6/360/08	592	592	360	8	3,4	8,5	3400 / 162	>2050	E
NW80-5/360/06	490	592	360	6	2,6	6,5	2800 / 162		
NW80-3/360/04	287	592	360	4	1,7	4,25	1700 / 162		

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

NW80-6/360/10	592	592	360	10	4,3	10,75	3400 / 133	2251	E
NW80-5/360/08	490	592	360	8	3,4	8,5	2800 / 133		
NW80-3/360/05	287	592	360	5	2,1	5,25	1700 / 133		
NW80-6/450/06	592	592	450	6	3,2	8	3400 / 144	>2050	E
NW80-5/450/05	490	592	450	5	2,7	6,75	2800 / 144		
NW80-3/450/03	287	592	450	3	1,6	4	1700 / 144		
NW80-6/450/08	592	592	450	8	4,3	10,75	3400 / 122	1978	D
NW80-5/450/06	490	592	450	6	3,2	8	2800 / 122		
NW80-3/450/04	287	592	450	4	2,1	5,25	1700 / 122		
NW80-6/450/10	592	592	450	10	5,3	13,25	3400 / 108	1596	D
NW80-5/450/08	490	592	450	8	4,3	10,75	2800 / 108		
NW80-3/450/05	287	592	450	5	2,7	6,75	1700 / 108		
NW80-6/535/10	592	592	535	10	6,3	15,75	3400 / 100	1396	C
NW80-6/580/06	592	592	580	6	4,1	10,25	3400 / 113	1778	D
NW80-5/580/05	490	592	580	5	3	7,5	2800 / 113		
NW80-3/580/03	287	592	580	3	2	5	1700 / 113		
NW80-6/580/08	592	592	580	8	5,5	13,75	3400 / 102	1496	D
NW80-5/580/06	490	592	580	6	4,1	10,25	2800 / 102		
NW80-3/580/04	287	592	580	4	2,75	6,9	1700 / 102		
NW80-6/580/10	592	592	580	10	6,9	17,25	3400 / 90	1202	C
NW80-5/580/08	490	592	580	8	5,5	13,7	2800 / 90		
NW80-3/580/05	287	592	580	5	3,5	8,75	1700 / 90		
NW80-6/635/10	592	592	635	10	7,5	18,75	3400 / 80	1047	B
NW80-6/635/08	592	592	635	8	6	15	3400 / 92	1295	C
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	EFFECTIVE AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 60% ISO16890 - (F7)									
NW85-6/360/06	592	592	360	6	2,5	6,25	3400 / 167	>2050	E
NW85-5/360/05	490	592	360	5	2,1	5,25	2800 / 167		
NW85-3/360/03	287	592	360	3	1,3	3,25	1700 / 167		
NW85-6/360/10	592	592	360	10	4,3	10,75	3400 / 108	1514	D
NW85-5/360/08	490	592	360	8	3,4	8,5	2800 / 108		
NW85-3/360/05	287	592	360	5	2,1	5,25	1700 / 108		
NW85-6/450/06	592	592	450	6	3,2	8	3400 / 133	1964	D
NW85-5/450/05	490	592	450	5	2,7	6,75	2800 / 133		
NW85-3/450/03	287	592	450	3	1,6	4	1700 / 133		
NW85-6/450/08	592	592	450	8	4,3	10,75	3400 / 105	1429	C
NW85-5/450/06	490	592	450	6	3,2	8	2800 / 105		

NW85-3/450/03	287	592	450	3	2,1	5,25	1700 / 105		
NW85-6/450/10	592	592	450	10	5,3	13,25	3400 / 94	1248	C
NW85-5/450/08	490	592	450	8	4,3	10,75	2800 / 94		
NW85-3/450/05	287	592	450	5	2,7	6,75	1700 / 94		
NW85-6/535/10	592	592	535	10	6,3	15,75	3400 / 74	1162	C
NW85-6/535/08	592	592	535	8	5,1	12,75	3400 / 85	1254	C
NW85-6/580/06	592	592	580	6	4,1	10,25	3400 / 106	1444	C
NW85-5/580/05	490	592	580	5	3	7,5	2800 / 106		
NW85-3/580/03	287	592	580	3	2	5	1700 / 106		
NW85-6/580/08	592	592	580	8	5,5	13,75	3400 / 86	1087	B
NW85-5/580/06	490	592	580	6	4,1	10,25	2800 / 86		
NW85-3/580/04	287	592	580	4	2,75	6,9	1700 / 86		
NW85-6/580/10	592	592	580	10	6,9	17,25	3400 / 76	930	A
NW85-5/580/08	490	592	580	8	5,5	13,7	2800 / 76		
NW85-3/580/05	287	592	580	5	3,5	8,75	1700 / 76		
NW85-6/635/10	592	592	635	10	7,5	18,75	3400 / 74	897	A
NW85-6/635/08	592	592	635	8	6	15	3400 / 74	950	A

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	EFFECTIVE AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR) *	ENERGY CLASS**
ePM1 70% ISO16890 - (F8)									
NW95-6/360/06	592	592	360	6	2,5	6,25	3400 / 194	>2150	E
NW95-5/360/05	490	592	360	5	2,1	5,25	2800 / 194		
NW95-3/360/03	287	592	360	3	1,3	3,25	1700 / 194		
NW95-6/360/08	592	592	360	8	3,4	8,5	3400 / 150	2196	E
NW95-5/360/06	490	592	360	6	2,6	6,5	2800 / 150		
NW95-3/360/04	287	592	360	4	1,7	4,25	1700 / 150		
NW95-6/360/10	592	592	360	10	4,3	10,75	3400 / 125	1739	D
NW95-5/360/08	490	592	360	8	3,4	8,5	2800 / 125		
NW95-3/360/05	287	592	360	5	2,1	5,25	1700 / 125		
NW95-6/450/06	592	592	450	6	3,2	8	3400 / 155	2264	E
NW95-5/450/05	490	592	450	5	2,7	6,75	2800 / 155		
NW95-3/450/03	287	592	450	3	1,6	4	1700 / 155		
NW95-6/450/08	592	592	450	8	4,3	10,75	3400 / 117	1590	D
NW95-5/450/06	490	592	450	6	3,2	8	2800 / 117		
NW95-3/450/03	287	592	450	3	2,1	5,25	1700 / 117		

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	EFFECTIVE AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR) *	ENERGY CLASS**
ePM1 70% ISO16890 - (F8)									

NW95-6/450/10	592	592	450	10	5,3	13,25	3400 / 105	1366	C
NW95-5/450/08	490	592	450	8	4,3	10,75	2800 / 105		
NW95-3/450/05	287	592	450	5	2,7	6,75	1700 / 105		
NW95-6/535/10	592	592	535	10	6,3	15,75	3400 / 81	1056	A
NW95-6/580/06	592	592	580	6	4,1	10,25	3400 / 117	1598	D
NW95-5/580/05	490	592	580	5	3	7,5	2800 / 117		
NW95-3/580/03	287	592	580	3	2	5	1700 / 117		
NW95-6/580/08	592	592	580	8	5,5	13,75	3400 / 95	1214	B
NW95-5/580/06	490	592	580	6	4,1	10,25	2800 / 95		
NW95-3/580/04	287	592	580	4	2,75	6,9	1700 / 95		
NW95-6/580/10	592	592	580	10	6,9	17,25	3400 / 86	1060	A
NW95-5/580/08	490	592	580	8	5,5	13,7	2800 / 86		
NW95-3/580/05	287	592	580	5	3,5	8,75	1700 / 86		
NW95-6/635/10	592	592	635	10	7,5	18,75	3400 / 74	936	A+
NW95-3/635/05	287	592	635	5	3,75	9,37	1700 / 74		
NW95-1/635/10	592	287	635	10	3,75	9,37	1700 / 74		
NW95-6/635/08	592	592	635	8	6	15	3400 / 81	1067	A
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	EFFECTIVE AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 90% ISO16890 - (F9)									
NW98-6/360/08	592	592	360	8	3,4	8,5	3400 / 228	>2500	E
NW98-5/360/06	490	592	360	6	2,6	6,5	2800 / 228		
NW98-3/360/04	287	592	360	4	1,7	4,25	1700 / 228		
NW98-6/360/10	592	592	360	10	4,3	10,75	3400 / 198	2616	E
NW98-5/360/08	490	592	360	8	3,4	8,5	2800 / 198		
NW98-3/360/05	287	592	360	5	2,1	5,25	1700 / 198		
NW98-6/450/08	592	592	450	8	4,3	10,75	3400 / 182	2367	D
NW98-5/450/06	490	592	450	6	3,2	8	2800 / 182		
NW98-3/450/03	287	592	450	3	2,1	5,25	1700 / 182		
NW98-6/450/10	592	592	450	10	5,3	13,25	3400 / 152	1912	D
NW98-5/450/08	490	592	450	8	4,3	10,75	2800 / 152		
NW98-3/450/05	287	592	450	5	2,7	6,75	1700 / 152		
NW98-6/535/10	592	592	535	10	6,3	15,75	3400 / 147	1837	C
NW98-6/535/08	592	592	535	8	5,1	12,75	3400 / 155	2001	D
NW98-6/580/08	592	592	580	8	5,5	13,75	3400 / 146	1821	C
NW98-5/580/06	490	592	580	6	4,1	10,25	2800 / 146		
NW98-3/580/04	287	592	580	4	2,75	6,9	1700 / 146		
NW98-6/580/10	592	592	580	10	6,9	17,25	3400 / 122	1493	B

NW98-5/580/08	490	592	580	8	5,5	13,7	2800 / 122		
NW98-3/580/05	287	592	580	5	3,5	8,75	1700 / 122		
NW98-6/635/10	592	592	635	10	7,5	18,75	3400 / 118	1392	A
NW98-6/635/08	592	592	635	8	6	15	3400 / 119	1397	A

BAG FILTERS

TNWES-1-70

Fine filtration in air treatment plants.



APPLICATION AREAS

Top New Wave Energy Saving

- Very low pressure drop
- Excellent dust retention capacity
- Self-supporting pockets
- Conical pockets designed to maximize performance
- Easy installation thanks to short pockets
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890: 2016
- Media: TNWES (Top New Wave Energy Saving)
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80 °C
- Available with plastic or galvanized frame
- Other dimensions available



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	ACTUAL FILTER AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890 - 350mm								
TNWES-1-70-6/0350/08	592	592	350	08	8	3400/88	1547	C
TNWES-1-70-5/0350/07	490	592	350	07	7	2740/88		
TNWES-1-70-3/0350/04	287	592	350	04	4	1700/88		
TNWES-1-70-2/0350/04	287	287	350	04	2	850/88		
TNWES-1-70-39/0350/04	287	892	350	04	6	2500/88		
TNWES-1-70-55/0350/07	490	490	350	07	6	2280/88		
TNWES-1-70-59/0350/07	490	892	350	07	11	4120/88		
TNWES-1-70-1/0350/08	592	287	350	08	4	1660/88		
TNWES-1-70-4/0350/08	592	490	350	08	7	2810/88		
TNWES-1-70-69/0350/08	592	892	350	08	13	5160/88		
TNWES-1-70-93/0350/12	892	287	350	12	6	2480/88		
TNWES-1-70-95/0350/12	892	490	350	12	10	4250/88		
TNWES-1-70-S/0350/12	892	592	350	12	12	5110/88		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	ACTUAL FILTER AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

TNWES-1-70-6/0400/08	592	592	400	08	9	3400/81	1240	B
TNWES-1-70-5/0400/07	490	592	400	07	8	2740/81		
TNWES-1-70-3/0400/04	287	592	400	04	5	1700/81		
TNWES-1-70-2/0400/04	287	287	400	04	2	850/81		
TNWES-1-70-39/0400/04	287	892	400	04	7	2550/81		
TNWES-1-70-55/0400/07	490	490	400	07	7	2280/81		
TNWES-1-70-59/0400/07	490	892	400	07	13	4120/81		
TNWES-1-70-1/0400/08	592	287	400	08	5	1660/81		
TNWES-1-70-4/0400/08	592	490	400	08	8	2810/81		
TNWES-1-70-69/0400/08	592	892	400	08	14	5160/81		
TNWES-1-70-93/0400/12	892	287	400	12	7	2480/81		
TNWES-1-70-95/0400/12	892	490	400	12	12	4250/81		
TNWES-1-70-96/0400/12	892	592	400	12	14	5110/81		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	ACTUAL FILTER AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890 - 450mm (8 pockets)								
TNWES-1-70-6/0450/08	592	592	450	08	11	3400/73	1095	A
TNWES-1-70-5/0450/06	490	592	450	06	8	2800/73		
TNWES-1-70-3/0450/04	287	592	450	04	5	1700/73		
TNWES-1-70-2/0450/04	287	287	450	04	3	850/73		
TNWES-1-70-39/0450/04	287	892	450	04	8	2550/73		
TNWES-1-70-55/0450/07	490	490	450	07	9	2740/73		
TNWES-1-70-4/0450/08	592	490	450	08	9	2810/73		
TNWES-1-70-69/0450/08	592	892	450	08	16	5160/73		
TNWES-1-70-93/0450/12	892	287	450	12	8	2480/73		
TNWES-1-70-95/0450/12	892	490	450	12	13	4250/73		
TNWES-1-70-96/0450/12	892	592	450	12	16	5110/73		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	ACTUAL FILTER AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890 - 450mm (10 pockets)								
TNWES-1-70-6/0450/10	592	592	450	10	13	3400/69	946	A+
TNWES-1-70-5/0450/08	490	592	450	08	11	2740/69		
TNWES-1-70-3/0450/05	287	592	450	05	7	1700/69		
TNWES-1-70-2/0450/05	287	287	450	05	3	850/69		
TNWES-1-70-39/0450/05	287	892	450	05	10	2550/69		
TNWES-1-70-55/0450/08	490	490	450	08	9	2280/69		
TNWES-1-70-59/0450/08	490	892	450	08	16	4120/69		
TNWES-1-70-1/0450/10	592	287	450	10	6	1660/69		

TNWES-1-70-4/0450/10	592	490	450	10	11	2810/69		
TNWES-1-70-69/0450/10	592	892	450	10	20	5160/69		
TNWES-1-70-93/0450/15	892	287	450	15	10	2480/69		
TNWES-1-70-95/0450/15	892	490	450	15	17	4250/69		
TNWES-1-70-96/0450/15	892	592	450	15	20	5110/69		
TNWES-1-70-6/0600/10	592	592	600	10	14	3400/62	724	A+

BAG FILTERS

TNWES-1-90

Fine filtration in air treatment plants.



APPLICATION AREAS

Top New Wave Energy Saving


- Very low pressure drop
- Excellent dust retention capacity
- Self-supporting pockets
- Conical pockets designed to maximize performance
- Easy installation thanks to short pockets
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890: 2016
- Media: TNWES (Top New Wave Energy Saving)
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80 °C
- Available with plastic or galvanized frame
- Other dimensions available



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 90% ISO 16890 - 350mm								
TNWES-1-90-6/0350/10	592	592	350	10	10,4	3400 / 125	1905	D
TNWES-1-90-5/0350/07	490	592	350	08	8,3	2800 / 125		
TNWES-1-90-3/0350/05	287	592	350	05	5,2	1700 / 125		
TNWES-1-90-2/0350/05	287	287	350	05	2,5	850 / 125		
TNWES-1-90-39/0350/05	287	892	350	05	7,8	2550 / 125		
TNWES-1-90-55/0350/07	490	490	350	08	6,9	2350 / 125		
TNWES-1-90-59/0350/07	490	892	350	08	12,5	4250 / 125		
TNWES-1-90-1/0350/10	592	287	350	10	5	1700 / 125		
TNWES-1-90-4/0350/10	592	490	350	10	8,6	2800 / 125		
TNWES-1-90-69/0350/10	592	892	350	10	15,6	5150 / 125		
TNWES-1-90-93/0350/12	892	287	350	15	7,5	2550 / 125		
TNWES-1-90-95/0350/12	892	490	350	15	12,9	4250 / 125		
TNWES-1-90-S/0350/12	892	592	350	15	15,5	5150 / 125		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 90% ISO 16890 - 450mm								

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

TNWES-1-90-6/0450/10	592	592	450	10	13,3	3400 / 95	1398	A
TNWES-1-90-5/0450/08	490	592	450	08	10,7	2800 / 95		
TNWES-1-90-3/0450/05	287	592	450	05	6,7	1700 / 95		
TNWES-1-90-2/0450/05	287	287	450	05	3,2	850 / 95		
TNWES-1-90-39/0450/05	287	892	450	05	10	2550 / 95		
TNWES-1-90-55/0450/08	490	490	450	08	8,8	2350 / 95		
TNWES-1-90-59/0450/08	490	892	450	08	16,1	4250 / 95		
TNWES-1-90-1/0450/10	592	287	450	10	6,5	1700 / 95		
TNWES-1-90-4/0450/10	592	490	450	10	11	2800 / 95		
TNWES-1-90-69/0450/10	592	892	450	10	20,1	5150 / 95		
TNWES-1-90-93/0450/15	892	287	450	15	9,7	2550 / 95		
TNWES-1-90-95/0450/15	892	490	450	15	16,5	4250 / 95		
TNWES-1-90-96/0450/15	892	592	450	15	20	5150 / 95		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 90% ISO 16890 - 500mm								
TNWES-1-90-6/0500/10	592	592	500	10	14,8	3400 / 88	1198	A+
TNWES-1-90-5/0500/08	490	592	500	08	11,8	2800 / 88		
TNWES-1-90-3/0500/05	287	592	500	05	7,4	1700 / 88		
TNWES-1-90-2/0500/05	287	287	500	05	3,6	850 / 88		
TNWES-1-90-39/0500/05	287	892	500	05	11,2	2550 / 88		
TNWES-1-90-55/0500/08	490	490	500	08	9,8	2350 / 88		
TNWES-1-90-59/0500/08	490	892	500	08	17,8	4250 / 88		
TNWES-1-90-1/0500/10	592	287	500	10	7,2	1700 / 88		
TNWES-1-90-4/0500/10	592	490	500	10	12,3	2800 / 88		
TNWES-1-90-69/0500/10	592	892	500	10	22,3	5150 / 88		
TNWES-1-90-93/0500/15	892	287	500	15	10,8	2550 / 88		
TNWES-1-90-95/0500/10	892	490	500	15	18,4	4250 / 88		
TNWES-1-90-96/0500/15	892	592	500	15	22,2	5150 / 88		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 90% ISO 16890 - 600mm								
TNWES-1-90-6/0600/10	592	592	600	10	17,8	3400 / 78	997	A+
TNWES-1-90-5/0600/08	490	592	600	08	14,2	2800 / 78		
TNWES-1-90-3/0600/05	287	592	600	05	8,9	1700 / 78		
TNWES-1-90-2/0600/05	287	287	600	05	4,3	850 / 78		
TNWES-1-90-39/0600/05	287	892	600	05	13,4	2550 / 78		
TNWES-1-90-55/0600/08	490	490	600	08	11,8	2350 / 78		

TNWES-1-90-59/0600/08	490	892	600	08	21,4	4250 / 78
TNWES-1-90-1/0600/10	592	287	600	10	8,6	1700 / 78
TNWES-1-90-4/0600/10	592	490	600	10	14,7	2800 / 78
TNWES-1-90-69/0600/10	592	892	600	10	26,9	5150 / 78
TNWES-1-90-93/0600/10	892	287	600	15	12,9	2550 / 78
TNWES-1-90-95/0600/10	892	490	600	15	22,1	4250 / 78
TNWES-1-90-96/0600/10	892	592	600	15	26,6	5150 / 78

BAG FILTERS

NWES98 PLUS

Protect your environment and your staff with our Deltri+ Technology plasma virucide filter. Viruses in the filtered air are inactivated.

APPLICATION AREAS

Virucidal plasma technology

The process used consists of plasma grafting of the virucide. Viruses, including COVID 19, are neutralised to 99%. The treated surface of the filter is activated by contact with the virus-carrying droplets. After the contact time, the viruses are deactivated and no longer infectious.

- Low pressure drop
- Excellent dust holding capacity
- Self-supporting bags
- Tapered bags, designed to maximise performance
- Easy to install
- Tested for food contact according to EC 1935/2004
- Effective in dry and/or wet environments (open or closed circuit)
- Reduces the risk of transmission and proliferation of viruses and bacteria in the air



EN 14476
+A2:07-2019



Validated according to ISO 10705 modified on MS2 Coronavirus equivalent strain
After 12 months RLV* = 99.21

Validated according to ISO 18184 on Coronavirus strain After 1 hour VLR* = 99.999


Validated according to EN 14476 on 229 E Human Coronavirus

*VLR : Viral Load Reduction

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890: 2016
- Media: Nanowave
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80 °C
- Relative humidity: 100% RH

Details and variations



BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CLASS**
ePM1 90% ISO 16890						
592	592	400	11	13	3400 / 98	A+

BAG FILTERS

K50

Filtration for air treatment units.

APPLICATION AREAS


- HIGH-TECH aerodynamic profile limiting turbulence at air outlet
- Conical sewn pockets
- Low pressure drop
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- Media: Synthetic 2 in 1 (pre-filter and filter)
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Recommended ECO final pressure drop: 250 Pa
- Continuous service temperature: 70°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS***
ePM10 70% ISO16890 - (M5)								
K50-6/360/06	592	592	360	6	2,5	3400 / 85	>1300	E
K50-5/360/05	490	592	360	5	2,1	2800 / 85		
K50-3/360/03	287	592	360	3	1,3	1700 / 85		
K50-6/360/08	592	592	360	8	3,4	3400 / 75	>1300	E
K50-5/360/06	490	592	360	6	2,6	2800 / 75		
K50-3/360/04	287	592	360	4	1,7	1700 / 75		
K50-6/360/10	592	592	360	10	4,3	3400 / 73	1174	D
K50-5/360/08	490	592	360	8	3,4	2800 / 73		
K50-3/360/05	287	592	360	5	2,1	1700 / 73		
K50-6/450/06	592	592	450	6	3,2	3400 / 70	1141	D
K50-5/450/05	490	592	450	5	2,7	2800 / 70		
K50-3/450/03	287	592	450	3	1,6	1700 / 70		
K50-6/450/08	592	592	450	8	4,3	3400 / 72	1148	D
K50-5/450/06	490	592	450	6	3,2	2800 / 72		
K50-3/450/04	287	592	450	4	2,1	1700 / 72		
K50-6/450/10	592	592	450	10	5,3	3400 / 68	1047	D
K50-5/450/08	490	592	450	8	4,3	2800 / 68		
K50-3/450/05	287	592	450	5	2,7	1700 / 68		

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

K50-6/580/06	592	592	580	6	4,1	3400 / 66	1022	D
K50-5/580/05	490	592	580	5	3	2800 / 66		
K50-3/580/03	287	592	580	3	2	1700 / 66		
K50-6/580/08	592	592	580	8	5,5	3400 / 65	829	C
K50-5/580/06	490	592	580	6	4,6	2800 / 65		
K50-3/580/04	287	592	580	4	2,7	1700 / 65		
K50-6/580/10	592	592	580	10	6,9	3400 / 59	752	B
K50-5/580/08	490	592	580	8	6	2800 / 59		
K50-3/580/05	287	592	580	5	3,5	1700 / 59		

BAG FILTERS

FP-10-50



The FP-10-50 bag filter is used as a pre-filter or fine filter, offering optimum performance in a variety of environments.

APPLICATION AREAS


- Low pressure drop
- Mechanical resistance
- Progressive density
- High retention capacity

CARACTÉRISTIQUES GÉNÉRALES

- Filtration class in accordance with ISO16890: 2016
- Media: thick synthetic with increasing density
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous operating temperature: 80
- Relative humidity: 100% RH
- Frame option: steel, wood, plastic, or reusable frame for LFC



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)	ENERGY CLASS
ISO ePM10 50%								
FP-10-50-6/0580/06	592	592	580	6	4,1	3400 / 45	510	A
FP-10-50-5/0580/05	490	592	580	5	3	2800 / 45		
FP-10-50-3/0580/03	287	592	580	3	2	1700 / 45		
FP-10-50-6/0450/08	592	592	450	8	4,3	3400 / 43	499	A
FP-10-50-5/0450/06	490	592	450	6	3,2	2800 / 43		
FP-10-50-3/0450/04	287	592	450	4	2,1	1700 / 43		
FP-10-50-6/0450/06	592	592	450	6	3,2	3400 / 50	638	B
FP-10-50-5/0450/05	490	592	450	5	2,7	2800 / 50		
FP-10-50-3/0450/03	287	592	450	3	1,6	1700 / 50		
FP-10-50-6/0360/08	592	592	360	8	3,4	3400 / 50	609	B
FP-10-50-5/0360/06	490	592	360	6	2,6	2800 / 50		
FP-10-50-3/0360/04	287	592	360	4	1,7	1700 / 50		
FP-10-50-6/0360/06	592	592	360	6	2,5	3400 / 55	694	C
FP-10-50-5/0360/05	490	592	360	5	2,1	2800 / 55		
FP-10-50-3/0360/03	287	592	360	3	1,3	1700 / 55		

BAG FILTERS

SGK-GK

Filtration for air handling units and pre-filtration in "CLEANROOM" applications.



APPLICATION AREAS


- Control your filtration costs with 2-stage filtration in 1
- Allows for the removal of pre-filters >> Reduction in the number of interventions and volume of waste
- Large retention capacity
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- Media: high efficiency synthetic (pre-filtration) + glass fibers (fine filtration)
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Recommended ECO final pressure drop: 250 Pa
- Continuous service temperature: 70 °C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 60% ISO 16890 - (F7)								
SGK85-6/635/08	592	592	635	8	6	3400 / 108	1333	C
SGK85-5/635/06	490	592	635	6	4,5	2800 / 108		
SGK85-3/635/04	287	592	635	4	3	1700 / 108		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890 - (F8)								
GK85-6/635/08	592	592	635	8	6	3400 / 120	1462	C
GK85-5/635/06	490	592	635	6	4,5	2800 / 120		
GK85-3/635/04	287	592	635	4	3	1700 / 120		

BAG FILTERS

SG

Filtration for air handling units.



APPLICATION AREAS


- HI-TECH aerodynamic profile limiting turbulence at air outlet
- Conical sewn pockets
- Low pressure drop
- Low energy consumption
- Variant with rigid plastic frame (SECURE) available on request
- M1 media fire rating
- Tested for food contact according to CE 1935/2004
- **OPTION: bacteriostatic and virucidal treatment on request**

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890: 2016
- Media: glass fibers
- Frame: galvanized
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Recommended final ECO pressure drop: 250 Pa
- Maximum continuous service temperature: 70 °C
- LFC frame option: steel or plastic



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 60% ISO16890 - (F7)								
SG85-6/670/10	592	592	670	10	7,9	3400 / 75	1073	B
SG85-6/535/11	592	592	535	11	6,95	3400 / 80	944	A
SG85-6/635/10	592	592	635	10	7,5	3400 / 74	916	A
SG85-6/635/08	592	592	635	8	6	3400 / 75	1004	B
SG85-6/635/06	592	592	635	6	4,5	3400 / 90	1225	C
SG85-6/535/10	592	592	535	10	6,3	3400 / 79	1011	B
SG85-6/535/08	592	592	535	8	5,1	3400 / 90	1178	C
SG85-6/535/06	592	592	535	6	3,8	3400 / 95	1365	C
SG85-6/380/08	592	592	380	8	3,6	3400 / 120	1830	D
SG85-6/380/06	592	592	380	6	2,7	3400 / 135	2008	D

BAG FILTERS

G – Glass Fiber



Filtration for air handling units and preparatory filtration in "CLEANROOM" applications.

APPLICATION AREAS


- HI-TECH aerodynamic profile limiting air output turbulence
- Conical sewn pockets
- Low pressure drop
- Low energy consumption
- Plastic frame variant (SECURE) available on request
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- EN779:2012 filtration class: M5-F9
- Media: glass fibers
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Recommended ECO final pressure drop: 250 Pa
- Continuous service temperature: 70°C
- Relative humidity: 100%
- LFC frame option: steel or plastic



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS***
ePM10 60% ISO16890 - (M5)								
G50-6/635/10	592	592	635	10	7,75	3400 / 38	494	A+
G50-5/635/08	490	592	635	8	6,2	2800 / 38		
G50-3/635/05	287	592	635	5	3,87	1700 / 38		
G50-6/635/08	592	592	635	8	6,2	3400 / 38	491	A+
G50-5/635/06	490	592	635	6	4,65	2800 / 38		
G50-3/635/04	287	592	635	4	3,1	1700 / 38		
G50-6/635/06	592	592	635	6	4,5	3400 / 43	635	B
G50-5/635/05	490	592	635	5	3,1	2800 / 43		
G50-3/635/03	287	592	635	3	2,3	1700 / 43		
G50-6/535/10	592	592	535	10	6,65	3400 / 40	594	A
G50-5/535/08	490	592	535	8	5,32	2800 / 40		
G50-3/535/05	287	592	535	5	3,32	1700 / 40		
G50-6/535/08	592	592	535	8	5,22	3400 / 39	589	A
G50-5/535/06	490	592	535	6	3,92	2800 / 39		
G50-3/535/04	287	592	535	4	2,61	1700 / 39		

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

G50-6/380/12	592	592	380	12	5,56	3400 / 45	695	B
G50-5/380/08	490	592	380	8	3,71	2800 / 45		
G50-3/380/06	287	592	380	6	2,78	1700 / 45		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS***
ePM2,5 50% ISO16890 - (M6)								
G65-6/635/12	592	592	635	12	9,03	3400 / 60	756	A
G65-5/635/10	490	592	635	10	6,23	2800 / 60		
G65-3/635/06	287	592	635	6	4,52	1700 / 60		
G65-6/635/10	592	592	635	10	7,5	3400 / 60	772	A
G65-5/635/08	490	592	635	8	5,7	2800 / 60		
G65-3/635/05	287	592	635	5	3,6	1700 / 60		
G65-6/635/08	592	592	635	8	6	3400 / 58	768	A
G65-5/635/06	490	592	635	6	4,5	2800 / 58		
G65-3/635/04	287	592	635	4	3	1700 / 58		
G65-6/535/10	592	592	535	10	6,3	3400 / 70	964	C
G65-5/535/08	490	592	535	8	5,1	2800 / 70		
G65-3/535/05	287	592	535	5	3,2	1700 / 70		
G65-6/535/08	592	592	535	8	5,1	3400 / 75	1017	C
G65-5/535/06	490	592	535	6	3,8	2800 / 75		
G65-3/535/04	287	592	535	4	2,5	1700 / 75		
G65-6/380/12	592	592	380	12	5,4	3400 / 90	1162	C
G65-5/380/08	490	592	380	8	4,5	2800 / 90		
G65-3/380/06	287	592	380	6	2,7	1700 / 90		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS***
ePM1 70% ISO16890 - (F7)								
G85-6/635/10	592	592	635	10	7,5	3400 / 94	1097	A
G85-5/635/08	490	592	635	8	6	2800 / 94		
G85-3/635/05	287	592	635	5	3,8	1700 / 94		
G85-6/635/08	592	592	635	8	6	3400 / 98	1239	B
G85-5/635/06	490	592	635	6	4,5	2800 / 98		
G85-3/635/04	287	592	635	4	3	1700 / 98		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS***
ePM1 70% ISO16890 - (F7)								
G85-6/535/10	592	592	535	10	6,3	3400 / 100	1244	B
G85-5/535/08	490	592	535	8	5,1	2800 / 100		
G85-3/535/05	287	592	535	5	3,2	1700 / 100		

G85-6/535/08	592	592	535	8	5,1	3400 / 105	1365	C
G85-5/535/06	490	592	535	6	3,8	2800 / 105		
G85-3/535/04	287	592	535	4	2,5	1700 / 105		
G85-6/380/12	592	592	380	12	5,4	3400 / 125	1647	D
G85-5/380/08	490	592	380	8	4,5	2800 / 125		
G85-3/380/06	287	592	380	6	2,7	1700 / 125		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS***
ePM1 80% ISO16890 - (F8/F9)								
G95-6/535/08	592	592	535	8	5,1	3400 / 170	2162	D
G95-5/535/06	490	592	535	6	3,8	2800 / 170		
G95-3/535/04	287	595	535	4	2,5	1700 / 170		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS***
ePM1 85% ISO16890 - (F8/F9)								
G95-6/380/12	592	592	380	12	5,4	3400 / 215	2760	E
G95-5/380/10	490	592	380	10	4,5	2800 / 215		
G95-3/380/06	287	592	380	6	2,7	1700 / 215		
G95-6/635/10	592	592	635	10	7,5	3400 / 145	1863	D
G95-5/635/08	490	592	635	8	6,2	2800 / 145		
G95-3/635/05	287	592	635	5	3,8	1700 / 145		
G95-6/635/08	592	592	635	8	6	3400 / 160	2045	D
G95-5/635/06	490	592	635	6	4,5	2800 / 160		
G95-3/635/04	287	592	635	4	3	1700 / 160		
G95-6/535/10	592	592	535	10	6,3	3400 / 165	2107	D
G95-5/535/08	490	592	535	8	5,1	2800 / 165		
G95-3/535/05	287	592	535	5	3,2	1700 / 165		
G95-6/535/08	592	592	535	8	5,1	3400 / 170	2232	D
G95-6/535/05	490	592	535	5	3,8	2800 / 170		
G95-6/535/04	287	592	535	4	2,5	1700 / 170		

BAG FILTERS

Plusair – ePM10 60%



Can be used as pre-filters and fine filters

APPLICATION AREAS

Final filters in general ventilation and air conditioning systems in offices, shopping centers, theaters, hotels, industrial sites, food industry, laboratories, etc.

Pre-filter for paint booth air intakes, electrical rooms, and in front of any fine or absolute filter


- Economical
- Low pressure drop
- Self-supporting conical pockets (100% synthetic)
- High retention capacity
- Very good mechanical resistance
- 100% incinerable

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890:2016
- Frame: thermo-molded plastic
- Media: synthetic
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 70°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 60% - ISO16890 - (M6)								
PA65-6/600/08	592	592	625	8	5,2	3400 / 61	744	C

OPTION AVEC JOINT

BAG FILTERS

PFL – PTL – PHL

Gas turbines, powder drying towers, pneumatic powder transport, centrifugal compressor suctions, offshore platforms.

APPLICATION AREAS


- Exceptional retention capacity
- Self-supporting pockets >> No dust release
- Aerodynamic stabilization cuffs (Diamond Spacer)
- 100% incinerable
- 100% synthetic, corrosion and moisture-resistant
- Mechanical resistance > 6000 Pa
- Limited energy and maintenance costs
- Validated for high flow rates

GENERAL FEATURES

- Filtration class EN779: 2012: M6-F7
- Media: synthetic
- Frame: rigid thermo-molded plastic (SECURE)
- Joint: clean air side polyurethane
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Continuous service temperature: 70 °C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 50% ISO16890 - (M5)								
PFL50-6/600/6	592	592	625	6	4,2	3400 / 45	547	A
PFL50-5/600/5	492	592	625	5	3,5	2800 / 45	-	-
PFL50-3/600/3	287	592	625	3	2,1	1700 / 45	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 55% ISO16890 - (M5)								
PFL50-6/600/6	592	592	625	6	4,2	4250 / 60	>1100	E
PFL50-5/600/5	492	592	625	5	3,5	3550 / 60	-	-
PFL50-3/600/3	287	592	625	3	2,1	2125 / 60	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 55% ISO16890 - (M6)								
PTL65-6/600/8	592	592	625	8	5,9	3400 / 54	627	B

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

PTL65-5/600/6	490	592	625	6	4,4	2800 / 54	-	-
PTL65-3/600/4	287	592	625	4	2,9	1700 / 54	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 60% ISO16890 - (M6)								
PTL65-6/600/8	592	592	625	8	5,9	4250 / 75	-	-
PTL65-5/600/6	490	592	625	6	4,4	3400 / 75	-	-
PTL65-3/600/4	287	592	625	4	2,9	2125 / 75	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 70% ISO 16890 - (M6)								
PHL75-6/600/8	592	592	625	8	5,86	3400 / 92	1087	D
PHL75-5/600/6	490	592	625	6	4,39	2850 / 92	-	-
PHL75-3/600/4	287	592	625	4	2,93	1700 / 92	-	-

COMPACT, RIGID FILTERS

FZGMP SC – Glass Fiber



Filtration for air treatment plants equipped with a pre-filter upstream, and in air conditioning cabinets.

APPLICATION AREAS


- Compact and economical
- Large filtration surface area
- High efficiency
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class ISO 16890 : 2016
- Media: mini-pleated fiberglass paper
- Frame: galvanised (G), plastic (PL), FiberPlast (F1-F2-F3-F4), Cardboard (CA)
- Separators: hot-melt
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Recommended ECO final pressure drop: 250 Pa
- Maximum continuous service temperature: 70°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 70% ISO 16890 - (M6)							
FZMP 65 SCG	592	592	47	6	2000 / 42	>1300	E
FZMP 65 SCG	592	490	47	5	1700 / 42	-	-
FZMP 65 SCG	592	287	47	3	1000 / 42	-	-
FZMP 65 SCG	592	592	97	11	2880 / 81	>1300	E
FZMP 65 SCG	592	490	97	9	2390 / 81	-	-
FZMP 65 SCG	592	287	97	5,5	1440 / 81	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 60% ISO 16890 - (F7)							
FZMP 85 SCG	592	592	47	6	2000 / 69	>2050	E
FZMP 85 SCG	592	490	47	5	1700 / 69	-	-
FZMP 85 SCG	592	287	47	3	1000 / 69	-	-
FZMP 85 SCG	592	592	97	11	2880 / 90	>2050	E
FZMP 85 SCG	592	490	97	9	2390 / 90	-	-

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

FZMP 85 SCG	592	287	97	5,5	1440 / 90	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR) *	ENERGY CLASS**
ePM1 70% ISO16890 - (F8)							
FZMP 95 SCG	592	592	47	6	2000 / 96	>2150	E
FZMP 95 SCG	592	490	47	5	1700 / 96	-	-
FZMP 95 SCG	592	287	47	3	1000 / 96	-	-
FZMP 95 SCG	592	592	97	11	2880 / 100	>2150	E
FZMP 95 SCG	592	490	97	9	2390 / 100	-	-
FZMP 95 SCG	592	287	97	5,5	1440 / 100	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR) *	ENERGY CLASS**
ePM1 80% ISO16890 - (F9)							
FZMP 98 SCG	592	592	47	6	2000 / 145	>2400	E
FZMP 98 SCG	592	490	47	5	1700 / 145	-	-
FZMP 98 SCG	592	287	47	3	1000 / 145	-	-
FZMP 98 SCG	592	592	97	11	2880 / 130	>2400	E
FZMP 98 SCG	592	490	97	9	2390 / 130	-	-
FZMP 98 SCG	592	287	97	5,5	1440 / 130	-	-

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015
Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

COMPACT, RIGID FILTERS

DCG



Filtration for air handling units equipped with a pre-filter. Ideal in preparatory filtration for “CLEANROOM” applications.

APPLICATION AREAS


- Compact and economical
- Large filtration surface
- High efficiency
- Tested for food contact according to CE 1935/2004
- Certified to be inert to microbial growth (ISO 846-VDI 6022)
- Tip : compare the filtration area... Higher filtration area = longer lifetime!

GENERAL CHARACTERISTICS

- Filtration class ISO 16890 : 2016
- Media: mini-pleated fiberglass paper
- Frame: galvanized (DCG) or polystyrene (DCP)
- Sealant: polyurethane
- Separators: hot-melt wire
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Recommended ECO final pressure drop: 250 Pa
- Maximum continuous service temperature: 70°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 55 % ISO 16890 - (F7)							
DCG85 SCG	592	592	150	20	142	3400 / 135	
DCG85 SCG	490	592	150	16	142	2850 / 135	
DCG85 SCG	287	592	150	10	142	1700 / 135	
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 65 % ISO 16890 - (F8)							
DCG95 SCG	592	592	150	20	142	3400 / 155	
DCG95 SCG	490	592	150	16	142	2850 / 155	
DCG95 SCG	287	592	150	10	142	1700 / 155	
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 80 % ISO 16890 - (F9)							
DCG98 SCG	592	592	150	20	142	3400 / 175	
DCG98 SCG	490	592	150	16	142	2850 / 175	

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

DCG98 SCG	287	592	150	10	142	1700 / 175	
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 65% ISO16890 - (M6)							
DCG65 SC	592	592	100	12,6	3400 / 132	2221	E
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 55% ISO16890 - (F7)							
DCG85 SC	592	592	100	12,6	3400 / 149	>2000	E
DCG85 SC	490	592	100	10,4	2850 / 149	-	-
DCG85 SC	287	592	100	6,1	1700 / 149	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 65% ISO16890 - (F8)							
DCG95 SC	592	592	100	12,6	3400 / 171	2266	E
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 80% ISO16890 - (F9)							
DCG98 SC	592	592	100	12,6	3400 / 189	3500	E
DCG98 SC	287	592	100	6,1	1700 / 187	-	-

COMPACT, RIGID FILTERS

RPV 3V ST



Filtration for air handling units equipped with a pre-filter upstream and preparatory filtration in "CLEANROOM" applications.

APPLICATION AREAS


- Compact and economical
- Very low pressure drop
- High efficiency
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890: 2016
- Media: mini-pleated fiberglass paper
- Frame: polystyrene
- Seal: polyurethane
- Separators: hot-melt wire
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller)
- Recommended ECO final pressure drop: 250 Pa
- Maximum continuous service temperature: 70°C
- Relative humidity: 100% RH



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 70% ISO 16890 - (M6)							
RPV65-6STG	592	592	292	13	3400 / 55	1019	D
RPV65-5STG	592	490	292	10	2800 / 55	-	
RPV65-3STG	592	287	292	6	1700 / 55	-	
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 50% ISO 16890 - (F7)							
RPV85-6STG	592	592	292	13	3400 / 65	1098	C
RPV85-5STG	592	490	292	10	2800 / 65	-	
RPV85-3STG	592	287	292	6	1700 / 65	-	
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890 - (F8)							
RPV95-6STG	592	592	292	13	3400 / 85	1258	C
RPV95-5STG	592	490	292	10	2800 / 85	-	

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

RPV95-3STG	592	287	292	6	1700 / 85	-	
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 85% ISO 16890 - (F9)							
RPV98-6STG	592	592	292	13	3400 / 110	1763	C
RPV98-5STG	592	490	292	10	2800 / 110	-	
RPV98-3STG	592	287	292	13	1700 / 110	-	

COMPACT, RIGID FILTERS

RPV SCG

Filtration for air treatment centers equipped with upstream pre-filtration and preparatory filtration in "CLEANROOM" applications.

APPLICATION AREAS


- Compact and economical
- Large filtration surface
- High efficiency
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial development (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class EN779:2012: M6-F9
- Media: mini-pleated fiberglass paper
- Frame: polystyrene
- Lut: polyurethane
- Separators: hot-melt wire
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Recommended ECO final pressure drop: 250 Pa
- Maximum continuous service temperature: 70°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 70% ISO 16890 - (M6)							
RPV65-6 SCG	592	592	292	18	3400 / 69	945	D
RPV65-5 SCG	592	490	292	15	2800 / 69	-	-
RPV65-3 SCG	592	287	292	9	1700 / 69	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 60% ISO 16890 - (F7)							
RPV85-6 SCG	592	592	292	18	3400 / 76	945	A
RPV85-5 SCG	592	490	292	15	2800 / 76	-	-
RPV85-3 SCG	592	287	292	9	1700 / 76	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 75% ISO 16890 - (F8)							
RPV95-6 SCG	592	592	292	18	3400 / 97	1437	C
RPV95-5 SCG	592	490	292	15	2800 / 97	-	-

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

RPV95-3 SCG	592	287	292	9	1700 / 87	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 85% ISO 16890 - (F9)							
RPV98-6 SCG	592	592	292	18	3400 / 118	1519	C
RPV98-5 SCG	592	490	292	15	2800 / 118	-	-
RPV98-3 SCG	592	287	292	9	1700 / 118	-	-

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015
Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

COMPACT, RIGID FILTERS

RPV ESG

Filtration for air handling units.



APPLICATION AREAS


- Compact and economical
- Large filtration surface
- High efficiency
- Tested for food contact in accordance with EC 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)
- Energy Saving Application

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890: 2016
- Media: glass-fibre mini-ply paper
- Frame: polystyrene
- Lining: polyurethane
- Separators: hot-melt wire
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Recommended final ECO pressure drop: 250 Pa
- Maximum continuous operating temperature: 70°C
- Relative humidity: 100% RH



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 60% ISO 16890 - (F7)							
RPV85-6 ESG	592	592	292	20	3400 / 68	836	A+
RPV85-5 ESG	592	490	292	16	2800 / 68	-	-
RPV85-3 ESG	592	287	292	10	1700 / 68	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890 - (F8)							
RPV95-6 ESG	592	592	292	20	3400 / 83	1058	A
RPV95-5 ESG	592	490	292	16	2800 / 83	-	-
RPV95-3 ESG	592	287	292	10	1700 / 83	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 80% ISO 16890 - (F9)							
RPV98-6 ESG	592	592	292	20	3400 / 92	1170	A
RPV98-5 ESG	592	490	292	16	2800 / 92	-	-
RPV98-3 ESG	592	287	292	10	1700 / 92	-	-

COMPACT, RIGID FILTERS

RPV ESN



Our revolutionary new A+ filter with nano media, rated ePM1 80%, offers maximum filtration with an ultra-low initial pressure drop of only 60 Pa.

APPLICATION AREAS


- ePM1 80% – nanofibre media with large filtration surface area
- Class A+: 60 Pa initial pressure drop and reduced operating costs
- Frame made from recycled materials (96%)
- Consistent performance even in humid environments
- Food contact compliant (EC 1935/2004)
- Inert to microbial growth (ISO 846 – VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class according to ISO 16890:2016
- Media: synthetic nano (PFAS FREE)
- Frame: 96% recycled
- Separators: hot-melt
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop × 3 (the lower of the two values)
- Maximum continuous operating temperature: 80 °C
- Relative humidity: 100 % RH



Details and variations



DESCRIPTION	FILTER BASE (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)	ENERGY CLASS
ePM1 80% ISO 16890 - (F9)							
RPV98-6 ESN	592	592	292	20	3400 / 60	826	A+
RPV98-5 ESN	592	490	292	16	2800 / 60		
RPV98-3 ESN	592	287	292	10	1700 / 60		
DESCRIPTION	FILTER BASE (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)	ENERGY CLASS
ePM1 60% ISO 16890 - (F7)							
RPV85-6 ESN	592	592	292	20	3400 / 54	689	A+
RPV85-5 ESN	592	490	292	16	2800 / 54		
RPV85-3 ESN	592	287	292	10	1700 / 54		

COMPACT, RIGID FILTERS

RPV XL

Ideal for gas turbine air intake systems.

APPLICATION AREAS

Terminal filtration in air treatment plants


- Compact and economical
- Very large filtration surface
- High efficiency
- Large dust retention capacity
- Tested for food contact
- According to CE 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)
- Filtration area: 32m²

GENERAL CHARACTERISTICS

- Filtration class EN779:2012: M6-F9
- Media: Glass fiber mini-pleat paper
- Frame: Polystyrene
- Lut: Polyurethane
- Separators: Hot-melt wire
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 70°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)	ENERGY CLASS**
ePM10 60% ISO 16890 - (M6)							
RPV65-6XL	592	592	440	32	3400 / 65	806	C
RPV65-5XL	592	287	440	27	3500 / 65	-	
RPV65-3XL	592	287	440	16	2125 / 65	-	
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)	ENERGY CLASS**
ePM1 55% ISO 16890 - (F7)							
RPV85-6XL	592	592	440	32	3400 / 72	871	A
RPV85-5XL	592	490	440	27	3500 / 72	-	
RPV85-3XL	592 592	287	440	16	2125 / 72	-	
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)	ENERGY CLASS**
ePM1 65% ISO 16890 - (F8)							
RPV95-6XL	592	592	440	32	3400 / 78	946	A
RPV95-5XL	592	490	440	27	3500 / 78	-	

* Conso. énergétique, kWh/an : calculée selon Eurovent Guideline 4/21-2018 | ** Classe énergétique : selon Eurovent RS4/C/001-2019 | *** Classe énergétique : selon Eurovent RS4/C/001-2015

Deltrian se réserve le droit de modifier les caractéristiques de ses produits sans avis préalable dans le cadre de sa politique d'amélioration continue de ses produits.

RPV95-3XL	592	287	440	16	2125 / 78	-	
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)	ENERGY CLASS**
ePM1 85% ISO 16890 - (F9)							
RPV98-6XL	592	592	440	32	3400 / 97	1170	A
RPV98-5XL	592	490	440	27	3500 / 97	-	
RPV98-3XL	592	287	440	16	2125 / 97	-	

COMPACT, RIGID FILTERS

HE-PP HT

Automotive industry and equipment subcontractors

APPLICATION AREAS


- Installed in Eisenmann, Dürr, Geico...
- Used in filtration stages requiring resistance to temperature
- Used in ovens, drying zones, or near heating areas (such as make-up)
- Silicone-free (approved by a large number of automotive manufacturers)
- Large filtration area
- High efficiency
- Careful and robust execution

GENERAL CHARACTERISTICS

- ISO16890: 2016 filtration class
- Media: deep pleats made of fiberglass
- Frame: galvanized
- Seal: dynamic
- Separators: aluminum
- Grilles: protection and maintenance at air inlet and outlet
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)	ENERGY CLASS**
ePM10 65% ISO16890 - (M6)							
HE-PP65G-HT	592	592	292	12	3400 / 143	2032	E
HE-PP65G-HT	287	592	292	6	170 / 143	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)	ENERGY CLASS**
ePM2,5 65% ISO16890 - (F8)							
HE-PP95G-HT	592	592	292	14	3400 / 160	2018	D
HE-PP95G-HT	287	592	292	7	1700 / 160	-	-

COMPACT, RIGID FILTERS

HE-MP HT

Automotive industry and equipment suppliers

APPLICATION AREAS


- Used in Eisenmann, Dürr installations, etc.
- Used in filtration steps requiring temperature resistance
- Used in ovens, drying zones, or near heating areas (such as make-up)
- Silicone-free (approved by many car manufacturers)
- Large filtration surface
- High efficiency
- Careful and robust execution

GENERAL CHARACTERISTICS

- EN779 filtration class: M6-F8
- Media: mini-pleated paper made of glass fibers
- Frame: extruded aluminum
- Lut: dynamic
- Separators: glass fiber paper
- Grids: protection and maintenance at air inlet and outlet
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 350 °C



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)
M6 - ePM10 70%						
HE-MP65A-HT	457	915	55	4,4	1250 / 90	2000 / 115
HE-MP65A-HT	610	305	55	3,4	1180 / 100	1500 / 150
HE-MP65A-HT	610	610	55	7,1	2360 / 90	2950 / 150
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)
F8 - ePM2,5 75%						
HE-MP95A-HT	457	915	55	4,4	1250 / 120	2000 / 170
HE-MP95A-HT	610	305	55	3,4	1000 / 114	1250 / 150
HE-MP95A-HT	610	610	55	7,1	2000 / 114	2500 / 150

COMPACT, RIGID FILTERS

RPV HT

Automotive industry and component suppliers

APPLICATION AREAS


- Examples of installations: Eisenmann, Dürr, ...
- Used in filtration stages requiring temperature resistance
- Used in studies, drying areas or near heating areas (make-up type)
- Silicone free (approved by many car manufacturers)
- Robust and high quality construction

GENERAL CHARACTERISTICS

- Media: glass fibre mini-paper
- Frame: galvanised
- Gasket: high temperature gasket, fibre free
- Grilles: protection and support at air inlet and outlet
- Separator : aluminium
- Mini-pleat technology
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum temperature in continuous operation: 350°C



Details and variations




DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CLASS	ENERGY CONSUMPTION (KWH/YEAR)
ePM10 60% ISO 16890 - (M6)							
RPV65-6HTG/350 4V	592	592	292	16	3400/111	>1200	E
RPV65-6HTG/350 4V	592	292	292	8	1700/111		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CLASS	ENERGY CONSUMPTION (KWH/YEAR)
ePM1 60% ISO 16890 - (F8)							
RPV95-6HTG/350 4V	592	592	292	16	3400/140	1763	D
RPV95-6HTG/350 4V	592	292	292	8	1700/140		

Absolute filtration.

Used in environments where air purity is essential.

Absolute filtration captures particles smaller than 0.3 micrometers using HEPA or ULPA filters, with an efficiency of up to 99.999%. It is essential in cleanrooms, hospitals, and research laboratories to ensure a sterile environment. This technology protects health and supports the safety of critical processes by removing viruses, ultrafine bacteria, and allergens from the air.

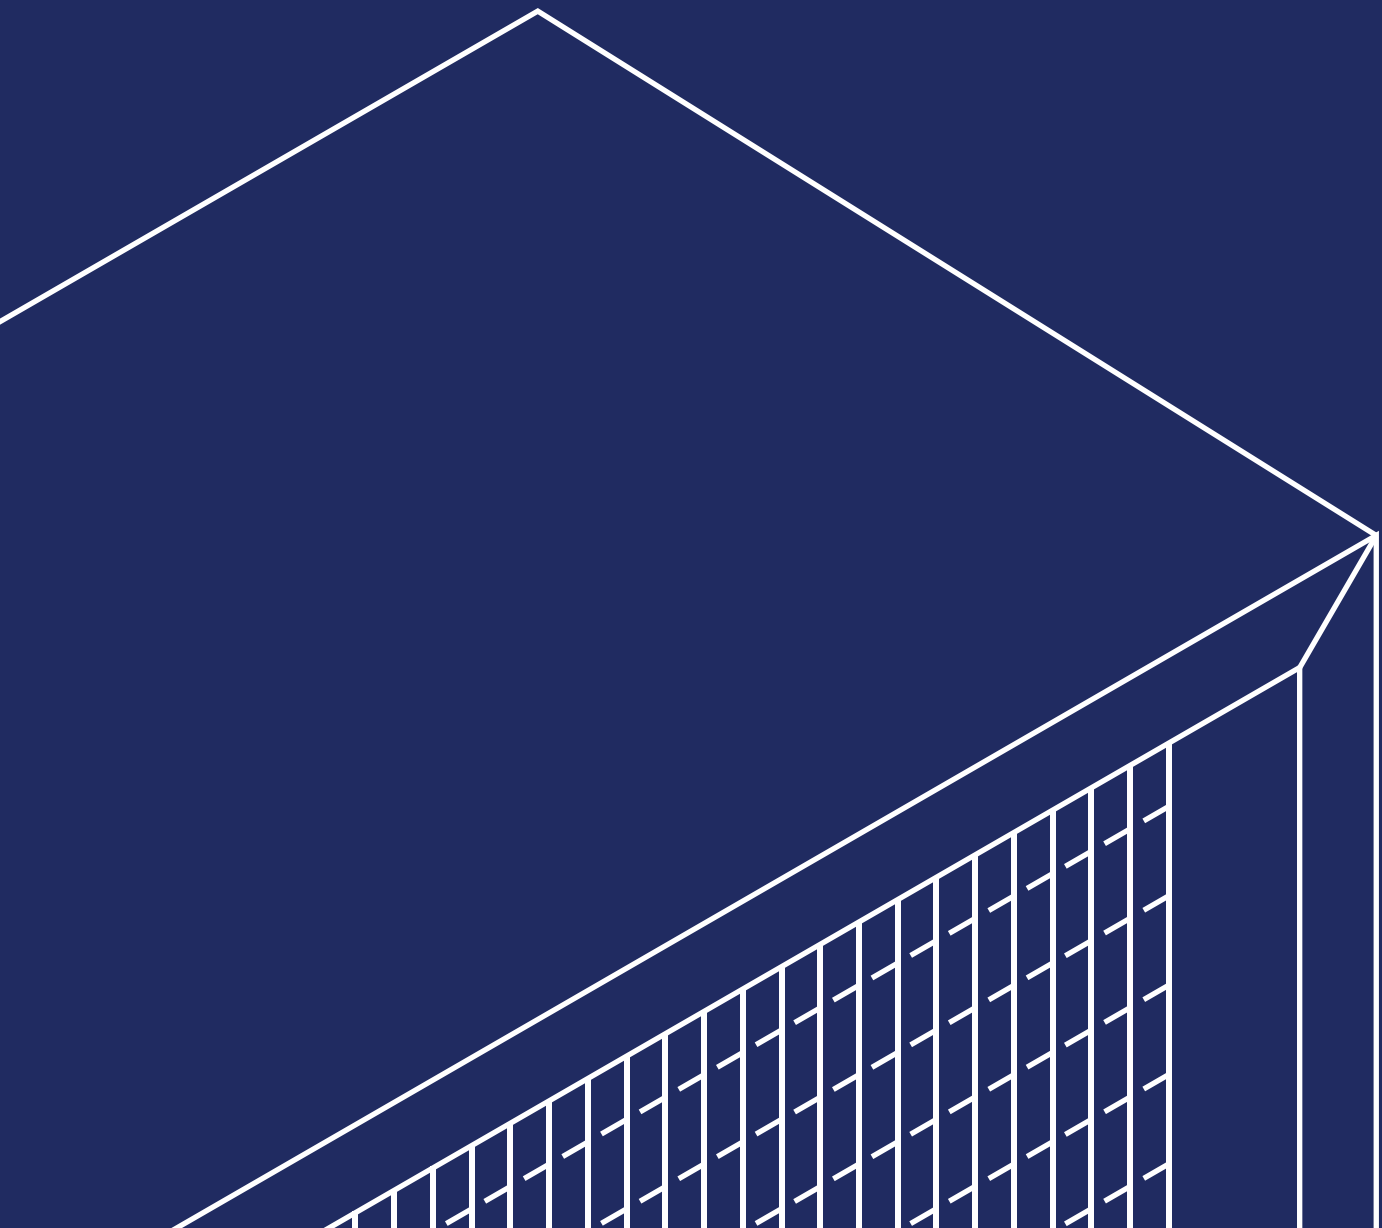

HEPA FILTERS

RPV HEPA



Terminal filtration in air handling units for "CLEANROOM" applications

APPLICATION AREAS


- Compact and economical
- Large filtration surface
- High efficiency
- Individual leak test at 0.3 µm at 0.45 m/s according to DIN 24.184 (from H13)
- Individual MPPS efficiency test at 0.12 µm at 0.45 m/s (scanning test) according to EN182 standard
- Individual test certificate provided with the filter (from H13)
- Double labeling for traceability (from E10)
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial development (ISO 846-VDI 6022)


SECURE™

GENERAL CHARACTERISTICS

- Filtration Class EN1822: E10-H13
- Media: mini-pleated glass fiber paper
- Frame: polystyrene (SECURE)
- Lut: polyurethane
- Separators: hot-melt wire
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 70°C
- Relative humidity: 70-80%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E10					
RPV100-6 SCG	592	592	292	18	3400 / 170
RPV100-5 SCG	592	490	292	14	3200 / 170
RPV100-3 SCG	592	287	292	8,5	1700 / 170
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E11					
RPV110-6 SCG	592	592	292	18	3400 / 200
RPV110-5 SCG	592	490	292	14	2850 / 200
RPV110-3 SCG	592	287	292	8,5	1700 / 200
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E12					
RPV120-6 SCG	592	592	292	18	2500 / 240
RPV120-5 SCG	592	490	292	14	2085 / 240
RPV120-3 SCG	592	287	292	8,5	1250 / 240

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |

*** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H13					
RPV130-6 SCG	592	592	292	18	2500 / 280
RPV130-5 SCG	592	490	292	14	2085 / 280
RPV130-3 SCG	592	287	292	8,5	1250 / 280
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H14					
RPV140-6 SCG	592	592	292	18	2500 / 300
RPV140-5 SCG	592	490	292	14	2100 / 300
RPV 140-3 SCG	592	287	292	8,5	1250 / 300

HEPA FILTERS

RPV HEPA XL



Terminal filtration in air handling units for "CLEANROOM" applications


APPLICATION AREAS

- Compact and economical
- Large filtration area
- High efficiency
- Individual leak test on 0.3 μm at 0.45 m/s according to DIN 24.184 (from H13)
- Individual MPPS efficiency test on 0.12 μm at 0.45 m/s (scanning test) according to EN182 standard
- Individual test certificate provided with the filter (from H13)
- Double labeling for traceability (from E10)
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class EN1822: E12
- Media: mini-pleated glass fiber paper
- Frame: Polystyrene (SECURE)
- Lut: polyurethane
- Separators: hot-melt wire
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 80°C
- Relative humidity: 70-80%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E10					
RPV100-6XL	592	592	440	32	5000 / 160
RPV100-5XL	592	490	440	27	4200 / 160
RPV100-3XL	592	287	440	16	2500 / 160
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E11					
RPV110-6XL	592	592	440	32	4250 / 250
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E12					
RPV120-6XL	592	592	440	32	3400 / 250
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H13					
RPV130-6XL	592	592	440	32	3400 / 250

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |

*** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

HEPA FILTERS

RPV HEPA XXL



Terminal filtration in air handling units for "CLEANROOM" applications


APPLICATION AREAS

- Compact and economical
- Large filtration area
- High efficiency
- Individual leak test on 0.3 µm at 0.45 m/s according to DIN 24.184 (from H13)
- Individual MPPS efficiency test on 0.12 µm at 0.45 m/s (scanning test) according to EN1822 standard
- Double labeling for traceability (from E10)
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class EN1822: E12
- Media: mini-pleated glass fiber paper
- Frame: aluminium
- Lut: polyurethane
- Separators: hot-melt wire
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 80°C
- Relative humidity: 70-80%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CLASS
E10						
RPV100-6XXL G	592	592	600	48	3400 / 95	
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CLASS
E12						
RPV120-6XXL G	592	592	600	48	4300 / 155	

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

HEPA FILTERS

THE-LA-69 MM

Terminal filtration for “CLEANROOM” application.

APPLICATION AREAS


- High air flow
- Very low pressure drop
- Individual leak test on 0.3 µm at 0.45 m/s according to DIN 24.184 (from H13)
- Individual MPPS efficiency test on 0.12 µm at 0.45 m/s (scanning test) according to EN1822 standard
- Individual test certificate (scanning test) provided with the filter
- Double labeling for traceability
- Tested for food contact according to CE 1935/2004
- Certified inert against microbial development (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- EN1822 filtration class: E10-U15
- Media: mini-pleated glass microfiber paper
- Frame: anodized extruded aluminum
- Lut: polyurethane
- Separators: continuous thermoplastic wires
- Joints: monobloc half-round polyurethane
- Grids: painted metal (upstream and downstream)
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 80°C
- Relative humidity: 70-80%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
E10						
THE-LA100A	305	305	69	50	2,6	150 / 50
THE-LA100A	305	610	69	50	5,2	300 / 50
THE-LA100A	457	457	69	50	5,8	335 / 50
THE-LA100A	457	610	69	50	7,8	450 / 50
THE-LA100A	610	610	69	50	10,4	600 / 50
THE-LA100A	610	762	69	50	13	750 / 50
THE-LA100A	610	915	69	50	15,6	900 / 50
THE-LA100A	610	1220	69	50	20,8	1200 / 50
THE-LA100A	610	1525	69	50	26	1500 / 50
THE-LA100A	610	1830	69	50	31,2	1800 / 50
THE-LA100A	762	762	69	50	16,2	935 / 50
THE-LA100A	915	915	69	50	23,4	1350 / 50
THE-LA100A	915	1220	69	50	31,2	1800 / 50

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |

*** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
H13						
THE-LA130A	305	305	69	50	2,6	150 / 110
THE-LA130A	305	610	69	50	5,2	300 / 110
THE-LA130A	457	457	69	50	5,8	335 / 110
THE-LA130A	457	610	69	50	7,8	450 / 110
THE-LA130A	610	610	69	50	10,4	600 / 110
THE-LA130A	610	762	69	50	13	750 / 110
THE-LA130A	610	915	69	50	15,6	900 / 110
THE-LA130A	610	1220	69	50	20,8	1200 / 110
THE-LA130A	610	1525	69	50	26	1500 / 110
THE-LA130A	610	1830	69	50	31,2	1800 / 110
THE-LA130A	762	762	69	50	16,2	935 / 110
THE-LA130A	915	915	69	50	23,4	1350 / 110
THE-LA130A	915	1220	69	50	31,2	1800 / 110
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
H14						
THE-LA140A	305	305	69	50	2,6	150 / 120
THE-LA140A	305	610	69	50	5,2	300 / 120
THE-LA140A	457	457	69	50	5,8	335 / 120
THE-LA140A	457	610	69	50	7,8	450 / 120
THE-LA140A	610	610	69	50	10,4	600 / 120
THE-LA140A	610	762	69	50	13	750 / 120
THE-LA140A	610	915	69	50	15,6	900 / 120
THE-LA140A	610	1220	69	50	20,8	1200 / 120
THE-LA140A	610	1525	69	50	26	1500 / 120
THE-LA140A	610	1830	69	50	31,2	1800 / 120
THE-LA140A	762	762	69	50	16,2	935 / 120
THE-LA140A	915	915	69	50	23,4	1350 / 120
THE-LA140A	915	1220	69	50	31,2	1800 / 120
THE-LA140A	1140	1140	69	50	39	2300 / 120
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
U15						
THE-LA150A	305	305	69	50	2,6	150 / 140
THE-LA150A	305	610	69	50	5,2	300 / 140
THE-LA150A	457	457	69	50	5,8	335 / 140
THE-LA150A	457	610	69	50	7,8	450 / 140

THE-LA150A	610	610	69	50	10,4	600 / 140
THE-LA150A	610	762	69	50	13	750 / 140
THE-LA150A	610	915	69	50	15,6	900 / 140
THE-LA150A	610	1220	69	50	20,8	1200 / 140
THE-LA150A	610	1525	69	50	26	1500 / 140
THE-LA150A	610	1830	69	50	31,2	1800 / 140
THE-LA150A	762	762	69	50	16,2	935 / 140
THE-LA150A	915	915	69	50	23,4	1350 / 140
THE-LA150A	915	1220	69	50	31,2	1800 / 140

HEPA FILTERS

THE-LA-78 MM



Terminal filtration for “CLEANROOM” application.

APPLICATION AREAS


- High air flow
- Very low pressure drop
- Individual leak test on 0.3 µm at 0.45 m/s according to DIN 24.184 (from H13)
- Individual MPPS efficiency test on 0.12 µm at 0.45 m/s (scanning test) according to EN1822 standard
- Individual test certificate (scanning test) provided with the filter
- Double labeling for traceability
- Tested for food contact according to CE 1935/2004
- Certified inert against microbial development (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- EN1822 filtration class: E10-U15
- Media: mini-pleated glass microfiber paper
- Frame: anodized extruded aluminum
- Lut: polyurethane
- Separators: continuous thermoplastic wires
- Joints: monobloc half-round polyurethane
- Grids: painted metal (upstream and downstream)
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 80°C
- Relative humidity: 70-80%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E10						
THE-LA100A	305	305	78	50	2,6	150 / 50
THE-LA100A	305	610	78	50	5,2	300 / 50
THE-LA100A	457	457	78	50	5,8	335 / 50
THE-LA100A	457	610	78	50	7,8	450 / 50
THE-LA100A	610	610	78	50	10,4	600 / 50
THE-LA100A	610	762	78	50	13	750 / 50
THE-LA100A	610	915	78	50	15,6	900 / 50
THE-LA100A	610	1220	78	50	20,8	1200 / 50
THE-LA100A	610	1525	78	50	26	1500 / 50
THE-LA100A	610	1830	78	50	31,2	1800 / 50
THE-LA100A	762	762	78	50	16,2	935 / 50
THE-LA100A	915	915	78	50	23,4	1350 / 50

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

THE-LA100A	915	1220	78	50	31,2	1800 / 50
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H13						
THE-LA130A	305	305	78	50	2,6	150 / 110
THE-LA130A	305	610	78	50	5,2	300 / 110
THE-LA130A	457	457	78	50	5,8	335 / 110
THE-LA130A	457	610	78	50	7,8	450 / 110
THE-LA130A	610	610	78	50	10,4	600 / 110
THE-LA130A	610	762	78	50	13	750 / 110
THE-LA130A	610	915	78	50	15,6	900 / 110
THE-LA130A	610	1830	78	50	31,2	1800 / 110
THE-LA130A	762	762	78	50	16,2	935 / 110
THE-LA130A	915	915	78	50	23,4	1350 / 110
THE-LA130A	915	1220	78	50	31,2	1800 / 110
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H14						
THE-LA140A	305	305	78	50	2,6	150 / 120
THE-LA140A	305	610	78	50	5,2	300 / 120
THE-LA140A	457	457	78	50	5,8	335 / 120
THE-LA140A	457	610	78	50	7,8	450 / 120
THE-LA140A	610	610	78	50	10,4	600 / 120
THE-LA140A	610	762	78	50	13	750 / 120
THE-LA140A	610	915	78	50	15,6	900 / 120
THE-LA140A	610	1220	78	50	20,8	1200 / 120
THE-LA140A	610	1525	78	50	26	1500 / 120
THE-LA140A	610	1830	78	50	31,2	1800 / 120
THE-LA140A	762	762	78	50	16,2	935 / 120
THE-LA140A	915	915	78	50	23,4	1350 / 120
THE-LA140A	915	1220	78	50	31,2	1800 / 120
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
U15						
THE-LA150A	305	305	78	50	2,6	305 / 140
THE-LA150A	305	610	78	50	5,2	300 / 140
THE-LA150A	457	457	78	50	5,8	335 / 140
THE-LA150A	457	610	78	50	7,8	450 / 140
THE-LA150A	610	610	78	50	10,4	600 / 140

THE-LA150A	610	762	78	50	13	750 / 140
THE-LA150A	610	915	78	50	15,6	900 / 140
THE-LA150A	610	1220	78	50	20,8	1200 / 140
THE-LA150A	610	1525	78	50	26	1500 / 140
THE-LA150A	610	1830	78	50	31,2	1800 / 140
THE-LA150A	762	762	78	50	16,2	935 / 140
THE-LA150A	915	915	78	50	23,4	1350 / 140
THE-LA150A	915	1220	78	50	31,2	1800 / 140

HEPA FILTERS

THE-LA-89 MM

Terminal filtration for "CLEANROOM" applications.

APPLICATION AREAS


- High air flow
- Very low pressure drop
- Individual leak test on 0.3 µm at 0.45 m/s according to DIN 24.184 (from H13)
- Individual MPPS efficiency test on 0.12 µm at 0.45 m/s (scanning test) according to EN1822 standard
- Individual test certificate (scanning test) provided with the filter (from H13)
- Double labeling for traceability
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration Class EN1822: E10-U15
- Media: mini-pleat glass microfiber paper
- Frame: anodized extruded aluminum
- Lut: polyurethane
- Separators: continuous thermoplastic wires
- Joints: monobloc half-round polyurethane
- Grilles: painted metal (upstream and downstream)
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 80°C
- Relative humidity: 70-80%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
E10						
THE-LA100A	305	305	89	75	3,1	150 / 35
THE-LA100A	305	610	89	75	6,2	300 / 35
THE-LA100A	457	457	89	75	7	335 / 35
THE-LA100A	457	610	89	75	9,4	450 / 35
THE-LA100A	610	610	89	75	12,5	600 / 35
THE-LA100A	610	762	89	75	15,6	750 / 35
THE-LA100A	610	915	89	75	18,7	900 / 35
THE-LA100A	610	1220	89	75	25	1200 / 35
THE-LA100A	610	1830	89	75	37,5	1800 / 35
THE-LA100A	762	762	89	75	19,5	935 / 35
THE-LA100A	915	915	89	75	28,1	1350 / 35
THE-LA100A	915	1220	89	75	37,5	1800 / 35
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

H13						
THE-LA130A	305	305	89	75	3,1	150 / 90
THE-LA130A	305	610	89	75	6,2	300 / 90
THE-LA130A	457	457	89	75	7	335 / 90
THE-LA130A	457	610	89	75	9,4	450 / 90
THE-LA130A	610	610	89	75	12,5	600 / 90
THE-LA130A	610	762	89	75	15,6	750 / 90
THE-LA130A	610	915	89	75	18,7	900 / 90
THE-LA130A	610	1220	89	75	25	1200 / 90
THE-LA130A	610	1830	89	75	37,5	1800 / 90
THE-LA130A	762	762	89	75	19,5	935 / 90
THE-LA130A	915	915	89	75	28,1	1350 / 90
THE-LA130A	915	1220	89	75	37,5	1800 / 90
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
H14						
THE-LA140A	305	305	89	75	3,1	150 / 100
THE-LA140A	305	610	89	75	6,2	300 / 100
THE-LA140A	457	457	89	75	7	335 / 100
THE-LA140A	457	610	89	75	9,4	450 / 100
THE-LA140A	610	610	89	75	12,5	600 / 100
THE-LA140A	610	762	89	75	15,6	750 / 100
THE-LA140A	610	915	89	75	18,7	900 / 100
THE-LA140A	610	1220	89	75	25	1200 / 100
THE-LA140A	610	1830	89	75	37,5	1800 / 100
THE-LA140A	762	762	89	75	19,5	935 / 100
THE-LA140A	915	915	89	75	28,1	1350 / 100
THE-LA140A	915	1220	89	75	37,5	1800 / 100
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H/M2)/DELTA P (PA)
U15						
THE-LA150A	305	305	89	75	3,1	150 / 120
THE-LA150A	305	610	89	75	6,2	300 / 120
THE-LA150A	457	457	89	75	7	335 / 120
THE-LA150A	457	610	89	75	9,4	450 / 120
THE-LA150A	610	610	89	75	12,5	600 / 120
THE-LA150A	610	762	89	75	15,6	750 / 120
THE-LA150A	610	915	89	75	18,7	900 / 120
THE-LA150A	610	1220	89	75	25	1200 / 120

THE-LA150A	610	1830	89	75	37,5	1800 / 120
THE-LA150A	762	762	89	75	19,5	935 / 120
THE-LA150A	915	915	89	75	28,1	1350 / 120
THE-LA150A	915	1220	89	75	37,5	1800 / 120

HEPA FILTERS

THE-LA-150 MM

Terminal filtration for “CLEANROOM” application.

APPLICATION AREAS

- High air flow
- Very low pressure drop
- Individual leakage test on 0.3 µm at 0.45 m/s according to DIN 24.184 (from H13)
- Individual MPPS efficiency test on 0.12 µm at 0.45 m/s (scanning test) according to EN1822 standard
- Individual test certificate (scanning test) provided with the filter
- Double labeling for traceability
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- EN1822 filtration class: E10-U15
- Media: mini-pleated glass microfiber paper
- Frame: anodized extruded aluminum
- Lut: polyurethane
- Separators: continuous thermoplastic wires
- Joints: monobloc half-round polyurethane
- Grilles: painted metal (upstream and downstream)
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 80°C
- Relative humidity: 70-80%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E10						
THE-LA100A	305	305	150	100	4,5	150 / 30
THE-LA100A	305	610	150	100	9	300 / 30
THE-LA100A	457	457	150	100	10,1	335 / 30
THE-LA100A	457	610	150	100	13,5	450 / 30
THE-LA100A	610	610	150	100	18	600 / 30
THE-LA100A	610	762	150	100	22,5	750 / 30
THE-LA100A	610	915	150	100	27	900 / 30
THE-LA100A	610	1220	150	100	36	1200 / 30
THE-LA100A	610	1830	150	100	54	1800 / 30
THE-LA100A	762	762	150	100	28,1	935 / 30
THE-LA100A	915	915	150	100	40,5	1350 / 30
THE-LA100A	915	1220	150	100	54	1800 / 30
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

H13						
THE-LA130A	305	305	150	100	4,5	150 / 75
THE-LA130A	305	610	150	100	9	300 / 75
THE-LA130A	457	457	150	100	10,1	335 / 75
THE-LA130A	457	610	150	100	13,5	450 / 75
THE-LA130A	610	610	150	100	18	600 / 75
THE-LA130A	610	762	150	100	22,5	750 / 75
THE-LA130A	610	915	150	100	27	900 / 75
THE-LA130A	610	1220	150	100	36	1200 / 75
THE-LA130A	610	1830	150	100	54	1800 / 75
THE-LA130A	762	762	150	100	28,1	935 / 75
THE-LA130A	915	915	150	100	40,5	1350 / 75
THE-LA130A	915	1220	150	100	54	1800 / 75
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H14						
THE-LA140A	305	305	150	100	4,5	150 / 85
THE-LA140A	305	610	150	100	9	300 / 85
THE-LA140A	457	457	150	100	10,1	335 / 85
THE-LA140A	457	610	150	100	13,5	450 / 85
THE-LA140A	610	610	150	100	18	600 / 85
THE-LA140A	610	762	150	100	22,5	750 / 85
THE-LA140A	610	915	150	100	27	900 / 85
THE-LA140A	610	1220	150	100	36	1200 / 85
THE-LA140A	610	1830	150	100	54	1800 / 85
THE-LA140A	762	762	150	100	28,1	935 / 85
THE-LA140A	915	915	150	100	40,5	1350 / 85
THE-LA140A	915	1220	150	100	54	1800 / 85
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
U15						
THE-LA150A	305	305	150	100	4,5	150 / 100
THE-LA150A	305	610	150	100	9	300 / 100
THE-LA150A	457	457	150	100	10,1	335 / 100
THE-LA150A	457	610	150	100	13,5	450 / 100
THE-LA150A	610	610	150	100	18	600 / 100
THE-LA150A	610	762	150	100	22,5	750 / 100
THE-LA150A	610	915	150	100	27	900 / 100
THE-LA150A	610	1220	150	100	36	1200 / 100

THE-LA150A	610	1830	150	100	54	1800 / 100
THE-LA150A	762	762	150	100	28,1	935 / 100
THE-LA150A	915	915	150	100	40,5	1350 / 100
THE-LA150A	915	1220	150	100	54	1800 / 100

HEPA FILTERS

THE-MP G 150 MM

Absolute HEPA-ULPA filters for
"CLEANROOM" air treatment centers.




APPLICATION AREAS

- Consists of a mini-pleated media that replaces the old generation deep pleated media effectively
- High air flow rate
- Low pressure drop
- Individual leakage test at 0.3 μm at 0.45 m/s according to DIN 24.184 (starting from H13)
- Individual MPPS efficiency test at 0.12 μm at 0.45 m/s (scanning test) according to EN1822 standard
- Certificate of individual test (scanning test) provided with the filter
- Double labeling for traceability
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial development (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- EN1822 filtration class: E10-H14
- Media: mini-pleated glass fiber paper
- Frame: galvanized (G), stainless steel (S) or aluminum (A)
- Seal: polyurethane
- Separators: continuous thermoplastic threads
- Joint: flat neoprene or monobloc polyurethane half-round
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 70°C
- Relative humidity: 70-80%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E10						
THE-MP100G	305	305	150	75	3,1	850 / 250
THE-MP100G	305	610	150	75	6,2	1700 / 250
THE-MP100G	457	610	150	75	9,4	2550 / 250
THE-MP100G	610	610	150	75	12,5	3400 / 250
THE-MP100G	610	762	150	75	15,6	4250 / 250
THE-MP100G	610	915	150	75	18,7	5100 / 250
THE-MP100G	610	1220	150	75	25	6800 / 250
THE-MP100G	610	1525	150	75	31,2	8500 / 250
THE-MP100G	610	1830	150	75	37,5	10200 / 250
THE-MP100G	915	1220	150	75	37,5	10200 / 250
THE-MP100G	305	305	150	100	4,5	900 / 250

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |

*** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

THE-MP100G	305	610	150	100	9	1800 / 250
THE-MP100G	457	610	150	100	13,5	2700 / 250
THE-MP100G	610	610	150	100	18	3600 / 250
THE-MP100G	610	762	150	100	22,5	4500 / 250
THE-MP100G	610	915	150	100	27	5400 / 250
THE-MP100G	610	1220	150	100	36	7200 / 250
THE-MP100G	610	1525	150	100	44,9	9000 / 250
THE-MP100G	610	1830	150	100	54	10800 / 250
THE-MP100G	915	1220	150	100	54	1080 / 250

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H13						
THE-MP130G	305	305	150	75	3,1	750 / 250
THE-MP130G	457	610	150	75	9,4	1120 / 250
THE-MP130G	305	610	150	75	6,2	750 / 250
THE-MP130G	610	610	150	75	12,5	1500 / 250
THE-MP130G	610	915	150	75	18,7	2250 / 250
THE-MP130G	610	1220	150	75	25	3000 / 250
THE-MP130G	610	1525	150	75	31,2	3750 / 250
THE-MP130G	610	1830	150	75	37,5	4500 / 250
THE-MP130G	610	762	150	75	15,6	1870 / 250
THE-MP130G	915	1220	150	75	37,5	4500 / 250
THE-MP130G	305	305	150	100	4,5	475 / 250
THE-MP130G	305	610	150	100	9	950 / 250
THE-MP130G	457	610	150	100	13,5	1420 / 250
THE-MP130G	610	610	150	100	18	1900 / 250
THE-MP130G	610	762	150	100	22,5	2370 / 250
THE-MP130G	610	915	150	100	27	2850 / 250
THE-MP130G	610	1220	150	100	36	3800 / 250
THE-MP130G	610	1525	150	100	44,9	4750 / 250
THE-MP130G	610	1830	150	100	54	5700 / 250
THE-MP130G	915	1220	150	100	54	5700 / 250

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H14						
THE-MP140G	305	305	150	75	3,1	325 / 250
THE-MP140G	305	610	150	75	6,2	650 / 250
THE-MP140G	457	610	150	75	9,4	975 / 250
THE-MP140G	610	610	150	75	12,5	1300 / 250

THE-MP140G	610	762	150	75	15,6	1620 / 250
THE-MP140G	610	915	150	75	18,7	1950 / 250
THE-MP140G	610	1220	150	75	25	2600 / 250
THE-MP140G	610	1525	150	75	31,2	3250 / 250
THE-MP140G	610	1830	150	75	37,5	3900 / 250
THE-MP140G	915	1220	150	75	37,5	3600 / 250
THE-MP140G	305	305	150	100	4,5	400 / 250
THE-MP140G	305	610	150	100	9	800 / 250
THE-MP140G	457	610	150	100	13,5	1200 / 250
THE-MP140G	610	610	150	100	18	1600 / 250
THE-MP140G	610	762	150	100	22,5	2000 / 250
THE-MP140G	610	915	150	100	27	2400 / 250
THE-MP140G	610	1220	150	100	36	3200 / 250
THE-MP140G	610	1525	150	100	44,9	4000 / 250
THE-MP140G	610	1830	150	100	54	4800 / 250
THE-MP140G	915	1220	150	100	54	4800 / 250

HEPA FILTERS

THE-MP M 150 MM

Final filtration in air handling units for “CLEANROOM” application

APPLICATION AREAS

- Consists of mini-pleat media that replaces the old generation deep pleat media
- High air flow rate
- Low pressure drop
- Individual leak test of 0.3 µm at 0.45 m/s according to DIN 24.184 (from H13)
- Individual MPPS efficiency test of 0.12 µm at 0.45 m/s (scanning test) according to EN182 standard
- Individual test certificate (scanning test) provided with the filter
- Double labeling for traceability
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class EN1822: E10-H14
- Media: mini-pleat glass fiber paper
- Frame: MDF (M)
- Seal: polyurethane half-round monobloc
- Separators: continuous thermoplastic wires
- Seal: polyurethane half-round monobloc
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 70°C
- Relative humidity: 70-80%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E10						
THE-MP100M	305	305	150	75	3,1	850 / 250
THE-MP100M	305	610	150	75	6,2	1700 / 250
THE-MP100M	457	610	150	75	9,4	2550 / 250
THE-MP100M	610	610	150	75	12,5	3500 / 250
THE-MP100M	610	762	150	75	15,6	4250 / 250
THE-MP100M	610	915	150	75	18,7	5100 / 150
THE-MP100M	610	1220	150	75	25	6800 / 250
THE-MP100M	915	1220	150	75	37,5	10200 / 250
THE-MP100M	305	305	150	100	4,5	900 / 250
THE-MP100M	305	610	150	100	9	1800 / 250
THE-MP100M	457	610	150	100	13,5	2700 / 250
THE-MP100M	610	610	150	100	18	3600 / 250

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

THE-MP100M	610	762	150	100	22,5	4500 / 250
THE-MP100M	610	915	150	100	27	5400 / 250
THE-MP100M	610	1220	150	100	36	7200 / 250
THE-MP100M	915	1220	150	100	54	10800 / 250

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H13						
THE-MP130M	305	305	150	75	3,1	475 / 250
THE-MP130M	305	610	150	75	6,2	750 / 250
THE-MP130M	457	610	150	75	9,4	1120 / 250
THE-MP130M	610	610	150	75	12,5	1500 / 250
THE-MP130M	610	762	150	75	15,6	1870 / 250
THE-MP130M	610	915	150	75	18,7	2250 / 250
THE-MP130M	610	1220	150	75	25	3000 / 250
THE-MP130M	915	1220	150	75	37,5	4500 / 250
THE-MP130M	305	305	150	100	4,5	475 / 250
THE-MP130M	305	610	150	100	9	950 / 250
THE-MP130M	457	610	150	100	13,5	1420 / 250
THE-MP130M	610	610	150	100	18	1900 / 250
THE-MP130M	610	915	150	100	27	2850 / 250
THE-MP130M	610	1220	150	100	36	3800 / 250
THE-MP130M	915	1220	150	100	54	5700 / 250

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H14						
THE-MP140M	305	305	150	75	3,1	325 / 250
THE-MP140M	305	610	150	75	6,2	650 / 250
THE-MP140M	457	610	150	75	9,4	975 / 250
THE-MP140M	610	610	150	75	12,5	1300 / 250
THE-MP140M	610	762	150	75	15,6	1620 / 250
THE-MP140M	610	915	150	75	18,7	1950 / 250
THE-MP140M	610	1220	150	75	25	2600 / 250
THE-MP140M	915	1220	150	75	37,5	3900 / 250
THE-MP140M	305	305	150	100	4,5	400 / 250
THE-MP140M	305	610	150	100	9	800 / 250
THE-MP140M	457	610	150	100	13,5	1200 / 250
THE-MP140M	610	610	150	100	18	1600 / 250
THE-MP140M	610	762	150	100	22,5	2000 / 250
THE-MP140M	610	915	150	100	27	2400 / 250
THE-MP140M	610	1220	150	100	36	3200 / 250
THE-MP140M	915	1220	150	100	54	4800 / 250

HEPA FILTERS

THE-MP G 292 MM



Filtration terminale dans les centrales de traitement d'air pour application "CLEANROOM"


AVANTAGES

- Constitué d'un média mini-plis remplaçant par excellence le média plis profonds ancienne génération
- Grand débit d'air
- Perte de charge faible
- Test individuel de fuite sur 0,3 µm à 0,45 m/s selon la DIN 24.184 (à partir de H13)
- Test individuel d'efficacité MPPS sur 0,12 µm à 0,45 m/s (scanning test) selon norme EN1822
- Certificat de test individuel (scanning test) fourni avec le filtre
- Double étiquetage pour traçabilité
- Testé pour le contact alimentaire selon CE 1935/2004
- Certifié inerte au développement microbien (ISO 846-VDI 6022)

CARACTÉRISTIQUES GÉNÉRALES

- Classe de filtration EN1822 : E10-H14
- Média : papier mini-plis en fibres de verre
- Cadre : galva (G), inox (S) ou aluminium (A)
- Lut : polyuréthane
- Séparateurs : fils thermoplastiques continus
- Joint : néoprène plat ou polyuréthane demi-rond monobloc
- Perte de charge finale : 600 Pa
- T° maximum de service en continu : 70°C
- Humidité relative : 70-80%

Détails et variations




DESCRIPTION	BASE A (MM)	HAUTEUR B (MM)	PROFONDEUR C (MM)	PACK FILTRANT (MM)	SURFACE (M2)	DÉBIT D'AIR (M3/H)/DELTA P (PA)
E10						
THE-MP100G	305	305	292	135	5,6	1050 / 250
THE-MP100G	457	457	292	135	12,6	2360 / 250
THE-MP100G	305	610	292	135	11,2	2100 / 250
THE-MP100G	457	610	292	135	16,8	3150 / 250
THE-MP100G	610	610	292	135	22,4	4200 / 250
THE-MP100G	305	305	292	150	6,2	1100 / 250
THE-MP100G	457	457	292	150	14	2470 / 250
THE-MP100G	305	610	292	150	12,5	2200 / 250
THE-MP100G	457	610	292	150	18,6	3300 / 250

H13						
THE-MP130G	305	305	292	135	5,6	600 / 250
THE-MP130G	457	457	292	135	12,2	1350 / 250
THE-MP130G	305	610	292	135	11,6	1200 / 250
THE-MP130G	457	610	292	135	16,8	1800 / 250
THE-MP130G	610	610	292	135	22,4	2400 / 250
THE-MP130G	457	457	292	150	14	1415 / 250
THE-MP130G	305	610	292	150	12,5	1260 / 250
THE-MP130G	457	610	292	150	18,6	1900 / 250
THE-MP130G	610	610	292	150	25	2500 / 250
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H14						
THE-MP140G	305	305	292	135	5,6	550 / 250
THE-MP140G	457	457	292	135	12,6	1210 / 250
THE-MP140G	395	610	292	135	11,2	1075 / 250
THE-MP140G	457	610	292	135	16,8	1610 / 250
THE-MP140G	610	610	292	135	22,4	2150 / 250
THE-MP140G	305	305	292	150	6,2	565 / 250
THE-MP140G	457	457	292	150	14	1280 / 250
THE-MP140G	305	610	292	150	12,5	1130 / 250
THE-MP140G	457	610	292	150	18,6	1700 / 250
THE-MP140G	610	610	292	150	25	2260 / 250

HEPA FILTERS

THE-MP M 292 MM

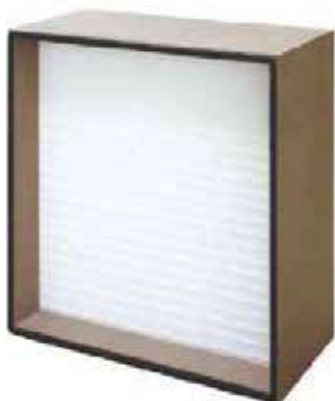

Terminal filtration in air treatment plants for "CLEANROOM" applications


APPLICATION AREAS

- Made of a mini-pleated media that replaces the old generation deep pleated media.
- High air flow.
- Low pressure drop.
- Individual leak test at 0.3 µm at 0.45 m/s according to DIN 24.184 (from H13).
- Individual MPPS efficiency test at 0.12 µm at 0.45 m/s (scanning test) according to EN182 standard.
- Individual test certificate (scanning test) provided with the filter.
- Double labeling for traceability.
- Tested for food contact according to CE 1935/2004.
- Certified inert to microbial development (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- EN1822 filtration class: E10-H14
- Media: mini-pleated fiberglass paper
- Frame: MDF (M)
- Lut: polyurethane
- Separators: continuous thermoplastic wires
- Joint: monobloc half-round polyurethane
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 70°C
- Relative humidity: 70-80%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E10						
THE-MP100M	305	305	292	135	5,6	1050 / 250
THE-MP100M	305	610	292	135	11,2	2100 / 250
THE-MP100M	457	457	292	135	12,6	2360 / 250
THE-MP100M	457	610	292	135	16,8	3150 / 250
THE-MP100M	610	610	292	135	22,4	4200 / 250
THE-MP100M	305	305	292	150	6,2	1100 / 250
THE-MP100M	305	610	292	150	12,5	2200 / 250
THE-MP100M	457	457	292	150	14	2470 / 250
THE-MP100M	457	610	292	150	18,6	3300 / 250
THE-MP100M	610	610	292	150	25	4400 / 250
H13						
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |

*** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

THE-MP130M	305	305	292	135	5,6	600 / 250
THE-MP130M	305	610	292	135	11,2	1200 / 250
THE-MP130M	457	457	292	135	12,6	1350 / 250
THE-MP130M	457	610	292	135	16,8	1800 / 250
THE-MP130M	610	610	292	135	22,4	2400 / 250
THE-MP130M	305	305	292	150	6,2	630 / 250
THE-MP130M	305	610	292	150	12,5	1260 / 250
THE-MP130M	457	457	292	150	14	1415 / 250
THE-MP130M	457	610	292	150	18,6	1900 / 250
THE-MP130M	610	610	292	150	25	2500 / 250
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	FILTER PACK (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H14						
THE-MP140M	305	305	292	135	5,6	550 / 250
THE-MP140M	305	610	292	135	11,2	1075 / 250
THE-MP140M	457	457	292	135	12,6	1210 / 250
THE-MP140M	457	610	292	135	16,8	1610 / 250
THE-MP140M	610	610	292	135	22,4	2150 / 250
THE-MP140M	305	305	292	150	6,2	565 / 250
THE-MP140M	305	610	292	150	12,5	1130 / 250
THE-MP140M	457	457	292	150	14	1280 / 250
THE-MP140M	457	610	292	150	18,6	1700 / 250
THE-MP140M	610	610	292	150	25	2260 / 250

HEPA FILTERS

THE-MD



Terminal filtration in air handling units for "CLEANROOM" applications.

APPLICATION AREAS

Consists of a mini-pleat media that replaces the old generation deep pleat media


- High air flow
- Low pressure drop
- Individual leakage test on 0.3 μm at 0.45 m/s according to DIN 24.184
- Individual MPPS efficiency test on 0.12 μm at 0.45 m/s (scanning test) according to EN1822 standard
- Individual test certificate (scanning test) provided with the filter
- Double labeling for traceability
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)



GENERAL CHARACTERISTICS

- Filtration class EN1822: E12-H13
- Media: mini-pleat glass fiber paper
- Frame: galvanized or polystyrene
- Lut: polyurethane
- Separators: continuous thermoplastic threads
- Joint: flat neoprene or monobloc half-round polyurethane
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 70°C
- Relative humidity: 70-80%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E12					
THE-MD120G	86,5	202	600	3,2	200 / 170
THE-MD120G	65	202	600	3,2	200 / 120
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H13					
THE-MD130G	86,5	202	600	3,2	200 / 195
THE-MD130G	65	202	600	3,2	200 / 145

HEPA FILTERS

THE-VF G & HC

THE-VF130G	305	610	292	20	2000 / 280
THE-VF130G	305	305	292	10	1000 / 280
THE-VF130G	610	610	292	35	3400 / 250
THE-VF130G	457	610	292	26	2550 / 250
THE-VF130G	305	610	292	17,5	1700 / 250
THE-VF130G	305	305	292	9	850 / 250
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H14					
THE-VF140G	610	610	292	40	3200 / 280
THE-VF140G	457	610	292	30	2400 / 280
THE-VF140G	305	610	292	20	1600 / 280
THE-VF140G	305	305	292	10	800 / 280
THE-VF140G	610	610	292	35	2800 / 250
THE-VF140G	457	610	292	26	2100 / 250
THE-VF140G	305	610	292	17,5	1400 / 250
THE-VF140G	305	305	292	9	700 / 250

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |
*** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

DESCRIPTION	BASE A (MM)	HAUTEUR B (MM)	PROFONDEUR C (MM)	SURFACE (M2)	DÉBIT D'AIR (M3/H)/DELTA P (PA)
H13					
THE-VF130G	610	610	292	40	4000 / 280
THE-VF130G	457	610	292	30	3000 / 280
THE-VF130G	305	610	292	20	2000 / 280
THE-VF130G	305	305	292	10	1000 / 280
THE-VF130G	610	610	292	35	3400 / 250
THE-VF130G	457	610	292	26	2550 / 250
THE-VF130G	305	610	292	17,5	1700 / 250
THE-VF130G	305	305	292	9	850 / 250
DESCRIPTION	BASE A (MM)	HAUTEUR B (MM)	PROFONDEUR C (MM)	SURFACE (M2)	DÉBIT D'AIR (M3/H)/DELTA P (PA)
H14					
THE-VF140G	610	610	292	40	3200 / 280
THE-VF140G	457	610	292	30	2400 / 280
THE-VF140G	305	610	292	20	1600 / 280
THE-VF140G	305	305	292	10	800 / 280
THE-VF140G	610	610	292	35	2800 / 250
THE-VF140G	457	610	292	26	2100 / 250
THE-VF140G	305	610	292	17,5	1400 / 250
THE-VF140G	305	305	292	9	700 / 250

ABSOLUTE FILTERS (HEPA - ULPA)

THE-VF P & HC

Terminal filtration in air handling units for "CLEANROOM" applications


SECURE™

APPLICATION AREAS


Extraction units for dangerous and toxic contaminants (asbestos, ...)

- Compact and lighter construction
- Maximized air flow rate
- Very low initial pressure drop
- Individual leak test on 0.3 µm at 0.45 m/s according to DIN 24.184
- Individual MPPS efficiency test on 0.12 µm at 0.45 m/s (scanning test) according to EN1822 standard
- Individual test certificate (scanning test) provided with the filter
- Double labeling for 100% incinerable traceability (SECURE)
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial development (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class EN1822: E10-H14
- Media: mini-pleated fibreglass paper
- Frame: polystyrene plastic with ergonomic handle
- Lut: polyurethane
- Separators: continuous thermoplastic wires
- Joints: monobloc half-round polyurethane
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 70°C
- Maximum air flow rate 1.25 x air flow rate ex: 3400 × 1.25 = 4250 m³/h

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E10					
THE-VF100HC	610	610	292	40	6000 / 250
THE-VF100HC	305	610	292	20	3000 / 250
THE-VF100P	610	610	292	35	5000 / 250
THE-VF100P	305	610	292	17,5	3000 / 250
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
H13					
THE-VF130HC	610	610	292	40	4000 / 280
THE-VF130HC	305	610	292	20	2000 / 280
THE-VF130P	610	610	292	35	3400 / 280
THE-VF130P	305	610	292	17,5	1700 / 280
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |
 *** Energy class: according to Eurovent RS4/C/001-2015


Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

H14					
THE-VF140HC	610	610	292	40	3200 / 280
THE-VF140HC	305	610	292	20	1600 / 280
THE-VF140P	610	610	292	35	2800 / 280
THE-VF140P	305	610	292	17,5	1400 / 280

Molecular filtration.

Molecular filtration, which is achieved using activated carbon filters, is essential for removing gaseous contaminants and odors.

These filters adsorb molecules of volatile chemicals, toxic gases, and odors, making them indispensable in industrial environments, laboratories, and for improving indoor air quality in living spaces. Their use contributes to a healthier and safer environment by effectively filtering a wide range of molecular pollutants.

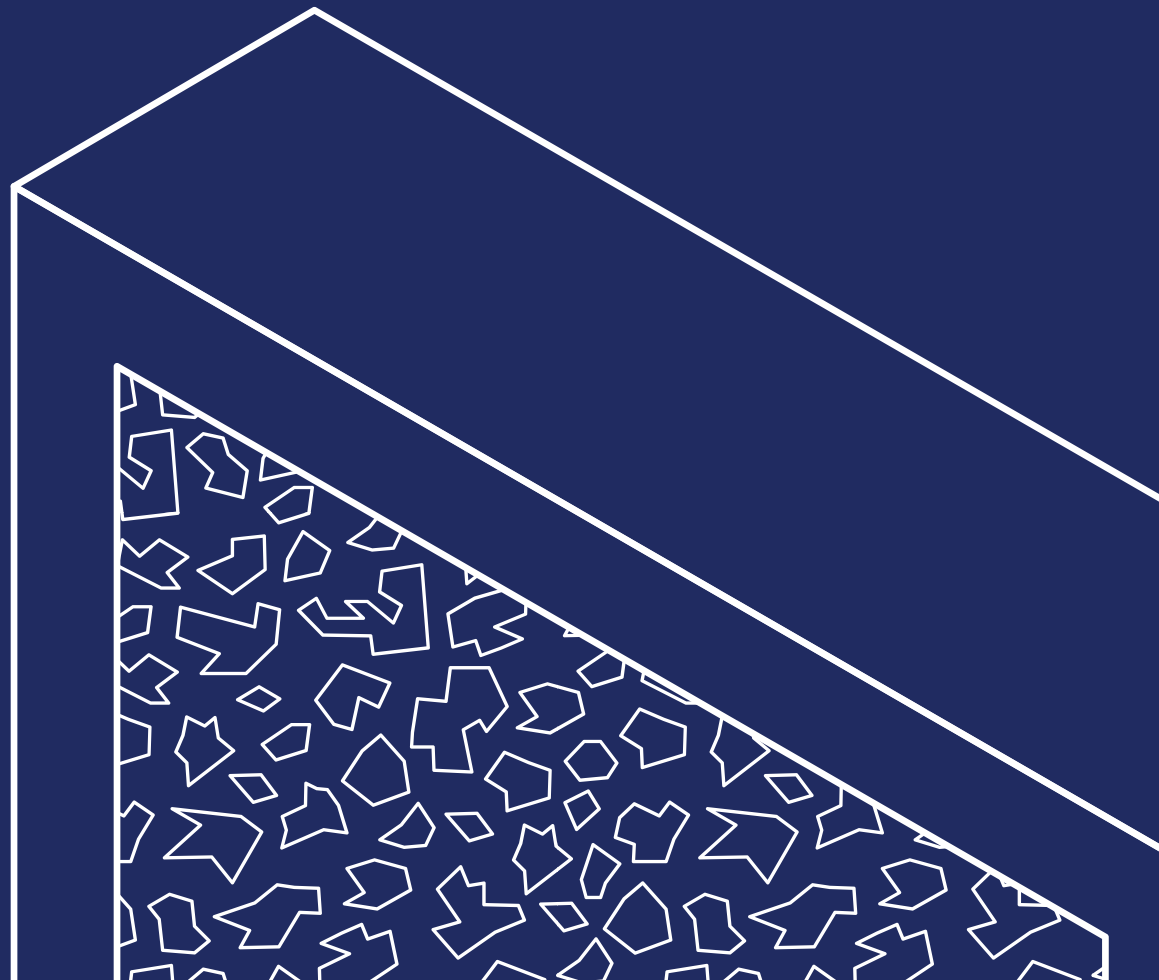

Molecular filtration.

Adsorption Guide

POLLUANTS	FAMILY	NB OF C/ ADSORPTION	
Acetaldehyde	Aldehyde & ketones	2	●
Acetylene	hydrocarbons (alkynes)	2	●
Acetic acid	Organic acids	2	●
Aceton	Aldehyde & ketones	3(*)	●
Acetonitrile	Nitriles	2	●
Acrolein	Aldehyde & ketones	3	●
Acrylonitrile	Nitriles	3(*)	●
Alcanes > C6	hydrocarbons (alkanes)	>6	●
Alcenes > C6	hydrocarbons (alkenes)	>6	●
Alcohols > C6	Alcohols	>6	●
Allyl Acetate	Esters	5	●
Ammonia	Ammonia & Amines	-	●
Anisole	Ethers	7	●
Benzaldehyde	Aldehyde & ketones	7	●
Benzene	Aromatic hydrocarbons	6	●
Benzoic acid	Organic acids	7	●
Biphenyl	Aromatic hydrocarbons	>9	●
Butadiene-1,3	hydrocarbons (alkenes)	4	●
Butane	hydrocarbons (alkanes)	4	●
Butanol	Alcohols	4	●
Butene	hydrocarbons (alkenes)	4	●
Butyl Acetate	Esters	6	●
Butyl acrylate	Esters	7	●
Butyric acid	Organic acids	4	●
Carbon Dioxide	Inorganic gases	1	●
Carbon monoxide	Inorganic gases	1	●
Carbon tetrachloride	Halogenated components	1	●
Chlorine	Acid gases	-	●
Chloroform	Halogenated components	1	●
Cyclohexane	hydrocarbons (alkanes)	6	●
Cyclohexanone	Aldehyde & ketones	6(*)	●
Diethyl ether	Ethers	4	●
Diethylhexyl phtalate (DEHP or DOP)	Esters (phtalates)	>9	●
Diisodecyl phtalate (DIP)	Esters (phtalates)	>9	●
Diisononyl phtalate (DIP)	Esters (phtalates)	>9	●
Dimethoxyethane	Ethers	4	●
Dimethyl sulfide (DMS)	Sulfide	2	●

POLLUANTS	FAMILY	NB OF C/ ADSORPTION	
Dioxane	Ethers	4	●
Diphenyl ether	Ethers	> 9	●
Ethane	hydrocarbons (alkanes)	2	●
Ethanol	Alcohols	2	●
Ethyl Acetate	Esters	4	●
Ethyl Acrylate	Esters	5	●
Ethyl chloride	Halogenated components	2	●
Ethyl Lactate	Esters	5	●
Ethyl mercaptan	Mercaptans	2	●
Ethyl Methacrylate	Esters	6	●
Ethylbenzene	Aromatic hydrocarbons	8	●
Ethylene	hydrocarbons (alkenes)	2	●
Ethylene Acrylate	Esters	8	●
Ethylene oxide	Ethers	2	●
Ethyleneglycol	Alcohols	2	●
Formaldehyde	Aldehyde & ketones	1	●
Formic acid	Organic acids	1	●
Heptanal	Aldehyde & ketones	7	●
Hexamethyldisiloxane (HMDSO)	Siloxanes	6	●
Hexane	hydrocarbons (alkanes)	6	●
Hexanediène-1,3	hydrocarbons (alkenes)	6	●
Hexanol	Alcohols	6	●
Hexene	hydrocarbons (alkenes)	6	●
Hydrazine	Ammonia & Amines	-	●
Hydrogen chloride	Acid gases	-	●
Hydrogen cyanide	Acid gases	-	●
Hydrogen fluoride	Acid gases	-	●
Hydrogen peroxide	Peroxides	-	●
Hydrogen sulfide	Acid gases	-	●
Isopropyl Acrylate	Esters	6	●
Mercury vapours	Metallic gases	-	●
Méthane	hydrocarbons (alkanes)	1	●
Methanol	Alcohols	1	●
Methyl Acetate	Esters	3	●
Methyl Acrylate	Esters	4	●
Methyl ethyl ketone	Aldehyde & ketones	4 (*)	●
Methyl Methacrylate	Esters	5	●

ADSORPTION GUIDE

- Adsorption is not possible
- Moderate adsorption
- Adsorption using impregnated media
- Low adsorption
- Good adsorption
- (*) Risk of bed ignition

POLLUANTS	FAMILY	NB OF C/ ADSORPTION		ODORS	ACTIVE(S) COMPOUND(S)	ADSORPTION PERFORMANCE
Methyl pyrrolidone	Ammonia & Amines	5	●	Anesthésiques	Ethers halogénés	●
Methylamine	Ammonia & Amines	1	●	Antiseptiques / Désinfec- tants	Ethers halogénés	●
Naphtalene	Aromatic hydrocarbons	> 9	●	Cuisine	Divers	●
Nicotine	Ammonia & Amines	> 9	●	Boissons alcoolisées	Alcools	●
Nitrogen dioxide	Acid gases	–	●	Cadavres d'animaux	Ammonia & Amines	●
Nonanal	Aldehyde & ketones	9	●	Colle	Composés halogénés	●
Ozon	Peroxides	–	●	Déchets industriels	Divers	●
Pentane	hydrocarbons (alkanes)	5	●	Détergents	Divers	●
Pentanol	Alcohols	5	●	Gaz d'échappement	Hydrocarbures, soufre	●
Pentene	hydrocarbons (alkenes)	5	●	Engrais / Fumier	Ammonia & Amines	●
Pentyl Acetate	Esters	7	●	Essence	Hydrocarbures	●
PGME Acetate	Esters	6	●	Produits d'embaumement	Aldéhydes, chlore	●
Phenol	Alcohols	6	●	Fromage	Esters ou acides gras	●
Propane	hydrocarbons (alkanes)	3	●	Fumées d'asphalte	Hydrocarbures	●
Propanoic acid	Organic acids	3	●	Goudron	Hydrocarbures	●
Propanol (iso)	Alcohols	3	●	Graisse / nourriture brûlée	Hydrocarbures	●
Propyl Acetate	Esters	5	●	Huiles essentielles	Divers	●
Propylene	hydrocarbons (alkenes)	3	●	Lubrifiants	Hydrocarbures	●
Propylene oxide	Ethers	3	●	Moisi	Divers	●
Pyridine	Ammonia & Amines	5	●	Tabac	>5300 produits chimiques	●
Radon	Radioactive gases	–	●	Peinture	Hydrocarbure	●
Styrène	Aromatic hydrocarbons	8	●	Légumes en décomposition	Composés soufrés	●
Sulfur dioxide	Acid gases	–	●	Matières fécales	Ammonia & Amines	●
Tetrachloroethylene	Halogenated components	2	●	Parfums, cosmétiques	Divers	●
Tetrahydrofurane	Ethers	8	●			
Toluene	Aromatic hydrocarbons	7	●			
Toluene diisocyanate (TDI)	Isocyanate	9	●			
Toluidine	Ammonia & Amines	7	●			
Tributylamine	Ammonia & Amines	> 9	●			
Trichloroethylene	Halogenated components	2	●			
Triethylamine	Ammonia & Amines	6	●			
Trimethylamine	Ammonia & Amines	3	●			
Trimethylbenzene	Aromatic hydrocarbons	9	●			
Vinyl Acetate	Esters	4	●			
Vinyl chloride	Halogenated components	2	●			
Xylène	Aromatic hydrocarbons	8	●			

DELTRICARB

Deltricarb – FZ Galva



Odor removal and purification of gaseous pollutants

APPLICATION AREAS


Commercial buildings, industrial premises, etc.

- Combined particle/molecule filtration
- Low pressure drop
- All dimensions
- Can replace your existing FZ

GENERAL CHARACTERISTICS

- Media: G4 impregnated with activated carbon
- Structure: galvanized or plastic
- Temperature: Max 40°C
- Relative humidity: 70%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
G4					
FZGA	592	592	48	1,3	3000 / 125
FZGA	592	490	48	1	2480 / 125
FZGA	592	287	48	0,7	1500 / 125
FZGA	592	592	96	2,2	4300 / 95
FZGA	592	490	96	1,9	2800 / 95
FZGA	592	287	96	1,1	1700 / 195

DELTRICARB
RPV Carbon

Deodorization and purification of gaseous pollutants.


APPLICATION AREAS

- Large, highly resistant structure
- High flow rate
- Large filtration surface area: 8m2!
- Compact 2-in-1 solution that improves air quality through combined particle and gas filtration
- Can be used to upgrade existing installations
- Highly effective media for particle filtration, with molecular media to remove VOCs and odours
- Ideal for low-concentration outdoor pollutants (road traffic, energy production, industry, etc.) and indoor pollutants (building materials, cleaning agents, etc.)
- Classified according to ISO16890

GENERAL CHARACTERISTICS

- EN779 filtration class: G4-F7
- Media: activated carbon between layers of synthetic media
- Frame: polystyrene (SECURE)
- Lut: polyurethane
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Recommended ECO final pressure drop: 250 Pa
- Maximum continuous service temperature: 70°C
- Relative humidity: 100%
- Complies with ISO10121-3:2022 standard

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	OZONE	NO2	SO2	TOLUENE
ISO COARSE 85%									
RPV00-6CASC-C1 4V CO85	592	592	292	8	3400 / 48	MD55	VLD40	LD55	HD55
RPV00-5CASC-C1 4V CO85	592	490	292	6,6	2800 / 48	MD55	VLD40	LD55	HD55
RPV00-3CASC-C1 4V CO85	592	287	292	3,6	1700 / 48	MD55	VLD40	LD55	HD55
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	OZONE	NO2	SO2	TOLUENE
ePM10 80% ISO16890									
RPV65-6CASC-C1 4V 1080	592	592	292	8	3400 / 80	HD70	HD65	MD60	HD70
RPV65-5CASC-C1 4V 1080	592	490	292	6,6	2800 / 80	HD70	HD65	MD60	HD70
RPV65-3CASC-C1 4V 1080	592	287	292	3,6	1700 / 80	HD70	HD65	MD60	HD70
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	OZONE	NO2	SO2	TOLUENE

ePM1 70% ISO16890									
RPV85-6CASC-C1 4V 0170	592	592	292	8	3400 / 100	MD90	MD65	LD60	MD80
RPV85-5CASC-C1 4V 0170	592	490	292	6,6	2800 / 100	MD90	MD65	LD60	MD80
RPV85-3CASC-C1 4V 0170	592	287	292	3,6	1700 / 100	MD90	MD65	LD60	MD80

DELTRICARB

Deltricarb – GCA



Elimination of gases and odors in urban environments (offices, schools, health centers, ...)


APPLICATION AREAS

- 2 in 1: filters both odors and dust
- Possibility of mounting in standard support frames
- Tested for food contact according to CE 1935/2004

GENERAL CHARACTERISTICS

- Media: fiberglass + activated carbon pellets
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Recommended final ECO pressure drop: 250 Pa
- Continuous service temperature: 50 ° C
- Relative humidity: 70%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)**
ePM1 60% ISO 16890 (F7)							
DELTRICARB G85-6/635/10	592	592	635	10	7,8	3400 / 105	1262
DELTRICARB G85-5/635/08	490	592	635	8	6,2	2800 / 105	-
DELTRICARB G85-3/635/05	287	592	635	5	3,9	1700 / 105	-
DELTRICARB G85-6/535/10	592	592	535	10	6,7	4300 / 130	-
DELTRICARB G85-5/535/08	490	592	535	8	5,4	2800 / 130	-
DELTRICARB G85-3/535/05	287	592	535	5	3,3	1700 / 130	-
DELTRICARB G85-6/380/10	592	592	380	10	4,7	3400 / 145	-
DELTRICARB G85-5/380/08	490	592	380	8	3,8	2800 / 145	-
DELTRICARB G85-3/380/05	287	592	380	5	2,2	1700 / 145	-



DELTRISORB

Deltrisorb & Deltrisorb ECO

Deodorization and purification of gaseous pollutants

APPLICATION AREAS


Airports, laboratories, kitchen exhaust hoods, offices, mortuaries, animal facilities, ...

- Rechargeable (metal version only)
- Incinerable (plastic version only)
- Resistant to corrosion (stainless steel and plastic versions)

GENERAL CHARACTERISTICS

- Structure: metal (galvanized or stainless steel) or plastic
- Gasket: neoprene flat
- Mounting system:
- Support frames (plates)
- Duct housings

Details and variations



DESCRIPTION	HEIGHT A (MM)	DIAMETER (MM)	AIRFLOW (M3/H)/DELTA P (PA)	WEIGHT (KG)
Deltrisorb				
DELTRISORB	600	145	212 / 150	5
DELTRISORB	600	145	212 / 150	4
DELTRISORB	450	145	156 / 100	4
DESCRIPTION	HEIGHT A (MM)	DIAMETER (MM)	AIRFLOW (M3/H)/DELTA P (PA)	WEIGHT (KG)
Deltrisorb ECO				
DELTRISORB ECO	450	145	156 / 100	3
DELTRISORB ECO	250	145	78 / 50	2,5
DELTRISORB ECO	250	145	78 / 50	1,8

DELTRISORB

Deltrisorb CD



Support frames for a secure attachment of
CART-CA cartridges in air handling units,
ducts, and plenums.


APPLICATION AREAS

- Adaptable to all types of installations
- Quick bayonet fastening
- 4 standard sizes

GENERAL CHARACTERISTICS

- Galvanized or Stainless steel structure

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	CAPACITY (CYLINDERS)	WEIGHT (KG)
CD					
DELTRISORB CD	610	610	70	16	4,5
DELTRISORB CD	610	505	70	12	4
DELTRISORB CD	610	305	70	8	2,8
DELTRISORB CD	305	305	70	4	1,5



DELTRISORB

Deltrisorb FC – Bulk Adsorbent (BCA)

Deodorization and purification of gaseous pollutants

APPLICATION AREAS


Commercial buildings, industrial premises, kitchens, mortuaries, animal facilities, airports

- Protective veil to prevent dust release
- No compaction of the charcoal due to the vibrating process of the cells
- High adsorption capacity
- All dimensions


GENERAL CHARACTERISTICS

- Frame: galvanized
- Media: any type of adsorbent
- Joint: flat neoprene upon request
- Grids: expanded metal (upstream and downstream)
- Maximum continuous service temperature: 50°C
- Relative humidity: 70%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	AIRFLOW (M3/H)/DELTA P (PA)	WEIGHT (KG)
FC BCA					
DELTRISORB FC BCA	200	600	25	110 / 50	1,5
DELTRISORB FC BCA	610	610	25	330 / 50	4,6

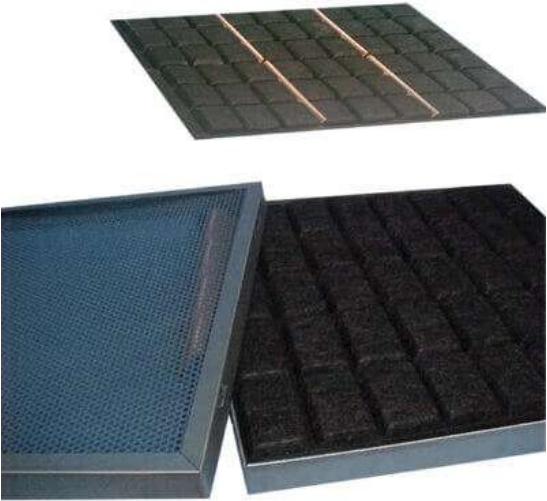

DELTRISORB

Deltrisorb FC(R) –Adsorbent Block Mattress (CPM)

Deodorization and purification of gaseous pollutants.


APPLICATION AREAS

- Available in rechargeable version
- Any type of charcoal
- Any dimensions
- No release of charcoal dust

GENERAL CHARACTERISTICS

- Media: activated charcoal mattress
- Structure: galvanized
- Grids: upstream and downstream
- Maximum continuous service temperature: 40°C
- Relative humidity: 70%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	AIRFLOW (M3/H)/DELTA P (PA)	WEIGHT (KG)
FC CPM					
DELTRISORB FC CPM	200	600	25	110 / 75	1,5
DELTRISORB FC CPM	592	592	23	310 / 75	4,2
DELTRISORB FC CPM	610	610	25	330 / 75	4,6



DELTRISORB

Deltrisorb FC – Agglomerated charcoal plates (NOP)

Deodorization and purification of gaseous pollutants

APPLICATION AREAS


Tertiary buildings, restaurants, offices, data centers, ...

- No dust release
- No activated charcoal compaction over time
- Longevity
- Easy, quick and neat replacement
- Polyurethane perimeter to ensure sealing during placement

GENERAL CHARACTERISTICS

- Media: agglomerated activated charcoal grains
- Structure: with or without polyurethane edge
- Available only in the above dimensions
- Max temperature: 40°C
- Relative humidity: max 70%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	AIRFLOW (M3/H)/DELTA P (PA)
FC NOP				
DELTRISORB FC NOP	708	188	16	720 / 100
DELTRISORB FC NOP	583	238	20	200 / 90
DELTRISORB FC NOP	570	238	20	250 / 90
DELTRISORB FC NOP	600	475	20	410 / 90
DELTRISORB FC NOP	583	238	20	200 / 90



DELTRISORB

Deltrisorb VN

Commercial buildings, Data Centers, and Airports.

APPLICATION AREAS

- User-friendly rechargeable system for placing activated carbon
- Very low air resistance thanks to its aerodynamics
- Self-supporting activated carbon panels that make them easy to change
- No diversion of stale air
- No carbon dust in the installation

GENERAL CHARACTERISTICS

- Media: Panels consisting of agglomerated activated carbon grains (with or without polyurethane border)
- Structure: Galvanized
- Max Temp: 40°C
- Max Relative Humidity: 70%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	AIRFLOW (M3/H)/DELTA P (PA)	WEIGHT (KG)
VN					
DELTRISORB VN	600	600	250	1800 / 120	46
DELTRISORB VN	300	600	250	950 / 120	27
DELTRISORB VN	600	600	500	3600 / 120	69
DELTRISORB VN	300	600	500	1900 / 120	40
DELTRISORB VN	595	595	197	1700 / 60	26



DELTRISORB

Deltrisorb VM

Deodorization and purification of gaseous pollutants

APPLICATION AREAS

Commercial buildings, restaurants, offices, kitchens, ...

- No release of coal dust
- Available with any type of coal
- All dimensions

GENERAL CHARACTERISTICS

- Media: Active carbon mattress in pavers
- Structure: Galvanized
- Max temp: 40°C
- Relative humidity: 70%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	AIRFLOW (M3/H)/DELTA P (PA)
VM				
DELTRISORB VM	592	592	397	3400 / 120
DELTRISORB VM	592	287	397	1700 / 120
DELTRISORB VM	592	592	197	1700 / 120
DELTRISORB VM	592	287	197	850 / 120



DELTRISORB

Deltrisorb VC(R)

Deodorization and purification of gaseous pollutants

APPLICATION AREAS


Commercial buildings, industrial premises, kitchen extraction systems, airports, paper mills, (petro) chemical industries

- High adsorption capacity
- Available with any type of adsorbent
- Available in all dimensions
- Rechargeable version available

GENERAL FEATURES

- Media: Adsorbent grains arranged in cells (Deltrisorb FC type)
- Structure: Galvanized steel
- Joint: Neoprene on cell profile
- Temp: Max 50°C
- Relative humidity: 70%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	AIRFLOW (M3/H/M2)/DELTA P (PA)	WEIGHT (KG)
VC(R)					
DELTRISORB VC(R)	600	600	250	1800 / 120	46
DELTRISORB VC(R)	300	600	250	950 / 120	27
DELTRISORB VC(R)	600	600	500	3600 / 120	69
DELTRISORB VC(R)	300	600	500	1900 / 120	40
DELTRISORB VC(R)	595	595	197	1700 / 60	26
DELTRISORB VC(R)	595	292	197	850 / 60	13
DELTRISORB VC(R)	595	595	397	3400 / 120	48
DELTRISORB VC(R)	595	292	397	1700 / 120	24



DELTRISORB

Deltrisorb VF

Odor control and purification of gaseous pollutants

APPLICATION AREAS


Airports, laboratories, kitchen exhausts, offices, mortuaries, animal facilities, etc.

- Very high adsorption power thanks to the large amount of charcoal.
- High flow rates.

GENERAL CHARACTERISTICS

- Media: Adsorbent grains arranged in cells (Deltrisorb type)
- Frame: Galvanized steel
- Gasket: Available upon request.
- Maximum continuous service temperature: 50°C
- Relative humidity: 70%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	AIRFLOW (M3/H)/DELTA P (PA)	WEIGHT (KG)
VF					
DELTRISORB VF	592	592	400	3400 / 120	48
DELTRISORB VF	287	592	400	1700 / 120	24
DELTRISORB VF	592	592	200	1700 / 60	26
DELTRISORB VF	287	592	200	850 / 60	13



DELTRISORB

Deltrisorb DMM

Completely resistant to corrosion

APPLICATION AREAS


Available with any type of media (activated carbon and/or impregnated zeolite)

- Completely resistant to corrosion
- Laboratory for analyzing the degree of saturation

GENERAL CHARACTERISTICS

- Media: activated carbon (impregnated) or zeolites
- Structure: plastic
- T°: max 55°C
- Relative humidity: 20 to 99% depending on the media

Details and variations




DESCRIPTION	WIDTH A (MM)	HEIGHT B (MM)	DEPTH C (MM)	BED HEIGHT (MM)	VOLUME (L)
DMM					
DELTRISORB DMM 12	300	300	300	75	15
DELTRISORB DMM 18	300	145	439	25	7,5

Boxes and mounting components.

The housings and mounting components provide structural support and ensure the integrity of the filtration system.

They facilitate the precise and secure installation of air filters, allowing for flexible adaptation to various environments and configurations. Their design optimizes airflow through the filtration system, reducing pressure drop and thereby increasing energy efficiency.

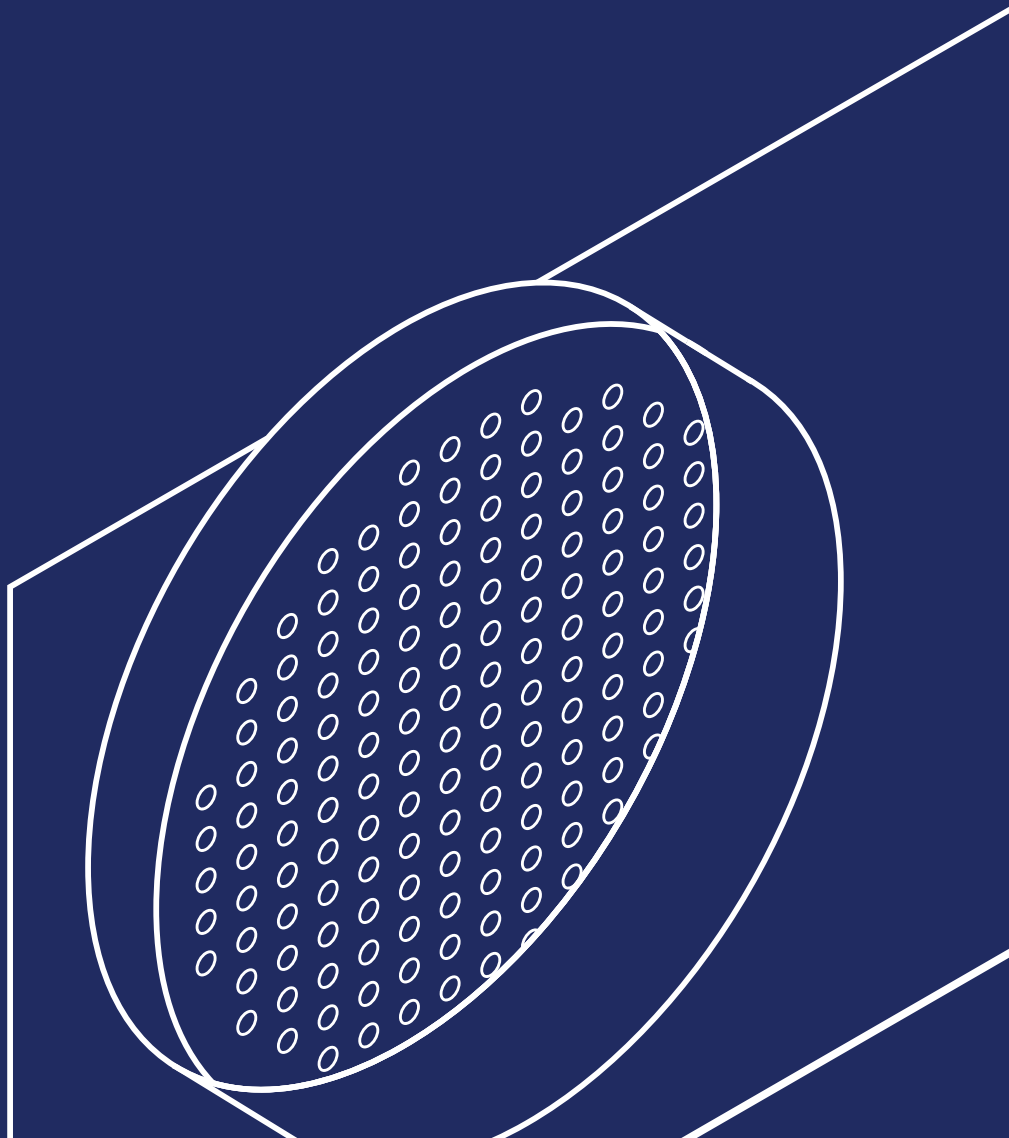

BOXES

CDLA

Highly efficient terminal filtration for process, product, and operator protection.



APPLICATION AREAS


Mainly used for turbulent air distribution in “CLEANROOM” applications.

- Economical: easy to assemble
- Lightweight casing
- Individual leak test on 0.3 µm at 0.45 m/s according to DIN 24.184
- Individual MPPS efficiency test on 0.12 µm at 0.45 m/s (scanning test) according to EN1822 standard.
- Double labeling for traceability

GENERAL CHARACTERISTICS

- EN1822 filtration class: H13-U15
- Media: mini-pleated glass fiber paper
- Frame: anodized extruded aluminum
- Sealant: polyurethane
- Separators: continuous thermoplastic wires
- Grille: painted metal (downstream)
- Option: pressure or DOP measurement, connection tubing in diam. 315 mm
- Final pressure drop: 600 Pa
- Maximum continuous service temperature: 80°C
- Relative humidity: 100%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	OUTLET (MM) D	SURFACE (M2)	AIRFLOW (M3/H)	DELTA P (PA)
H13							
CD-LA130A	610	610	125	200	10,4	600	125
CD-LA130A	610	915	125	200	15,6	900	125
CD-LA130A	610	1220	125	200	20,8	1200	125
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	OUTLET (MM) D	SURFACE (M2)	AIRFLOW (M3/H)	DELTA P (PA)
H14							
CD-LA140A	610	610	125	200	10,4	600	135
CD-LA140A	610	915	125	200	15,6	900	135
CD-LA140A	1127	1127	140	200	35,5	2050	135
CD-LA/B140A	1127	1127	130	200	35,5	2050	135
CD-LA140A	610	1220	125	200	20,8	1200	135
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	OUTLET (MM) D	SURFACE (M2)	AIRFLOW (M3/H)	DELTA P (PA)
U15							
CD-LA150A	610	610	125	200	10,04	600	155
CD-LA150A	610	915	125	200	15,6	900	155
CD-LA150A	610	1220	125	200	20,8	1200	155

BOXES

CDR



CDR diffuser plenum or wall-mounted units for terminal filtration

APPLICATION AREAS

Used in supply and exhaust for "CLEANROOM" applications, operating rooms, and pharmaceutical industries.

- Robust construction
- Easy to clean and resistant to disinfection products
- Easy filter replacement from the room
- Adjustable register on the clean air side or top
- Adjustable fixing system for ceiling adjustment
- Easy filter installation with a safety clamp leaving hands free
- Filter fastening with 4 removable brackets ensuring centering of the filter on the support
- Standard connection by lateral or upper circular tapping
- Available in flanged or flush-mounted version
- Pressure and EMERY measurement available

GENERAL CHARACTERISTICS

- Continuously welded steel, painted white epoxy Ral 9010
- Designed for THE-LA filters with a thickness of 69-89-110 mm
- Grids: perforated epoxy painted grid or 4-direction grid or helical jet grid
- Grid fastening: by screws at the 4 corners of the diffuser

MOUNTING SYSTEM

CDU



Receiving frame for prefilters, pocket filters, and compact cells

APPLICATION AREAS


Allows the creation of filtration sections in air treatment units as well as large filter walls.

- Modular design adaptable to any application
- Easy assembly of the wall with stiffening plates
- Quick, simple, and leak-proof installation of filters in the receiving frame
- Different mounting kits allow for the installation of filters with thicknesses ranging from 23 to 97 mm

GENERAL CHARACTERISTICS

- Galvanized or stainless steel frame
- Supplied with cell fixation kit 23 to 47 mm (other kit for clamping 75-97 mm on request)
- Gasket: available on request

Details and variations



DESCRIPTION	FRAME	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER BASE (MM)	FILTER HEIGHT (MM)
GALVA						
CDU	GALVA	305	305	72	287	287
CDU	GALVA	305	610	72	287	592
CDU	GALVA	508	610	72	490	592
CDU	GALVA	610	610	72	592	592
CDU	GALVA	305	910	72	287	892
CDU	GALVA	508	910	72	490	892
CDU	GALVA	610	910	72	592	892
DESCRIPTION	FRAME	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER BASE (MM)	FILTER HEIGHT (MM)
INOX						
CDU	INOX	305	305	72	287	287
CDU	INOX	305	610	72	287	592
CDU	INOX	508	610	72	490	592
CDU	INOX	610	610	72	592	592
CDU	INOX	305	910	72	287	892
CDU	INOX	508	910	72	490	892
CDU	INOX	610	910	72	592	892

MOUNTING SYSTEM
CDCH



Receiving frame for very high efficiency filters

APPLICATION AREAS

- Allows the creation of filtration sections in air handling units as well as large filter walls
- Modular design adaptable to any application
 - Easy installation of the wall with stiffening sheets
 - Quick, simple and tight installation of filters in the receiving frame
 - Different fixing kits allow filters with thicknesses ranging from 150 to 400 mm to be mounted

GENERAL CHARACTERISTICS

- Galvanized or stainless steel frame
- Supplied with 292 mm cell fixing kit (other kit for clamping 150-400 mm on request)

Details and variations




DESCRIPTION	FRAME	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	FILTER BASE (MM)	FILTER HEIGHT (MM)
CDCH						
CDCH	GALVA	321	626	345	305	610
CDCH	GALVA	626	626	345	610	610
CDCH	GALVA	305	610	345	287	592
CDCH	GALVA	610	610	345	592	592
CDCH	INOX	321	626	345	305	610
CDCH	INOX	626	626	345	610	610
CDCH	INOX	305	610	345	287	592
CDCH	INOX	610	610	345	592	592

Air flow regulators.

Improve air distribution and quality
in your facilities with our air flow regulators.

We offer control dampers made from high-quality materials that can be easily adapted to your systems. Our air flow regulators are ideal for transportation-related industries, particularly the rail sector.

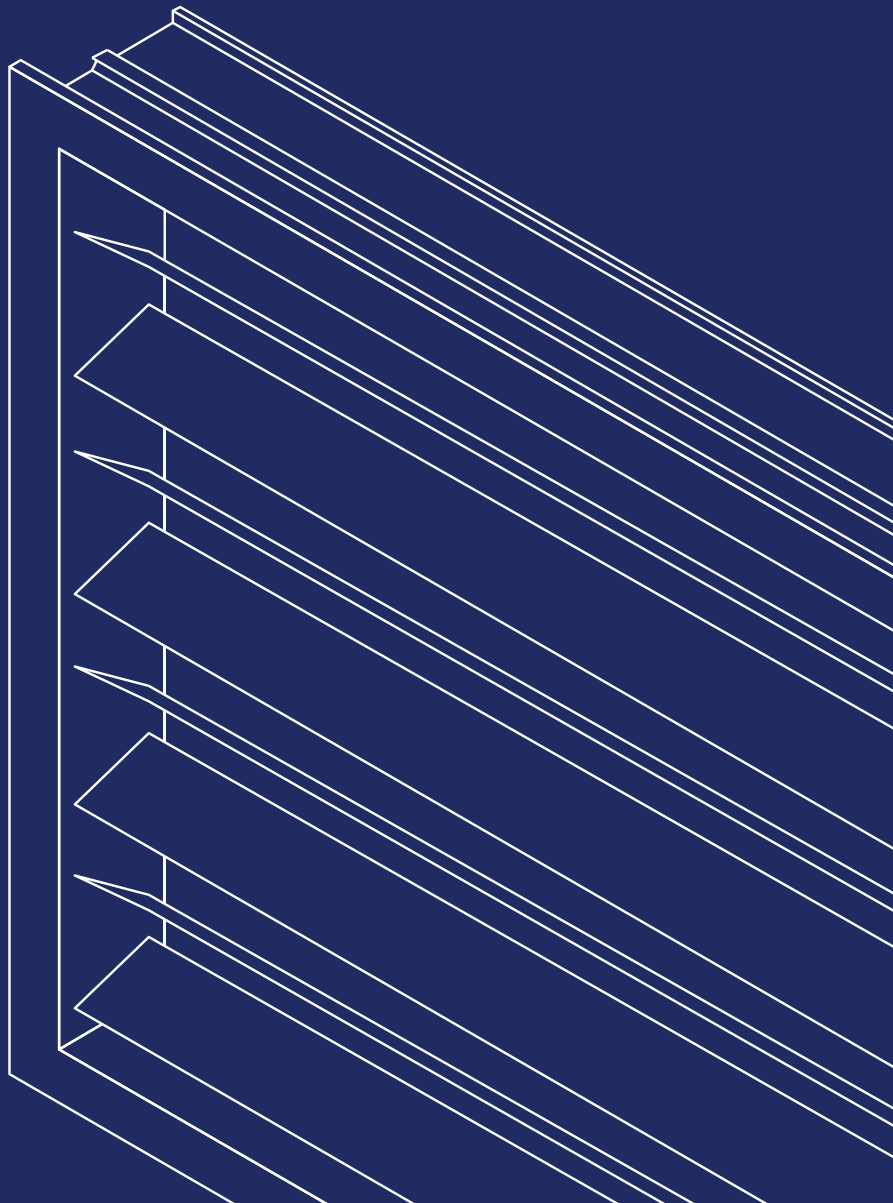

AIR FLOW REGULATORS

Damper



Flow control damper for installation in air handling units and rectangular air ducts for the rail sector. Validated to meet the high requirements of reliability and safety in the railway sector.

APPLICATION AREAS

- Robust and easy to install.
- Precise airflow control and reliable operation.
- Possibility of machining holes in the frame according to customer requirements.
- Improved transmission in “multi-zone systems” (open/open or open/closed) and for by-pass systems. Construction in a larger size without compromising functionality.
- Standard construction in unfinished aluminium with the option of different surface treatments or coatings to protect against environmental corrosion.
- Universal actuator motor mounting system, any actuator model can be installed on a single support. Axial and frontal transmission options.


GENERAL CHARACTERISTICS

- | | |
|--|--|
| • Frame and blades in extruded aluminium sections EN AW6060 T6. | • 8×8mm square aluminium shaft. |
| • Transmission system (gears) with no backlash, offering greater reliability and better control of regulation. | • Recommended operating temperature: -40°C +135°C. |
| • Gears completely hidden in the aluminium profile, with no exposed plastic parts, providing greater protection against dust, impact and fire. Made from PA6+FV (glass-fibre reinforced polyamide), classified V0 according to UL94. | • CLASS C2 ACCORDING TO EN1751:2014 |
| • TPE-V seals on slats and frame, classified V0 to UL94. | • CLASS R5 ACCORDING TO EN45545- HL3 |

Atex filter.

Designed for use in explosive atmospheres.

ATEX-rated filters are designed for use in explosive atmospheres, ensuring safety in areas at risk of explosion due to the presence of flammable gases, vapors, or dust. They meet strict standards to prevent sparks or heat generation that could trigger an explosion. The importance of these filters lies in their ability to maintain effective filtration while ensuring optimal protection against fire and explosion hazards in critical industrial sectors.

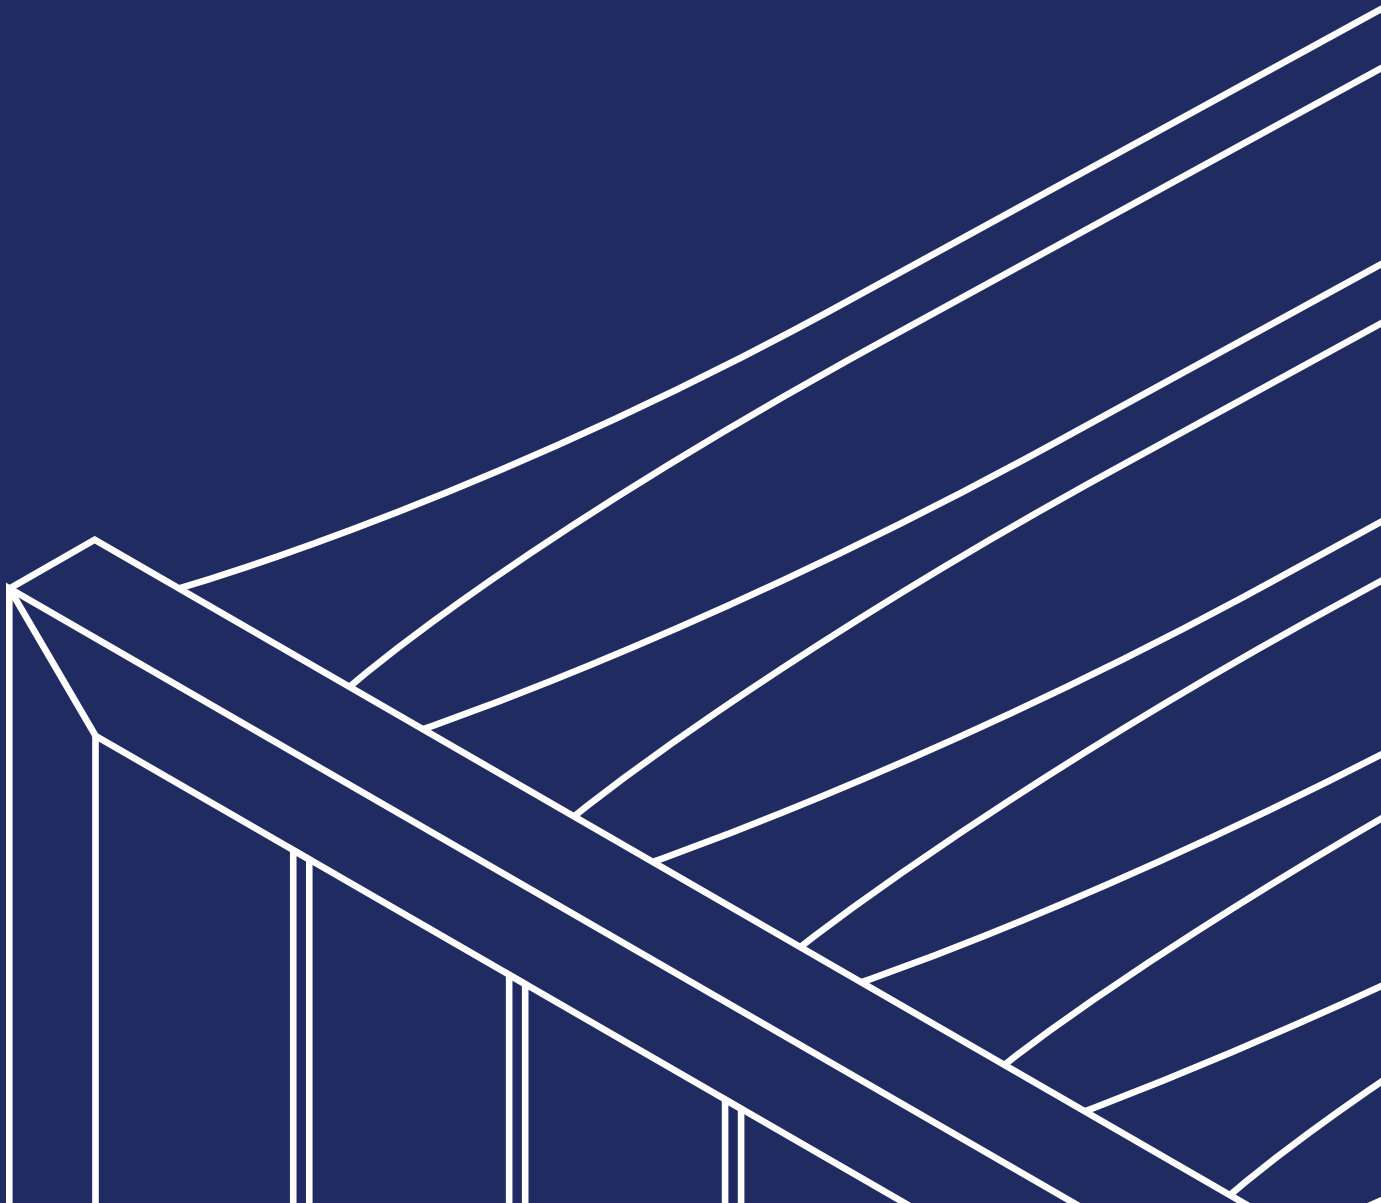

POCKET FILTERS

G Atex



Deltrian offers a range of filters that are ATEX-certified.


APPLICATION AREAS

The directive defines the responsibilities of manufacturers, importers and distributors in the sale of equipment and protection systems intended for use in potentially explosive atmospheres.

GENERAL FEATURES

- Model: ATEX filter bags
- Product code: G-Ex
- Media: Fiberglass
- Filtration class: ePM1 - ePM 2.5
- Number of bags: 6-8-10-12
- Outer metal frame: Zinc layer 100gr/m².
- Inner metal frame
- Temperature resistance: -20° to +80°
- Maximum air flow 1.25 x air flow ex: 3400 x 1.25 = 4250 m³/h
- Initial pressure drop (Pa): see table
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
M5 - ePM10 60% ISO 16890						
GEX50-6/360/06	592	592	360	6	2,6	3400 / 52
GEX50-3/360/03	287	592	360	3	1,2	1700 / 52
GEX50-2/360/03	287	287	360	3	0,6	800 / 52
GEX50-6/600/06	592	592	600	6	4,3	3400 / 41
GEX50-3/600/03	287	592	600	3	2,1	1700 / 41
GEX50-2/600/03	287	287	600	3	1	800 / 41
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
F7 - ePM1 70% ISO 16890						
GEX85-6/360/08	592	592	360	8	3,4	3400 / 108
GEX85-3/360/08	287	592	360	4	1,7	1700 / 108
GEX85-2/360/08	287	287	360	4	0,8	800 / 108
GEX85-6/600/08	592	592	600	8	5,7	1700 / 74
GEX85-3/600/08	287	592	600	4	2,8	800 / 74
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
F8 / F9 - ePM1 90% ISO 16890						

GEX95-6/600/08	592	592	600	8	5,7	3400 / 170
GEX95-3/600/04	287	592	600	4	2,8	1700 / 170
GEX95-2/600/04	287	287	600	4	1,4	800 / 170

POCKET FILTERS

TNWES Atex



Deltrian offers a range of filters that are ATEX certified.

APPLICATION AREAS


The directive defines the responsibilities of manufacturers, importers and distributors in the sale of protective equipment and systems intended for use in potentially explosive atmospheres.

GENERAL CHARACTERISTICS

- Filtration class according to ISO16890: 2016
- Product code : TNWES-Ex
- Media: TNWES (Top New Wave Energy Saving)
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80 °C
- Frame: wood + braid
- Available with galvanised frame
- Other dimensions available



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	ACTUAL FILTER AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890								
TNWES-1-70-6/0350/08	592	592	350	08	8	3400/88	1547	C
TNWES-1-70-5/0350/07	490	592	350	07	7	2740/88		
TNWES-1-70-3/0350/04	287	592	350	04	4	1700/88		
TNWES-1-70-2/0350/04	287	287	350	04	2	850/88		
TNWES-1-70-39/0350/04	287	892	350	04	6	2500/88		
TNWES-1-70-55/0350/07	490	490	350	07	6	2280/88		
TNWES-1-70-59/0350/07	490	892	350	07	11	4120/88		
TNWES-1-70-1/0350/08	592	287	350	08	4	1660/88		
TNWES-1-70-4/0350/08	592	490	350	08	7	2810/88		
TNWES-1-70-69/0350/08	592	892	350	08	13	5160/88		
TNWES-1-70-93/0350/12	892	287	350	12	6	2480/88		
TNWES-1-70-95/0350/12	892	490	350	12	10	4250/88		
TNWES-1-70-S/0350/12	892	592	350	12	12	5110/88		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	ACTUAL FILTER AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890								
TNWES-1-70-6/0400/08	592	592	400	08	9	3400/81	1240	B

TNWES-1-70-5/0400/07	490	592	400	07	8	2740/81		
TNWES-1-70-3/0400/04	287	592	400	04	5	1700/81		
TNWES-1-70-2/0400/04	287	287	400	04	2	850/ 81		
TNWES-1-70-39/0400/04	287	892	400	04	7	2550/81		
TNWES-1-70-55/0400/07	490	490	400	07	7	2280/81		
TNWES-1-70-59/0400/07	490	892	400	07	13	4120/81		
TNWES-1-70-1/0400/08	592	287	400	08	5	1660/81		
TNWES-1-70-4/0400/08	592	490	400	08	8	2810/81		
TNWES-1-70-69/0400/08	592	892	400	08	14	5160/81		
TNWES-1-70-93/0400/12	892	287	400	12	7	2480/81		
TNWES-1-70-95/0400/12	892	490	400	12	12	4250/81		
TNWES-1-70-96/0400/12	892	592	400	12	14	5110/81		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	ACTUAL FILTER AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890								
TNWES-1-70-6/0450/08	592	592	450	08	11	3400/73	1095	A
TNWES-1-70-5/0450/06	490	592	450	06	8	2800/73		
TNWES-1-70-3/0450/04	287	592	450	04	5	1700/73		
TNWES-1-70-2/0450/04	287	287	450	04	3	850/73		
TNWES-1-70-39/0450/04	287	892	450	04	8	2550/73		
TNWES-1-70-55/0450/07	490	490	450	07	9	2740/73		
TNWES-1-70-4/0450/08	592	490	450	08	9	2810/73		
TNWES-1-70-69/0450/08	592	892	450	08	16	5160/73		
TNWES-1-70-93/0450/12	892	287	450	12	8	2480/73		
TNWES-1-70-95/0450/12	892	490	450	12	13	4250/73		
TNWES-1-70-96/0450/12	892	592	450	12	16	5110/73		
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	ACTUAL FILTER AREA (M2)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM1 70% ISO 16890								
TNWES-1-70-6/0450/10	592	592	450	10	13	3400/69	946	A+
TNWES-1-70-5/0450/08	490	592	450	08	11	2740/69		
TNWES-1-70-3/0450/05	287	592	450	05	7	1700/69		
TNWES-1-70-2/0450/05	287	287	450	05	3	850/69		
TNWES-1-70-39/0450/05	287	892	450	05	10	2550/69		
TNWES-1-70-55/0450/08	490	490	450	08	9	2280/69		
TNWES-1-70-59/0450/08	490	892	450	08	16	4120/69		
TNWES-1-70-1/0450/10	592	287	450	10	6	1660/69		
TNWES-1-70-4/0450/10	592	490	450	10	11	2810/69		

TNWES-1-70-69/0450/10	592	892	450	10	20	5160/69		
TNWES-1-70-93/0450/15	892	287	450	15	10	2480/69		
TNWES-1-70-95/0450/15	892	490	450	15	17	4250/69		
TNWES-1-70-96/0450/15	892	592	450	15	20	5110/69		
TNWES-1-70-6/0600/10	592	592	600	10	14	3400/62	724	A+

Filter for gas turbines.

Filters and cartridges for extreme conditions.

Our products are specially designed to withstand harsh conditions, such as high temperatures, high humidity, and the presence of fine particles and chemical pollutants. Our filters play a vital role in protecting sensitive components, minimizing wear, and optimizing overall performance. The ability of these cartridges to maintain high filtration efficiency under extreme conditions ensures increased equipment reliability and longevity—essential for critical operations where failure is not an option.

FILTER CELLS

FZPL GTWR

Pre-filtration with hydrophobic treatment.

APPLICATION AREAS


- High filtration surface
- Suitable for flow rates up to 5000 m³/h
- Thick, highly retentive synthetic media with hydrophobic treatment
- 100% incinerable
- Tested for food contact in accordance with EC 1935/2004

GENERAL CHARACTERISTICS

- Filtration class according to standard 29461-1 : T4
- Media: Synthetic
- Separators: Synthetic
- Frame: Plastic (SECURE)
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 70 °C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	THICKNESS C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 65% ISO16890 - (T4)						
FZPL GTWR	592	592	97	2,2	4250 / 110	3400 / 75
FZPL GTWR	287	592	97	1,1	2150 / 110	1700 / 75

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

BAG FILTERS

DS (PPL/PPS – PFL – PTL)



The DS (PPL/PPS – PFL – PTL) rigid pocket filters are highly effective prefilters dedicated to air intake systems in gas turbines.

APPLICATION AREAS

DS (PPL/PPS – PFL – PTL) rigid pocket filters protect downstream systems and equipment (including final filters) from airborne particulate pollutants, as well as snow, fog, and mist.

- Air filtration and water coalescence in a single filter
- Water-tight pockets integrated in a polyurethane frame resistant to bursting >> 6000 Pa
- Sealed pocket bottoms: water coalescence in pockets, upstream filter drainage
- Self-supporting welded pockets >> Elimination of release risks
- Aerodynamic stabilization cuffs (Diamond Spacer)
- 100% incinerable

GENERAL CHARACTERISTICS

- Filtration class according to standard 29461-1: T4 - T5 - T6
- Media: Synthetic with hydrophobic treatment
- Frame: Polyurethane (SECURE)
- Joint: Polyurethane Clean Air Side
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Continuous service temperature: 70°C
- Relative humidity: 100%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ISO COARSE 80% ISO 16890 - (T4)									
PPL40-DS	592	592	625	6	4,2	4250 / 55	3400 / 35	-	-
PPL40-DS	490	592	625	5	3,5	3500 / 55	2800 / 35	-	-
PPL40-DS	287	592	625	3	2,1	2125 / 55	1700 / 35	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ISO COARSE 65% ISO 16890 - (T4)									
PPS40-DS	592	592	330	6	2,1	4250 / 70	3400 / 50	-	-
PPS40-DS	490	592	330	5	1,8	3500 / 70	2800 / 50	-	-
PPS40-DS	287	592	330	3	1	2125 / 70	1700 / 50	-	-
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 50% ISO 16890 - (T5)									
PFL50-DS	592	592	625	6	4,39	3400 / 45	-	580	B

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |

*** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)	ENERGY CONSUMPTION (KWH/YEAR)*	ENERGY CLASS**
ePM10 55% ISO 16890 - (T6)									
PTL65-DS	592	592	625	8	5,86	3400 / 58	-	709	C
PTL65-DS	287	592	625	4	2,93	1700 / 58	-	-	-

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |
*** Energy class: according to Eurovent RS4/C/001-2015
Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

BAG FILTERS

PFS



Gas turbines, powder drying towers, pneumatic powder transport, centrifugal compressor suctions, offshore platforms.


APPLICATION AREAS

- Exceptional retention capacity
- Self-supporting pockets >> No dust release
- Aerodynamic stabilization cuffs (Diamond Spacer)
- 100% incinerable
- 100% synthetic, corrosion and moisture-resistant
- Mechanical resistance > 6000 Pa
- Limited energy and maintenance costs
- Validated for high flow rates

GENERAL FEATURES

- Filtration class EN779: 2012: M6-F7
- Media: synthetic
- Frame: rigid thermo-molded plastic (SECURE)
- Joint: clean air side polyurethane
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Continuous service temperature: 70 °C
- Relative humidity: 100%

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	POCKETS	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)
ePM10 50% ISO 6890 - (M5)							
PFS50-6/300/6	592	592	330	6	1,6	3400 / 55	4250 / 75
PFS50-5/300/5	492	592	330	5	1,3	2800 / 55	3500 / 75
PFS50-3/300/3	287	592	330	3	1	1700 / 55	2125 / 75

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.



BAG FILTERS

REVERSE HSP500

Water Repellent filter perfect for pre-filtration and coarse filtration to protect high-efficiency filters.


APPLICATION AREAS

- 100% synthetic – moisture is removed immediately
- **Effective coalescence of water droplets:** the progressive hydrophobic composition of the media acts as a reliable coalescer for water droplets and high humidity. This feature allows droplets to agglomerate and flow from the vertical pockets, significantly reducing the ingress of salt and hydrocarbons.
- **Superior dust management:** dust is not stored as easily as in a traditional bag filter. The HSP500 uses an integrated self-supporting plastic cage system to optimise performance. Drainage water removes dust captured on the filter media.
- **Maximised functional reliability:** this is due to the watertight welded edge configuration of the filter pockets, sealed with foam in a PUR front frame, as well as the stable construction of the filter element as a whole.
- **Versatile 2-in-1 filtration system solutions:** based on the unique modular attachment system, this design allows close coupling with the intermediate or final filter without any structural modifications.

GENERAL CHARACTERISTICS

- Filtration class according to standard 29461-1 : T4
- Media: synthetic
- Frame: galvanised
- Maximum continuous operating temperature: <100°
- Final pressure drop according to EN 13053: initial pressure drop + 50 Pa or initial pressure drop x3 (whichever is smaller).
- Relative humidity: 100% RH
- Water repellency: 650

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)
ISO COARSE 85% - (T4)						
HSP500 - S/360/06	560	560	360	2,6	3400 / 75	4250 / 118
HSP500 - 6/535/06	592	592	535	3,8	3400 / 65	4250 / 105

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

COMPACT, RIGID FILTERS

RPV GTG



Filtration for air treatment centers equipped, upstream, with a pre-filter and preparatory filtration in "GTG" applications.

APPLICATION AREAS


- Compact and economical
- Large filtration surface
- High efficiency
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial development (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class according to standard 29461-1 : T6-T10
- Media: mini-pleated glass fiber paper
- Frame: polystyrene
- Lut: polyurethane
- Separators: hot-melt wire
- Final pressure drop: 450 Pa
- Final pressure drop according to EN 13053: initial pressure drop + 100 Pa or initial pressure drop x3 (whichever is smaller).
- Maximum continuous service temperature: 80°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)	DELTA P (PA)
ePM10 70% ISO 16890 - (T6)						
RPV65-6GTG	592	592	292	18	4250	98
RPV65-3GTG	592	287	292	9	2125	98
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)	DELTA P (PA)
ePM1 60% ISO 16890 - (T7)						
RPV85-6GTG	592	592	292	18	4250	114
RPV85-3GTG	592	287	292	9	2125	114
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)	DELTA P (PA)
ePM1 70% ISO 16890 - (T8)						
RPV95-6GTG	592	592	292	18	4250	126
RPV95-3GTG	592	287	292	9	2125	126
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)	DELTA P (PA)
ePM1 85% ISO 16890 - (T9)						
RPV98-6GTG	592	592	292	18	4250	155
RPV98-3GTG	592	287	292	9	2125	155
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)	DELTA P (PA)

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

E10 - (T10)						
RPV100-6GTG	592	592	292	18	4250	190
RPV100-3GTG	592	287	292	9	2125	190

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |
*** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

COMPACT, RIGID FILTERS

RPV GT XL



Filtration for air treatment centers equipped upstream with a pre-filter and preparatory filtration in "GTS" applications.

APPLICATION AREAS

- Compact and economical
- Large filter surface
- High efficiency
- Tested for food contact according to CE 1935/2004
- Certified inert to microbial development (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class according to standard 29461-1 : T9-T12
- Media: mini-pleated fiberglass paper
- Frame: polystyrene
- Lut: polyurethane
- Separators: hot-melt wire
- Final pressure drop: 450 Pa
- Recommended ECO final pressure drop: 250 Pa
- Maximum continuous service temperature: 80°C
- Relative humidity: 100%



Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)
F9 - (T9)						
RPV98-6XL/X WR	592	592	440	32	3400 / 85	4250 / 125
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)
E10 - (T10)						
RPV100-6XL/X WR	592	592	440	32	3400 / 137	42550 / 180
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)
E11 - (T11)						
RPV110-6XL/X WR	592	592	440	32	3400 / 190	4250 / 250
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)	AIRFLOW (M3/H)/DELTA P (PA)
E12 - (T12)						
RPV120-6XL/X WR	592	592	440	32	3400 / 220	4250 / 285

COMPACT, RIGID FILTERS

RPV GT XXL



Filtration for air handling units fitted with a pre-filter upstream and preparatory filtration in gas turbines.


APPLICATION AREAS

- Large filtration surface
- High efficiency
- Individual leakage test on 0.3 µm at 0.45 m/s in accordance with DIN 24.184 (from H13)
- Individual MPPS efficiency test on 0.12 µm at 0.45 m/s (scanning test) in accordance with standard EN1822
- Double labelling for traceability (from E10)
- Tested for food contact in accordance with EC 1935/2004
- Certified inert to microbial growth (ISO 846-VDI 6022)

GENERAL CHARACTERISTICS

- Filtration class according to standard 29461-1 : T9-T12
- Media: glass-fibre mini-ply paper
- Frame: aluminium
- Liner: polyurethane
- Separators: hot-melt wire
- Final pressure drop: 600 Pa
- Maximum continuous operating temperature: 80°C
- Relative humidity: 70-80

Details and variations



DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
F9 - (T9)					
RPV98-6GTGXXL	592	592	600	48	5000 / 145
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E10 - (T10)					
RPV100-6GTGXXL	592	592	600	48	5000 / 175
DESCRIPTION	BASE A (MM)	HEIGHT B (MM)	DEPTH C (MM)	SURFACE (M2)	AIRFLOW (M3/H)/DELTA P (PA)
E12 - (T12)					
RPV120-6GTGXXL	592	592	600	48	5000 / 250

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

CARTRIDGES

GT-CY120G & GT-CO120G

These filters ensure the protection and performance of gas turbines

APPLICATION AREAS

- Gas turbine heat rate is maximised
- Gas turbine fouling is negligible
- Long service life
- The Mini-pleat Hot-Melt system ensures equal spacing between each filter pleat and maintains the "V" pleat geometry throughout the life of the filter.

GT-CY120G/A4HE – H12/0445/0324/0660

- Filter surface area: 17.7m²
- Top cap: closed galvanised + 28mm hole
- Outside diameter (top/bottom): 324mm / 324mm
- Inside diameter (top/bottom): 215mm / 215mm
- Height: 660 mm

GT-CO120G/A2HE – H12/0324/0324/0660

- Filter area: 21.5m²
- Top & bottom cap: open galvanised
- Outside diameter (top/bottom): 324mm / 445mm
- Inside diameter (top/bottom): 215mm / 332mm
- Height: 660 mm

GENERAL CHARACTERISTICS

- | | |
|--|--|
| • Filtration class to ISO29461 : T12 | • Flow rate (m ³ /h)/Pressure drop (Pa): 2600 / 203 |
| • Filtration class to EN1822 : H12 | • Final pressure drop: 450 Pa |
| • Media: glass fibre | • Dust loading: ASHRAE dust |
| • Hydrophobic (does not absorb moisture) | • Lining: expanded galvanised |
| • Dust holding capacity: 1582 g | • Linings fixed by thermofusion (between the folds of the substrate) |
| • Average efficiency (0.4µm): 100% | • Sealing material: polyurethane foam |
| • Average stopping capacity: 100% | |



CARTRIDGES

GT-CC95G



Deltrian PV filters are made of a blend of fully synthetic fibers with a special layer of high-efficiency micro glass fibers.

APPLICATION AREAS

There is no better filtering media available to meet the performance requirements of flows and high-efficiency filtration needs for gas turbines.

- Turbine heat is maximized
- Turbine fouling is negligible
- Suitable for pulsation systems

GENERAL CHARACTERISTICS

- Media: synthetic and micro glass fibre
- Flange dimensions: 406 mm x 362 mm
- Separators: expanded galvanised steel
- Fastening: hot melt
- Cap: galvanised steel
- Seal: polyurethane foam
- Air flow test: 951 m3/h
- Initial pressure drop: 169 Pa
- Final pressure drop: 1500 Pa
- ATM dust removal efficiency: 94%
- Initial efficiency: 67% (0.4 µm)
- Standard test: ASHRAE 52-1
- Dust: SAE (ISO 12103-1 A2)
- Dust retention capacity: 4218g



Details and variations



DESCRIPTION	HEIGHT A (MM)	DIAMETER (MM)	SURFACE (M2)
T 8			
GT-CC95G/B8PV F8/0324(406/362)/0570	570	EXT. : 324 / INT. 212	17

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 | *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

CARTRIDGES

GT-CO85G



Deltrian PC filters are made of a blend of fully synthetic fibers and cellulose fibers.

APPLICATION AREAS

There is no better filtering media available to meet the performance requirements of high efficiency filtration needs for gas turbines.

- Turbine heat is maximized
- Negligible turbine fouling
- Suited for pulsation systems
- Long lifespan

GENERAL CHARACTERISTICS

- High average efficiency
- Cellulose and synthetic fibers with high mechanical strength

Details and variations



	SMALL CONE	LARGE CONE
CYLINDRIQUE		
DESCRIPTION	GT-CO85G/A9PC	GT-CO85G/B6PC
	F7/0445/0324/0710	F7/0570/0445/0710
SURFACE FILTRANTE	26 M2	41 M2
MÉDIA	MÉLANGE DE SYNTHÉTIQUE ET DE CELLULOSE	
CAPUCHON SUPÉRIEUR	GALVA FERMÉ TROU Ø 28 MM	GALVA OUVERT
DIAMÈTRE EXTERNE	324 MM	570 MM
DIAMÈTRE INTERNE	212 MM	445 MM
SÉPARATEURS	MÉTAL EXPANSÉ	MÉTAL EXPANSÉ
FIXING LINERS	HOT MELT ADHÉSIF	HOT MELT ADHÉSIF
BOTTOM CAP	GALVA OUVERT	GALVA OUVERT
DIAMÈTRE EXTÉRIEUR INFÉRIEUR	445 MM	445 MM
DIAMÈTRE INTÉRIEUR INFÉRIEUR	330 MM	330 MM
CAPUCHON	GALVA	
JOINT	MOUSSE POLYURETHANE	MOUSSE POLYURETHANE
LONGUEUR	710 MM	710 MM

	SMALL CONE	LARGE CONE
CARACTÉRISTIQUES TECHNIQUES ET PERFORMANCES		
CLASSE DE FILTRATION SELON LA NORME 29461-1	T7	
TEST DÉBIT D'AIR	6000 M3/H	
PERTE DE CHARGE INITIALE	257 PA	
ATM DUST SPOT EFFICIENCY	83 %	
EFFICACITÉ INITIALE	21 % (0,4 MM)	
TEST STANDARD	EN 779	
POUSSIÈRE	ASHRAE DUST	
CAPACITÉ DE RET. DE POUSSIÈRE	2850 G (1000 PA)	
MOYENNE	> 99 %	
PERTE DE CHARGE FINALE	1500 PA	

CARTRIDGES

GT-CY100G



Deltrian FV filters are made of highly efficient glass microfibers.

APPLICATION AREAS

There is no better filtering media available to meet the performance requirements of high-efficiency filtration needs and flows for gas turbines.

- Turbine heat is maximized
- Negligible turbine fouling
- Suitable for pulsation systems
- Long service life

GENERAL CHARACTERISTICS

- High initial efficiency
- Fibers do not absorb moisture
- The Hot-Melt pleating system ensures a similar spacing between each filter pleat and maintains a "V" pleat throughout the life of the filter.

Details and variations



DATA	DATA
CYLINDRIQUE	
DESCRIPTION	GT-CY100G/A3FV
SURFACE FILTRANTE	20 M2
MÉDIA	MICRO FIBRE DE VERRE HAUTE EFFICACITÉ
CAPUCHON SUPÉRIEUR	GALVA FERMÉ TROU Ø 28 MM
DIAMÈTRE EXTERNE	412 MM
DIAMÈTRE INTERNE	300 MM
SÉPARATEURS	EXPANDED GALVANIZED
FIXING LINERS	HOT MELT (ENTRE LES PLIS DU MÉDIA)
BOTTOM CAP	GALVA OUVERT
DIAMÈTRE EXTÉRIEUR INFÉRIEUR	412 MM
DIAMÈTRE INTÉRIEUR INFÉRIEUR	300 MM
JOINT	POLYURETHANE
LONGUEUR	600 MM

DATA	DATA
CARACTÉRISTIQUES TECHNIQUES ET PERFORMANCES	
CLASSE DE FILTRATION SELON LA NORME 29461-1	T10
TEST DÉBIT D'AIR*	2400 M3/H
PERTE DE CHARGE INITIALE*	300 PA
ATM DUST SPOT EFFICIENCY*	100%
EFFICACITÉ INITIALE* :	90 % (0,4 MM)
TEST STANDARD	ASHRAE 52-1
POUSSIÈRE*	SAE (ISO 12103-1 A2)
CAPACITÉ DE RET. DE POUSSIÈRE*	4200 G (TOTAL)
MOYENNE*	100%
PERTE DE CHARGE FINALE	1500 PA

* Energy consumption, kWh/year: calculated in accordance with Eurovent Guideline 4/21-2018 | ** Energy class: according to Eurovent RS4/C/001-2019 |
 *** Energy class: according to Eurovent RS4/C/001-2015

Deltrian reserves the right to modify the specifications of its products without prior notice as part of its policy of continuous product improvement.

Index of our filtration products.

ISO COARSE PREFILTER.....64

Poly.....	65
Andreae	66
Colombus	67
DG.....	69
DGPS.....	70
DPA-G	71
DPA-W.....	72
DPA-Box.....	73
Roll Filters.....	74
Polyfil	75
Ecovyl - Cylindrical	77
Ecovyl - Flat filter	79
FC Carton	80
FC Galva	81
FZ Carton.....	82
FZ Galva.....	84
FS Galva.....	85
FCM	86
FZ SS - SC & ES	87
FP40	89
Plusair - ISO COARSE 65%	90

FINE FILTRATION91

Poly 600-660.....	92
FP50	93
FPS50.....	94
KS	95
K+	97
NW.....	98
TNWES-1-70	103
TNWES-1-90	106
NWES98 PLUS	109
K50	110
FP-10-50.....	112
SGK-GK.....	113
SG	114
G - Glass Fiber	115
Plusair - ePM10 60%	118
PFL - PTL - PHL	119
FZGMP SC - Glass Fiber	121
DCG	123
RPV 3V ST	125
RPV SCG.....	127
RPV ESG.....	129
RPV ESN	130
RPV XL	131
HE-PP HT.....	133
HE-MP HT.....	134
RPV HT.....	135

ABSOLUTE FILTRATION136

RPV HEPA	137
RPV HEPA XL.....	139
RPV HEPA XXL	140
THE-LA-69 MM.....	141
THE-LA-78 MM	144
THE-LA-89 MM.....	147
THE-LA-150 MM	150
THE-MP G 150 MM	153
THE-MP M 150 MM	156
THE-MP G 292 MM	158
THE-MP M 292 MM	160
THE-MD	162
THE-VF G & HC	163
THE-VF P & HC	165

MOLECULAR FILTRATION.....167

Deltricarb - FZ Galva.....	170
RPV Carbon	171
Deltricarb - GCA	173
Deltrisorb & Deltrisorb ECO.....	174
Deltrisorb CD	175
Deltrisorb FC - Bulk Adsorbent (BCA)	176
Deltrisorb FC(R) - Adsorbent Block Mattress	177
Deltrisorb FC - Agglomerated charcoal plates	178
Deltrisorb VN.....	179
Deltrisorb VM	180
Deltrisorb VC(R)	181
Deltrisorb VF	182
Deltrisorb DMM.....	183

BOXES AND MOUNTING COMPONENTS184

CDLA	185
CDR	186
CDU	187
CDCH	188

AIR FLOW REGULATORS189

Damper	190
--------------	-----

ATEX FILTER.....191

G Atex.....	192
TNWES Atex	194

FILTERS FOR GAS TURBINES197

FZPL GTWR	198
DS (PPL/PPS - PFL - PTL).....	199
PFS	201
REVERSE HSP500	202
RPV GTG	203
RPV GT XL	205
RPV GT XXL.....	206
GT-CY120G & GT-CO120G.....	207
GT-CC95G.....	208
GT-CO85G	209
GT-CY100G	211

DELTRIAN INTERNATIONAL SA

Rue du Berlaimont 21A - ZI Martinrou
BE-6220 Fleurus
+32 71 36 40 30

www.deltrian.com

AFRICA

1 Rue Fisem Q Ain Dalia
BP 90000 TANGER
+212667795063

AG SCHWEIZ

Pulverhausweg 13
CH-5033 Buchs
+41 62 552 19 20

AMERICA INC.

3260 Industry Drive, Unit 2
North Charleston
US-29418 South Carolina
+1 8438791524

CHINA

CN-215332 Huaqiao, Kunshan, Jiangshu
+86 512 503 307 82

DENMARK

Egehaven 1, Troelstrup By
4690 Haslev
+45 23 60 00 70

DEUTSCHLAND GMBH

Wittauer Straße 12
D-74564 Crailsheim
+49 7951 966 48 50

FILTRATION GMBH

Frankfurter Str. 87
97082 Würzburg

FRANCE SARL

ZI du Grand Launay
7 Av. Victor Griffuelhes
FR-76120 Le Grand-Quevilly
+33 2 32 11 71 25

ZI du BRAY III - 5 rue Benjamin Franklin
FR-53600 Evron
+33 2 43 69 08 75

ITALIA SRL

Via Milano 18/20
26016 Spino d'Adda (CR)
+39 0373 477 455

LITHUANIA UAB

Liepu STR. 17
98270 Mosedis
+37 0 440 76602

NETHERLANDS

Seggeweg 2
NL-3237 MK Vierpolders
+31 181 473 637

NORGE AS

Kvasnesvegen 2
NO-6037 Eidsnes
+47 477 92 550

SLOVAKIA

Weinova 2538/1
SK-06001 Kezmarok
+421 524 265 204

SPAIN SLU

Calle Jacinto Benavente, 5
28850 Torrejón de Ardoz
Poligono Industrial Casablanca
Madrid
+34 915 556 634

SWEDEN

Kardavägen 64
461 38 Trollhättan
+46 520-47 71 00

UNITED KINGDOM

Unit 1 Sandringham Court Network 65,
Burnley, Lancashire BB11 5TD
+44 01282 459744