


Mirror Mezz 15x11 OCP Connectors >

Footprint-compatible, hermaphroditic Mirror Mezz 15x11 OCP Connector lowers application costs with stackable mating that supports data speeds up to 224 Gbps per differential pair, for telecommunications, networking and other applications.

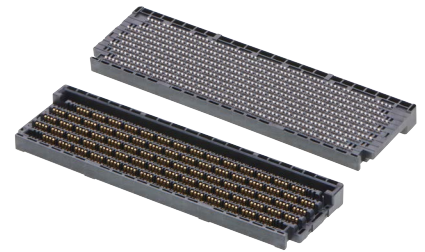

15x11 Mirror Mezz OCP Connectors

FEATURES AND ADVANTAGES

Reduces mis-mating and assembly errors with robust shrouded housing design

Shrouding encapsulates the pin field, helping protect pins and offering blind-mate guidance to eliminate any possibility of mis-mating

Reduces costs through use of ball grid array (BGA) attachment

Stitched BGA design offers greater cost savings than insert-molded BGA attachments, reduces lead times and simplifies product matrix

Eases design challenges by maximizing PCB real estate

High-density connector pin field includes up to 270 differential pairs

Simplifies assembly operations

Contact tip design offers fine alignment of 0.70mm in blind mating scenarios, making mating operations easier and more reliable

Improves signal integrity (SI) performance and reliability

"Stubless" contact interface includes two points of contact on each beam for greater reliability and reduces minimum stack height to 5.00mm

Offers increased reliability and minimizes crosstalk between rows

Opposing beam support helps ensure improved performance with 1.50mm row pitch

Standard	Open Compute Project (OCP)
Speed	Up to 224 Gbps (Mirror Mezz Enhanced) Up to 112 Gbps (Mirror Mezz, Mirror Mezz Pro)
Pin Count	Up to 270 differential pairs (DPs)
Stack Height	5.00, 8.00 or 11.00mm
Mates With	2.50 and 5.50mm connectors
Operating Temperature	-40 to +105°C

Helps to ensure constant electrical contact and improved reliability

Contact beam structure prevents vibrations and terminal lift to ensure 2-point electrical contact, offers reliable normal force for harsh environments, and ensures sufficient engagement with 1.50mm of nominal contact wipe

Offers relaxed tolerances and greater architectural flexibility with flex cable links

Accommodates offsets between boards and flexible system components with flex cable links featuring controlled channels and pinned grounds

Maximizes high-speed performance and clean routing out of the connector footprint

Precise arrangement of wide ground pins and electrically tuned signal contacts improves signal integrity and helps balance the electrical field

Optimizes use of space in height-constrained applications

Cross-mating or self-mating of 2.50 and 5.50mm height connectors permits ultra-low and medium stack heights of 5.00, 8.00 or 11.00mm


Lowers costs through hermaphroditic design

Simplifies procurement processes and inventory management while minimizing tooling requirements

Delivers high-speed data transmission rates for next-generation applications

Mirror Mezz Enhanced Connectors offer 224 Gbps NRZ data speeds and Mirror Mezz Pro Connectors support 112 Gbps data speeds for high-performance applications


Mirror Mezz 15x11 OCP Connectors >



Shrouded Housing Design



Stitched Ball Grid Array



Ground and Signal Pin Design

MARKETS AND APPLICATIONS

Server and Storage


Networking
Storage
Servers

Telecommunications

Infrastructure
Networking Systems



Servers



Networking Systems

SPECIFICATIONS

Reference Information

Packaging: Tape and reel
Mates With:
2.50 and 5.50mm height
connectors can self- or cross-mate
Designed in: Millimeters
RoHS: Yes
Halogen Free: Yes

Electrical

Voltage (max.): 29.9V AC RMS
Current (max. per contact):
Mirror Mezz, Mirror Mezz Pro: 1.0A
Mirror Mezz Enhanced: 0.75A
Low Level Contact Resistance:
30 milliohms max. (initial)
10 milliohms max. (delta)
Dielectric Withstanding Voltage: 500V DC
Insulation Resistance: 1,000 Megohms
Impedance: 90 Ohms

Mechanical

Pitch: 4.00mm between differential pairs
1.50mm between rows
Circuits:
Mirror Mezz, Mirror Mezz Pro: Up to 270
differential pairs
Mirror Mezz Enhanced: Up to 166 differential
pairs
Durability: 100 cycles
Mate Force (max. per pin):
Mirror Mezz, Mirror Mezz Pro: 0.35N
Mirror Mezz Enhanced: 0.5N
Gatherability: 1.20mm (Y-axis) and 1.00mm
(X-axis)
Average Unmating Force (min.): 0.045N per pin

Physical

Housing: LCP
Contact: Copper Alloy
Plating: Contact Area—Gold
Solder Tail Area—Tin
Underplating—Nickel
Operating Temperatures: -40 to +105°C