



SPECIFICATION

JGB3865-520R45-12-150RPM

1. Basic Information

Motor Model	520
Shell Material	Zinc Alloy
Gear Material	Metal
Weight(g)	290
Gear Ratio	1:45

2. Standard Operating Conditions

2.1 Voltage Range: 3.0-12V

2.2 Direction of Rotation: CCW

With positive voltage applied to the positive terminal (When viewed from the output shaft side)

2.3 Operating Temperature Range: -30 to +70 °C

2.4 Storage Temperature Range: -30 to +70 °C °C

3. Electrical Characteristics (At initial stage after 30 seconds run-in)

3.1 Measuring Condition

3.1.1 Rated Voltage: 12V DC

3.1.2 Power Supply: Regulated DC power supply.


3.2 Motor Performance

Reduction ratio	Rated Voltage (V)	NO-Load		Rated Load			Stall		Starting Voltage (V)
		Current (A)	Speed (RPM±10%)	Current (A)	Speed (RPM±10%)	Torque (kg*cm)	Current (A)	Torque (kg*cm)	
50	12	0.11	149	0.294	122.5	1.48	1.5	6.2	1.8

4. Noise Level

60dB(A) Max/RMS, no load, rated voltage, with motor to be set and measured as below.


Background noise: 35dB(A) Max./RMS max.

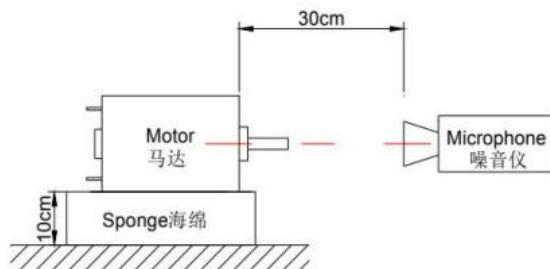

5. Life Span:

Lifetime conditions	Duty cycle	Operating requirement
As per samp		

6. Test Curve:

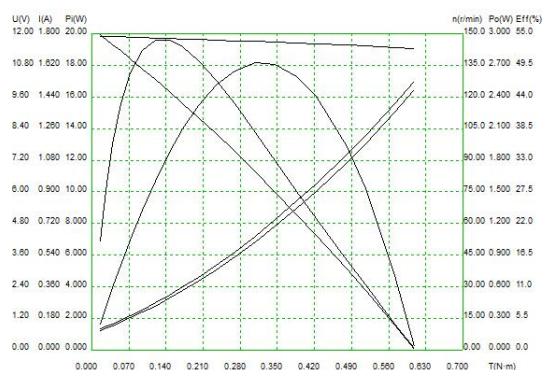

7. Dimensional Drawing/Physical Picture



