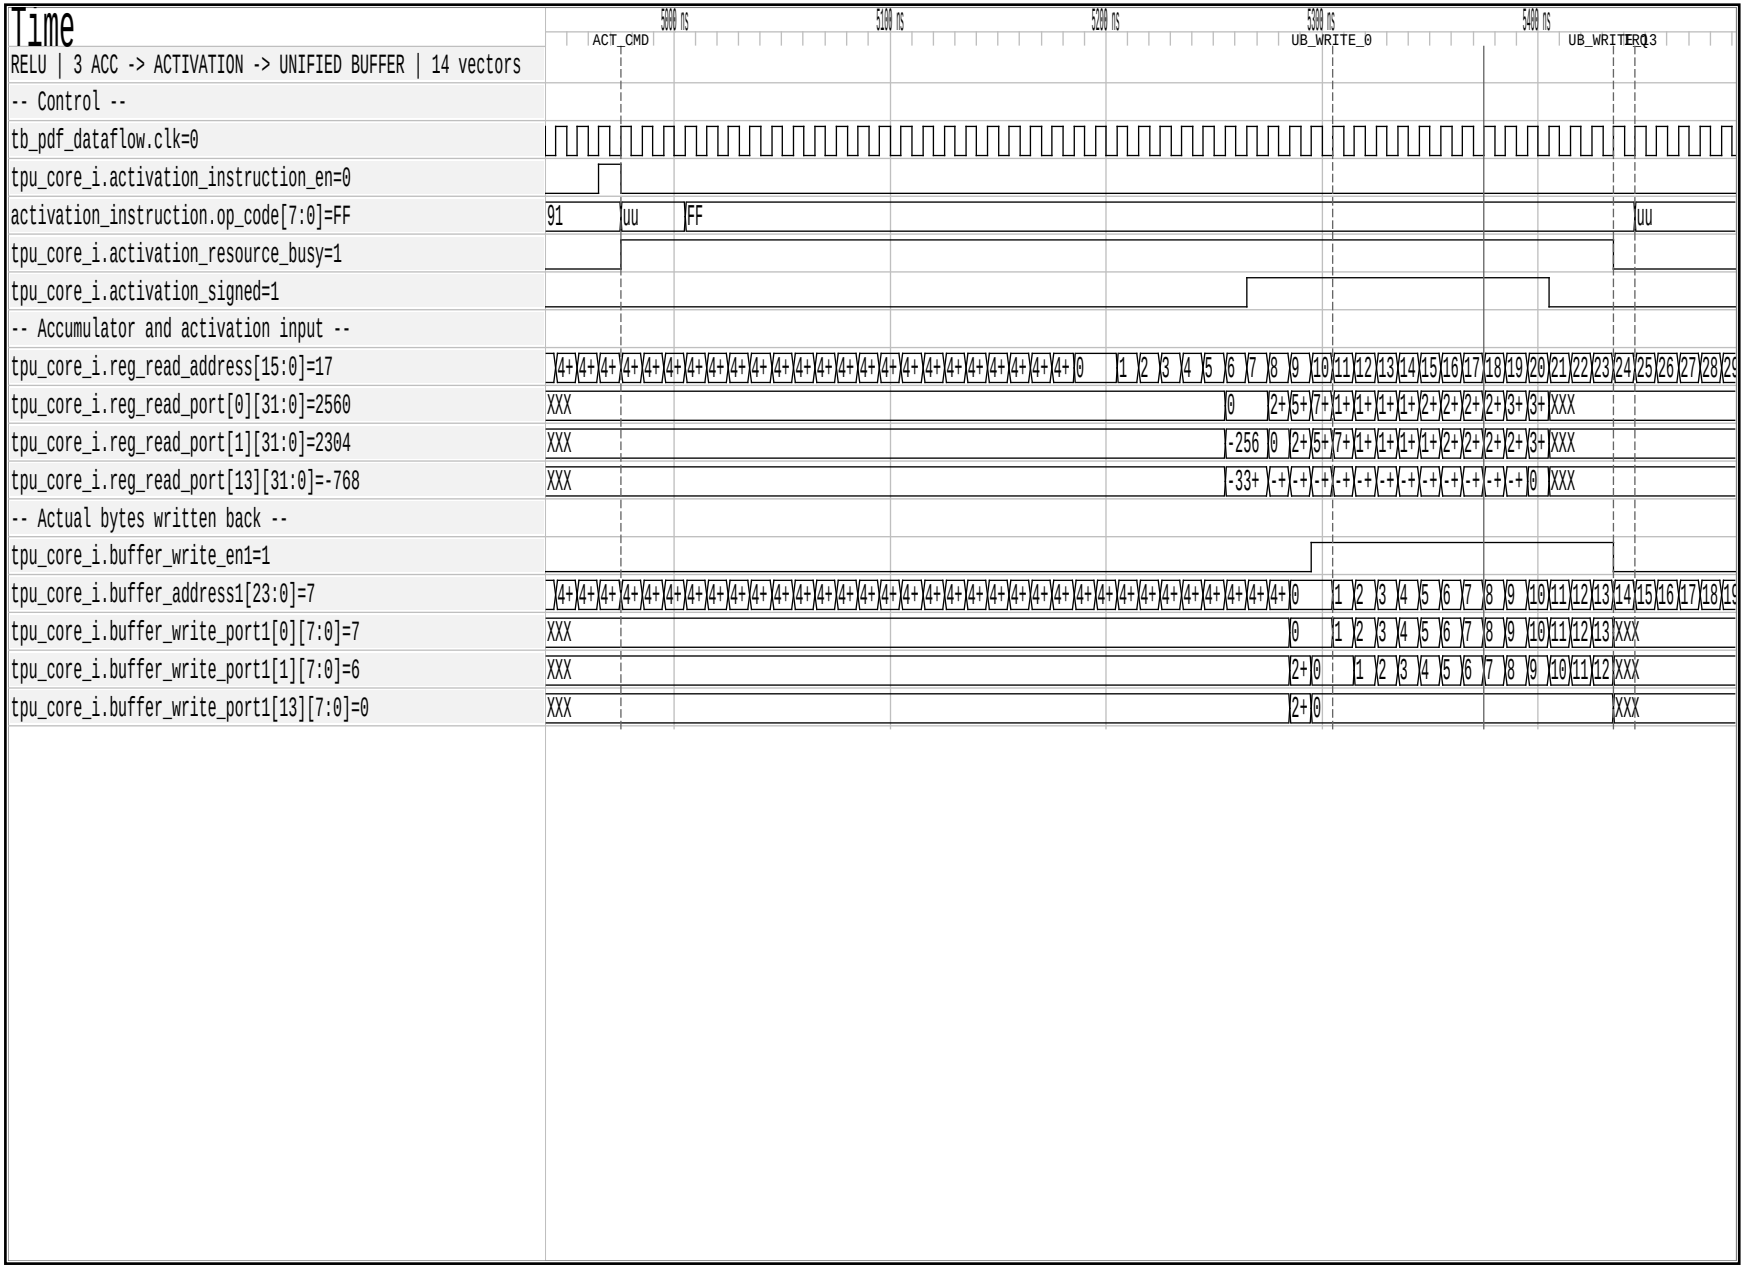

Time
RELU | 3 ACC -> ACTIVATION -> UNIFIED BUFFER | 14 vectors
-- Control --
tb_pdf_dataflow.clk=0
tpu_core_i.activation_instruction_en=0
activation_instruction.op_code[7:0]=FF
tpu_core_i.activation_resource_busy=1
tpu_core_i.activation_signed=1
-- Accumulator and activation input --
tpu_core_i.reg_read_address[15:0]=17
tpu_core_i.reg_read_port[0][31:0]=2560
tpu_core_i.reg_read_port[1][31:0]=2304
tpu_core_i.reg_read_port[13][31:0]=-768
-- Actual bytes written back --
tpu_core_i.buffer_write_en1=1
tpu_core_i.buffer_address1[23:0]=7
tpu_core_i.buffer_write_port1[0][7:0]=7
tpu_core_i.buffer_write_port1[1][7:0]=6
tpu_core_i.buffer_write_port1[13][7:0]=0
5000 ns
5100 ns
5200 ns
5300 ns
5400 ns
ACT_CMD
UB_WRITE_0
UB_WRITE_13