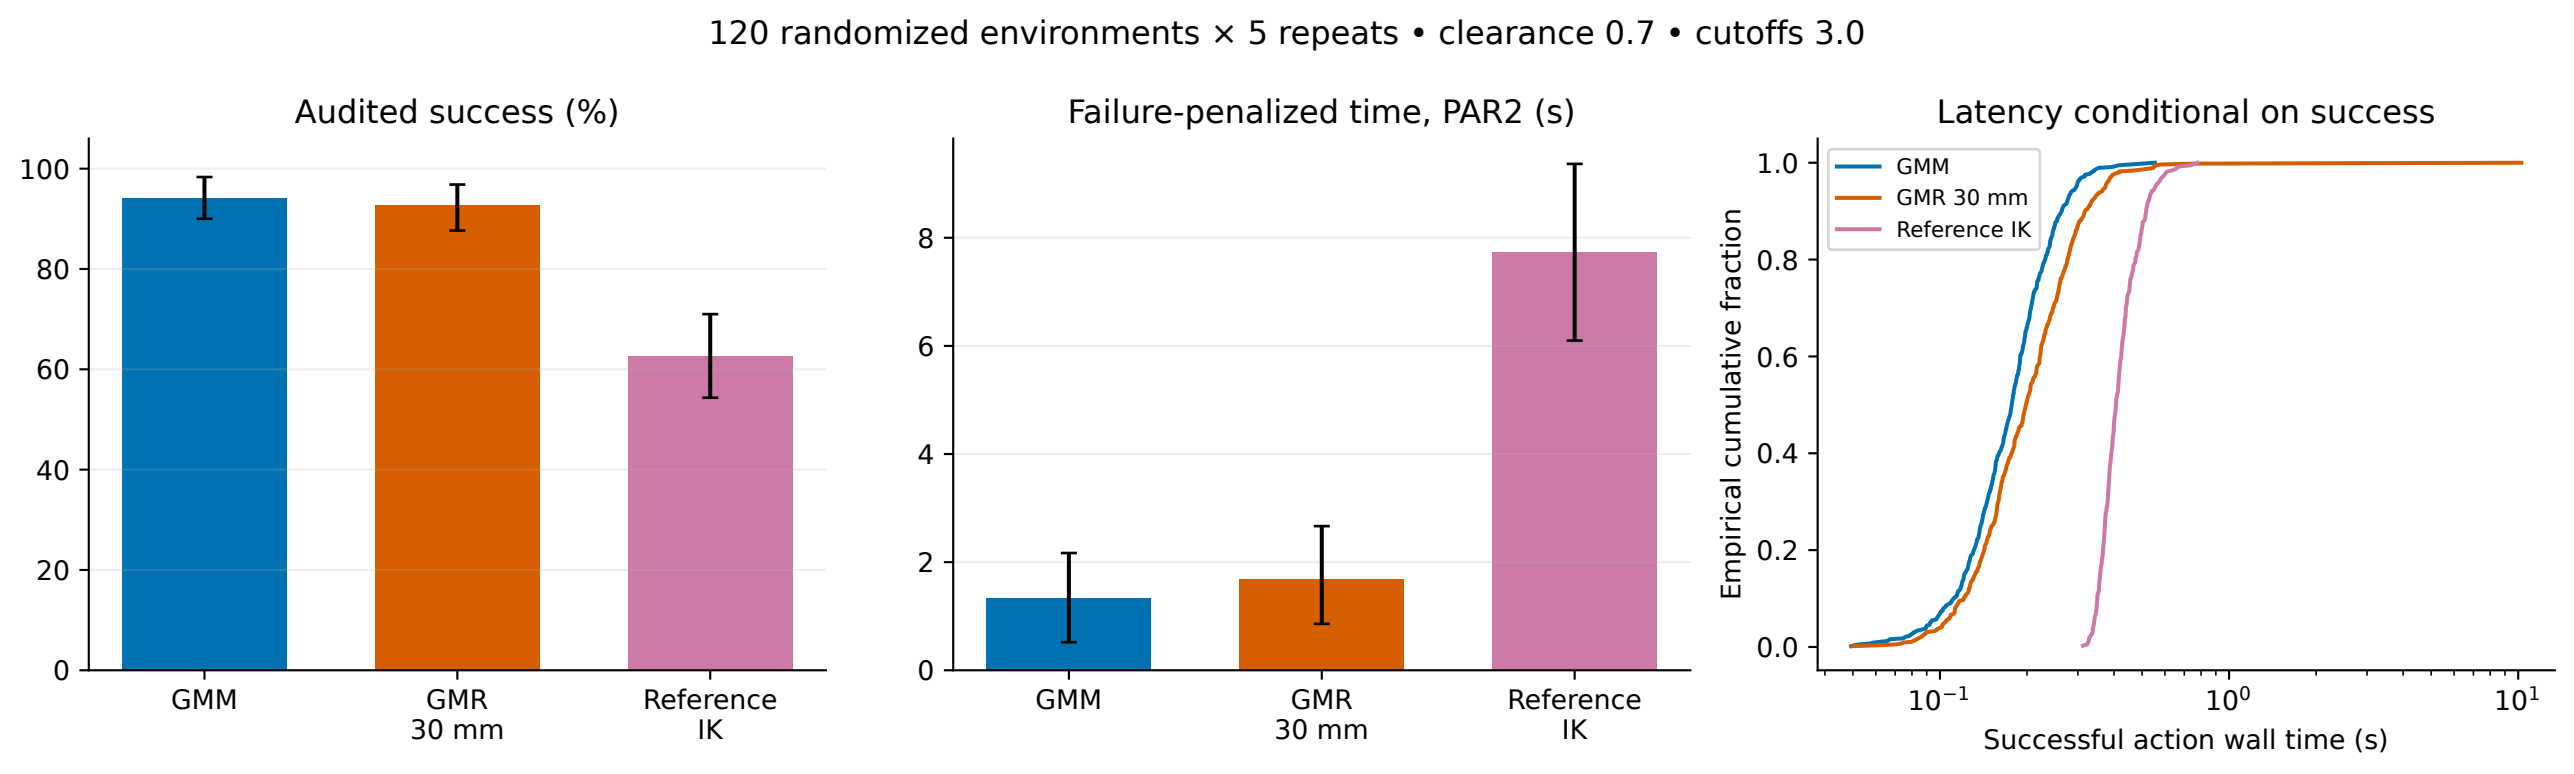
120 randomized environments × 5 repeats • clearance 0.7 • cutoffs 3.0
Audited success (%)
100
80
60
40
20
0
GMM
GMR
30 mm
Reference
IK
Failure-penalized time, PAR2 (s)
8
6
4
2
0
GMM
GMR
30 mm
Reference
IK
Latency conditional on success
GMM
GMR 30 mm
Reference IK
Empirical cumulative fraction
1.0
0.8
0.6
0.4
0.2
0.0
10^{-1}
10^{0}
10^{1}
Successful action wall time (s)