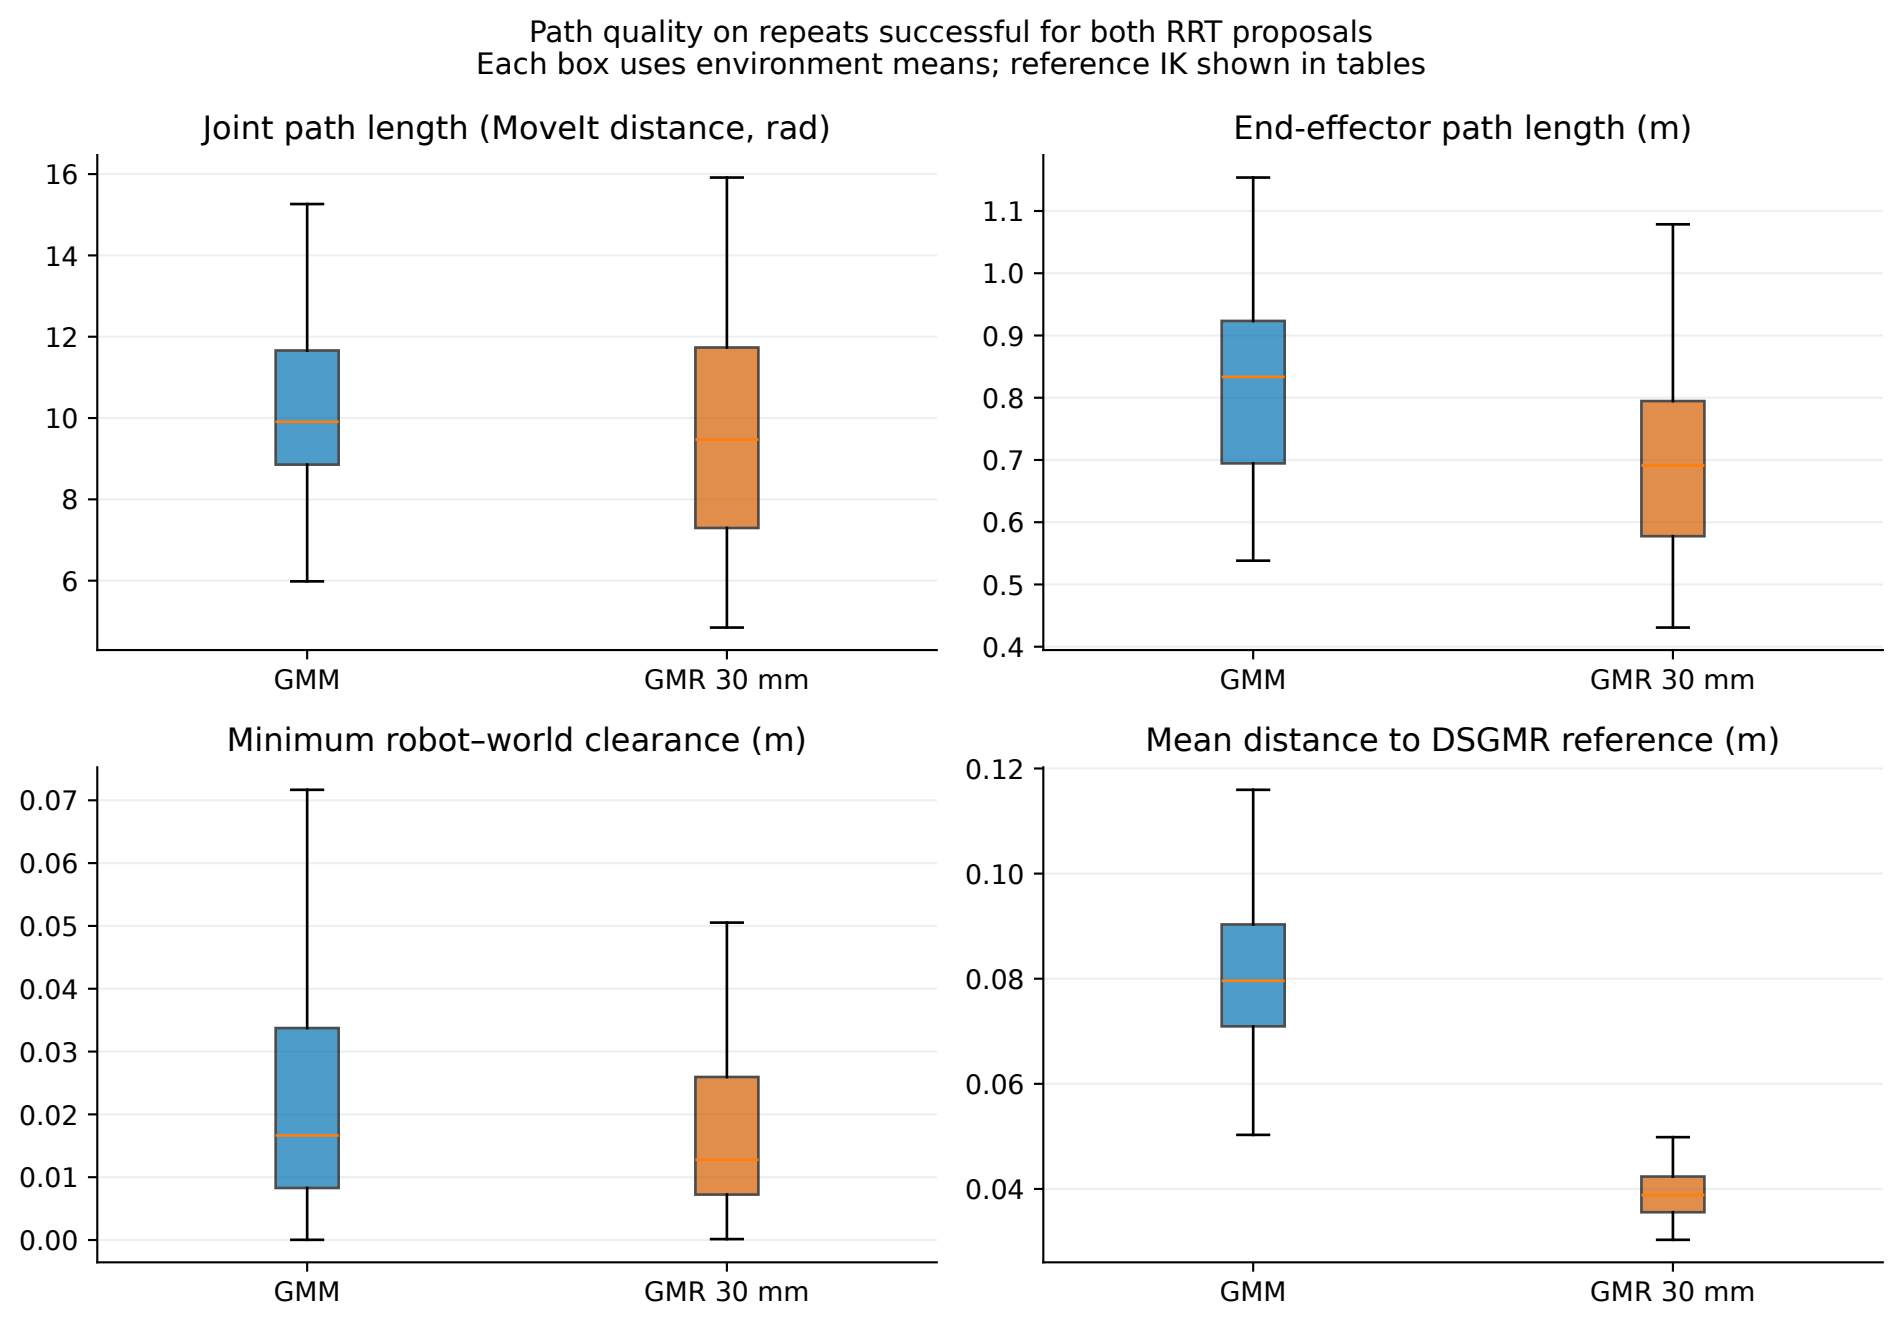
Path quality on repeats successful for both RRT proposals
Each box uses environment means; reference IK shown in tables
Joint path length (MoveIt distance, rad)
16
14
12
10
8
6
GMM
GMR 30 mm
End-effector path length (m)
1.1
1.0
0.9
0.8
0.7
0.6
0.5
0.4
GMM
GMR 30 mm
Minimum robot–world clearance (m)
0.07
0.06
0.05
0.04
0.03
0.02
0.01
0.00
GMM
GMR 30 mm
Mean distance to DSGMR reference (m)
0.12
0.10
0.08
0.06
0.04
GMM
GMR 30 mm