



宇树关节模组

IM6014 仿生机器人关节电机

快速安装，低负载下可快捷拆装

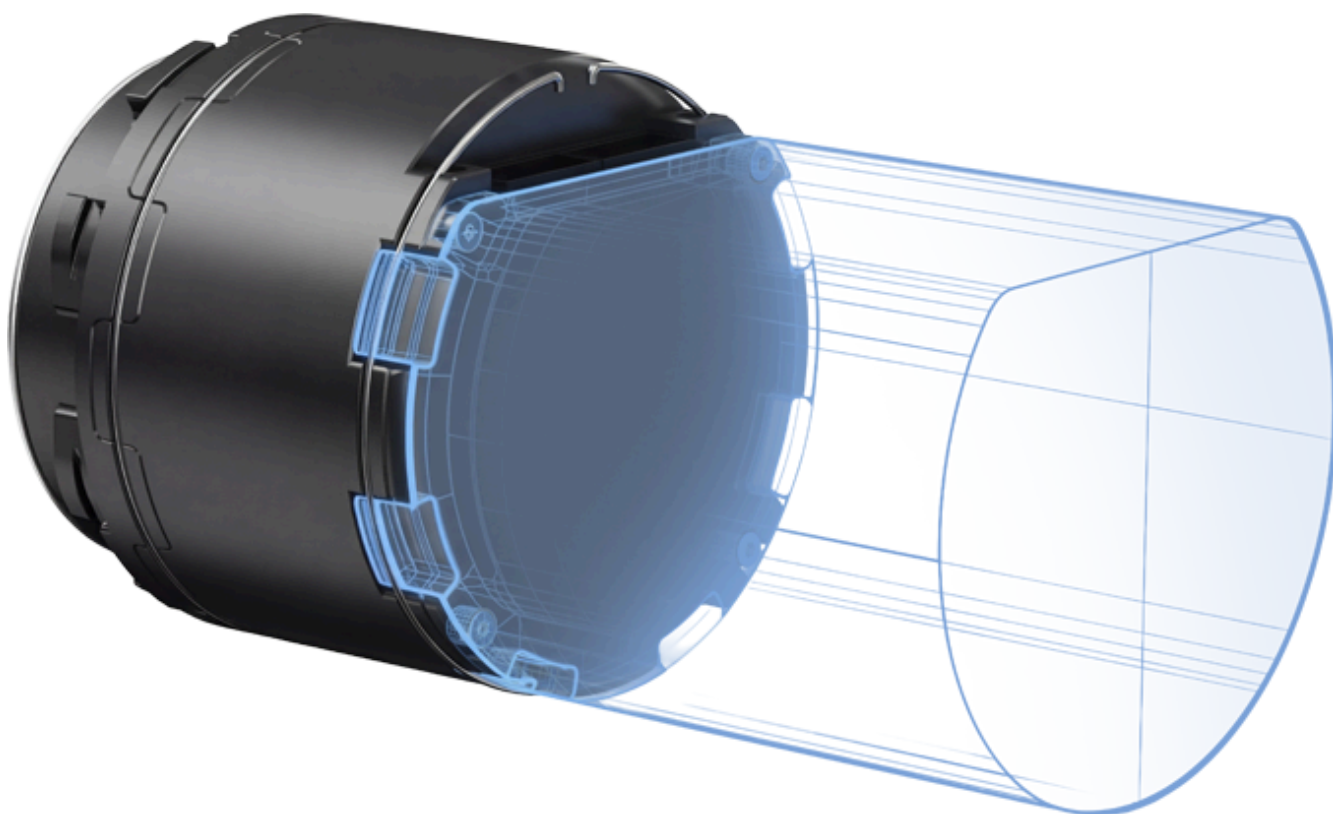


环抱安装

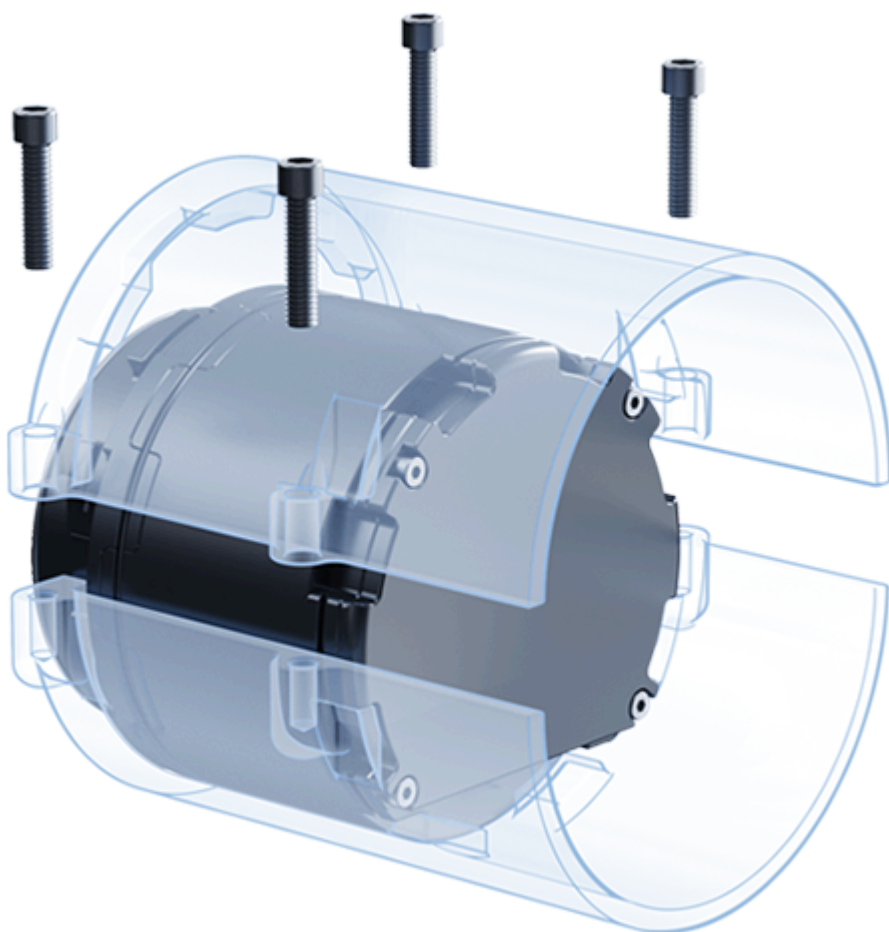

在电机高速换向过程中，通过自研温度场管理模型，每秒 400 次监控整机实时温度。

FOC 控制曲线图：在 25°C 室温 60V 供电下，12.66 的速比可为整机提供 31.7Nm 的峰值扭矩和 54.2rad/s 的转速。

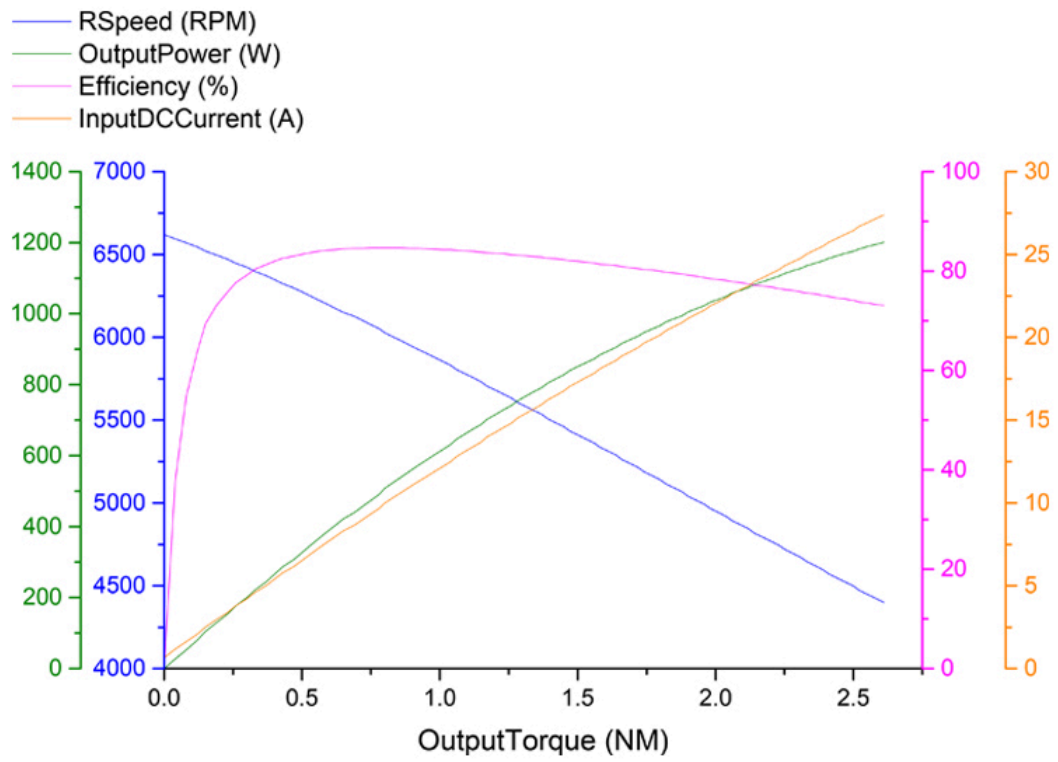

IM6014 性能参数

性能特点	电机型号	N6014B-12.6
	电机重量	535g
	电机尺寸	φ65*60mm
	最大(空载)转速	54.2 rad/s (60v)
	输入电压	24v~75v
	减速比	3:38
	最大线电流	40A
	峰值扭矩 输出扭矩与转速方向相反	34.4N.m
	峰值扭矩 输出扭矩与转速方向相同	31.7N.m
工作温度	Min	-20℃
	Max	驱动板超过90度停机并报过热错误 绕组超过130度停机并报过热错误
其他	波特率	6000000bps/4000000bps
	控制算法	混合控制
	齿轮材料	金属
	外壳材料	铝合金+高强度工程塑料
	编码器分辨率	15bit
	协议类型	高速485通信 (8bit, 1stop, No Parity)
	链接(物理)	485多点总线
	ID	0-14
	位置传感器	转子、输出端、双绝对值编码器
	指令信号	电机ID、工作模式、超时保护、前馈扭矩、目标速度、目标位置、位置刚度、速度刚度
	电机反馈	力矩、角度、角速度、温度、电压、错误状态
	电机控制	力矩、角度、角速度、前馈扭矩、位置刚度、速度刚度

A1 电机

A1 Motor

Weight

605g

Maximum Joint Rotate Speed

21rad/s

Torque Constant

0.9287N.m/A

Communication Control Period

1KHz

Motor Encoder Resolution

15bit

Motor Perceptual Feedback

Torque, Angle, Angular Velocity, Angular Acceleration, Temperature

Motor Control Instruction

Torque, Angle, Angular Velocity, Stiffness, Damping

Maximum Instantaneous Torque


33.5N.m

Working Voltage

20 ~ 40V

Commutation Mode

RS 485

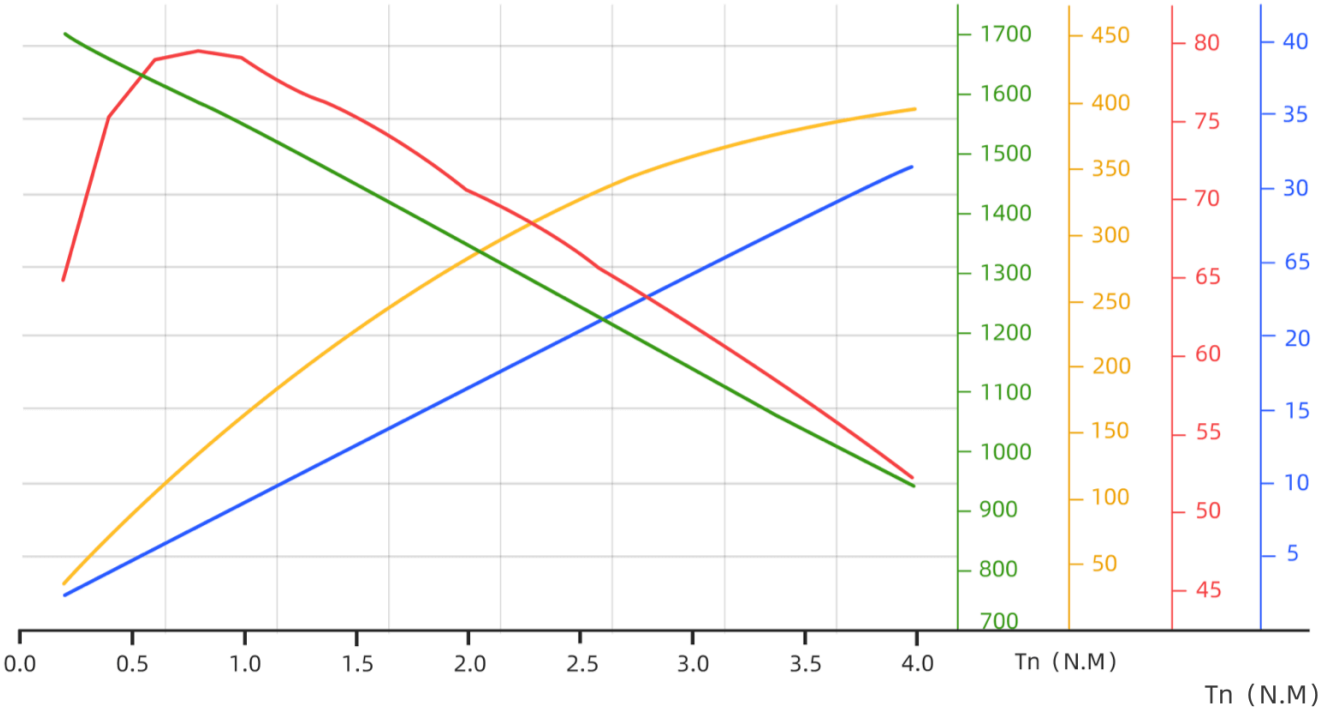

Go 电机

GO Motor


Model	Weight
GO-M8010-6	About 530g
Maximum Current	Maximum Rotational Speed
40A	30rad/s (@24VDC)
Reduction Ratio	Size
1:6.33	96.5x92.5x42.3mm
Maximum Torque	Torque Constant
23.7NM	0.63895Nm/A
Communication Mode	Communication Baud Rate
RS-485	4Mbps
Communication Control Frequency	Motor Encoder Resolution
6000Hz	15bit
Operation Environment	Working Voltage
-5°C ~ 40°C	12V ~ 30VDC 24VDC recommend
Motor Perceptual Feedback	
Torque, Angle, Angular Velocity, Temperature	
Motor Control Instruction	
Torque, Angle, Angular Velocity, Stiffness, Damping	



Brushless High Speed Motor Strong Driving Force, Longer Service Life

FOC Control Characteristics Graph

It provides stronger driving force. The maximum torque of 23.7 NM and the maximum speed of 30 rad/s can be reached at a reduction ratio of 6.33 (Note: Measured at 24°C).

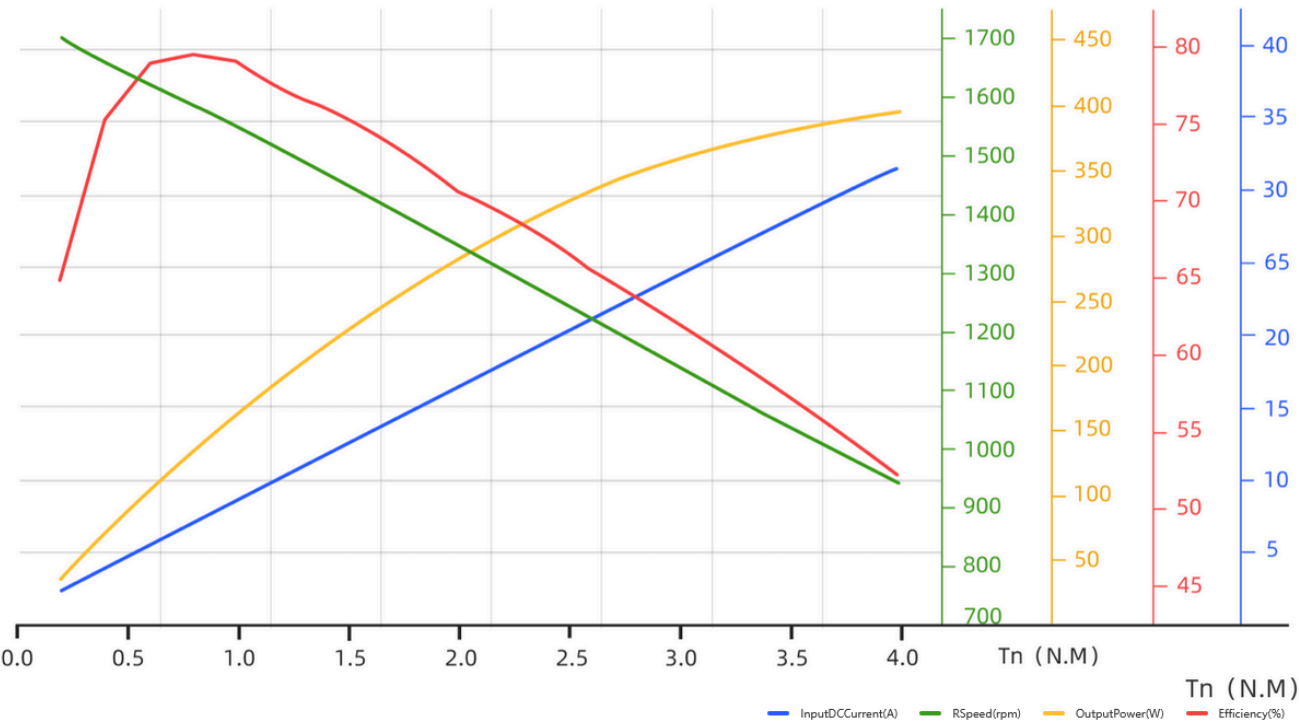

B1-16 电机

B1-16 Super Robot Waterproof Joint

Weight

1740g

Maximum Instantaneous Torque

140N.m

Protection Level

IP68

Working Voltage

36 ~ 64V

Torque Constant

2.165N.m/A

Commutation Mode

RS 485

Communication Control Period

1KHz

Motor Encoder Resolution

15bit

Motor Perceptual Feedback

Torque, Angle, Angular Velocity, Angular Acceleration, Temperature

Motor Control Instruction

Torque, Angle, Angular Velocity, Stiffness, Damping