



To provide users with high quality pump products and system solutions



Sewage lifting equipment



专业 · 专注 — 30年品质保证

杭州西子泵业有限公司

Add: No.8 Shunqi Road, Tangqi Industrial Park,
Linping District,

Hangzhou City, Zhejiang Province

Tel: 0571-88111009/88111688

Postcode: 311106

Website: www.xizipumps.com



杭州西子泵业有限公司
Hangzhou Xizi pump Co.,Ltd



Hangzhou Xizi Pump Co., Ltd. has been committed to the research and development and production of water environmental products for more than 30 years. Since its establishment in 1999, the company has always been committed to scientific and technological innovation, and the products are widely used in energy saving and environmental protection, landscape engineering, urban and rural water supply and drainage, municipal sewage upgrading and transportation and other fields.

The main products of the company are submersible sewage pump, sewage cutting pump, stainless steel submersible sewage pump, landscape fountain pump, integrated prefabricated pump station, sewage elevator grease separator and variable frequency constant pressure water supply system.

The company uses CAD three-dimensional design, CFD fluid analysis and calculation software for product development; With automatic pump type test center, the company has established a perfect ISO9000 quality management system and has been awarded "Provincial quality products", "Provincial product quality trustworthy enterprise", "AA level credit and contract" unit for three consecutive times.

In line with the "quality first, customer first, reputation first" business policy, to "meet customer requirements, quality, innovation, improvement" as the goal, Xizi pump industry with its good reputation of quality, perfect service quality, and continue to grow and develop!

Content

◎ Application of external decontamination	-----	01
◎ Type description	-----	02
◎ Technical advice	-----	03/04
◎ XZWL20	-----	05/06
◎ XZWL60	-----	07/08
◎ XZWL120	-----	09/10
◎ XZWL200	-----	11/12
◎ XZWL350	-----	13/14
◎ XZWL500	-----	15/16



Test center



▲ Metalworking workshop



▲ Spray shop



▲ Motor shop



Accessories Warehouse



Materials warehouse

Application of external decontamination

- Collect discharges from sewage from bathrooms, kitchens, basements, garages, etc.;
- Increase the safety of sewage discharge below the back pressure water level to prevent sewage backflow.
- Xizi Pump external sewage elevator, is a new derivative product, set sewage tank, sewage pump, level meter, supporting valves, pipe fittings and control system in one, the public places and households containing excreta, oil-containing low sewage centralized pump to the municipal sewage system. The first to use the sewage of the family villa to lift, and then gradually applied to other industries. The external sewage elevator has obvious advantages over other types of elevators in terms of environmental impact, operation and maintenance, and comprehensive cost.



XZWL20/60



OXZWL120/200




XZWL350/500



XZWL500

Type description

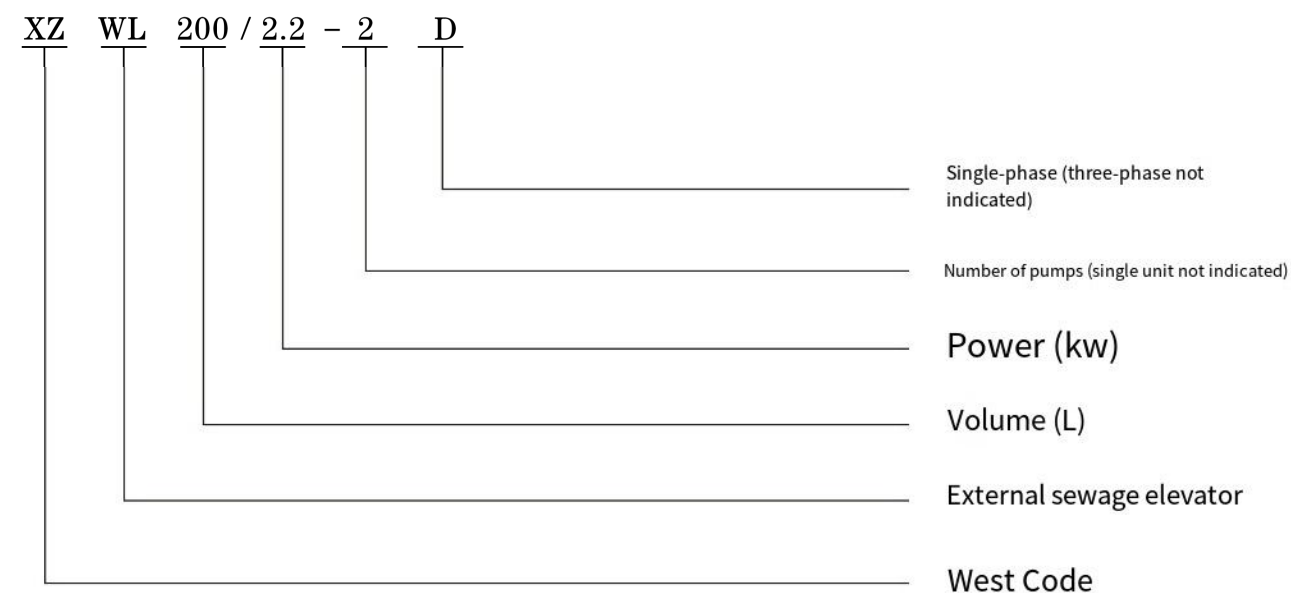

Installation diagram



Technical advantages of external sewage elevator

※ Integrated equipment, ready to use:

The necessary pumps, water intakes, water outlet pipes, valves and ventilation pipes have been installed at the time of supply. Water intakes in different positions can also be freely selected at the installation site, greatly reducing the installation cost.

※ Stable and reliable, powerful function:

The protection level of the whole machine is IP68, the protection level of the intelligent control system is IP54. High-performance waterproof motor, can run continuously, can be started frequently, without air cooling, water cooling, no leakage concerns, suitable for surface installation or underground pit installation. Even if the equipment is flooded by water for a short time, it can also be used normally.

※ Minimum maintenance, maximum service life:

HDPE- body forming water tank, international similar products common, high strength, corrosion resistance, its life can be the same as the building. External dry installation sewage pump, easy to disassemble, maintenance does not contact with sewage. Sophisticated processing technology, longer service life. All products are strictly tested and inspected to ensure that customers can use at ease.

※ Complete specifications:

A variety of specifications to meet the needs of different applications. Supporting water tank capacity from 20L to 500L., single-phase or three-phase motor, power from 0.75kw to 11kw, pump head from 5m to 42m, can be selected according to the needs of the site.

※ Waterproof and odor-proof design:

HDPE integrated box, reinforced design, with a comfortable appearance and 10m water pressure bearing capacity. No seams inside and outside, completely sealed, completely prevent leakage and corrosion, no smell out.

※ Stable performance, strong passing ability:

The pump can run continuously in S1 mode, the maximum hourly startup times is up to 20 times, and the maintenance cycle is as long as 10000 total startup. The rotary impeller is adopted to ensure no clogging and no winding.

※ Silent operation:

In the design of water pump, motor, water tank, base, etc. the noise factor is taken into account, so as to achieve quiet operation, especially suitable for home use.

※ Intelligent control system:


. Humanized design, easy to operate. It can monitor the operation, switch, alarm and water tank level intelligently. . Germany imported liquid level pressure sensor to ensure the stable operation of the drainage system, high sensitivity, low failure rate. 0 Self-diagnostic system for continuous system monitoring, and remind the next maintenance time. . High protection grade and three anti-coating circuit board to ensure stable operation in special environment.

0 Optional: Data via USB interface, 485 communication transmission, touch screen.



XZWL20

※ Product picture:

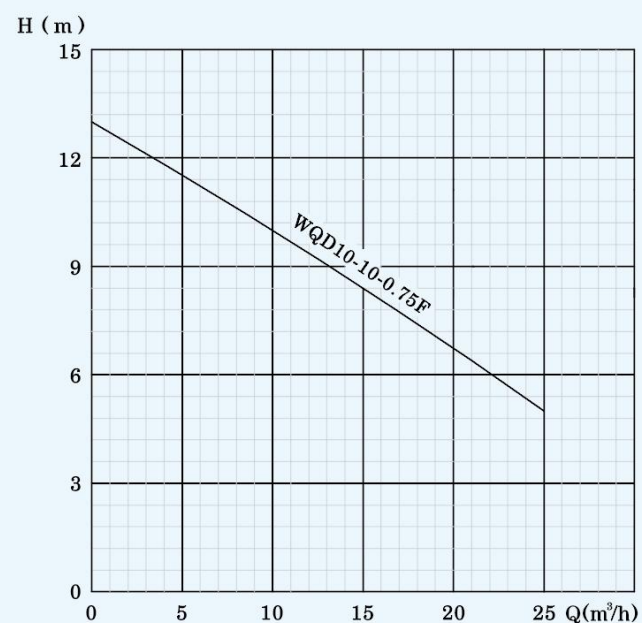


※ Product Overview:

- . Miniature lifting equipment, compact, light and beautiful.
- . Pressure controller control system of start and stop, level alarm function, high sensitivity, low failure rate. 0 Single pump external installation, easy and fast maintenance.
- 0 Suitable for back-row toilet, rain room, wash basin, counter sink and other domestic sewage discharge.

※ Scope of supply:

Serial number	let	Quantity	Units	Remarks
1	HDPE High density polyethylene sewage tank 20L	1	a	Standard
2	Slop pump	1	a	Standard
3	Controller NK-1	1	a	Standard
4	Aerate soft connect DN40	1	a	Standard
5	Soft connect DN40 with water	1	a	Standard
6	Soft connect DN100 with water	1	a	Standard
7	Check valve DN40	1	a	Standard
8	Soft connect DN40 out of the water	1	a	Standard
9	Effluent stop valve DN40	1	a	assorting

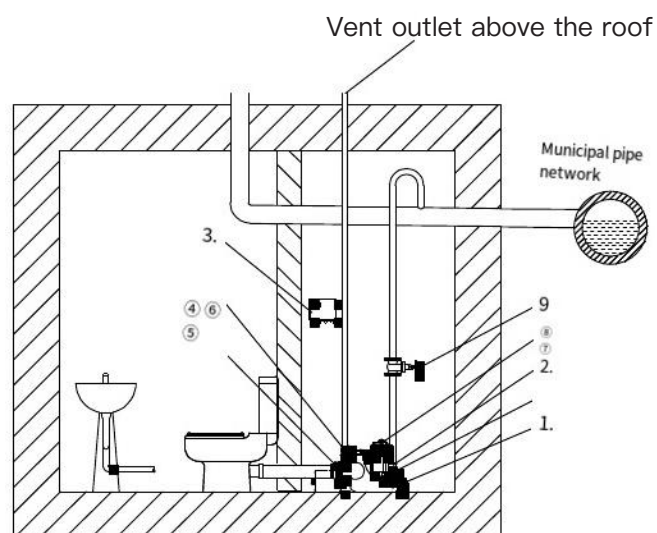


※XZWL20 series box performance parameters:

Model number	Tank volume (L)	Effective volume (L)	Box material	Number of imports (PCS)	Minimum height of import (mm)	Inlet pipe diameter (mm)	Outlet pipe diameter (mm)	Vent pipe diameter (mm)	Equipment weight (kg)
XZWL20/0.75D	20	11	PE	7	50	DN100/DN40	DN40	DN40	24

※XZWL20 series electrical parameters:

Model number	Pump model	Rated flow (m³/h)	Rated head (m)	Power (KW)	Voltage/frequency	Current (A)	level of protection	Pump body Material	impeller Material	Sewage transit form	Overflow diameter	Control mode	Motor speed (r/min)
XZWL20/0.75D	WQD10-10-0.75F	10	10	0.75	220V/50Hz	5.4	IP68	HT200	HT250	Swirling current	30	Air Pressure control + alarm level gauge	2850

※ Size specification:

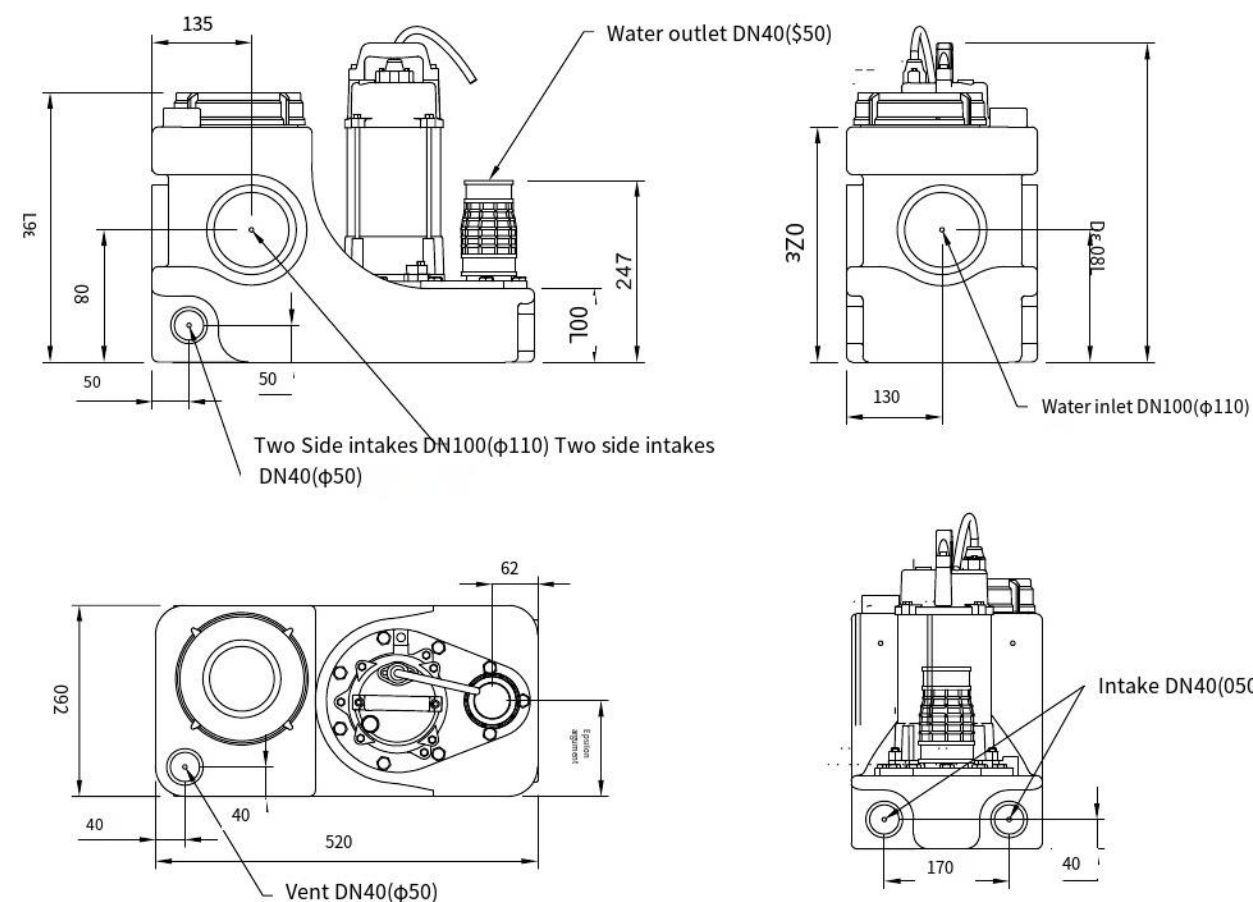


XZWL60

※ Product picture:



※ Performance graph:

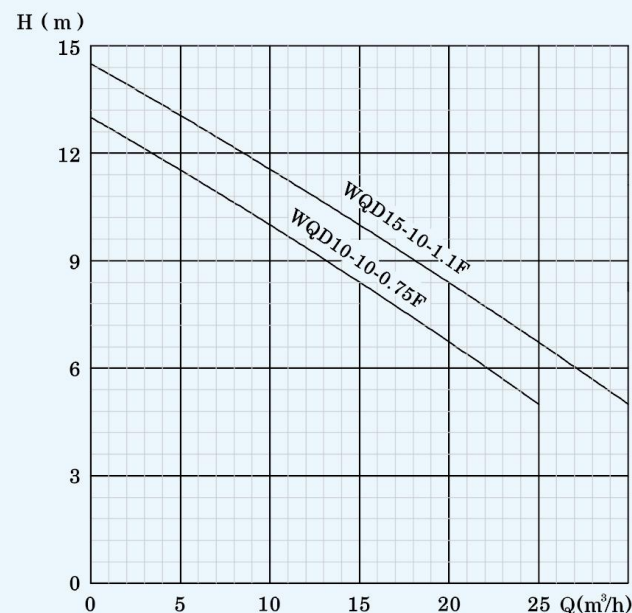


※ Product Overview:

- o Single pump, can be installed in the sump or freely installed on the ground.
- . Pressure controller controls pump start and stop, level alarm function, high sensitivity, low failure rate.
- o Single pump external installation, easy and fast maintenance.
- o Suitable for discharge of domestic sewage produced by basement toilet, bar sink, laundry room, etc.

※ Scope of Supply:

Serial number	Within the let	Quantity	Units	Remarks
1	HDPE High density polyethylene sewage tank 60L	1	a	Standard
2	Slop pump	1	a	Standard
3	Controller NK-1	1	a	Standard
4	Aerate soft connect DN40	1	a	Standard
5	Soft connect DN40 with water	1	a	Standard
6	Soft connect DN100 with water	1	a	Standard
7	Check valve DN50	1	a	Standard
8	Soft connect DN50 out of the water	1	a	Standard set
9	Outlet flange DN50	1	a	Standard set
10	Water inlet stop valve DN100	1	a	Optional
11	Effluent stop valve DN80	1	a	Optional
12	Auxiliary pump outlet stop valve DN40	1	a	Matching
13	Auxiliary pump	1	a	Optional

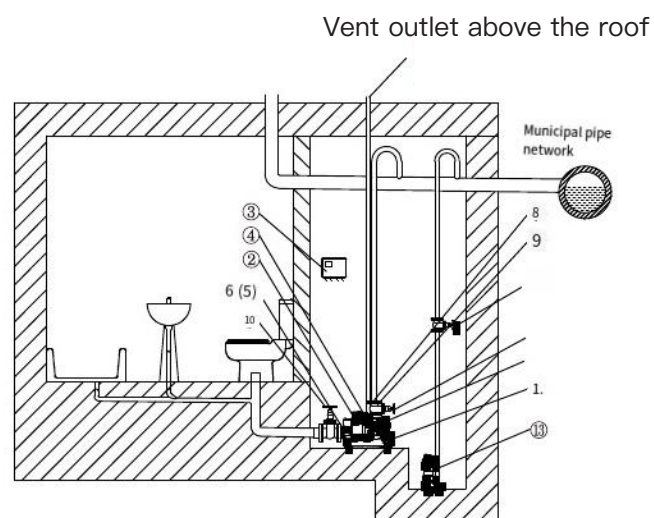


※ XZWL60 series box performance parameters:

Model number	Tank volume (L)	Effective volume (L)	Box material	Number of imports (PCS)	Minimum height of import (mm)	Inlet pipe diameter (mm)	Outlet pipe diameter (mm)	Vent pipe diameter (mm)	Equipment weight (kg)
XZWL60/0.75D	60	35	PE	6	60	DN100/DN40	DN65	DN40	36
XZWL60/1.1D	60								37

※ XZWL60 series electrical parameters:

Model number	Pump model	Rated flow (m³/h)	Rated head (m)	Power (KW)	Voltage/frequency	Current (A)	level of protection	Pump body material	Impeller material	Sewage transit form	Overflow diameter	Control mode	Motor speed (r/min)
XZWL60/0.75D	WQD10-10-0.75F	10	10	0.75	220V/50Hz	5.4	IP68	HT200	HT250	Swirling current	30	Air pressure control + alarm level gauge	2850
XZWL60/1.1D	WQD15-10-1.1F	15	10	1.1	220V/50Hz	7.8	IP68	HT200	HT250		30		2850

※ RT grid:

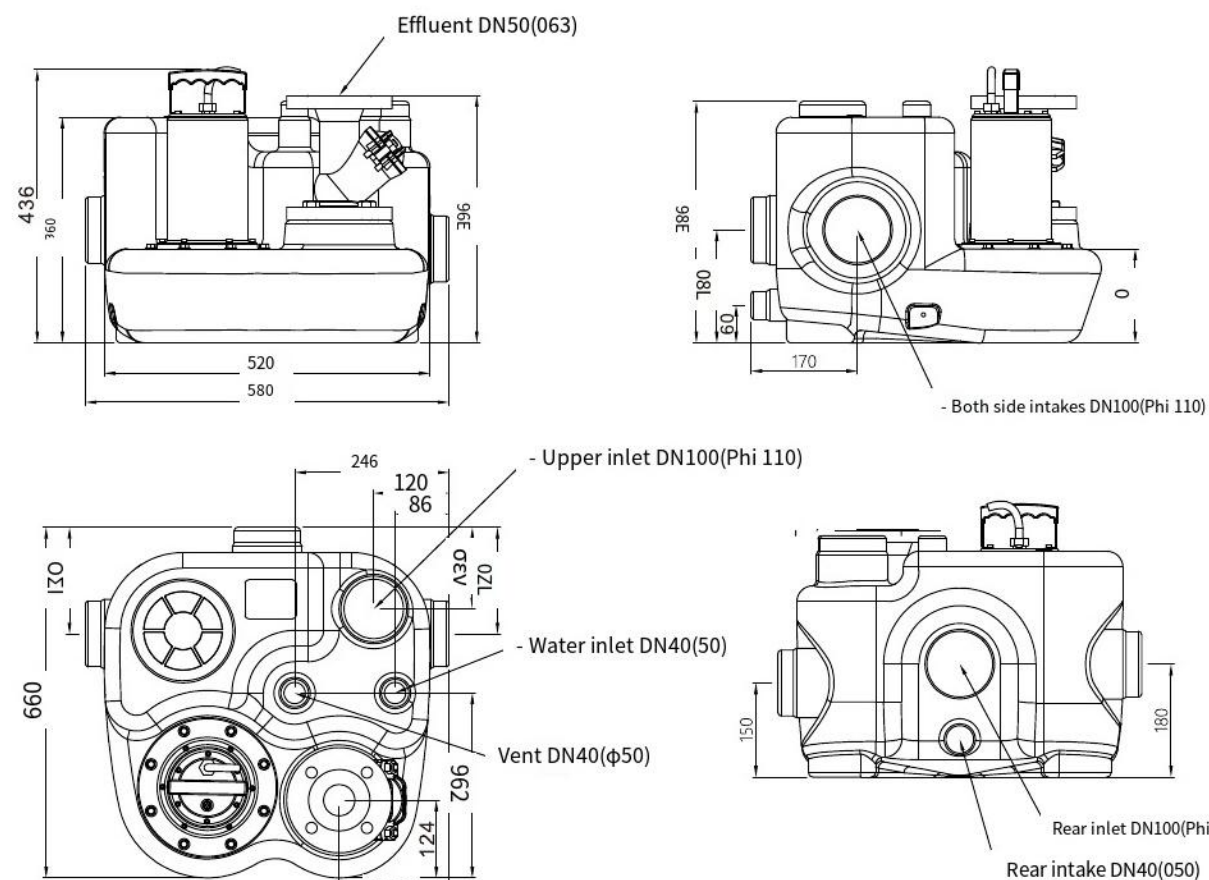


XZWL120

※ Product picture:



※ Performance picture:

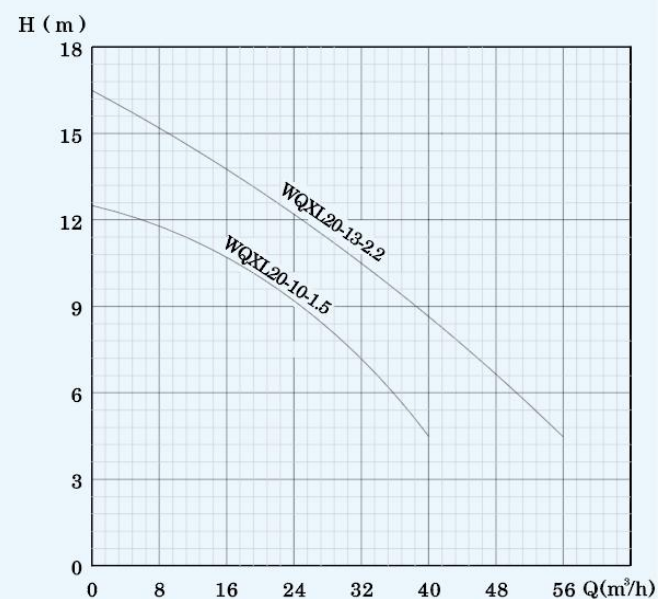


※ Product Overview:

- o Single pump, can be installed in the sump or ground mounted freely.
- . Pressure controller controls pump start and stop, level alarm function, high sensitivity, low failure rate.
- o Single pump external installation, easy and fast maintenance.
- . Suitable for discharge of domestic sewage produced by basement bathroom, bar sink, laundry room, etc.
- . Anti-floating fixed installation (anchor bolt).

※ Scope of Supply:

Serial number	Within the let	Quantity	Units	Remarks
1	HDPE High density polyethylene sewage tank 120L	1	a	Standard
2	Slop pump	1	a	Standard
3	Controller NK-1	1	a	Standard
4	Aerate soft connect DN65	1	a	Standard
5	Soft connect DN65 with water	1	a	Standard
6	Soft connect DN100 with water	1	a	Standard
7	Check valve DN80	1	a	Standard
8	Soft connect DN80 out of water	1	a	Standard set
9	Outlet flange DN80	1	a	Standard set
10	Water inlet stop valve DN100	1	a	Optional
11	Outlet stop valve DN80	1	a	Optional
12	Auxiliary pump outlet stop valve DN40	1	a	Optional
13	Auxiliary pump	1	a	Optional

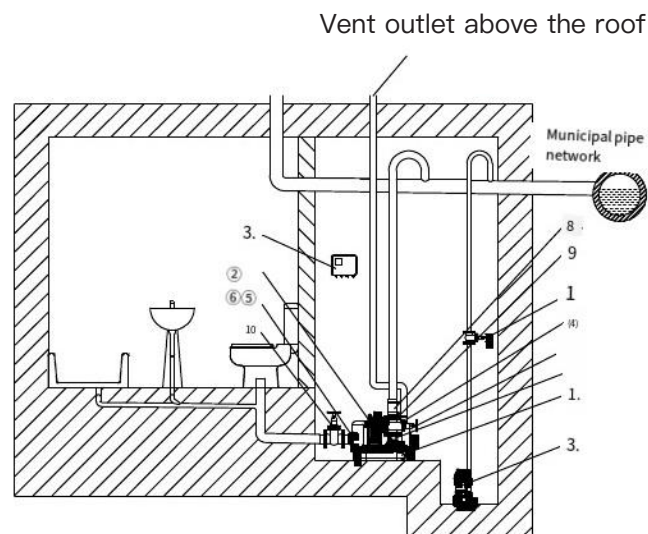


※XZWL120 series box performance parameters:

Model number	Tank volume (L)	Effective volume (L)	Box material	Number of imports (PCS)	Minimum height of import (mm)	Inlet pipe diameter (mm)	Outlet pipe diameter (mm)	Vent pipe diameter (mm)	Equipment weight (kg)
XZWL120/1.5	120	75	PE	6	110	DN65	DN80	DN65	68
XZWL120/2.2	120								70

* XZWL120 series electrical parameters:


Model number	Pump model	Rated flow (m³/h)	Rated head (m)	Power (KW)	Voltage/frequency	Current (A)	level of protection	Pump body material	Impeller material	Sewage transit form	Overflow diameter	Control mode	Motor speed (r/min)
XZWL120/1.5	WQXL20-10-1.5	20	10	1.5	380V/50Hz	3.6	IP68	HT200 HT150		Swirling current	35	Air pressure control + alarm level gauge	2950
XZWL120/2.2	WQXL20-13-2.2	20	13	2.2	380V/50Hz	4.9	IP68	HT200 HT150			35		2950

※R inch specification:

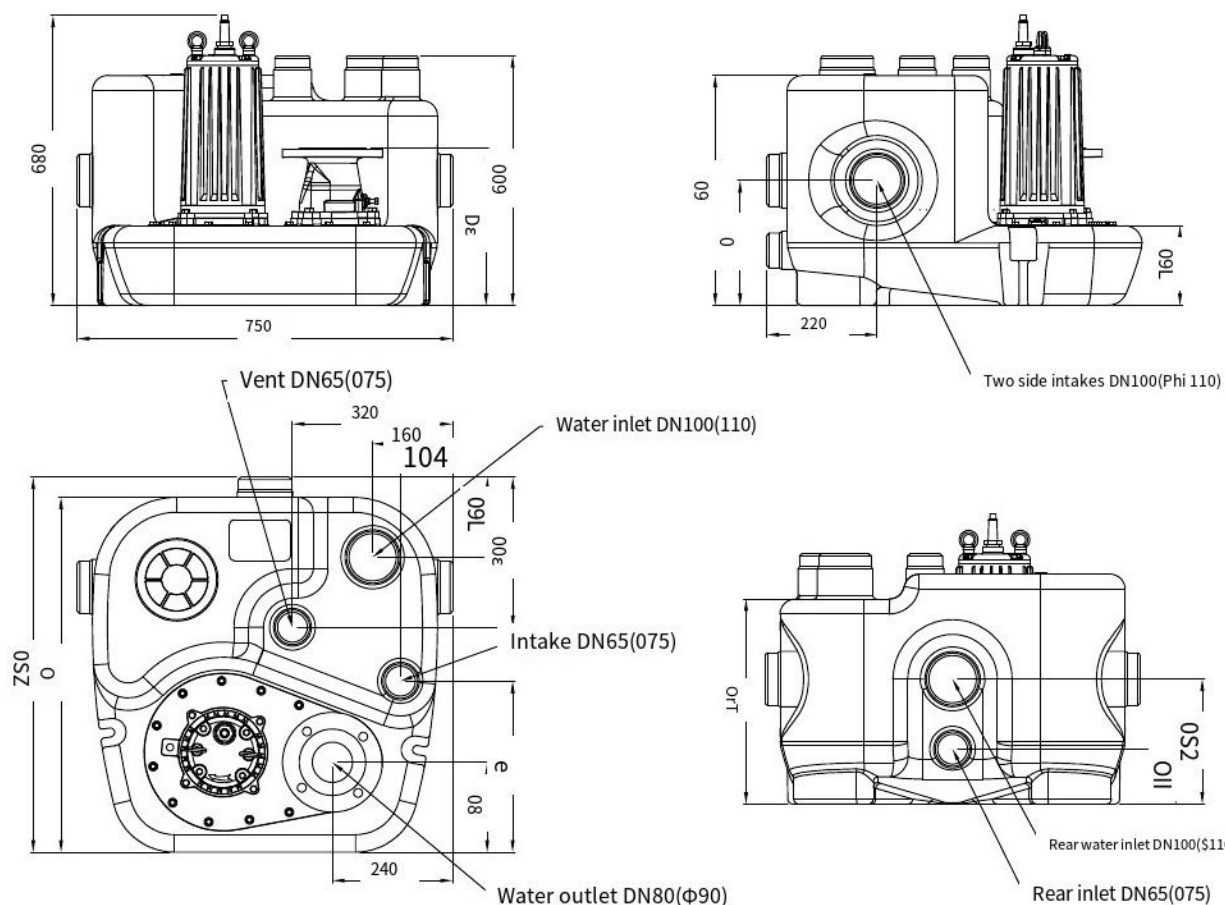


XZWL200

※ Product picture:

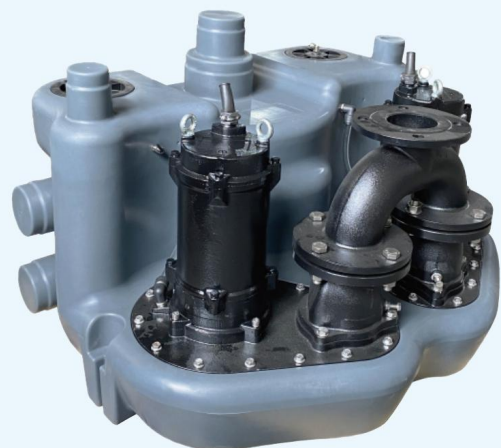

※ Performance picture:

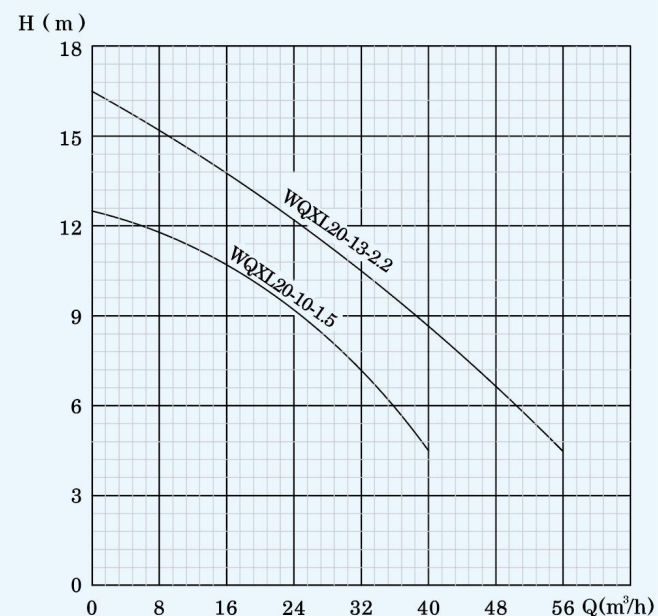


※ Product Overview:

- . Can be mounted in a sump or freely on the ground.
- . Double pump system, mutual backup, under normal circumstances, double pump alternately run, the flow peak can be started at the same time, such as one of the pump failure system can automatically switch to single pump operation mode.
- . The pressure controller controls the start and stop of the system with high sensitivity and low failure rate.
- 0 Suitable for large villas, multiple toilets, small shopping malls and other public places to produce domestic sewage discharge. . Anti-floating fixed installation (anchor bolt).

※ Scope of Supply:

Serial number	Within the let	Quantity	Units	Remarks
1	HDPE High density polyethylene sewage tank 200L	1	a	Standard
2	Slop pump	2	a	Standard set
3	Controller NK-2	1	a	Standard set
4	Aerate soft connect DN65	1	a	Standard set
5	Water is soft connected to DN65	1	a	Standard
6	Soft connect DN100 with water	1	a	Standard
7	Soft connect the DN150 with water	1	a	Standard set
8	Check valve DN80	2	a	Standard set
9	Water tee DN80	1	a	Standard
10	Soft connect DN80 out of water	1	a	Standard
11	Outlet flange DN80	1	a	Standard
12	Water inlet stop valve DN150/DN100	1	a	Optional
13	Effluent stop valve DN80	1	All	Optional
14	Auxiliary pump outlet stop valve DN40	1	All	Matching
15	Auxiliary pump	1	All	Optional

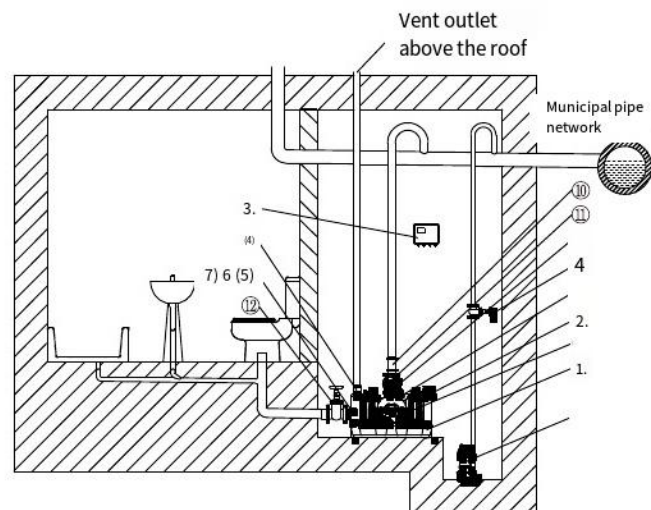





XXZWL200 series box performance parameters:

Model number	Tank volume (L)	Effective volume (L)	Box material	Number of imports (PCS)	Minimum height of import (mm)	Inlet pipe diameter (mm)	Outlet pipe diameter (mm)	Vent pipe diameter (mm)	Equipment weight (kg)
XZWL200/1.5-2	200	120	PE	7	100	DN150/DN100/DN65	DN80	DN65	144
XZWL200/2.2-2	200								148

XXZWL200 series electrical parameters:

Model number	Pump model	Rated flow (m³/h)	Rated head (m)	Power (KW)	Voltage/frequency	Current (A)	level of protection	Pump body material	Impeller material	Sewage transit form	Overflow diameter	Control mode	Motor speed (r/min)
XZWL200/1.5-2	WQXL20-10-1.5	20	10	1.5	380V/50Hz	3.6	IP68	HT200	HT250	Swirling current	35	Air Pressure control + alarm level gauge	2950
XZWL200/2.2-2	WQXL20-13-2.2	20	13	2.2	380V/50Hz	4.9	IP68	HT200	HT250		35		2950


※RT:

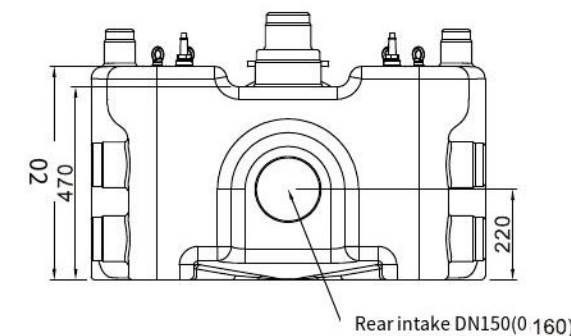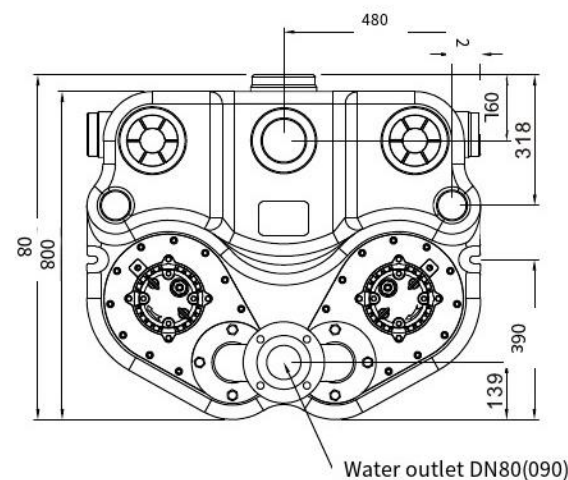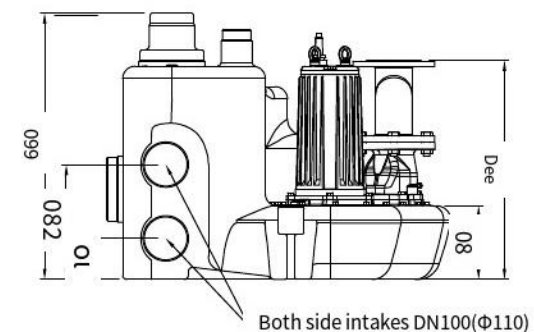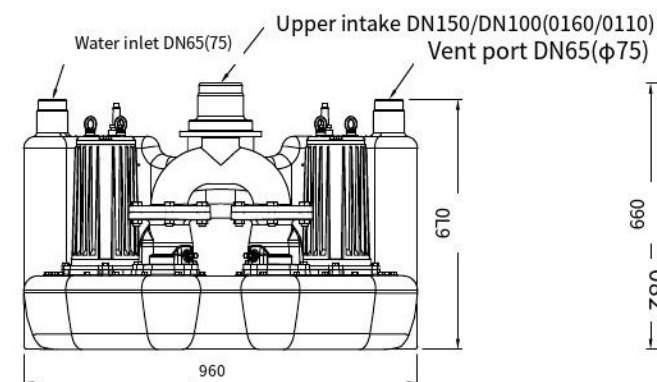

XZWL350



※ Performance curve:

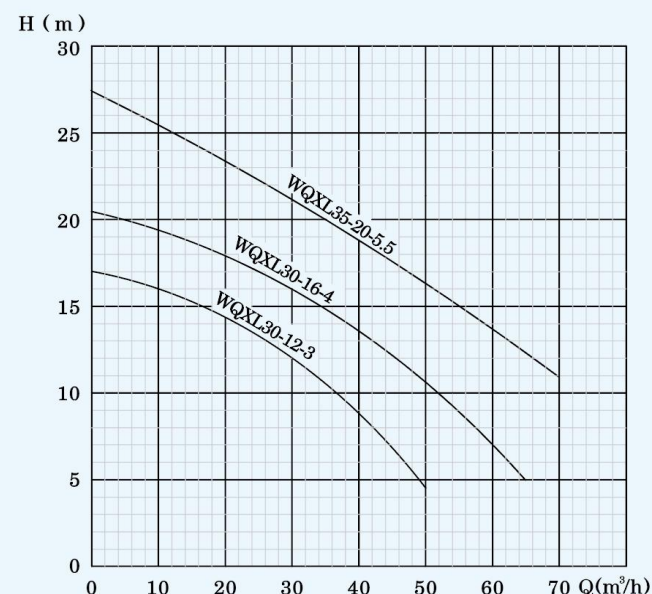


※ Product Overview:

- . Can be mounted in a sump or freely on the ground.
- . Double pump system, mutual backup, under normal circumstances, double pump alternately run, the flow peak can be started at the same time, such as one of the pump failure system can automatically switch to single pump operation mode.
- . The pressure controller controls the start and stop of the pump with high sensitivity and low failure rate.
- . Suitable for small shopping malls, public enterprises and institutions, multi-family and other places produced domestic sewage discharge.
- . Anti-floating fixed installation (anchor bolt)

※ Scope of Supply:

Serial number	let	Quantity	Units	Remarks
1	HDPE High density polyethylene sewage tank 350L	1	a	Standard set
2	Slop pump	2	a	Standard set
3	Controller NK-2	1	a	Standard set
4	Aerate soft connect DN65	1	a	Standard
5	Soft connect DN65 with water	1	a	Standard set
6	Soft connect DN100 with water	1	a	Standard set
7	Soft connect the DN150 with water	1	All of	Standard set
8	Check valve DN80	2	them	Standard
9	Water tee DN80	1	a	Standard
10	Soft connect DN80 out of water	1	a	Standard kit
11	Outlet flange DN80	1	a	Standard kit
12	Water inlet stop valve DN150/DN100	1	a	option
13	Outlet stop valve DN80	1	a	Optional
14	Auxiliary pump outlet stop valve DN40	1	a	Optional
15	Auxiliary pump	1	a	Optional

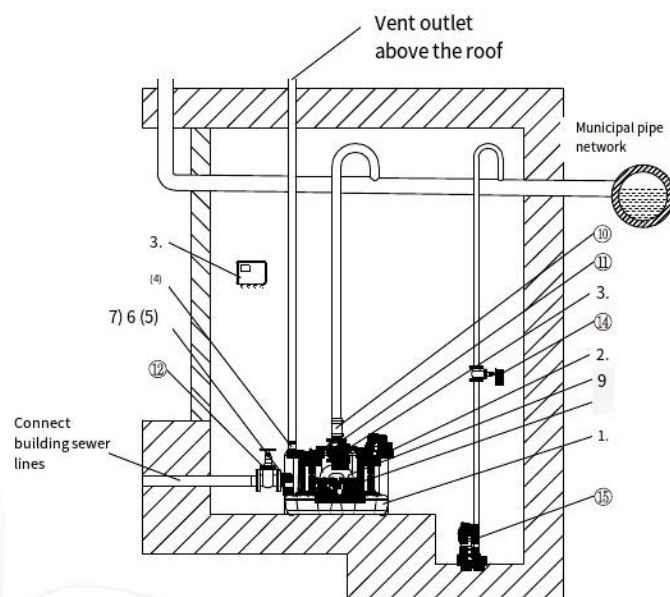





※XZWL350 series box performance parameters:

Model number	Tank volume (L)	Effective volume (L)	Box material	Number of imports (PCS)	Minimum height of import (mm)	Inlet pipe diameter (mm)	Outlet pipe diameter (mm)	Vent pipe diameter (mm)	Equipment weight (kg)
XZWL350/3-2	350	220	PE	8	150	DN150/ DN100/ DN65	DN80	DN65	168
XZWL350/4-2	350								172
XZWL350/5.5-2	350								198

*XZWL350 series electrical parameters:


Model number	Pump model	Rated flow (m³/h)	Rated head (m)	Power (KW)	Voltage/frequency	Current (A)	level of protection	Pump body material	Impeller material	Sewage transit form	Overflow diameter	Control mode	Motor speed (r/min)
XZWL350/3-2	WQXL30-12-3	30	12	3	380V/50Hz	6.4	IP68	HT200	HT250	Swirling current	40	Air Pressure control + alarm level gauge	2950
XZWL350/4-2	WQXL30-16-4	30	16	4	380V/50Hz	8.2	IP68	HT200	HT250		40		2950
XZWL350/5.5-2	WQXL35-20-5.5	35	20	5.5	380V/50Hz	11	IP68	HT200	HT250		40		2950

※R inch specifications:

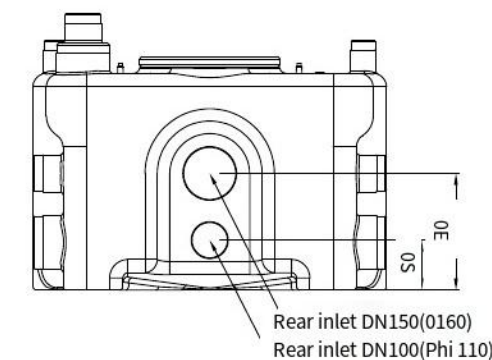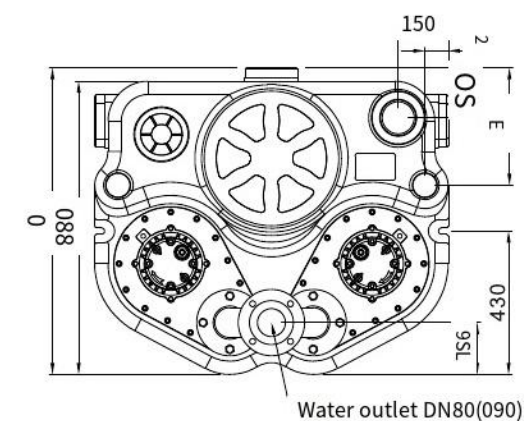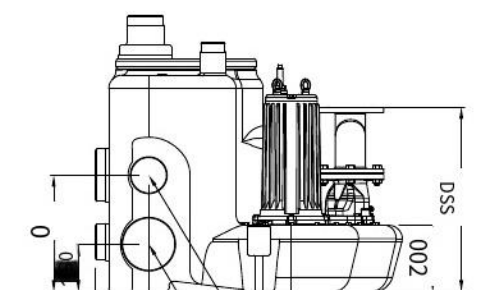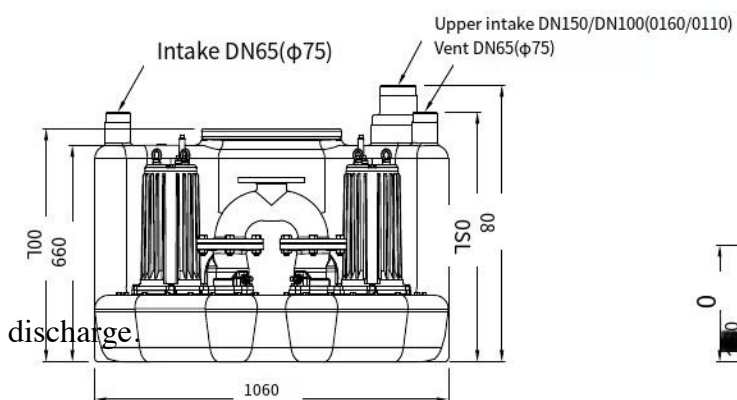

XZWL500

※ Performance curve:

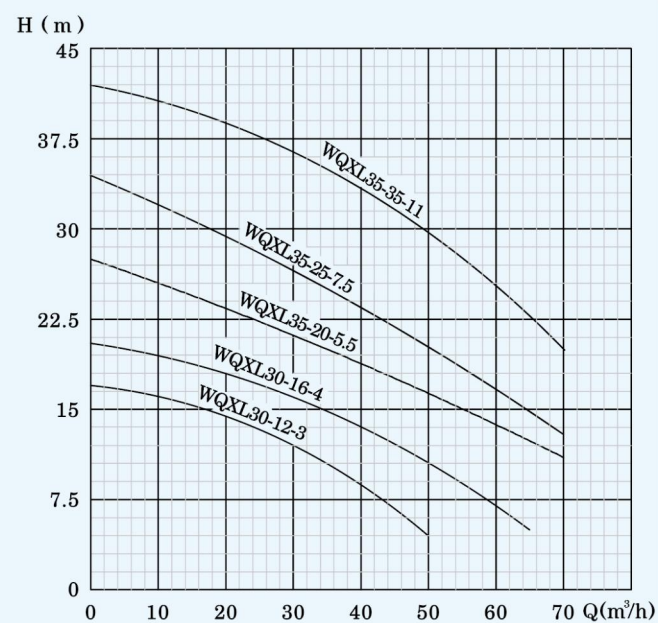

※ XZWL500 series box performance parameters

Model number	Tank volume (L)	Effective volume (L)	Box material	Number of imports (PCS)	Minimum height of import (mm)	Inlet pipe diameter (mm)	Outlet pipe diameter (mm)	Vent pipe diameter (mm)	Equipment weight (kg)
XZWL500/3-2	500	320	PE	6	150	DN100/DN40 DN150	DN80	DN65	185
XZWL500/4-2	500								189
XZWL500/5.5-2	500								215
XZWL500/7.5-2	500								272
XZWL500/11-2	500								306

※ XZWL500 series electrical parameters:

Model number	Pump model	Rated flow (m³/h)	Rated head (m)	Power (KW)	Voltage/frequency	Current (A)	level of protection	Pump body Material	Impeller Material	Sewage transit form	Overflow diameter	Control mode	Motor speed (r/min)
XZWL500/3-2	WQXL30-12-3	30	12	3	380V/50Hz	6.4	IP68	HT200	HT250	Swirling current	40	Air Pressure control + alarm level gauge	2950
XZWL500/4-2	WQXL30-16-4	30	16	4	380V/50Hz	8.2	IP68	HT200	HT250		40		2950
XZWL500/5.5-2	WQXL35-20-5.5	35	20	5.5	380V/50Hz	11	IP68	HT200	HT250		40		2950
XZWL500/7.5-2	WQXL35-25-7.5	35	25	7.5	380V/50Hz	15	IP68	HT200	HT250		50		2950
XZWL500/11-2	WQXL35-35-11	35	35	11	380V/50Hz	22	IP68	HT200	HT250		50		2950

※ Size:

※ Product Overview:

- . Can be mounted in a sump or freely on the ground.
- . Double pump system, mutual backup, under normal circumstances, double pump alternately run, the flow peak can be started at the same time, such as one of the pump failure system can automatically switch to single pump operation mode.
- . The pressure controller controls the start and stop of the pump with high sensitivity and low failure rate.
- . It is suitable for discharge of domestic sewage produced by large commercial complex, large public place, enterprise and other places.
- . Anti-floating fixed installation (anchor bolt).

※ Scope of Supply:

Serial number	let	Quantity	Units	Remarks
1	HDPE High density polyethylene sewage tank 500L	1	a	Standard
2	Slop pump	2	a	Standard set
3	Controller NK-2	1	a	Standard set
4	Aerate soft connect DN65	1	a	Standard set
5	Soft connect the DN150 with water	2	a	Standard set
6	Check valve DN80	2	a	Standard
7	Water tee DN80	1	a	Standard
8	Soft connect DN80 out of water	1	a	Standard
9	Outlet flange DN80	1	a	Standard
10	Water inlet stop valve DN150	1	a	Optional
11	Effluent stop valve DN80	1	a	Optional
12	Auxiliary pump outlet stop valve DN40	1	a	Optional
13	Auxiliary pump	1	a	Optional

