



潜水轴流泵 & 潜水混流泵系列

Submersible Axial-flow Pumps &
Mixed-flow Pumps Series



杭州西子泵业有限公司
杭州市临平区塘栖工业园顺启路8号
0571-88111009/88111688
www.xizipumps.com



西子泵业公众号



西子泵业视频号

荣誉资质

Honor & Qualification



杭州西子泵业有限公司 三十余年致力于潜水排污泵及相关系统的研发与制造。自1994年公司创建以来，始终秉持“客户至上，品质为先”的经营理念。专注于做好每一个产品，致力于为每一位合作伙伴提供更优质的泵产品与服务。

公司与相关高校合作建设了专业的研发和技术团队，获得国家实用/发明专利及计算机软件著作权等四十余项。并于2022年获得首批潜污泵“**国家一级能效**”认证。数以千计的西子泵产品在全球范围内成功地运行，并在废水处理、污水输送、防洪排涝、水利工程以及灌溉、给排水等领域贡献出优质的西子解决方案。

西子泵业自创立以来一直重视对科学现代管理手段的学习和运用，先后通过了ISO9001, ISO14001, ISO45001等管理体系认证。并连续多年获得“**国家高新技术企业**”、“**浙江省专精特新企业**”、“**浙江制造认证**”、“**杭州市企业技术中心**”等称号。



工厂概览

Factory Overview



工厂位于杭州市临平区塘栖工业园区，建筑面积30000平方米，拥有完整的生产制造及研发测试中心。主要功能区有金属加工、电机制造、水泵装配、泵站及污提车间以及“国家一级精度”水泵测试中心。

工厂可以为不同需求的客户定制个性化的产品和服务。为客户提供泵与系统的最佳解决方案。

- 专业 Professional**
专注 专业，污水泵与系统三十年的研发制造经验。
- 品质 High-quality**
拥有严格的质量管理体系以及行业内先进的检测设备和水性能实验中心，100%检测合格出厂。
- 高效 Efficient**
产品高效，生产高效，服务高效。产品采用国际先进水力模型的水力部件和高效电机，已达到高效区宽、效率高、性能稳定的特征。
- 创新 Innovative**
拥有专业的研发和技术团队，获得多项国家发明专利。
- 服务 Customization**
完整的生产制造中心和售后团队，可以为不同需求的客户定制个性化的产品和服务，为客户提供泵与系统的最佳解决方案。

专注潜水泵与系统研发制造32年





目
录

产品简介	01
Introduction	
产品主要用途	01
Chief usage	
泵的使用条件	01
Working conditions	
QZ型潜水轴流泵结构图	02
QZ type submersible axial pumpsstructure darwing	
QH型潜水混流泵结构图	03
QH type submersible mixed-flow pumpsstructure darwing	
结构说明	04
Structurevo	
型号释义	05
Model meaning	
泵性能参数表及性能曲线图	06
Performance table and curve chart	
安装形式及尺寸	54
Installation and dimension	
各种附件附图	58
Variousof attachments drawingh	
订货须知	62
Instrument to order	

产品简介 INTRODUCTION

QZ系列潜水轴流泵、QH系列潜水混流泵是本公司在引进国内外先进技术，根据用户的要求及使用条件精心设计而研制成功的新一代产品。水力模型均达到国内领先水平，和旧模型相比流量提高20%—30%，效率提高3%—5%，且抗汽蚀性能优良。

QZ、QH系列泵具有单机流量大，扬程幅度宽，效率高等特点。潜水电机与水泵一体式结构，潜入水中运行，具有传统机组无法比拟的优点：

A：大大简化泵站土建及建筑结构工程，节约泵站工程造价占总造价30%—40%。

B：维护简便，有泄漏及内部绕组温升保护装置，可配备控制柜，运行可靠。

C：噪声低、寿命长。

QZ、QH系列产品的叶轮与叶轮座材料有铸铁、球铁、铸铜（青铜）及不锈钢等，供用户按照所需选取。

QZ series axial-flow pumps QH series mixed-flow pumps are modern productions successfully designed by the means of adopting foreign modern technology. The new pumps' capacity are 20% larger than the old ones. The efficiency is 3~5% higher than the old ones.

QZ、QH series pump with adjustable impellers has the advantages of large capacity, broad head, high efficiency, wide application and so on.

A: pump station is small in scale, the construction is simple and the investment is greatly decreased, This can save 30%~40% for the building cost.

B: It is easy to install, maintain and repair this kind of pump.

C: low noise, long life.

The material of the series of QZ QH can be cast iron, ductile iron, copper or stainless steel.

产品主要用途 CHIEF USAGE

QZ系列潜水轴流泵、QH系列潜水混流泵广泛应用于工农业输送水、城市给水、轻度污水排放及调水工程。


QZ series axial-flow pump QH series mixed-flow pumps application range: water supply in cities, diversion works, sewage drainage system, sewage disposal project.

泵的使用条件 WORKING CONDITIONS


不超过50℃的清水及类似清水的其它液体。

The medium for pure-water should be no larger than 50℃.

QZ型潜水轴流泵结构图 QZ TYPE SUBMERSIBLE AXIAL-FLOW PUMPS STRUCTURE DRAWING

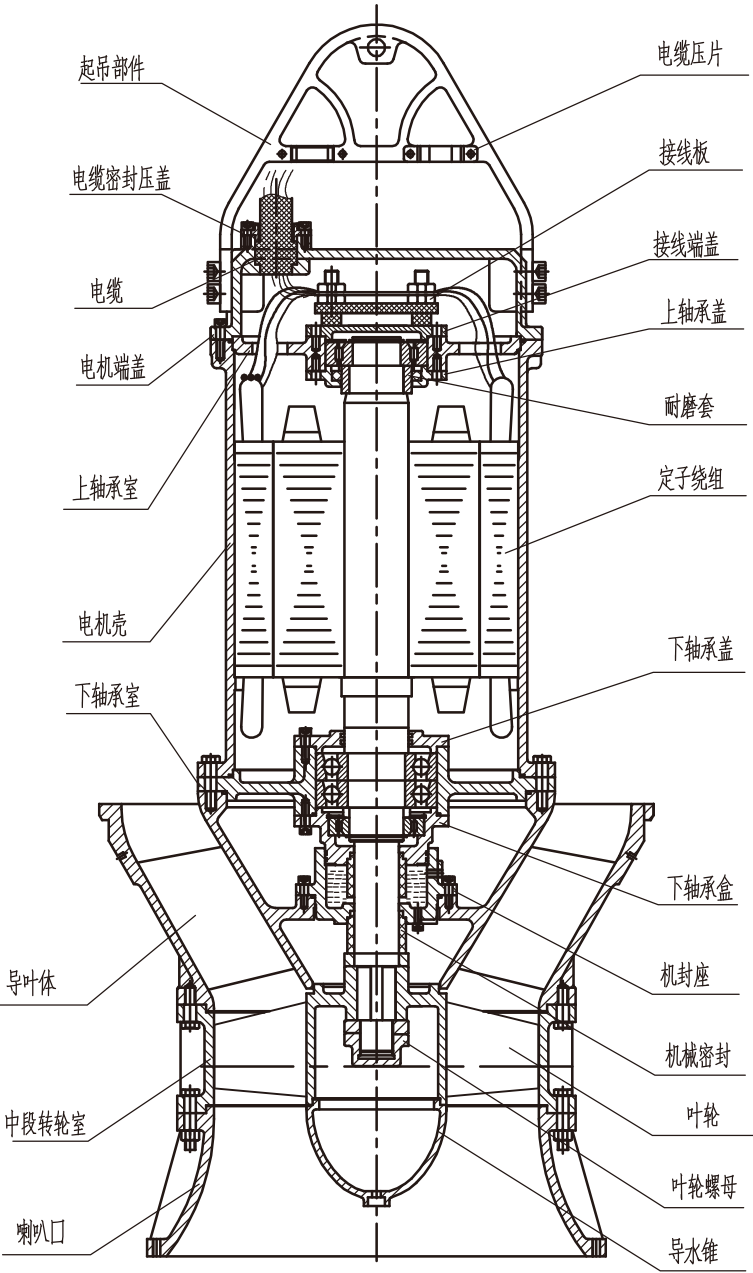

QH型潜水混流泵结构图 QH TYPE SUBMERSIBLE MIXED-FLOW PUMPS STRUCTURE DRAWING

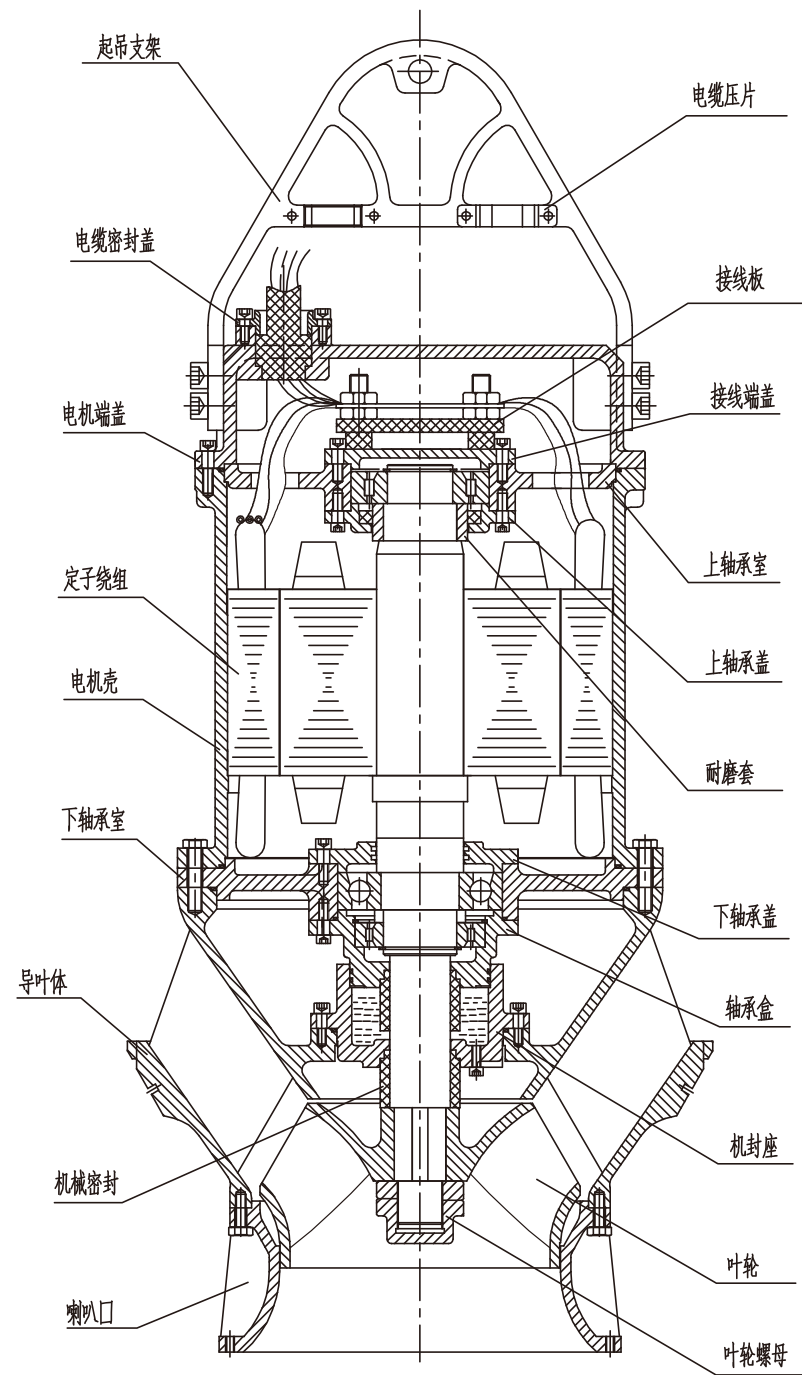

结构说明 STRUCTUREVO

进出水流道安装方式

- 1、进水流道：按样本外形安装图推荐形式，泵在液体中
最小淹没深度应大于图中值。
- 2、出水方式：拍门或其它方式。
- 3、安装方式：变管悬吊、井筒悬吊、混凝土预制井筒
式。

电 机

潜水电机

功率等级：电气性能指标符合GB755

防护等级：IP68

冷却方式：ICWO8A41

基本安装形式：IM3013

电压等级：≤355kw 电压为 380V或 660V>355kw
电压为380V、660V、6kv、10kv

绝缘等级：F

额定频率：50Hz

电缆长度：10m

轴 封

设有两道或三道机械密封。第一道与水直接接触
的机械密封一般为碳化硅对碳化硅，第二、第三道一般
为石墨对碳化硅。

防漏保护

QZ、QH系列泵设有防漏保护传感器。当油室、电
机腔或接线盒内被水渗漏时，传感器发出警报或停机，
并保留故障信号。

过热保护装置

潜水电机绕组中设有过热保护器，当温度超过规定
时，发出信号或停机。

转 向

从电机上方看，叶轮顺时针方向旋转。

Installation of Suction and Discharge Pipes

- 1.Suction Pipe:according to the outline drawing in the booklet. Th
smallest depth of the pump under the water should be bigg
than the datum in the drawing.
- 2.Discharge:flap valve and other methods.
- 3.Installation:QZ series are suitable for elbow cantilever in-
stallation,well cantiever installation and concrete well canti
lever installation. Our company will supply whole set of steel
well pipe for elbow cantilever and well cantilever install-
ation. For concrete well cantilever installation, our comp-
any will provide cover and brackets. LZ and JZ series have
open or shut installation. The length of cardon shaft can be
made according to different requirements of customers.

Motor

1. Submersible Motor(QZ series)

Power class:electric performance meets GB755

Protection class:IP68

Cooling system:ICWO8A41

Basic installation type: IM3013

Voltage: up to 355kw, 380V 600V 355KW, 380V 600V
6kv, 10kv

Insulation class: F

Rated power: 50Hz

Length of cable: 10m

Shaft Seal

This type has two or three mechanical seals. The first seal,
which contacts water, is usually made of carbon silicon and carb
silicon. The second and third are usually made of graphite an
carbon silicon.

Leakage Protection

QZ、QH series has leakage protection sensor. When the oil
house of motor or the wire-box is leaking, sensor will give out
warning or stop working and maintain the signal.

Overheat Protector

The winding of QZ series submersible motor has overheat
protector. When it is overheated, warning will be given out or
the motor will stop working.

Rotating Direction

Looking from upper side, the impeller is rotating clockwise.

Series Definition

型号释义 MODEL MEANING

1.产品代号

QZ-叶片可调式潜水轴流泵

QH-叶片可调式潜水混流泵

2.型号举例

350 QZ(H) - 35 - G (D)

1.Series Code

QZ-impeller adjustable submersible axial flow pump

QH-impeller adjustable submersible mixed flow pump

2. Example

比转数，名义排出口径相同较低一档转速
Equal specific number of revolutions and nominal release aperture rotating speed at a lower shift

比转数，名义排出口径相同较高一档转速
Equal specific number of revolutions and nominal release aperture rotating speed at a higher shift


比转数的1/10
1/10 of the specific number of revolution

潜水轴流泵（潜水混流泵）
Submersible axial-flow pump(submersible mixed-flow pump)

名义排出口径
Nominal release aperture


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

350QH-35G

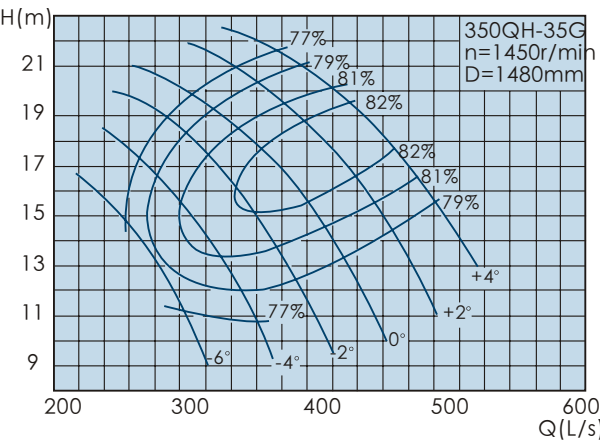

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	929.5 1044 1099.8	258.2 290 305.5	14.65 12.6 11.05	1450	48.2 45.7 43	55	77 78.4 77	300
-4°	961.6 1170 1255.7	267.1 325 348.8	17.2 14 11.9		58.5 55 51.5	75	77 81.2 79	
-2°	1049 1296 1413.7	291.4 360 392.7	18.9 15.2 12.3		70.2 65.3 60	90	77 82.2 79	
0°	1118.9 1404 1548	310.8 390 430	19.8 16.32 13.25		78.4 75.7 70.7		77 82.5 79	
+2°	1241.6 1512 1685.2	344.9 420 468.1	20.87 17.73 14.38		91.7 87.9 83.6	110	77 83.1 79	
+4°	1350.4 1620 1804	375.1 450 501.1	21.51 18.5 15.47		102.8 99 96.3		77 82.5 79	


350QH-35D

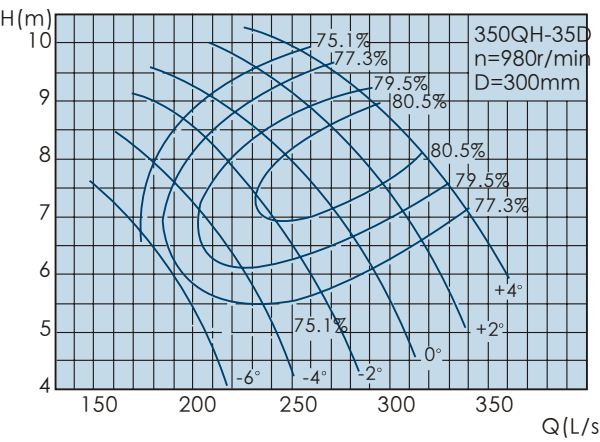

叶片安装角度 Angle	流量 Q Capacity		扬程H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	628.2 705.6 743.3	174.5 196 206.5	6.69 5.76 5.05	980	15.2 14.4 13.6	18.5	75.1 76.7 75.1	300
-4°	649.9 790.8 848.7	180.5 219.7 235.7	7.86 6.4 5.44		18.5 17.3 16.3	22	75.1 79.6 77.3	
-2°	709 875.9 955.5	196.9 243.3 265.4	8.63 6.94 5.62		22.2 20.5 18.9	30	75.1 80.7 77.3	
0°	756.2 948.9 1046.2	210.1 263.6 290.6	9.04 7.45 6.05		24.8 23.8 22.3		75.1 81.1 77.3	
+2°	839.2 1021.9 1138.9	233.1 283.9 316.4	9.53 8.1 6.57		29 27.6 26.4	37	75.1 81.7 77.3	
+4°	912.7 1094.9 1219.2	253.5 304.1 338.7	9.83 8.45 7.07		32.5 31.1 30.4		75.1 81 77.3	


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

350QH-40G

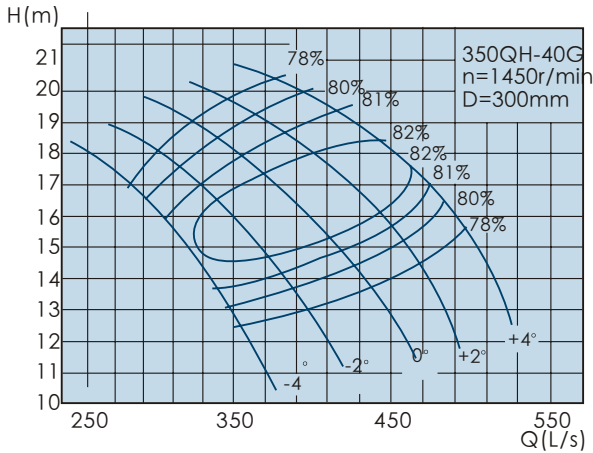

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	转速 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1005.5	279.3	17.05	1450	59.9	75	78	300
	1170	325	13.65		53.3		81.6	
	1275.8	354.4	12.44		55.4		78	
-2°	1079.9	300	18.08		68.2	90	78	
	1296	360	14.8		63.7		82	
	1430.3	397.3	13.01		65		78	
0°	1168.6	324.6	19.04		77.7	110	78	
	1404	390	16.1		74.8		82.3	
	1572.6	436.8	13.68		75.2		78	
+2°	1243	345.3	19.72		85.6		78	
	1512	420	17.2		85.4		83	
	1683.3	467.6	14.42		84.8		78	
+4°	1352.2	375.6	20.39		96.3		78	
	1620	450	18.2		97.4		82.5	
	1785.5	496	15.59		97.2		78	


350QH-40D

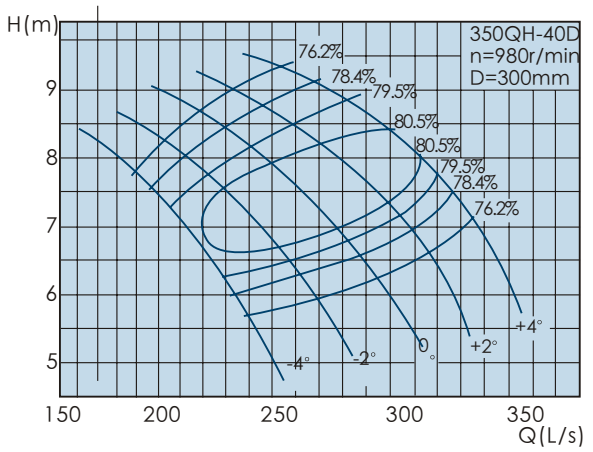

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	转速 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	679.6	188.8	7.79	980	18.9	22	76.2	300
	790.8	219.7	6.24		16.8		80.1	
	862.3	239.5	5.68		17.5		76.2	
-2°	729.8	202.7	8.26		21.6	30	76.2	
	875.9	243.3	6.76		20		80.5	
	966.7	268.5	5.94		20.5		76.2	
0°	789.8	219.4	8.7		24.6	37	76.2	
	948.9	263.6	7.35		23.5		80.9	
	1062.9	295.2	6.25		23.7		76.2	
+2°	840.1	233.4	9.01		27.1		76.2	
	1021.9	283.9	7.86		26.8		81.6	
	1137.7	316	6.59		26.8		76.2	
+4°	913.9	253.9	9.31		30.4		76.2	
	1094.9	304.1	8.31		30.6		81.1	
	1206.7	335.2	7.12		30.7		76.2	


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

350QH-72G

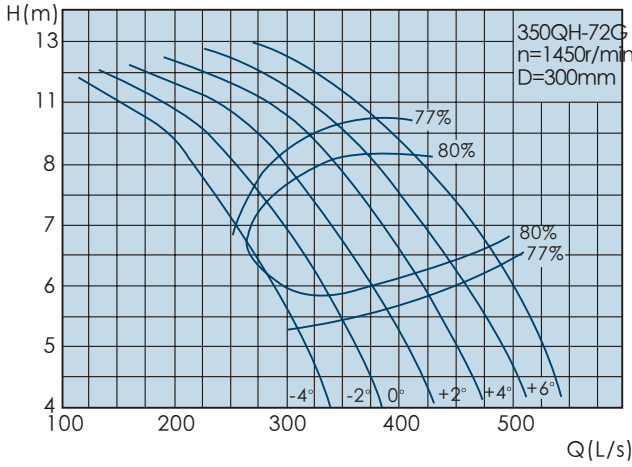

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	转速 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	817.2	227	8.3	1450	24	30	77	300
	936	260	6.3		20.1		80	
	964.8	268	5.84		19.2		80.2	
-2°	968.4	269	5.75		19	37	80	
	1072.8	298	3.9		14.8		77	
	896.4	249	9		28.6	45	77	
0°	975.6	271	7.95		26.4		80	
	1076.4	299	6.34		22.8		81.5	
	1184.4	329	4.6		18.6		80	
+2°	1227.6	341	3.7		16.1	55	77	
	1018.8	283	9.4		33.9	77	80	
	1101.6	306	8.34		31.3		81.8	
+4°	1238.4	344	6.28		25.9		80	
	1317.6	366	5		22.4		80	
	1364.4	379	4.1		19.8		77	
+6°	1108.8	308	10.01	980	39.3	11	77	300
	1173.6	326	9.3		37.2		80	
	1328.4	369	7.2		31.7		82.3	
-4°	1472.4	409	5		25.1	15	80	
	1530	425	4.2		22.7		77	
	1209.6	336	10.35		44.3	18.5	77	
-2°	1296	360	9.46		41.8		80	
	1454.4	404	7.38		35.7		81.8	
	1584	440	5.5		29.7		80	
0°	1656	460	4.5		26.4		77	
	1332	370	10.5		49.5		77	
	1440	400	9.2		45.1		80	
+2°	1544.4	429	8.14		42.1		81.4	
	1692	470	6.2		35.7		80	
	1728	480	5.6		34.2		77	


350QH-72D

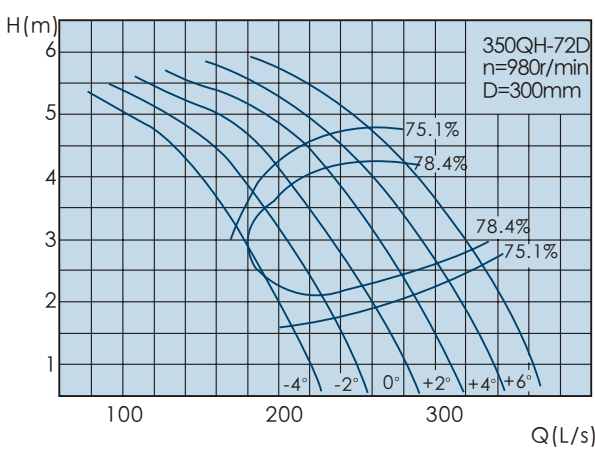

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	转速 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	552.3	153.4	3.79	980	7.6	11	75.1	300
	632.6	175.7	2.88		6.3		78.4	
	652.1	181.1	2.67		6		78.5	
-2°	654.5	181.8	2.63		6	15	78.4	
	725.1	201.4	1.78		4.7		75.1	
	605.8	168.3	4.11		9	18.5	75.1	
0°	659.4	183.2	3.63		8.3		78.4	
	727.5	202.1	2.9		7.2		79.9	
	800.5	222.4	2.1		5.8		78.4	
+2°	829.7	230.5	1.69		5.1		75.1	
	688.6	191.3	4.29		10.7	15	75.1	
	744.5	206.8	3.81		9.9		78.4	
+4°	837	232.5	2.87		8.1		80.3	
	890.5	247.4	2.28		7.1	18.5	78.4	
	922.1	256.2	1.87		6.3		75.1	
+6°	749.4	208.2	4.57	1450	12.4	30	75.1	300
	793.2	220.3	4.25		11.7		78.4	
	897.8	249.4	3.29		10		80.9	
-4°	995.1	276.4	2.28		7.9	37	78.4	
	1034.1	287.2	1.92		7.2		75.1	
	817.5	227.1	4.73		14	45	75.1	
-2°	875.9	243.3	4.32		13.2		78.4	
	983	273	3.37		11.2		80.3	
	1070.6	297.4	2.51		9.4		78.4	
0°	1119.2	310.9	2.06		8.3		75.1	
	900.2	250.1	4.8		15.7	55	75.1	
	973.2	270.3	4.2		14.2		78.4	
+2°	1043.8	289.9	3.72		13.2		79.9	
	1143.6	317.7	2.83		11.3		78.4	
	1167.9	324.4	2.56		10.8		75.1	

OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION


350QZ-50G

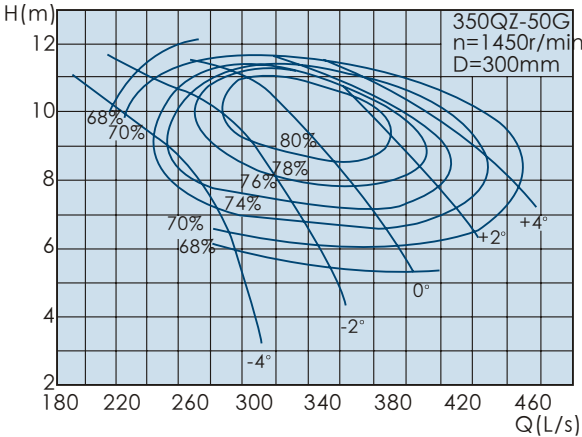

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	877.2	243.7	9.32	1450	30.1	37	74	300
	900	250	9.3		29.7		76.8	
	1022.1	283.9	7.18		27		74	
-2°	934.6	259.6	10.69		36.8	45	74	
	1054.8	293	9.6		34.4		80.3	
	1214.3	337.3	6.77		30.3		74	
0°	1033.7	287.1	11.27		42.9	55	74	
	1173.6	326	10.1		39.5		81.8	
	1389.2	385.9	6.63		33.9		74	
+2°	1202.5	334	11.3		50		74	
	1350	375	10		45.1		81.5	
	1545.1	429.2	7.19		40.9		74	
+4°	1332.1	370	11.15		54.7	75	74	
	1483.2	412	9.78		51.2		77.2	
	1606	446.1	8.74		51.7		74	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

350QZ-75G

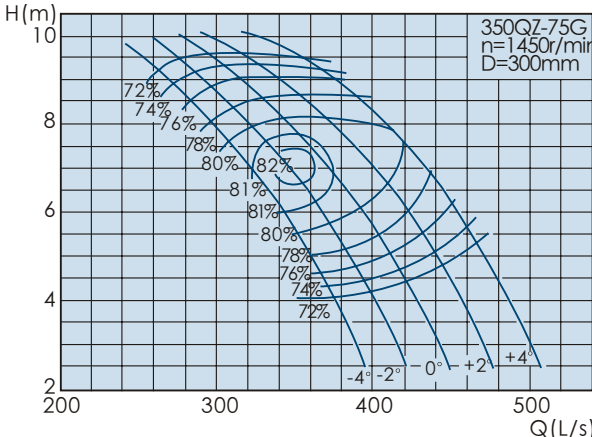


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1071.9	297.7	8.1	1450	30.3	37	78	300
	1221.8	339.4	6.34		25.9		81.6	
	1309	363.6	5.03		23		78	
-2°	1108	307.8	8.4		32.5	45	78	
	1275.5	354.3	6.78		28.6		82.3	
	1386.4	385.1	5.2		25.2		78	
0°	1192.1	331.1	8.61		35.9	55	78	
	1335.2	370.9	7.04		31.5		81.4	
	1454.9	404.1	5.53		28.1		78	
+2°	1282.6	356.3	8.69		38.9		78	
	1428.8	396.9	7.19		34.7		80.8	
	1537.1	427	6.16		33.1		78	
+4°	1416.9	393.6	8.68		43	75	78	
	1495.1	415.3	7.62		38.8		80	
	1574.9	437.5	6.85		37.7		78	

350QZ-50D

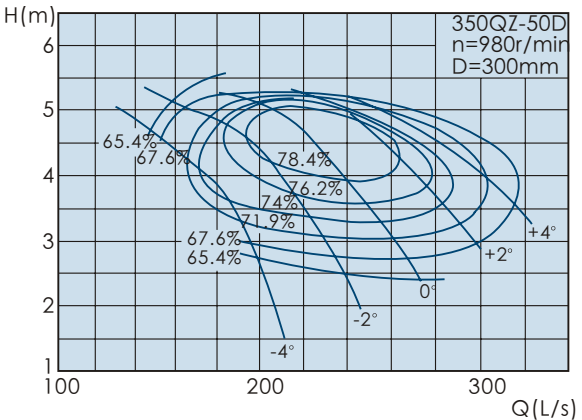

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	592.8	164.7	4.26	980	9.6	11	71.9	300
	608.3	169	4.25		9.4		74.9	
	690.8	191.9	3.28		8.6		74.9	
-2°	631.7	175.5	4.88		11.7	15	71.9	
	712.9	198	4.39		10.8		78.7	
	820.7	228	3.09		9.6		71.9	
0°	698.6	194.1	5.15		13.6		71.9	
	793.2	220.3	4.61		12.4		80.3	
	938.9	260.8	3.03		10.8		71.9	
+2°	812.8	225.8	5.16		15.9	18.5	71.9	
	912.4	253.4	4.57		14.2		80	
	1044.3	290.1	3.28		13		71.9	
+4°	900.3	250.1	5.09		17.4	22	71.9	
	1002.4	278.5	4.47		16.2		75.3	
	1085.4	301.5	3.99		16.4		71.9	


350QZ-75D

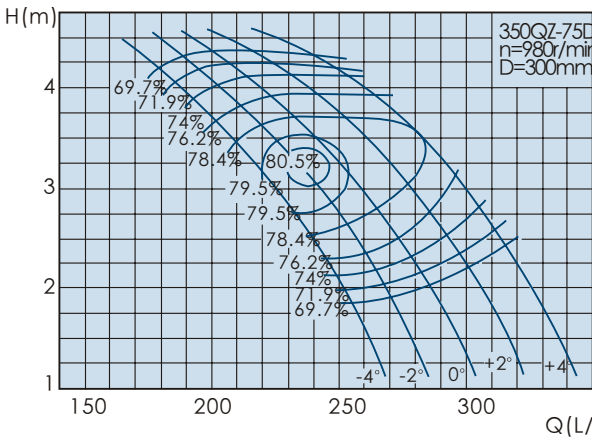

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	724.4	201.2	3.7	980	9.6	11	76.2	300
	825.8	229.4	2.9		8.1		80.1	
	884.7	245.7	2.3		7.3		76.2	
-2°	748.9	208	3.84		10.3	15	76.2	
	862	239.5	3.1		9		80.9	
	937	260.3	2.38		8		76.2	
0°	805.7	223.8	3.93		11.3		76.2	
	902.4	250.7	3.22		9.9		79.9	
	983.3	273.1	2.53		8.9		76.2	
+2°	866.9	240.8	3.97		12.3	22	76.2	
	965.7	268.2	3.28		10.9		79.2	
	1038.9	288.6	2.81		10.5		76.2	
+4°	957.6	266	3.96		13.6	22	76.2	
	1010.5	280.7	3.48		12.2		78.4	
	1064.4	295.7	3.13		11.9		76.2	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

350QZ-100G

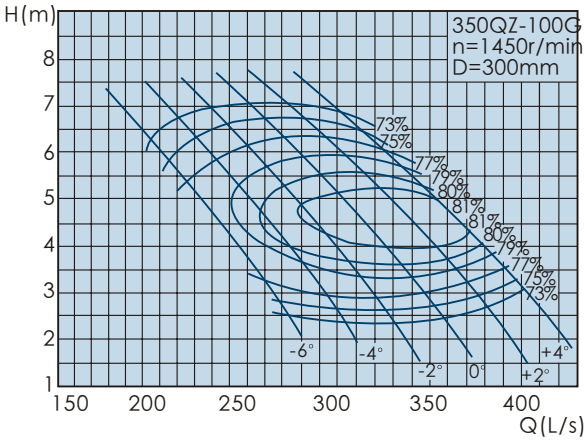

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	826.2	229.5	5.26	1450	15.4	18.5	77	300
	900	250	4.03		12.5		79	
	969.8	269.4	3.25		11.2		77	
-4°	877.1	243.6	5.83		18.1	22	77	
	1008	280	4.1		14.1		80.1	
	1100.8	305.8	2.91		11.3		77	
-2°	938.8	260.8	6.11		20.3		77	
	1098	305	4.2		15.6		80.7	
	1198.2	332.8	2.94		12.5		77	
0°	1005.8	279.4	6.25		22.2	30	77	
	1188	330	4.21		16.8		81	
	1284.3	356.7	2.98		13.5		77	
+2°	1098.2	305.1	6.28		24.4		77	
	1260	350	4.43		18.7		81.5	
	1360.1	377.8	3.22		15.5		77	
+4°	1200.4	333.4	6.06		25.7		77	
	1350	375	4.45		20.2		81.2	
	1432.2	397.8	3.52		17.8		77	


350QZ-100D

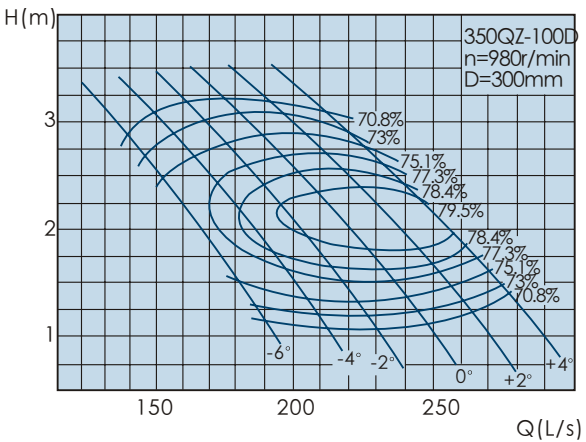

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	558.4	155.1	2.4	1450	4.9	5.5	75.1	300
	608.3	169	1.84		3.9		77.3	
	655.5	182.1	1.48		3.5		75.1	
-4°	592.8	164.7	2.66		5.7	7.5	75.1	
	681.3	189.2	1.87		4.4		78.5	
	744	206.7	1.33		3.6		75.1	
-2°	634.5	176.3	2.79		6.4		75.1	
	742.1	206.1	1.92		4.9		79.1	
	809.8	225	1.34		3.9		75.1	
0°	679.8	188.8	2.85		7	11	75.1	
	802.9	223	1.92		5.3		79.5	
	868	241.1	1.36		4.3		75.1	
+2°	742.2	206.2	2.87		7.7		75.1	
	851.6	236.6	2.02		5.9		80	
	919.3	255.3	1.47		4.9		75.1	
+4°	811.3	225.4	2.77		8.1		75.1	
	912.4	253.4	2.03		6.3		79.7	
	967.9	268.9	1.61		5.6		75.1	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

350QZ-135G

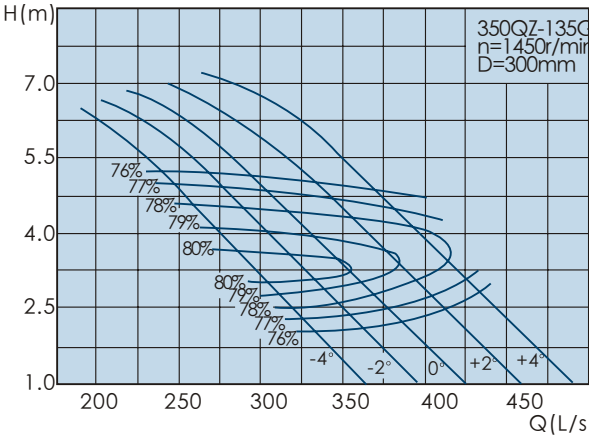

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	864.4	240.1	5.22	1450	16.2	18.5	76	300
	1116.7	310.2	2.88		10.8		80.8	
	1196.9	332.5	2.07		8.9		76	
-2°	964.2	267.8	5.17		17.9	22	76	
	1200.6	333.5	3.08		12.5		80.5	
	1300.2	361.2	2.19		10.2		76	
0°	1064.7	295.7	5.12		19.5		76	
	1280.2	355.6	3.25		14.2		80.1	
	1390.3	386.2	2.24		11.2		76	
+2°	1211.7	336.6	4.84		21	30	76	
	1379.2	383.1	3.37		16		79.3	
	1484.9	412.5	2.47		13.2		76	
+4°	1334.4	370.7	4.87		23.3		76	
	1476.4	410.1	3.55		18.2		78.5	
	1563.6	434.3	2.85		16		76	


350QZ-135D

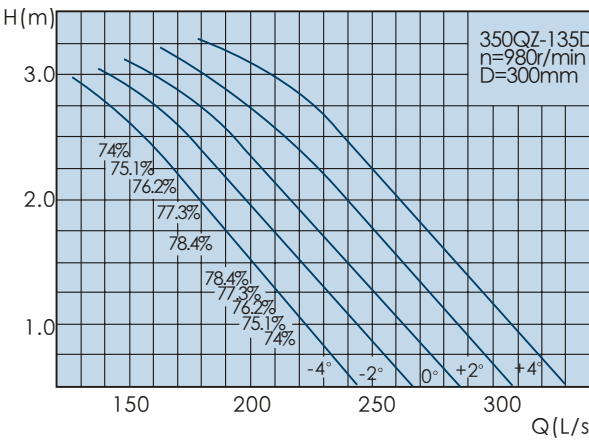

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	584.2	162.3	2.38	980	5.1	5.5	74	300
	754.7	209.7	1.32		3.4		79.2	
	808.9	224.7	0.95		2.8		74	
-2°	651.7	181	2.36		5.7	7.5	74	
	811.4	225.4	1.41		3.9		78.9	
	878.7	244.1	1		3.2		74	
0°	719.6	199.9	2.34		6.2		74	
	865.2	240.3	1.48		4.5		78.5	
	939.7	261	1.02		3.5		74	
+2°	818.9	227.5	2.21		6.7	11	74	
	932.1	258.9	1.54		5		77.6	
	1003.6	278.8	1.13		4.2		74	
+4°	901.9	250.5	2.22		7.4		74	
	997.8	277.2	1.62		5.7		76.7	
	1056.8	293.5	1.3		5.1		74	

OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION


500QH-35G

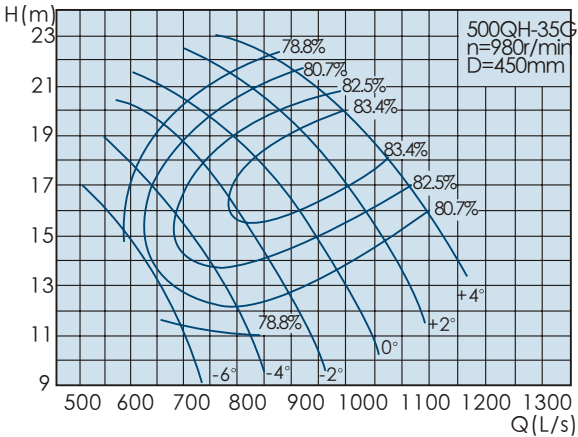

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	2120.3	589	15.06	980	110.3	132	78.8	450
	2381.4	661.5	12.95		104.8		80.2	
	2508.7	696.9	11.36		98.5		78.8	
-4°	2193.4	609.3	17.68		134	160	78.8	
	2668.8	741.3	14.39		126.6		82.7	
	2864.2	795.6	12.23		118.3		80.7	
-2°	2392.9	664.7	19.42		160.6	185	78.8	
	2956.2	821.2	15.62		150.6		83.6	
	3224.7	895.8	12.64		137.7		80.7	
0°	2552.2	708.9	20.35		179.5	200	78.8	
	3202.6	889.6	16.77		174.5		83.9	
	3531	980.8	13.62		162.4		80.7	
+2°	2832.2	786.7	21.45		210	250	78.8	
	3448.9	958	18.22		202.8		84.5	
	3843.9	1067.8	14.78		191.9		80.7	
+4°	3080.2	855.6	22.11		235.3	280	78.8	
	3695.3	1026.5	19.01		228.3		83.9	
	4114.9	1143	15.9		221		80.7	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

500QH-40G

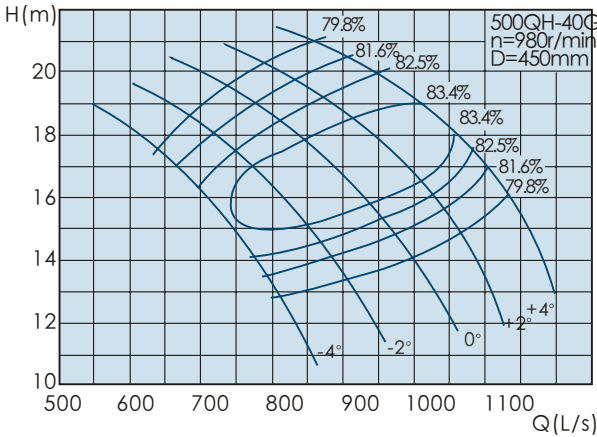


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2293.5	637.1	17.52	980	137.3	160	79.8	450
	2668.8	741.3	14.03		122.8		83.1	
	2910.2	808.4	12.79		127.1		79.8	
-2°	2463.2	684.2	18.58		156.4	185	79.8	
	2956.2	821.2	15.21		146.8		83.4	
	3262.5	906.3	13.37		149		79.8	
0°	2665.6	740.4	19.57		178.2	200	79.8	
	3202.6	889.6	16.55		172.5		83.7	
	3587.2	996.4	14.06		172.3		79.8	
+2°	2835.4	787.6	20.27		196.3	220	79.8	
	3448.9	958	17.68		196.9		84.4	
	3839.7	1066.6	14.82		194.4		79.8	
+4°	3084.5	856.8	20.96		220.8	250	79.8	
	3695.3	1026.5	18.71		224.5		83.9	
	4072.7	1131.3	16.02		222.9		79.8	

500QH-35D

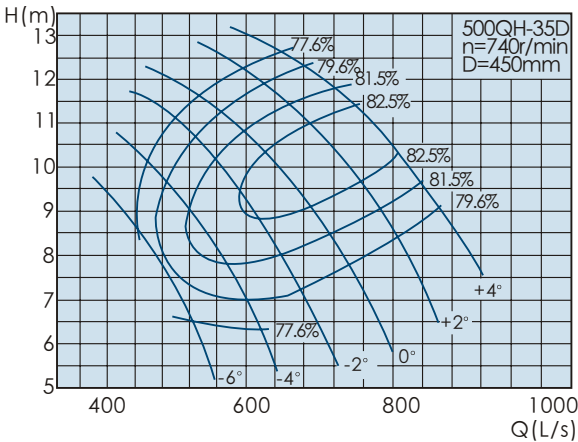

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	1601	444.7	8.59	740	48.2	55	77.6	450
	1798.2	499.5	7.38		45.8		79	
	1894.3	526.2	6.48		43.1		77.6	
-4°	1656.2	460.1	10.08		58.6	75	77.6	
	2015.2	559.8	8.2		55.2		81.7	
	2162.8	600.8	6.97		51.7		79.6	
-2°	1806.9	501.9	11.08		70.3	90	77.6	
	2232.2	620.1	8.91		65.6		82.6	
	2435	676.4	7.21		60.1		79.6	
0°	1927.2	535.3	11.6		78.5	90	77.6	
	2418.3	671.7	9.56		76		83	
	2666.3	740.6	7.76		70.9		79.6	
+2°	2138.6	594.1	12.23		91.8	110	77.6	
	2604.3	723.4	10.39		88.2		83.6	
	2902.5	806.3	8.43		83.8		79.6	
+4°	2325.9	646.1	12.61		102.9	132	77.6	
	2790.3	775.1	10.84		99.4		82.9	
	3107.2	863.1	9.07		96.5		79.6	


500QH-40D

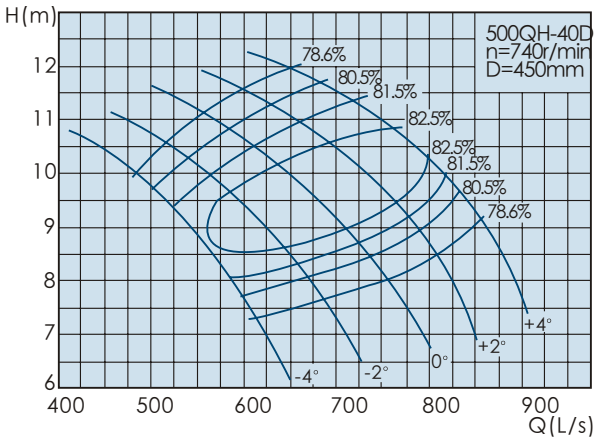

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1731.9	481.1	9.99	740	60	75	78.6	450
	2015.2	559.8	8		53.5		82.1	
	2197.5	610.4	7.29		55.5		78.6	
-2°	1860	516.7	10.6		68.3	90	78.6	
	2232.2	620.1	8.67		64		82.5	
	2463.5	684.3	7.62		65.1		78.6	
0°	2012.8	559.1	11.16		77.9	90	78.6	
	2418.3	671.7	9.43		75.1		82.8	
	2708.7	752.4	8.02		75.3		78.6	
+2°	2141	594.7	11.56		85.8	110	78.6	
	2604.3	723.4	10.08		85.7		83.5	
	2899.4	805.4	8.45		84.9		78.6	
+4°	2329.1	647	11.95		96.5	110	78.6	
	2790.3	775.1	10.67		97.7		83	
	3075.3	854.2	9.14		97.4		78.6	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

500QH-72G

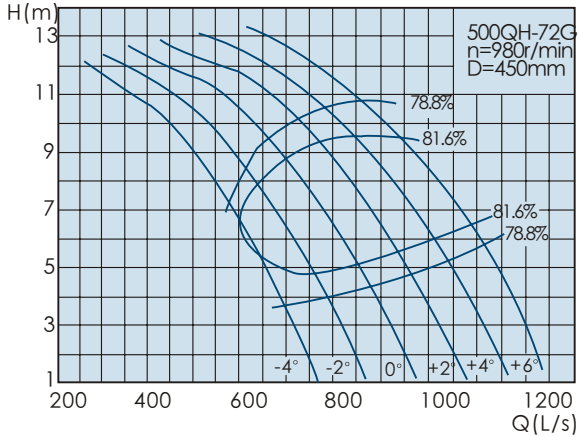

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1864.1	517.8	8.53	980	55	75	78.8	450
	2135	593.1	6.47		46.2		81.6	
	2200.7	611.3	6		44		81.8	
	2209	613.6	5.91		43.6		81.6	
-2°	2044.7	568	9.25		65.4	90	78.8	
	2225.4	618.2	8.17		60.7		81.6	
	2455.3	682	6.52		52.6		83	
	2701.7	750.5	4.73		42.6		81.6	
0°	2323.9	645.5	9.66		77.6	110	78.8	
	2512.8	698	8.57		71.9		81.6	
	2824.8	784.7	6.45		59.7		83.3	
	3005.5	834.9	5.14		51.6		81.6	
+2°	2529.2	702.6	10.29		89.9	132	78.8	
	2677	743.6	9.56		85.4		81.6	
	3030.1	841.7	7.4		73		83.7	
	3358.6	932.9	5.14		57.6		81.6	
+4°	2759.1	766.4	10.64		101.4		78.8	
	2956.2	821.2	9.72		96		81.6	
	3317.5	921.5	7.58		82.3		83.3	
	3613.2	1003.7	5.65		68.2		81.6	
+6°	3777.4	1049.3	4.62		60.4		78.8	
	3038.3	844	10.79		113.3		78.8	
	3284.7	912.4	9.46		103.7		81.6	
	3522.8	978.6	8.37		96.8		82.9	
	3859.5	1072.1	6.37		82.1		81.6	
	3941.4	1094.9	5.76		78.4		78.8	


500QH-72D

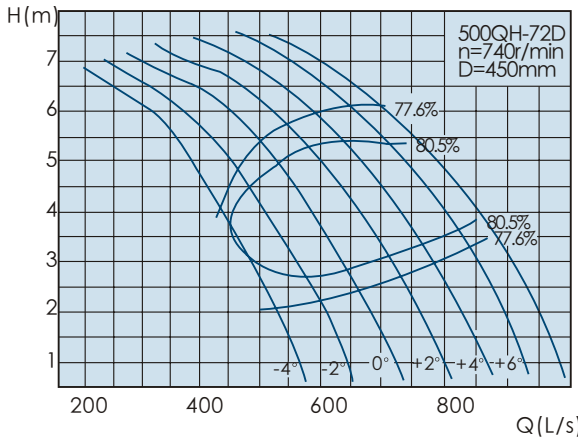

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1407.69	391	4.86	740	24	30	77.6	450
	1612.2	447.8	3.69		20.1		80.5	
	1661.8	461.8	3.42		19.2		80.7	
	1168	463.3	3.37		19		80.5	
-2°	1544	428.9	5.27		28.6	37	77.6	
	1680.4	466.8	4.66		26.5		80.5	
	1854	515	3.72		22.9		82	
	2040	566.7	2.7		18.6		80.5	
0°	1754.8	487.4	5.51		33.9	45	77.6	
	1897.4	527.1	4.89		31.4		80.5	
	2133	592.5	3.68		26		82.3	
	2269.5	630.4	2.93		22.5		80.5	
+2°	1909.8	530.5	5.87		39.3	55	77.6	
	2021.4	561.5	5.45		37.3		80.5	
	2288.1	635.6	4.22		31.8		82.8	
	2536.1	704.5	2.93		25.1		80.5	
+4°	2083.4	578.7	6.07		44.4		77.6	
	2232.2	620.1	5.54		41.9		80.5	
	2505.1	695.9	4.32		35.9		82.3	
	2728.3	757.9	3.22		29.8		80.5	
+6°	2852.3	792.3	2.64		26.4		77.6	
	2294.3	637.3	6.15		49.6		77.6	
	2480.3	689	5.39		45.2		80.5	
	2660.1	738.9	4.77		42.2		82	
	2914.3	809.5	3.63		35.8		80.5	
	2976.3	826.8	3.28		34.3		77.6	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

500QZ-50G

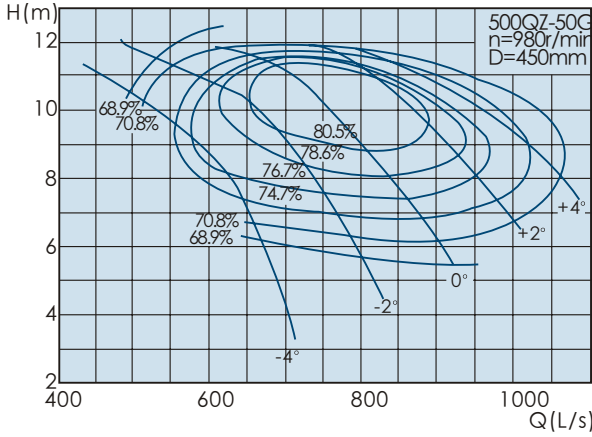

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2000.9	555.8	9.58	980	68.6	75	76.1	450
	2052.9	570.3	9.56		68		78.7	
	2331.6	647.7	7.38		61.6		76.1	
-2°	2131.8	592.2	10.99		83.9	90	76.1	
	2406	668.3	9.87		79		81.9	
	2769.9	769.4	6.96		69		76.1	
0°	2357.8	655	11.58		97.8	110	76.1	
	2677	743.6	10.38		90.9		83.3	
	3168.9	880.3	6.81		77.3		76.1	
+2°	2743	762	11.61		114.1	132	76.1	
	3079.4	855.4	10.28		103.9		83	
	3524.5	979	7.39		93.3		76.1	
+4°	3038.5	844	11.46		124.7	160	76.1	
	3383.2	939.8	10.05		117.3		79	
	3663.3	1017.6	8.98		117.8		76.1	


500QZ-50D

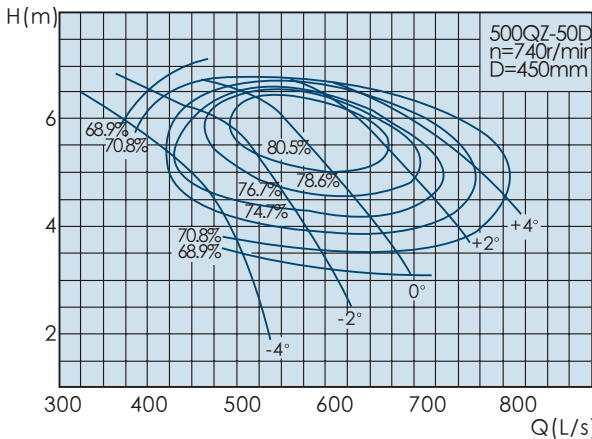

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1510.9	419.7	5.46	740	30.1	37	74.7	450
	1550.2	430.6	5.45		29.7		77.4	
	1760.6	489	4.21		27		74.7	
-2°	1609.8	447.2	6.26		36.8	45	74.7	
	1816.8	504.7	5.63		34.5		80.8	
	2091.6	581	3.97		30.3		74.7	
0°	1780.4	494.6	6.6		42.9	55	74.7	
	2021.4	561.5	5.92		39.6		82.3	
	2392.8	664.7	3.89		33.9		74.7	
+2°	2071.3	575.4	6.62		50	75	74.7	
	2325.3	645.9	5.86		45.3		82	
	2661.3	739.3	4.21		40.9		74.7	
+4°	2294.4	637.3	6.53		54.7		74.7	
	2554.7	709.6	5.73		51.3		77.8	
	2766.1	768.4	5.12		51.7		74.7	

OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION


500QZ-75G

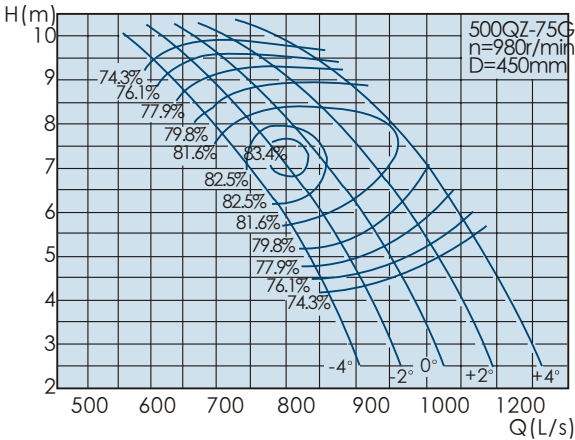

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2445	679.2	8.32	980	69.5	75	79.8	450
	2787.1	774.2	6.52		59.6		83.1	
	2985.8	829.4	5.17		52.7		79.8	
-2°	2527.5	702.1	8.63		74.5	90	79.8	
	2909.4	808.2	6.97		66		83.7	
	3162.4	878.4	5.34		57.7		79.8	
0°	2719.3	755.4	8.85		82.2		79.8	
	3045.7	846	7.24		72.5		82.9	
	3318.8	921.9	5.68		64.4		79.8	
+2°	2925.8	812.7	8.93		89.3	110	79.8	
	3259.2	905.3	7.39		79.7		82.3	
	3506.2	973.9	6.33		75.8		79.8	
+4°	3232	897.8	8.92		98.5		79.8	
	3410.3	947.3	7.83		89.1		81.6	
	3592.5	997.9	7.04		86.4		79.8	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

500QZ-100G

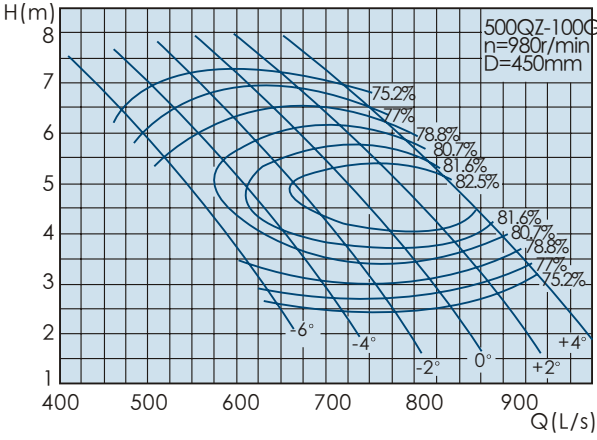


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	1884.5	523.5	5.41	980	35.2	45	78.8	450
	2052.9	570.3	4.14		28.7		80.7	
	2212.2	614.5	3.34		25.5		78.8	
-4°	2000.6	555.7	5.99		41.4	55	78.8	
	2299.3	638.7	4.21		32.3		81.7	
	2510.9	697.5	2.99		26		78.8	
-2°	2141.5	594.8	6.28		46.5	75	78.8	
	2504.6	695.7	4.32		35.8		82.3	
	2733.2	759.2	3.02		28.5		78.8	
0°	2294.4	637.3	6.42		50.9		78.8	
	2709.9	752.7	4.33		38.7		82.5	
	2929.5	813.7	3.06		31		78.8	
+2°	2505.1	695.9	6.45		55.9	75	78.8	
	2874.1	798.4	4.55		43		83	
	3102.5	861.8	3.31		35.5		78.8	
+4°	2738.1	760.6	6.23		58.9		78.8	
	3079.4	855.4	4.57		46.4		82.7	
	3266.8	907.4	3.62		40.8		78.8	

500QZ-75D

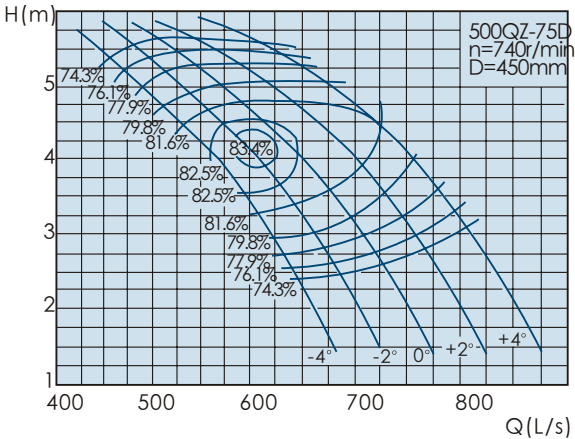

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1846.2	512.8	4.75	740	30.4	37	78.6	450
	2104.5	584.6	3.72		26		82.1	
	2254.6	626.3	2.95		23		78.6	
-2°	1908.5	530.1	4.92		32.6	45	78.6	
	2196.9	610.3	3.97		28.7		82.8	
	2387.9	663.3	3.05		25.2		78.6	
0°	2053.4	570.4	5.05		35.9		78.6	
	2299.8	638.8	4.13		31.6		81.9	
	2506	696.1	3.24		28.2		78.6	
+2°	2209.2	613.7	5.09		39	55	78.6	
	2461.1	683.6	4.21		34.8		81.3	
	2647.5	735.4	3.61		33.1		78.6	
+4°	2440.5	677.9	5.09		43		78.6	
	2575.1	715.3	4.47		38.9		80.6	
	2712.7	753.5	4.01		37.8		78.6	


500QZ-100D

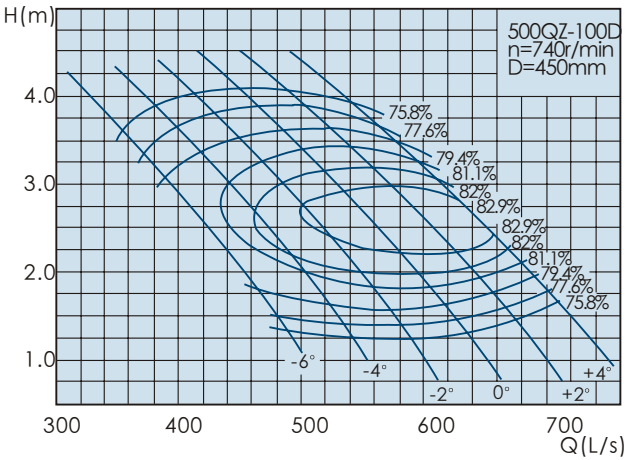

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	1423	395.3	3.08	740	15.4	18.5	77.6	450
	1550.2	430.6	2.36		12.5		79.6	
	1670.5	464	1.9		11.2		77.6	
-4°	1510.7	419.6	3.42		18.1	22	77.6	
	1736.2	482.3	2.4		14.1		80.6	
	1896	526.7	1.71		11.3		77.6	
-2°	1617	449.2	3.58		20.3	30	77.6	
	1891.2	525.3	2.46		15.6		81.2	
	2063.8	573.3	1.72		12.5		77.6	
0°	1732.5	481.2	3.66		22.3		77.6	
	2046.2	568.4	2.47		16.9		81.5	
	2212	614.5	1.75		13.6		77.6	
+2°	1891.6	525.4	3.68		24.4	30	77.6	
	2170.2	602.8	2.6		18.7		82	
	2342.7	650.7	1.89		15.5		77.6	
+4°	2067.6	574.3	3.55		25.8		77.6	
	2325.3	645.9	2.61		20.2		81.7	
	2466.8	685.2	2.06		17.9		77.6	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

500QZ-135G

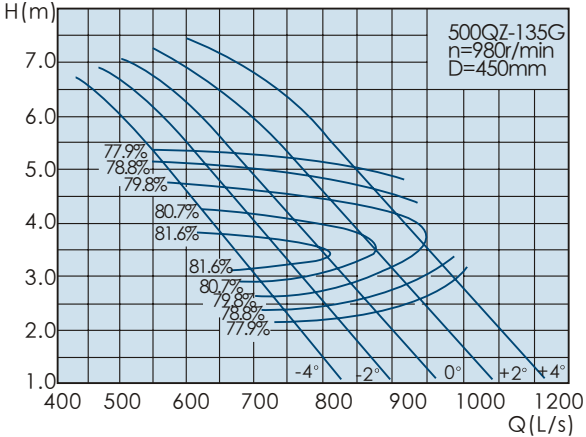

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1971.7	547.7	5.36	980	37	45	77.9	450
	2547.3	707.6	2.96		24.9		82.4	
	2730.2	758.4	2.13		20.3		77.9	
-2°	2199.4	611	5.31		40.9	55	77.9	
	2738.6	760.7	3.17		28.8		82	
	2965.7	823.8	2.25		23.3		77.9	
0°	2428.5	674.6	5.26		44.7	75	77.9	
	2920.1	811.1	3.34		32.5		81.7	
	3171.4	880.9	2.3		25.5		77.9	
+2°	2763.9	767.8	4.97		48.1		77.9	
	3145.9	873.9	3.46		36.7		80.9	
	3387.1	940.9	2.54		30.1		77.9	
+4°	3043.8	845.5	5.01		53.3		77.9	
	3367.6	935.5	3.65		41.7		80.2	
	3566.6	990.7	2.93		36.5		77.9	


500QZ-135D

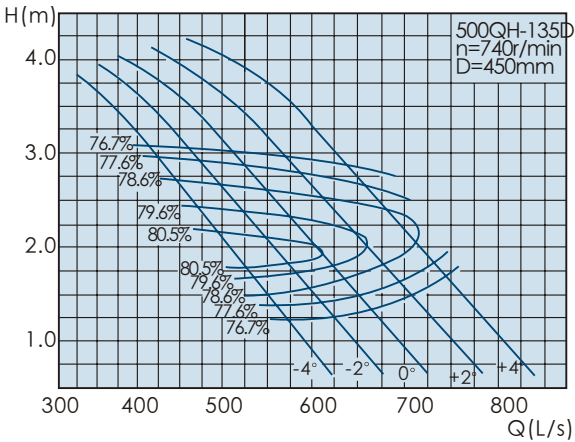

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1488.8	413.6	3.06	740	16.2	18.5	76.7	450
	1923.5	534.3	1.69		10.9		81.3	
	2061.5	572.7	1.21		8.9		76.7	
-2°	1660.8	461.3	3.03		17.9	22	76.7	
	2067.9	574.4	1.8		12.6		81	
	2239.4	622.1	1.28		10.2		76.7	
0°	1833.8	509.4	3		19.6	30	76.7	
	2205	612.5	1.9		14.2		80.5	
	2394.7	665.2	1.31		11.2		76.7	
+2°	2087	579.7	2.84		21		76.7	
	2375.5	659.9	1.97		16		79.8	
	2557.6	710.4	1.45		13.2		76.7	
+4°	2298.4	638.4	2.85		23.3		76.7	
	2542.9	706.4	2.08		18.2		79.1	
	2693.1	748.1	1.67		16		76.7	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

600QH-35

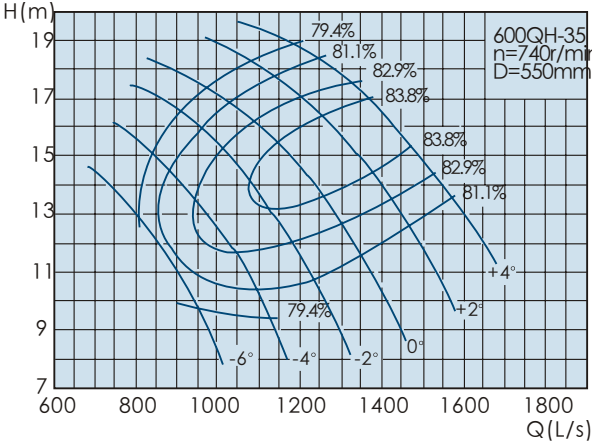

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	2923.1	812	12.82	740	128.7	160	79.4	550
	3283.1	912	11.03		122.4		80.6	
	3458.6	960.7	9.67		114.9		79.4	
-4°	3023.9	840	15.06		156.4	185	79.4	
	3679.4	1022	12.26		147.9		83.1	
	3948.8	1096.9	10.42		138.1		81.1	
-2°	3299	916.4	16.55		187.4	220	79.4	
	4075.6	1132.1	13.31		176		84	
	4445.8	1234.9	10.77		160.8		81.1	
0°	3518.6	977.4	17.33		209.4	250	79.4	
	4415.2	1226.5	14.29		204		84.3	
	4868.1	1352.2	11.6		189.6		81.1	
+2°	3904.7	1084.6	18.27		245	280	79.4	
	4754.9	1320.8	15.52		237.1		84.8	
	5299.4	1472.1	12.59		224		81.1	
+4°	4246.6	1179.6	18.83		274.6	315	79.4	
	5094.6	1415.1	16.2		266.8		84.3	
	5673	1575.8	13.54		258		81.1	


600QH-40

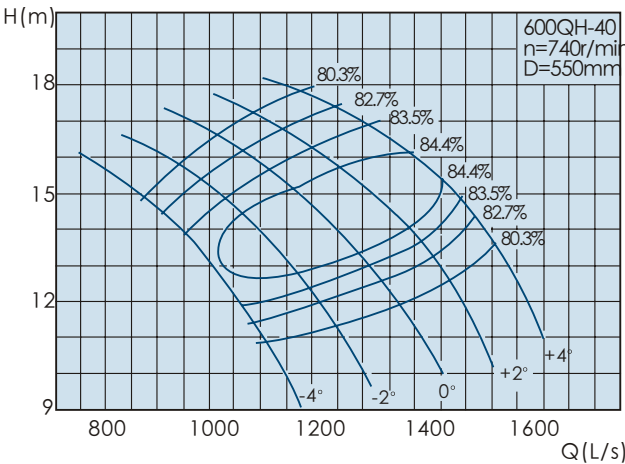

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	3162	878.3	14.93	740	160.3	185	80.3	550
	3679.4	1022	11.95		143.5		83.5	
	4012.2	1114.5	10.89		148.4		80.3	
-2°	3395.9	943.3	15.83		182.5	200	80.3	
	4075.6	1132.1	12.96		171.6		83.8	
	4497.9	1249.4	11.39		173.9		80.3	
0°	3675	1020.8	16.67		208	250	80.3	
	4415.2	1226.5	14.09		201.6		84.1	
	4945.5	1373.8	11.98		201.1		80.3	
+2°	3909.1	1085.9	17.26		229.1		80.3	
	4754.9	1320.8	15.06		230.2		84.7	
	5293.7	1470.5	12.62		226.9		80.3	
+4°	4252.4	1181.2	17.85		257.7	280	80.3	
	5094.5	1415.1	15.93		262.4		84.3	
	5614.8	1559.7	13.65		260.2		80.3	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

600QH-72

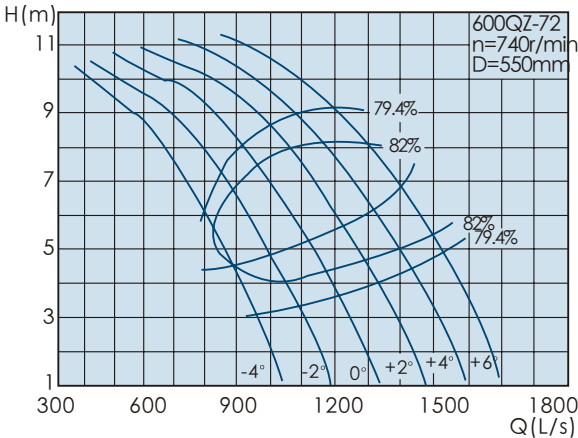

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2569.9	713.9	7.27	740	64.1	75	79.4	550
	2943.5	817.6	5.52		53.9		82	
	3034.1	842.8	5.11		51.4		82.2	
	3045.4	845.9	5.03		50.9		82	
-2°	2819	783	7.88		76.3	90	79.4	
	3068	852.2	6.96		70.9		82	
	3385	940.3	5.55		61.4		83.4	
	3724.7	1034.6	4.0		49.8		82	
0°	3203.9	890	8.23		90.5	110	79.4	
	3464.3	962.3	7.3		84		82	
	3894.5	1081.8	5.5		69.7		83.7	
	4143.5	1151	4.38		60.2		82	
+2°	3486.9	968.6	8.76		104.9	160	79.4	
	3690.7	1025.2	8.14		99.8		82	
	4177.5	1160.4	6.3		85.3		84.1	
	4630.4	1286.2	4.38		67.3		82	
+4°	3803.9	1056.6	9.06		118.4	160	79.4	
	4075.6	1132.1	8.28		112.1		82	
	4573.7	1270.5	6.46		96.2		83.3	
	4981.3	1383.7	4.81		79.7		82	
+6°	4188.8	1163.6	9.19		132.2	160	79.4	
	4528.5	1257.9	8.05		121.1		82	
	4856.8	1349.1	7.13		113.2		83.3	
	5320.9	1478	5.43		95.9		82	


600QZ-50

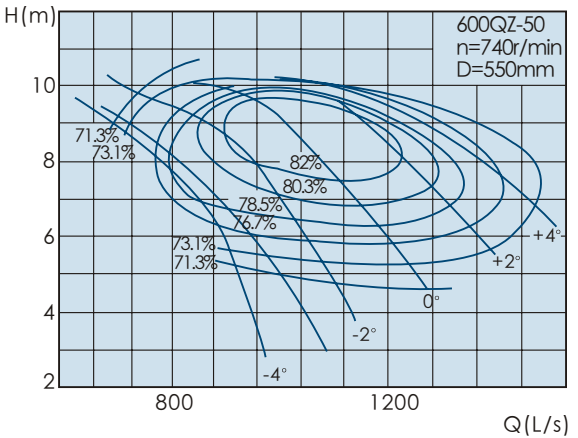

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2758.5	766.3	8.16	740	80	90	76.7	550
	2830.3	786.2	8.14		79.3		79.2	
	3214.4	892.9	6.29		71.8		76.7	
-2°	2939.1	816.4	9.36		97.8	110	76.7	
	3317.1	921.4	8.4		92.3		82.3	
	3818.7	1060.8	5.93		80.4		76.7	
0°	3250.6	903	9.87		114	132	76.7	
	3690.7	1025.2	8.84		106.3		83.7	
	4368.8	1213.6	5.8		90.1		76.7	
+2°	3781.7	1050.5	9.89		133	160	76.7	
	4245.4	1179.3	8.75		121.4		83.4	
	4859	1349.7	6.29		108.7		76.7	
+4°	4189.1	1163.6	9.76		145.3	160	76.7	
	4664.3	1295.6	8.56		136.8		79.5	
	5050.4	1402.9	7.65		137.4		76.7	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

600QZ-75

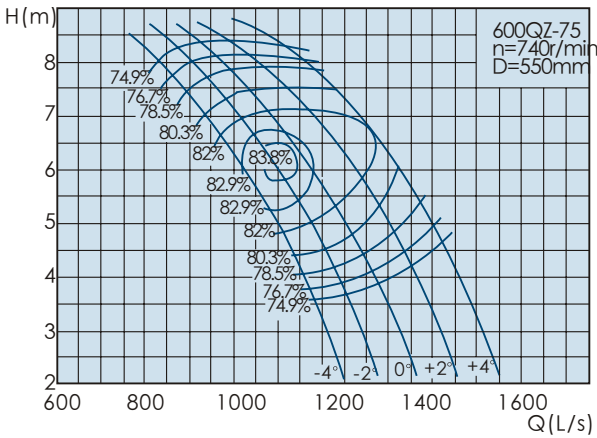

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	3370.8	936.3	7.09	740	81.2	90	80.3	550
	3842.4	1067.3	5.55		69.6		83.5	
	4116.4	1143.4	4.4		61.5		80.3	
-2°	3484.5	967.9	7.35		87	110	80.3	
	4011.1	1114.2	5.94		77.1		84.1	
	4359.9	1211.1	4.55		67.4		80.3	
0°	3749	1041.4	7.54		96	110	80.3	
	4199	1166.4	6.16		84.7		83.3	
	4575.4	1271	4.84		75.2		80.3	
+2°	4033.6	1120.4	7.61		104.2	132	80.3	
	4493.4	1248.2	6.29		93.1		82.7	
	4833.8	1342.7	5.39		88.5		80.3	
+4°	4455.8	1237.7	7.6		115	132	80.3	
	4701.7	1306	6.67		104.1		82.1	
	4952.8	1375.8	6		100.8		80.3	


600QZ-100

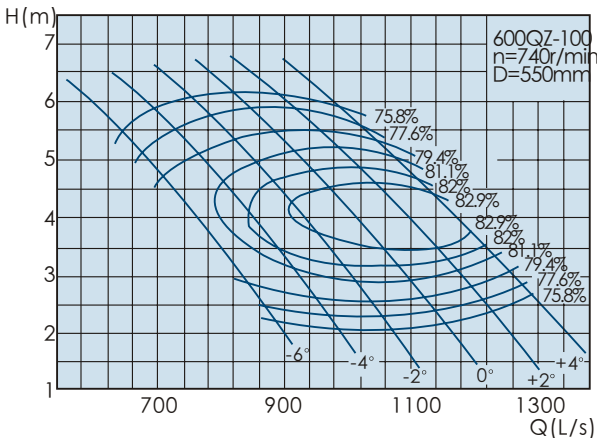

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	2598.1	721.7	4.6	740	41.1	45	79.4	550
	2830.3	786.2	3.53		33.5		81.1	
	3049.9	847.2	2.85		29.8		79.4	
-4°	2758.2	766.2	5.1		48.3	55	79.4	
	3169.9	880.5	3.59		37.7		82.1	
	3461.7	961.5	2.55		30.3		79.4	
-2°	2952.3	820.1	5.35		54.2	75	79.4	
	3453	959.2	3.68		41.8		82.7	
	3768.1	1046.7	2.57		33.3		79.4	
0°	3163.1	878.6	5.47		59.4	75	79.4	
	3736	1037.8	3.69		45.2		82.9	
	4038.7	1121.9	2.61		36.2		79.4	
+2°	3453.6	959.3	5.5		65.2	75	79.4	
	3962.4	1100.7	3.88		50.2		83.4	
	4277.2	1188.1	2.82		41.4		79.4	
+4°	3774.9	1048.6	5.3		68.8	75	79.4	
	4245.4	1179.3	3.9		54.2		83.1	
	4503.8	1251	3.08		47.7		79.4	

OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION


600QZ-135

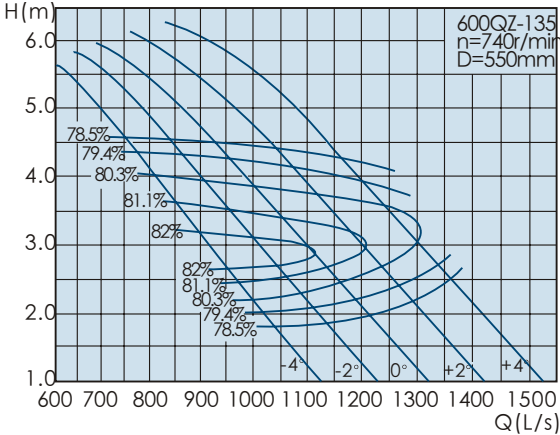

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2718.3	755.1	4.57	740	43.1	55	78.5	550
	3511.8	975.5	2.52		29.1		82.8	
	3763.9	1045.5	1.81		23.7		78.5	
-2°	3032.3	842.3	4.53		47.7	75	78.5	
	3775.6	1048.8	2.7		33.6		82.5	
	4088.7	1135.8	1.92		27.2		78.5	
0°	3348.1	930	4.48		52.1	75	78.5	
	4025.8	1118.3	2.85		38		82.1	
	4372.2	1214.5	1.96		29.8		78.5	
+2°	3810.5	1058.5	4.24		56.1	75	78.5	
	4337.1	1204.8	2.95		42.8		81.4	
	4669.6	1297.1	2.16		35.1		78.5	
+4°	4196.4	1165.7	4.26		62.1	75	78.5	
	4642.8	1289.7	3.11		48.7		80.7	
	4917.1	1365.9	2.49		42.6		78.5	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

700QH-40

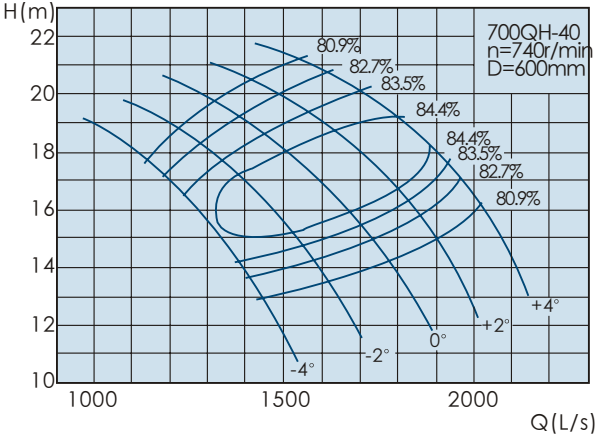


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	4105.1	1140.3	17.76	740	245.5	280	80.9	600
	4776.8	1326.9	14.22		220.2		84	
	5208.9	1446.9	12.96		227.3		80.9	
-2°	4408.8	1224.7	18.84		279.6	315	80.9	
	5291.3	1469.8	15.42		263.4		84.4	
	5839.5	1622.1	13.55		266.5		80.9	
0°	4771.1	1325.3	19.84		318.7	355	80.9	
	5732.2	1592.3	16.77		309.5		84.7	
	6420.6	1783.5	14.25		308.1		80.9	
+2°	5075	1409.7	20.54		351.1	400	80.9	
	6173.1	1714.8	17.92		353.5		85.3	
	6872.6	1909.1	15.02		347.7		80.9	
+4°	5520.8	1533.6	21.24		394.9	450	80.9	
	6614.1	1837.2	18.96		402.9		84.8	
	7289.6	2024.9	16.24		398.7		80.9	

700QH-35

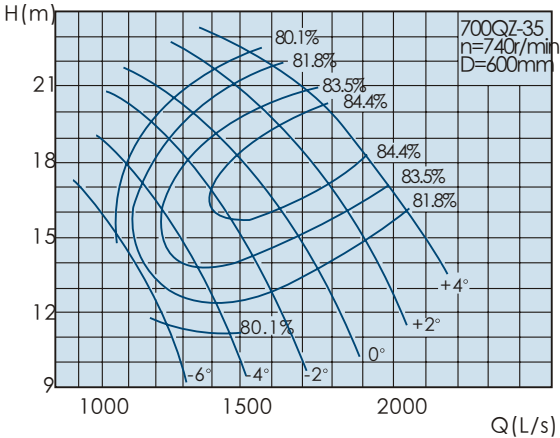

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	3795	1054.2	15.26	740	197.1	220	80.1	600
	4262.4	1184	13.13		187.6		81.3	
	4490.2	1247.3	11.51		175.9		80.1	
-4°	3925.8	1090.5	17.92		239.4	280	80.1	
	4776.8	1326.9	14.59		226.9		83.7	
	5126.6	1424.1	12.4		211.7		81.8	
-2°	4283	1189.7	19.69		287	315	80.1	
	5291.3	1469.8	15.84		270.1		84.5	
	5771.9	1603.3	12.81		246.4		81.8	
0°	4568.1	1268.9	20.63		320.7	355	80.1	
	5732.2	1592.8	17		313.1		84.8	
	6320.1	1755.6	13.8		290.7		81.8	
+2°	5069.3	1408.1	21.74		375.2	450	80.1	
	6173.1	1714.8	18.47		364.1		85.3	
	6880.1	1911.1	14.98		343.4		81.8	
+4°	5513.2	1531.4	22.41		420.5	450	80.1	
	6614.1	1837.2	19.27		409.7		84.8	
	7365.1	2045.9	16.12		395.5		81.8	


700QH-72

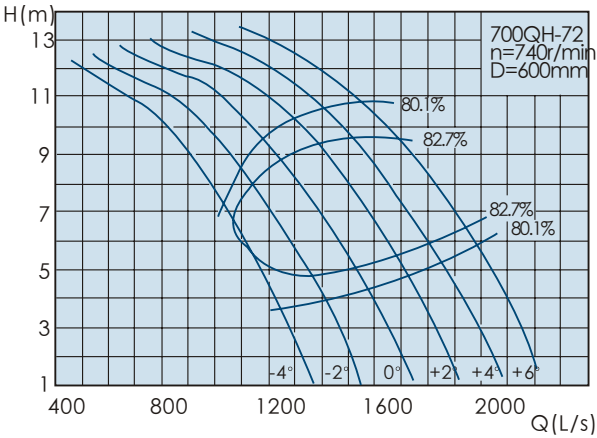

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	3336.4	926.8	8.65	740	98.2	110	80.1	600
	3821.5	1061.5	6.56		82.7		82.7	
	3939	1094.2	6.08		78.9		82.8	
-2°	3953.7	1098.3	5.99		78.1	132	82.7	
	4380	1216.7	4.06		60.6		80.1	
	3659.8	1016.6	9.38		116.8	185	80.1	
0°	3983.1	1106.4	8.28		108.8		82.7	
	4394.7	1220.7	6.61		94.2		83.9	
	4835.6	1343.2	4.79		76.4		82.7	
+2°	5012	1392.2	3.85		65.8	200	80.1	
	4159.5	1155.4	9.79		138.6	220	80.1	
	4497.6	1249.3	8.69		128.8		82.7	
+4°	5056.1	1404.5	6.54		107	220	84.2	
	5379.4	1494.3	5.21		92.4		82.7	
	5570.5	1547.4	4.27		81		80.1	
+6°	4527	1257.5	10.43		160.7	220	80.1	
	4791.5	1331	9.69		153		82.7	
	5423.5	1506.5	7.5		130.9		84.7	
+8°	6011.5	1669.8	5.21		103.2	220	82.7	
	6246.6	1735.2	4.38		93		80.1	
	4938.5	1371.8	10.78		181.3	220	80.1	
+10°	5291.3	1469.8	9.86		171.9		82.7	
	5938	1649.4	7.69		147.7		84.2	
+12°	6467.1	1796.4	5.73		122.2	220	82.7	
	6761	1878.1	4.69		107.9		80.1	
	5438.2	1510.6	10.94		202.5	220	80.1	
+14°	5879.2	1633.1	9.58		185.8		82.7	
	6305.4	1751.5	8.48		173.6		83.9	
	6908	1918.9	6.46		147.1		82.7	
+16°	7055	1959.7	5.83		140.1		80.1	

OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION


700QZ-50

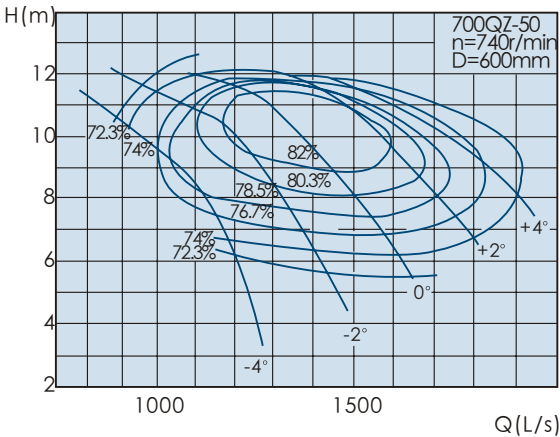

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	3581.3	994.8	9.71	740	122.3	132	77.5	600
	3674.5	1020.7	9.69		121.4		79.9	
	4173.2	1159.2	7.48		109.8		77.5	
-2°	3815.7	1059.9	11.14		149.5	160	77.5	
	4306.5	1196.2	10		141.5		82.9	
	4957.8	1377.2	7.05		123		77.5	
0°	4220.2	1172.3	11.74		174.3	200	77.5	
	4791.5	1331	10.52		163.1		84.2	
	5671.9	1575.5	6.91		137.8		77.5	
+2°	4909.7	1363.8	11.77		203.3	220	77.5	
	5511.7	1531	10.42		186.4		84	
	6308.4	1752.3	7.49		166.2		77.5	
+4°	5438.5	1510.7	11.62		222.3	250	77.5	
	6055.5	1682.1	10.19		209.6		80.2	
	6556.7	1821.3	9.11		210		77.5	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

700QZ-100

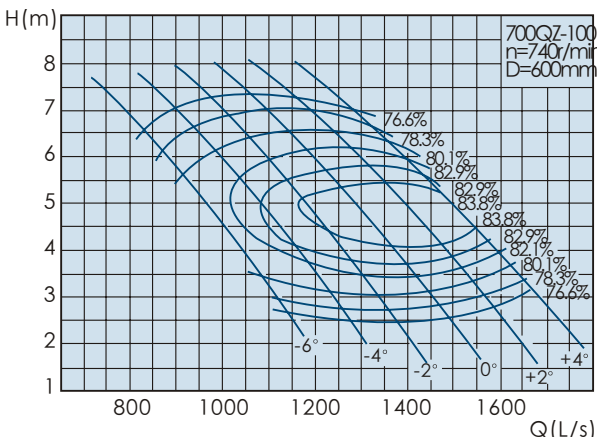


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	3373	937	5.48	740	62.9	75	80.1	600
	3674.5	1020.7	4.2		51.4		81.8	
	3959.6	1099.9	3.39		45.6		80.1	
-4°	3580.9	994.7	6.07		74	90	80.1	
	4115.4	1143.2	4.27		57.9		82.7	
	4494.2	1248.4	3.03		46.4		80.1	
-2°	3832.9	1064.7	6.37		83	110	80.1	
	4482.9	1245.2	4.38		64.2		83.3	
	4892.7	1358.9	3.06		51		80.1	
0°	4106.6	1140.7	6.51		91	132	80.1	
	4850.3	1347.3	4.39		69.4		83.5	
	5243.3	1456.5	3.1		55.4		80.1	
+2°	4483.8	1245.5	6.54		99.8	132	80.1	
	5144.3	1429	4.62		77.1		84	
	5553	1542.5	3.35		63.4		80.1	
+4°	4900.9	1361.4	6.31		105.3	132	80.1	
	5511.7	1531	4.64		83.2		83.7	
	5847.1	1624.2	3.67		73		80.1	

700QZ-75

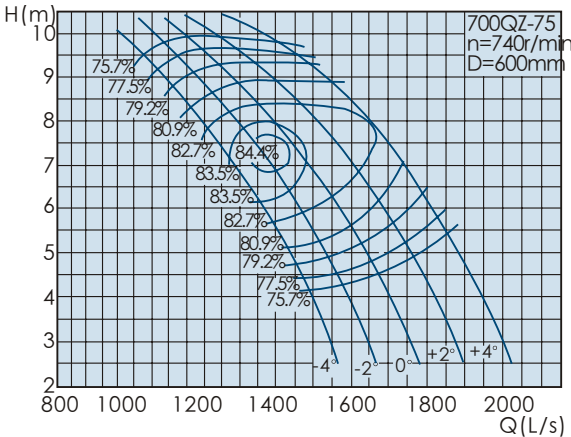

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	4376.2	1215.6	8.44	740	124.3	160	80.9	600
	4988.5	1385.7	6.61		106.8		84	
	5344.2	1484.5	5.24		94.3		80.9	
-2°	4523.9	1256.6	8.75		133.3	185	80.9	
	5207.5	1446.5	7.06		118.4		84.7	
	5660.3	1572.3	5.42		103.3		80.9	
0°	4867.2	1352	8.97		147	200	80.9	
	5451.5	1514.3	7.33		129.9		83.9	
	5940.2	1650	5.76		115.2		80.9	
+2°	5236.7	1454.6	9.05		159.6	200	80.9	
	5833.6	1620.4	7.49		142.9		83.3	
	6275.6	1743.2	6.42		135.6		80.9	
+4°	5784.8	1606.9	9.04		176.1	200	80.9	
	6104.1	1695.6	7.94		159.7		82.7	
	6430.1	1786.1	7.14		154.5		80.9	


700QZ-135

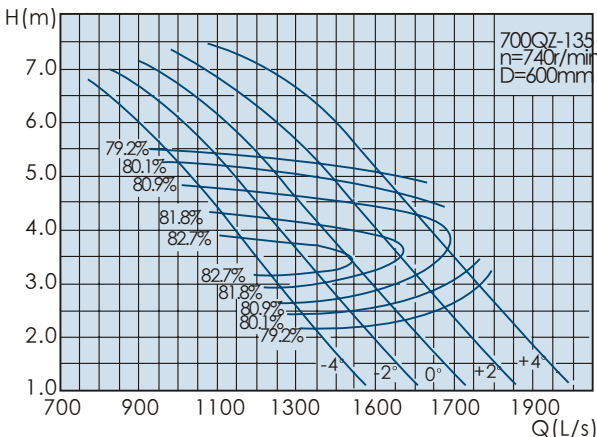

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	3529.1	980.3	5.44	740	66	75	79.2	600
	4559.3	1266.5	3		44.7		83.4	
	4886.6	1357.4	2.16		36.3		79.2	
-2°	3936.7	1093.5	5.39		73	90	79.2	
	4901.8	1361.6	3.21		51.6		83.1	
	5308.3	1474.5	2.28		41.7		79.2	
0°	4346.8	1207.4	5.33		79.8	110	79.2	
	5226.6	1451.8	3.39		58.3		82.7	
	5676.3	1576.8	2.33		45.6		79.2	
+2°	4947	1374.2	5.04		85.8	132	79.2	
	5630.8	1564.1	3.51		65.7		82	
	6062.5	1684	2.57		53.7		79.2	
+4°	5448.1	1513.4	5.07		95.1	132	79.2	
	6027.6	1674.3	3.7		74.7		81.4	
	6383.8	1773.3	2.97		65.2		79.2	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

700QZ-160

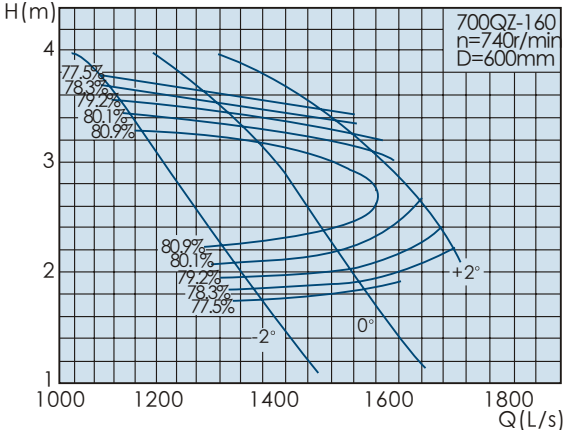

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	3990.2 4556.4 4977.3	1108.4 1265.7 1382.6	3.68 2.59 1.83	740	51.1 39.2 31.8	55	78.3 82.2 78.3	600
0°	4713.3 5291.3 5625.3	1309.3 1469.8 1562.6	3.52 2.6 1.9		57.7 46.2 37.1	75	78.3 81.4 78.3	
+2°	5474 5908.6 6233.5	1520.5 1641.3 1731.5	3.37 2.81 2.19		64.1 56.6 47.4		78.3 80.1 78.3	


800QH-35

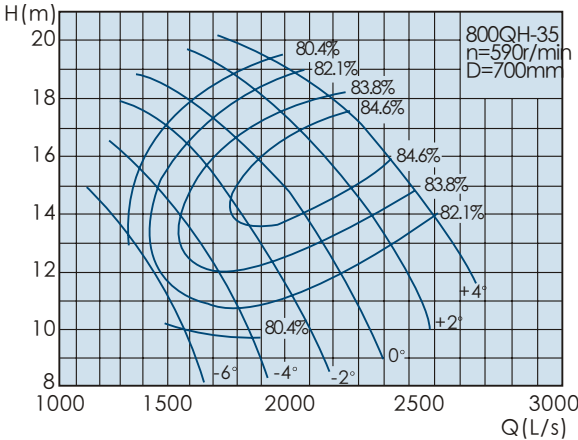

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	4804.8 5396.5 5685	1334.7 1499 1579.2	13.21 11.36 9.96	590	215.1 204.7 192	250	80.4 81.6 80.4	700
-4°	4970.4 6047.8 6490.7	1380.7 1680 1803	15.5 12.62 10.73		261.2 247.8 231.1	280	80.4 83.9 82.1	
-2°	5422.6 6699.1 7307.7	1506.3 1860.9 2029.9	17.04 13.7 11.09		313.2 295 269	355	80.4 84.8 82.1	
0°	5783.6 7257.4 8001.8	1606.6 2015.9 2222.7	17.85 14.71 11.94		349.9 342 317.3	400	80.4 85.1 82.1	
+2°	6418.2 7815.7 8710.7	1782.8 2171 2419.7	18.81 15.98 12.96		409.3 397.7 374.8	450	80.4 85.6 82.1	
+4°	6980.1 8373.9 9324.8	1938.9 2326.1 2590.2	19.39 16.68 13.94		458.8 447.5 431.7	500	80.4 85 82.1	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

800QH-40

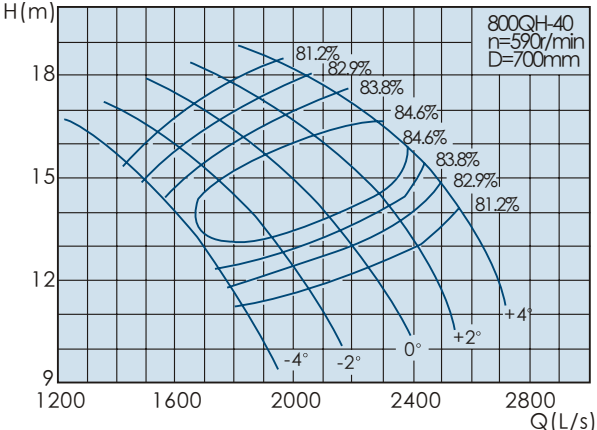

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	5197.4 6047.8 6594.9	1443.7 1680 1831.9	15.37 12.3 11.21	590	268 240.5 248.1	315	81.2 84.3 81.2	700
-2°	5581.9 6699.1 7393.3	1550.5 1860.9 2053.7	16.3 13.34 11.73		305.2 387.7 290.8	355	81.2 84.6 81.2	
0°	6040.6 7257.4 8129	1677.9 2015.9 2258.1	17.16 14.51 12.33		347.8 338 336.3	400	81.2 84.9 81.2	
+2°	6425.4 7815.7 8701.3	1784.8 2171 2417	17.78 15.5 13		383.1 386.2 379.4	450	81.2 85.5 81.2	
+4°	6989.8 8373.9 9229.2	1941.6 2326.1 2563.7	18.38 16.41 14.05		430.9 440 435.1	500	81.2 85.1 81.2	


800QH-72

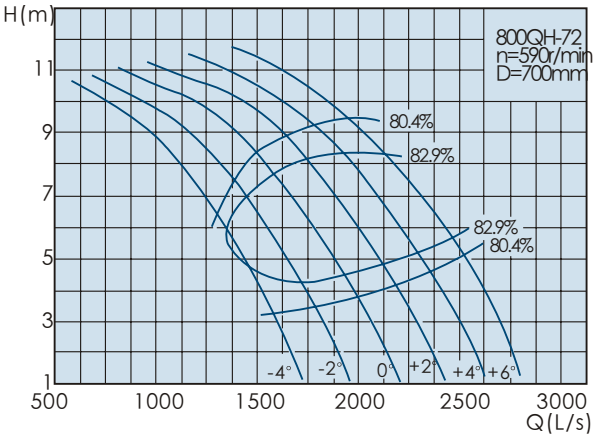

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	4224.2 4838.3 4987.1 5005.8 5545.4	1173.4 1344 1385.3 1390.5 1540.4	7.48 5.68 5.26 5.18 3.52	590	107.1 90.3 86.1 85.2 66.1	132	80.4 82.9 83.1 82.9 80.4	700
-2°	4633.6 5043 5564 6122.3 6345.6	1287.1 1400.8 1545.6 1700.6 1762.7	8.11 7.17 5.71 4.15 3.34		127.4 118.7 102.9 83.4 71.7	160	80.4 82.9 84.2 82.9 80.4	
0°	5266.3 5694.3 6401.4 6810.8 7052.7	1462.9 1581.7 1778.2 1891.9 1959.1	8.47 7.52 5.66 4.51 3.7		151.3 140.6 116.9 100.9 88.4	185	80.4 82.9 84.5 82.9 80.4	
+2°	5731.5 6066.4 6866.6 7611 7908.7	1592.1 1685.1 1907.4 2114.2 2196.9	9.02 8.38 6.49 4.51 3.79		175.3 167.1 143 112.7 101.5	200	80.4 82.9 84.9 82.9 80.4	
+4°	6252.5 6699.1 7517.9 8187.8 8560	1736.8 1860.9 2088.3 2274.4 2377.8	9.33 8.53 6.65 4.96 4.06		197.8 187.7 161.3 133.4 117.7	220	80.4 82.9 84.5 82.9 80.4	
+6°	6885.2 7443.5 7983.1 8746.1 8932.2	1912.6 2067.6 2217.5 2429.5 2481.2	9.46 8.29 7.34 5.59 5.05		220.9 202.8 189.6 160.6 152.9	3250	80.4 82.9 84.2 82.9 80.4	

OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION


800QZ-50

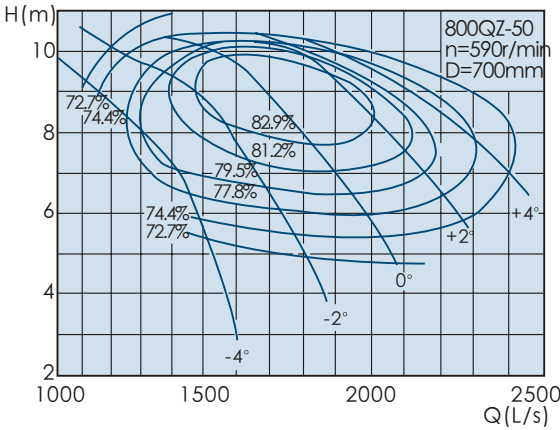

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	4534.2	1259.5	8.40	590	133.4	160	77.8	700
	4652.2	1292.3	8.38		132.5		80.2	
	5283.6	1467.7	6.47		119.7		77.8	
-2°	4831	1341.9	9.64		163	185	77.8	
	5452.4	1514.5	8.65		154.5		83.2	
	6276.9	1743.6	6.1		134.1		77.8	
0°	5343.1	1484.2	10.16		190.1	220	77.8	
	6066.4	1685.1	9.1		178.2		84.5	
	7181.1	1994.8	5.98		150.3		77.8	
+2°	6216.1	1726.7	10.19		221.7	250	77.8	
	6978.3	1938.4	9.01		203.5		84.2	
	7986.9	2218.6	6.48		181.3		77.8	
+4°	6885.6	1912.7	10.05		242.3	280	77.8	
	7666.8	2129.7	8.82		228.6		80.6	
	8301.4	2305.9	7.88		229		77.8	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

800QZ-100

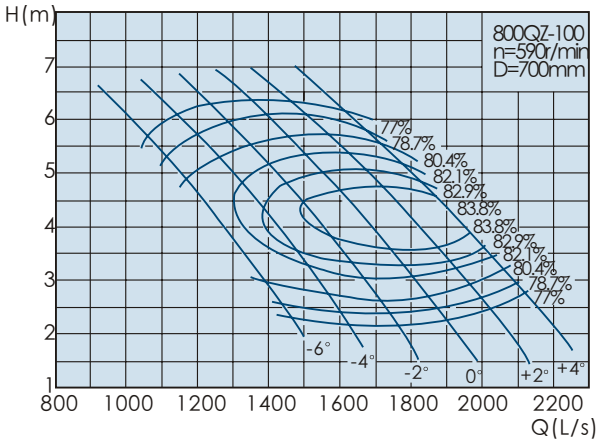


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

800QZ-160

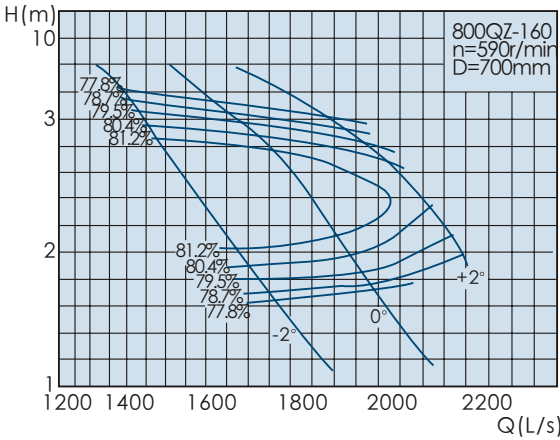

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	5051.9	1403.3	3.18	590	55.7	75	78.7	700
	5768.7	1602.4	2.24		42.8		82.5	
	6301.7	1750.5	1.59		34.6		78.7	
0°	5967.4	1657.6	3.05		63		78.7	
	6699.1	1860.9	2.25		50.4		81.7	
	7122.1	1978.4	1.64		40.5		78.7	
+2°	6930.5	1925.1	2.91		69.9	75	78.7	
	7480.7	2078	2.43		61.7		80.4	
	7892.2	2192.3	1.89		51.7		78.7	


900QH-35G

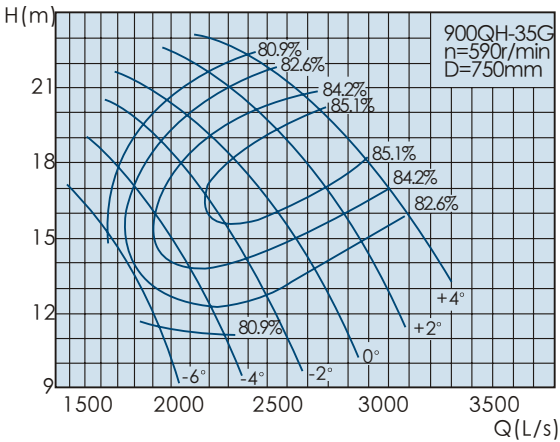

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	5909.7	1641.6	15.16	590	301.7	355	80.9	750
	6637.5	1843.8	13.04		287.3		82.1	
-4°	6113.4	1698.2	17.8		366.4	400	80.9	
	7438.6	2066.3	14.49		348		84.4	
-2°	6669.5	1852.7	19.56		439.3	500	80.9	
	8239.7	2288.8	15.73		414.6		85.2	
0°	7113.6	1976	20.49		490.8	560	80.9	
	8926.3	2479.5	16.89		480.6		85.5	
+2°	7894	2192.8	21.6		574.1	630	80.9	
	9612.9	2670.3	18.35		559		86	
+4°	8585.3	2384.8	22.26		643.5	710	80.9	
	10299.6	2861	19.14		628.8		85.4	
	11469.1	3185.9	16.01		605.9		82.6	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

900QH-35D

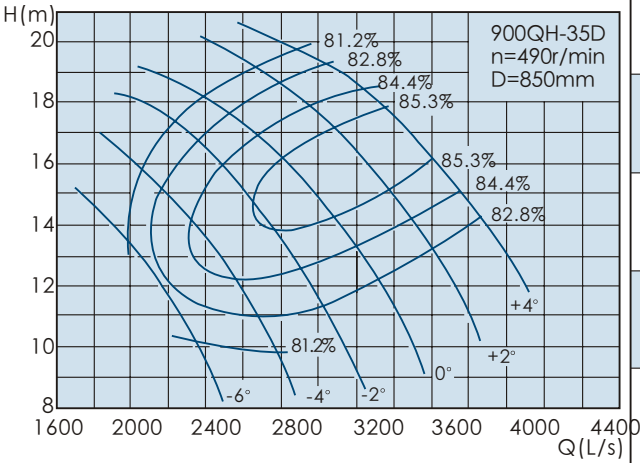

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	7144.6	1984.6	13.43	490	322.2	355	81.2	850
	8024.6	2229	11.55		306.8		82.3	
	8453.5	2348.2	10.13		287.5		81.2	
-4°	7390.9	2053	15.77		391.3	450	81.2	
	8993	2498.1	12.83		371.9		84.6	
	9651.6	2681	10.91		346.5		82.8	
-2°	8063.3	2239.8	17.33		469.1	560	81.2	
	9961.5	2767.1	13.93		443		85.4	
	10866.4	3018.4	11.28		403.3		82.8	
0°	8600.1	2388.9	18.15		524.1	630	81.2	
	10791.7	2997.7	14.96		513.7		85.7	
	11898.5	3305.1	12.15		475.7		82.8	
+2°	9543.7	2651	19.13		613.1	710	81.2	
	11621.8	3228.3	16.25		597.5		86.2	
	12952.8	3598	13.18		562		82.8	
+4°	10379.4	2883.2	19.72		687.2	800	81.2	
	12451.9	3458.9	16.96		672		85.6	
	13865.9	3851.6	14.18		647.2		82.8	


900QH-40G

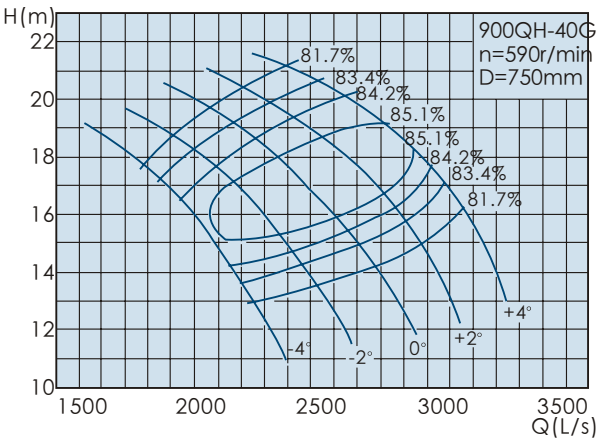

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6392.6	1775.7	17.64	590	376	450	81.7	750
	7438.6	2066.3	14.12		337.9		84.7	
	8111.5	2253.2	12.87		348.1		81.7	
-2°	6865.5	1907.1	18.71		428.2	500	81.7	
	8239.7	2288.8	15.31		404.2		85.1	
	9096.4	2525.9	13.46		408.1		81.7	
0°	7429.7	2063.8	19.7		488	560	81.7	
	8926.3	2479.5	16.66		475		85.3	
	9998.4	2777.3	14.16		471.8		81.7	
+2°	7903	2195.3	20.41		537.6	630	81.7	
	9612.9	2670.3	17.8		542.8		85.9	
	10702.2	2972.8	14.92		532.3		81.7	
+4°	8597.2	2388.1	21.1		604.7	710	81.7	
	10299.6	2861	18.83		618.4		85.5	
	11351.5	3153.2	16.13		610.4		81.7	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

900QH-40D

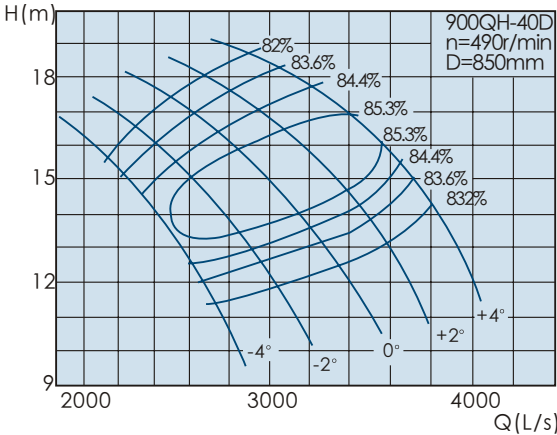

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	7728.5	2146.8	15.63	490	401.5	450	82	850
	8993	2498.1	12.51		361.1		84.9	
	9806.6	2724	11.4		371.7		82	
-2°	8300.2	2305.6	16.57		457.3	500	82	
	9961.5	2767.1	13.57		432		85.3	
	10993.7	3053.8	11.93		435.8		82	
0°	8982.3	2495.1	17.45		521.1	560	82	
	10791.7	2997.7	17.76		507.6		85.5	
	12087.8	3357.7	12.54		503.9		82	
+2°	9554.5	2654	18.08		574.1	630	82	
	11621.8	3228.3	15.77		580.1		86.1	
	12938.6	3594.1	13.22		568.5		82	
+4°	10393.8	2887.2	18.69		645.8	710	82	
	12451.9	3458.9	16.68		660.9		85.7	
	13723.7	3812.1	14.29		652		82	


900QH-72G

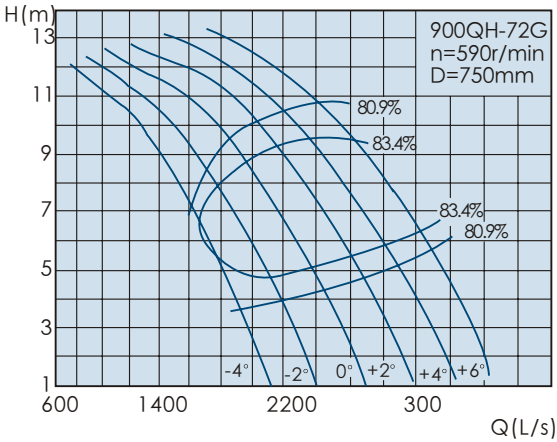

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	5195.6	1443.2	8.59	590	150.3	185	80.9	750
	5950.9	1653	6.52		126.7		83.4	
	6134	1703.9	6.04		120.9		83.5	
	6156.9	1710.2	5.95		119.7		83.4	
-2°	5699.1	1583.1	9.31		178.7	200	80.9	
	6202.6	1723	8.23		166.7		83.4	
	6843.5	1901	6.56		144.6		84.6	
	7530.1	2091.7	4.76		117.1		83.4	
0°	6477.3	1799.2	9.73		212.2	250	80.9	
	7003.7	1945.5	8.65		197.5		83.4	
	7873.4	2187.1	6.5		164.2		84.9	
	8377	2326.9	5.17		141.6		83.4	
+2°	8674.5	2409.6	4.24		123.9	280	80.9	
	7049.5	1958.2	10.36		245.9		80.9	
	7461.5	2072.6	9.62		234.6		83.4	
	8445.6	2346	7.45		201		85.3	
+4°	9361.2	2600.3	5.17		158.2	315	83.4	
	9727.4	2702	4.35		142.4		80.9	
	7690.3	2136.2	10.71		277.4	355	80.9	
	8239.7	2288.8	9.79		263.5		83.4	
+6°	9246.7	2568.5	7.64		226.6		84.9	
	10070.7	2797.4	5.69		187.3		83.4	
	10528.4	2924.6	4.66		165.1		80.9	
	8468.5	2352.4	10.87		309.9	355	80.9	
	9155.2	2543.1	9.52		284.8		83.4	
	9818.9	2727.5	8.42		266.4		84.6	
	10757.3	2988.1	6.42		225.5		83.4	
	10986.2	3051.7	5.79		214.4		80.9	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

900QH-72D

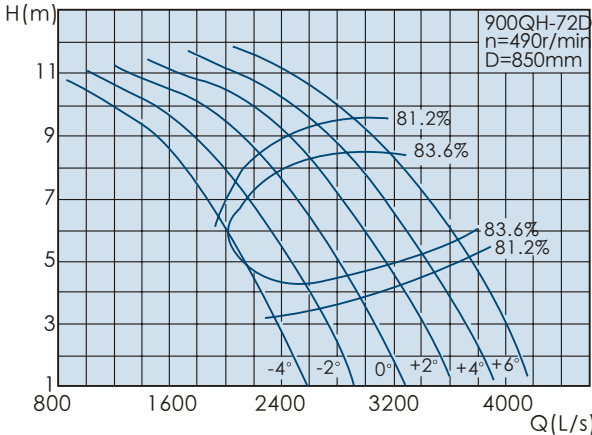

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6281.3	1744.8	7.61	490	160.5	185	81.2	850
	7194.4	1998.5	5.78		135.4		83.6	
	7415.8	2059.9	5.35		129.2		83.7	
	7443.5	2067.6	5.27		127.9		83.6	
	8245.9	2290.5	3.58		99		81.2	
-2°	6890.1	1913.9	8.25		190.9	220	81.2	
	7498.8	2083	7.29		178.1		83.6	
	8273.6	2298.2	5.81		154.5		84.8	
	9103.7	2528.8	4.22		125.1		83.6	
	9435.8	2621.1	3.39		107.5		81.2	
0°	7830.9	2175.2	8.62		226.6	250	81.2	
	8467.3	2352	7.65		211		83.6	
	9518.8	2644.1	5.76		175.5		85.1	
	10127.6	2813.2	4.58		151.3		83.6	
	10487.6	2913.1	3.76		132.3		81.2	
+2°	8522.6	2367.4	9.18		262.6	315	81.2	
	9020.7	2505.8	8.53		250.6		83.6	
	10210.6	2836.3	6.6		214.8		85.5	
	11317.4	3143.7	4.58		169.1		83.6	
	11760.1	3266.7	3.85		152		81.2	
+4°	9297.4	2582.6	9.49		296.2	355	81.2	
	9961.5	2767.1	8.67		281.5		83.6	
	11179.1	3105.3	6.77		242.2		85.1	
	12175.2	3382	5.04		200.1		83.6	
	12728.6	3535.7	4.13		176.3		81.2	
+6°	10238.2	2844	9.63		330.9	355	81.2	
	11068.4	3074.5	8.43		304.2		83.6	
	11870.8	3297.5	7.46		284.6		84.8	
	13005.3	3612.6	5.68		240.9		83.6	
	13282	3689.5	5.13		228.9		81.2	


900QZ-50G

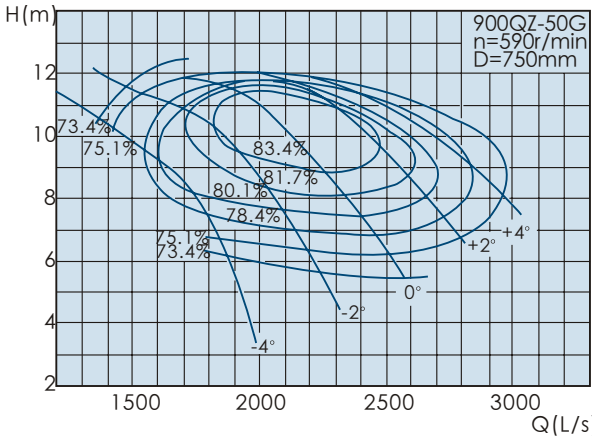

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	5576.9	1549.1	9.64	590	186.9	200	78.4	750
	5722	1589.4	9.62		185.8		80.8	
	6498.6	1805.2	7.43		167.8		78.4	
-2°	5941.9	1650.5	11.06		228.4	250	78.4	
	6706.2	1862.8	9.93		217		83.7	
	7720.3	2144.5	7.01		187.9		78.4	
0°	6571.8	1825.5	11.66		266.3	315	78.4	
	7461.5	2072.6	10.45		250.3		84.9	
	8832.5	2453.5	6.86		210.5		78.4	
+2°	7645.5	2123.7	11.69		310.6	355	78.4	
	8583	2384.2	10.35		285.9		84.7	
	9823.5	2728.8	7.44		253.9		78.4	
+4°	8469	2352.5	11.54		339.5	400	78.4	
	9429.8	2619.4	10.12		320.7		81.1	
	10210.3	2836.2	9.04		320.8		78.4	

OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表
 CURVE AND SPECIFICATION


900QZ-50D

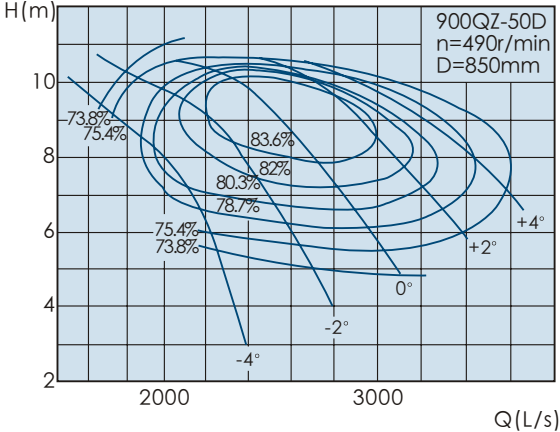

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6742.3	1872.9	8.54	490	199.5	220	78.7	850
	6917.7	1921.6	8.53		198.4		81	
	7856.6	2182.4	6.58		179.1		78.7	
-2°	7183.6	1995.5	9.8		243.7	280	78.7	
	8107.6	2252.1	8.8		231.8		83.9	
	9333.7	2592.7	6.21		200.6		78.7	
0°	7945.2	2207	10.33		284.2	315	78.7	
	9020.7	2505.8	9.26		267.5		85.1	
	10678.2	2966.2	6.08		224.7		78.7	
+2°	9243.2	2567.6	10.36		331.5	355	78.7	
	10376.6	2882.4	9.17		305.5		84.8	
	11876.4	3299	6.59		271		78.7	
+4°	10238.8	2844.1	10.22		362.4	400	78.7	
	11400.4	3166.8	8.97		342.5		81.3	
	12344	3428.9	8.01		342.4		78.7	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表
 CURVE AND SPECIFICATION

900QZ-75D

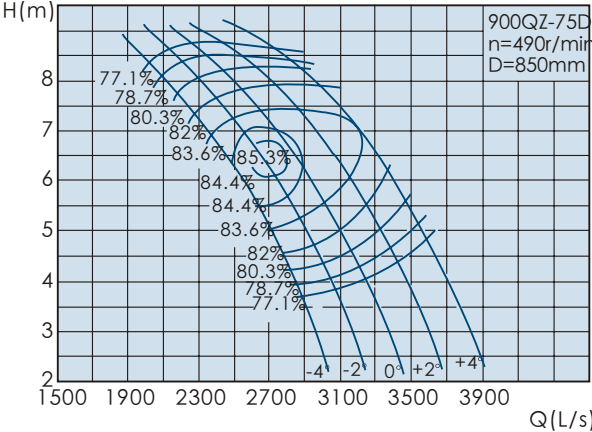


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	8238.7	2288.5	7.43	490	203.4	220	82	850
	9391.5	2608.8	5.81		175.2		84.9	
	10061.1	2794.8	4.61		154.2		82	
-2°	8516.8	2365.8	7.7		218	250	82	
	9803.8	2723.3	6.22		194.2		85.5	
	10656.3	2960.1	4.77		168.9		82	
0°	9163.2	2545.3	7.89		240.4	280	82	
	10263.1	2850.9	6.45		213		84.8	
	11183.2	3106.4	5.07		188.5		82	
+2°	9858.9	2738.6	7.97		261.1		82	
	10982.6	3050.7	6.59		234.1		84.3	
	11814.7	3281.8	5.65		221.8		82	
+4°	10890.7	3025.2	7.96		288.1	315	82	
	11491.7	3192.1	6.99		261.5		83.7	
	12105.5	3362.6	6.28		252.7		82	

900QZ-75G

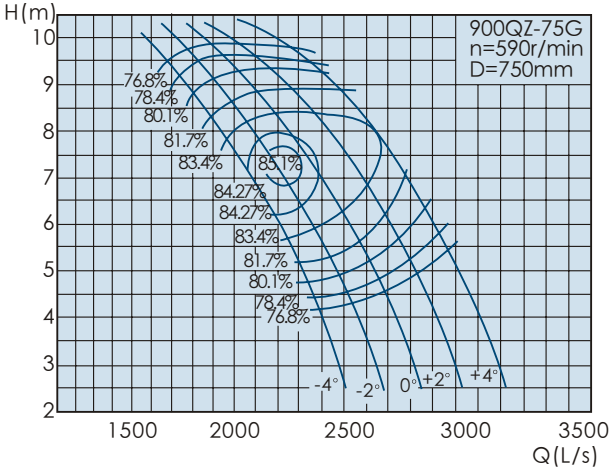

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6814.7	1893	8.38	590	190.4	220	81.7	750
	7768.2	2157.8	6.56		163.9		84.7	
	8322.1	2311.7	5.2		144.4		81.7	
-2°	7044.7	1956.9	8.69		204.1	250	81.7	
	8109.2	2252.6	7.02		181.7		85.3	
	8814.4	2448.4	5.38		158.1		81.7	
0°	7579.3	2105.4	8.91		225.1	280	81.7	
	8489.1	2358.1	7.28		199.3		84.6	
	9250.2	2569.5	5.72		176.4		81.7	
+2°	8154.7	2265.2	8.99		244.4	315	81.7	
	9084.2	2523.4	7.44		219.1		84.1	
	9772.5	2714.6	6.37		207.6		81.7	
+4°	9008.2	2502.3	8.98		269.7		81.7	
	9505.4	2640.4	7.89		244.8		83.4	
	10013	2781.4	7.09		236.6		81.7	


900QZ-100G

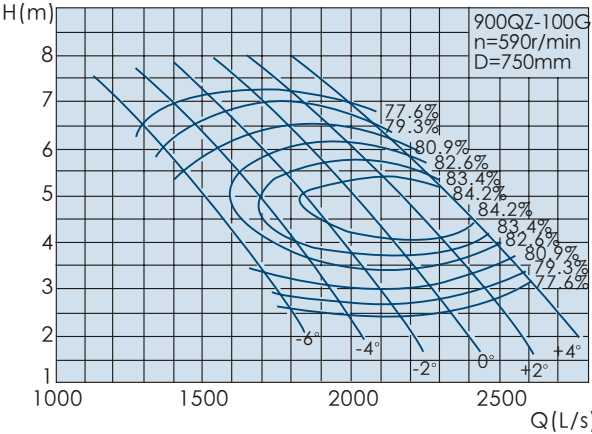

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	5252.6	1459	5.44	590	96.3	110	80.9	750
	5722	1589.4	4.17		78.7		82.6	
	6166	1712.8	3.36		69.8		80.9	
-4°	5576.2	1548.9	6.03		113.3	132	80.9	
	6408.6	1780.2	4.24		88.7		83.5	
	6998.4	1944	3.01		71		80.9	
-2°	5968.7	1658	6.32		127.1	160	80.9	
	6980.8	1939.1	4.35		98.4		84	
	7618	2116.1	3.04		78		80.9	
0°	6394.9	1776.4	6.47		139.3	185	80.9	
	7553	2098.1	4.36		106.4		84.2	
	8165	2268.1	3.08		84.8		80.9	
+2°	6982.2	1939.5	6.5		152.8		80.9	
	8010.8	2225.2	4.58		118.2		84.7	
	8647.3	2402	3.33		97		80.9	
+4°	7631.8	2119.9	6.27		161.2		80.9	
	8583	2384.2	4.6		127.6		84.4	
	9105.3	2529.2	3.64		111.7		80.9	

OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION


900QZ-100D

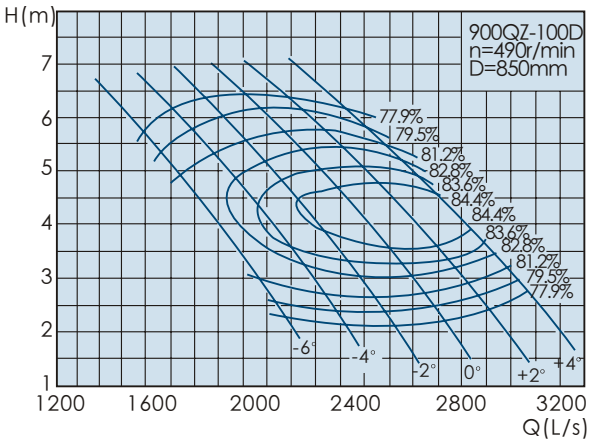

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	6350.2	1763.9	4.82	490	102.8	132	81.2	850
	6917.7	1921.6	3.69		84.1		82.8	
	7454.5	2070.7	2.98		74.6		81.2	
-4°	6741.5	1872.6	5.34		121	160	81.2	
	7747.9	2152.2	3.76		94.8		83.7	
	8460.9	2350.3	2.67		75.8		81.2	
-2°	7216	2004.5	5.6		135.7	185	81.2	
	8439.6	2344.3	3.85		105.2		84.2	
	9210	2558.3	2.7		83.3		81.2	
0°	7731.3	2147.6	5.73		148.7	185	81.2	
	9131.4	2536.5	3.86		113.7		84.4	
	9871.3	2742	2.73		90.5		81.2	
+2°	8441.3	2344.8	5.76		163.2	185	81.2	
	9684.8	2690.2	4.06		126.3		84.8	
	10454.3	2904	2.95		103.6		81.2	
+4°	9226.6	2562.9	5.56		172.1	185	81.2	
	10376.6	2882.4	4.08		136.3		847.6	
	11008	3057.8	3.23		119.3		81.2	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

900QZ-135D

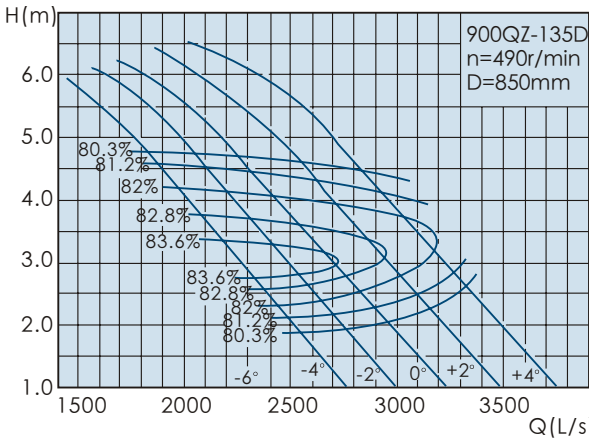


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6644.1	1845.6	4.79	490	107.8	132	80.3	850
	8583.5	2384.3	2.64		73.3		84.3	
	9199.8	2555.5	1.9		59.2		80.3	
-2°	7411.4	2058.7	4.74		119.1	160	80.3	
	9228.3	2563.4	2.82		84.5		84	
	9993.6	2776	2.01		68.1		80.3	
0°	8183.4	2273.2	4.69		130.3	160	80.3	
	9839.8	2733.3	2.98		95.5		83.7	
	10686.5	2968.5	2.05		74.4		80.3	
+2°	9313.5	2587.1	4.44		140.2	160	80.3	
	10600.7	2944.6	3.09		107.5		83	
	11413.4	3170.4	2.26		87.7		80.3	
+4°	10256.8	2849.1	4.46		155.3	185	80.3	
	11347.8	3152.2	3.25		122.2		82.4	
	12018.3	3338.4	2.61		106.5		80.3	

900QZ-135G

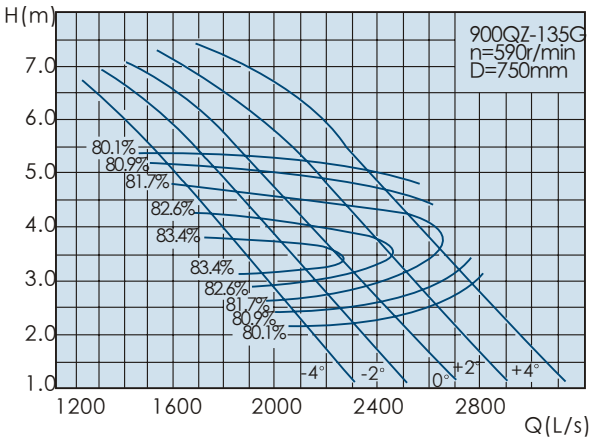

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	5495.6	1526.6	5.4	590	101	110	80.1	750
	7099.8	1972.2	2.98		68.6		84.1	
	7609.5	2113.8	2.14		55.5		80.1	
-2°	6130.3	1702.9	5.35		111.6	132	80.1	
	7633.1	2120.3	3.19		79.1		83.8	
	8266.2	2296.2	2.27		63.7		80.1	
0°	6768.9	1880.2	5.3		122	160	80.1	
	8138.9	2260.8	3.36		89.3		83.5	
	8839.3	2455.4	2.32		69.7		80.1	
+2°	7703.6	2139.9	5.01		131.3	160	80.1	
	8768.4	2435.7	3.49		100.6		82.8	
	9440.6	2622.4	2.56		82.1		80.1	
+4°	8483.9	2356.6	5.04		145.5	160	80.1	
	9386.3	2607.3	3.67		114.4		82.2	
	9940.9	2761.4	2.95		99.8		80.1	


900QZ-160G

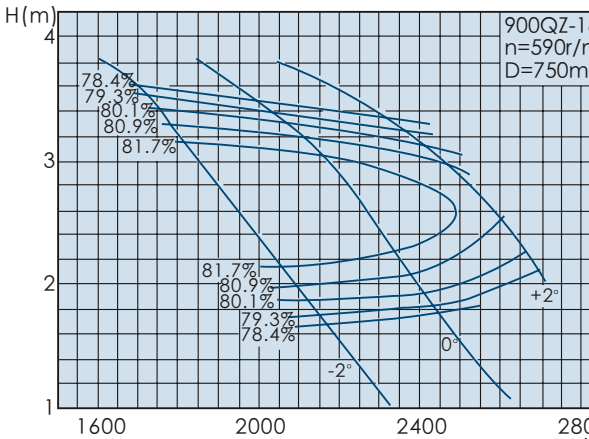

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	6213.6	1726	3.65	590	78	90	79.3	750
	7095.3	1970.9	2.58		60		83	
	7750.8	2153	1.82		48.5		79.2	
0°	7339.7	2038.8	3.5		88.3	110	79.3	
	8239.7	2288.8	2.59		70.7		82.2	
	8759.9	2433.3	1.88		56.7		79.3	
+2°	8524.2	2367.8	3.34		98	110	79.3	
	9200.9	2555.8	2.79		86.6		80.9	
	9707	2696.4	2.17		72.5		79.3	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表
 CURVE AND SPECIFICATION

900QZ-160D

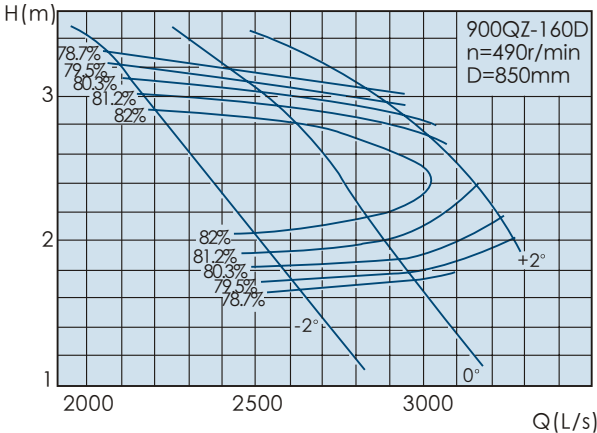

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	7512.1	2086.7	3.24	490	83.3	90	79.5	850
	8578	2382.8	2.28		64.1		83.2	
	9370.5	2602.9	1.61		51.8		79.5	
0°	8873.5	2464.9	3.1		94.2	110	79.5	
	9961.5	2767.1	2.29		75.5		82.4	
	10590.5	2941.8	1.67		60.5		79.5	
+2°	10305.5	2862.6	2.96		104.6	132	79.5	
	11123.7	3089.9	2.48		92.4		81.2	
	11735.5	3259.9	1.93		77.4		79.5	


1000QZ-35

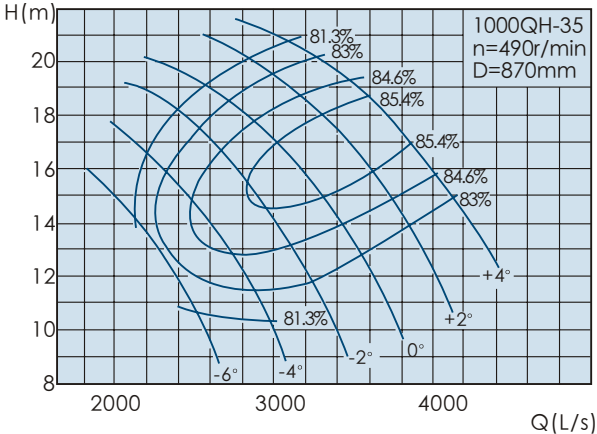

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	7660.9	2128	14.07	490	361.1	400	81.3	870
	8604.4	2390.1	12.1		344		82.5	
	9064.3	2517.9	10.61		322.3		81.3	
-4°	7925	2201.4	16.52		438.6	500	81.3	
	9642.9	2678.6	13.45		417		84.7	
	10349.1	2874.7	11.43		388.5		83	
-2°	8646	2401.7	18.15		525.8	630	81.3	
	10681.4	2967	14.6		496.9		85.5	
	11651.6	3236.6	11.81		452.1		83	
0°	9221.6	2561.6	19.02		587.5	800	81.3	
	11571.5	3214.3	15.67		576.1		85.8	
	12758.3	3544	12.73		533.3		83	
+2°	10233.3	2842.6	20.04		687.2	900	81.3	
	12461.6	3461.6	17.03		670.1		86.3	
	13888.8	3858	13.81		630.1		83	
+4°	11129.4	3091.5	20.66		770.3		81.3	
	13351.7	3708.8	17.77		753.7		85.8	
	14867.9	4130	14.86		725.6		83	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表
 CURVE AND SPECIFICATION

1000QH-40

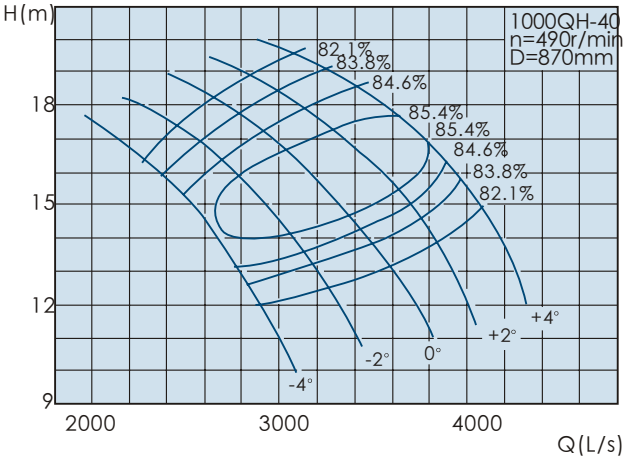

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	8287	2301.9	16.37	490	450.1	500	82.1	870
	9642.9	2678.6	13.11		404.9		85.1	
	10515.2	2920.9	11.95		416.7		82.1	
-2°	8900	2472.2	17.36		512.6	560	82.1	
	10681.4	2967	14.21		484.5		85.4	
	11788.1	3274.5	12.49		488.6		82.1	
0°	9631.3	2675.4	18.29		584.2	630	82.1	
	11571.5	3214.3	15.46		569.3		85.6	
	12961.3	3600.3	13.14		564.9		82.1	
+2°	10244.9	2845.8	18.94		643.6	710	82.1	
	12461.6	3461.6	16.52		650.7		86.2	
	13873.6	3853.8	13.85		637.4		82.1	
+4°	11144.8	3095.8	19.58		724	800	82.1	
	13351.7	3708.8	17.48		741.2		85.8	
	14715.4	4087.6	14.97		730.9		82.1	


1000QH-72

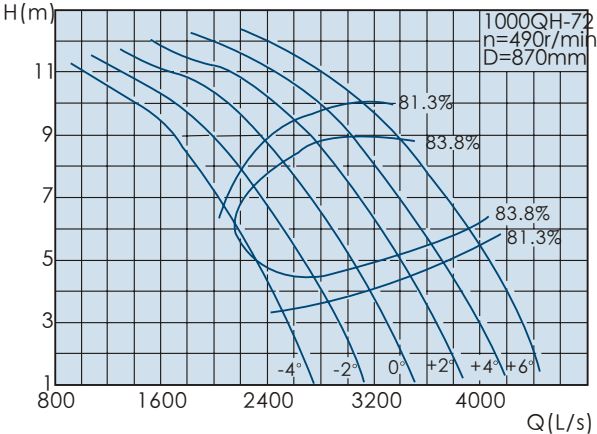

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6735.2	1870.9	7.97	490	179.9	200	81.3	870
	7714.3	2142.9	6.05		151.8		83.8	
	7951.7	2208.8	5.61		144.9		83.9	
	7981.4	2217	5.52		143.4		83.8	
	8841.8	2456.1	3.75		111		81.3	
-2°	7387.9	2052.2	8.64		213.9	250	81.3	
	8040.7	2233.5	7.64		199.7		83.8	
	8871.5	2464.3	6.09		173.3		85	
	9761.6	2711.6	4.42		140.3		83.8	
	10117.6	2810.5	3.55		120.5		81.3	
0°	8396.7	2332.4	9.03		254	280	81.3	
	9079.2	2522	8.01		236.6		83.8	
	10206.6	2835.2	6.03		196.8		85.2	
	10859.4	3016.5	4.8		169.6		83.8	
	11245.1	3123.6	3.94		148.3		81.3	
+2°	9138.5	2538.5	9.61		294.3	315	81.3	
	9672.6	2686.8	8.93		281		83.8	
	10948.4	3041.2	6.91		240.9		85.6	
	12135.2	3370.9	4.8		189.6		83.8	
	12610	3502.8	4.03		170.4		81.3	
+4°	9969.3	2769.2	9.94		332	400	81.3	
	10681.4	2967	9.09		315.7		83.8	
	11986.9	3329.7	7.09		271.6		85.2	
	13055	3626.4	5.28		224.3		83.8	
	13648.4	3791.2	4.32		197.6		81.3	
+6°	10978.1	3049.5	10.08		370.9		81.3	
	11868.2	3296.7	8.84		341.1		83.8	
	12728.6	3535.7	7.82		319.2		84.9	
	13945.1	3873.6	5.95		270.1		83.8	
	14241.8	3956.1	5.38		256.6		81.3	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1000QZ-50

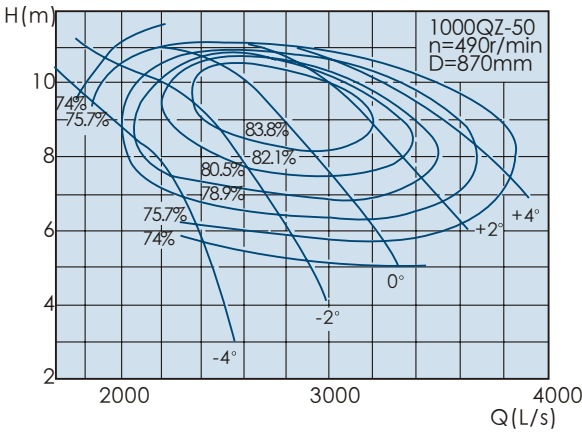

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	7229.5	2008.2	8.95	490	223.5	250	78.9	870
	7417.6	2060.4	8.93		222.4		81.2	
	8424.3	2340.1	6.9		200.6		78.9	
-2°	7702.8	2139.7	10.27		273.1	315	78.9	
	8693.5	2414.8	9.22		260		84	
	10008.1	2780	6.5		224.7		78.9	
0°	8519.3	2366.5	10.82		318.5	355	78.9	
	9672.6	2686.8	9.7		300		85.2	
	11449.8	3180.5	6.37		251.8		78.9	
+2°	9911.1	2753.1	10.85		371.5	400	78.9	
	11126.4	3090.7	9.6		342.6		85	
	12734.6	3537.4	6.91		303.7		78.9	
+4°	10978.7	3049.6	10.71		406	450	78.9	
	12224.2	3395.6	9.39		383.9		81.5	
	13236	3676.7	8.39		383.7		78.9	


1000QZ-75

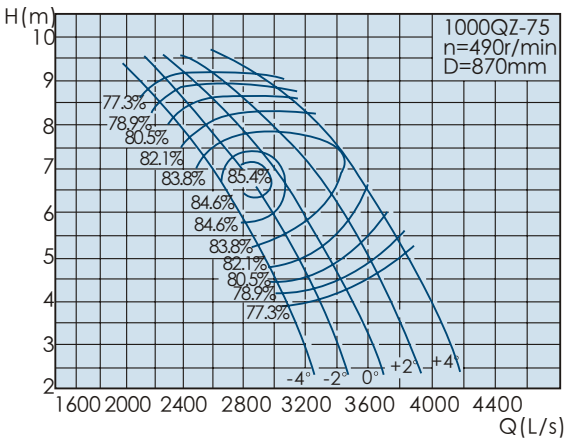

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	8834.1	2453.9	7.78	490	228	250	82.1	870
	10070.2	2797.3	6.09		196.4		85.1	
	10788.2	2996.7	4.83		172.9		82.1	
-2°	9132.3	2536.7	8.07		244.4	280	82.1	
	10512.3	2920.1	6.51		217.8		85.6	
	11426.4	3174	4.99		189.3		82.1	
0°	9825.4	2729.3	8.27		269.5	315	82.1	
	11004.8	3056.9	6.76		238.8		84.9	
	11991.3	3330.9	5.31		211.3		82.1	
+2°	10571.3	2936.5	8.35		292.7	355	82.1	
	11776.2	3271.2	6.91		262.5		84.4	
	12668.4	3519	5.92		248.6		82.1	
+4°	11677.7	3243.8	8.34		322.9	355	82.1	
	12322.1	3422.8	7.32		293.2		83.8	
	12980.2	3605.6	6.58		283.3		82.1	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1000QZ-100

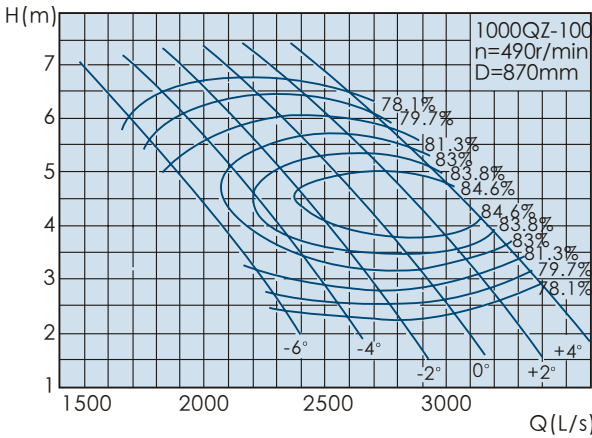

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	6809.1	1891.4	5.05	490	115.2	132	81.3	870
	7417.6	2060.4	3.87		94.3		83	
	7993.2	2220.3	3.12		83.6		81.3	
-4°	7228.6	2007.9	5.6		135.6	160	81.3	
	8307.7	2307.7	3.94		106.3		83.9	
	9072.3	2520.1	2.79		84.9		81.3	
-2°	7737.5	2149.3	5.87		152.1	185	81.3	
	9049.5	2513.7	4.03		117.9		84.3	
	9875.5	2743.2	2.82		93.4		81.3	
0°	8289.9	2302.8	6		166.7	200	81.3	
	9791.3	2719.8	4.04		127.5		84.6	
	10584.6	2940.2	2.86		101.5		81.3	
+2°	9051.3	2514.2	6.03		182.9	220	81.3	
	10384.7	2884.6	4.25		141.7		85	
	11209.8	3113.8	3.09		116.1		81.3	
+4°	9893.3	2748.1	5.82		192.9	220	81.3	
	11126.4	3090.7	4.27		152.9		84.7	
	11803.5	3278.8	3.38		133.7		81.3	


1000QZ-135

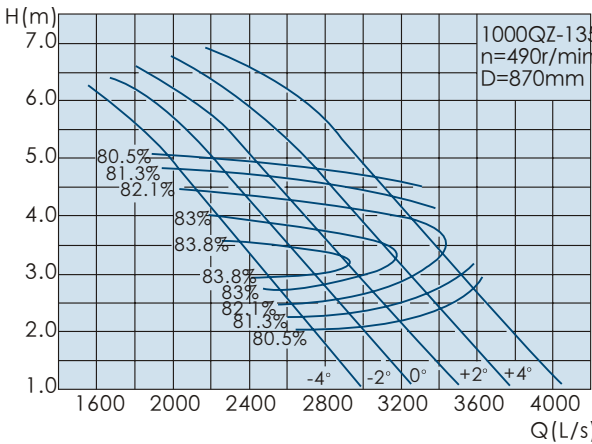

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	7124.2	1978.9	5.01	490	120.9	132	80.5	870
	9203.8	2556.6	2.77		82.2		84.4	
	9864.5	2740.2	1.99		66.4		80.5	
-2°	7946.9	2207.5	4.97		133.5	160	80.5	
	9895.1	2748.6	2.96		94.8		84.2	
	10715.8	2976.6	2.1		76.3		80.5	
0°	8774.7	2437.4	4.92		146	185	80.5	
	10550.8	2930.8	3.12		107		83.8	
	11458.7	3183	2.15		83.4		80.5	
+2°	9986.5	2774	4.65		157.1	200	80.5	
	11366.8	3157.4	3.24		120.5		83.2	
	12238.2	3399.5	2.37		98.2		80.5	
+4°	10998	3055	4.68		174.1	200	80.5	
	12167.9	3380	3.41		137		82.5	
	12886.8	3579.7	2.74		119.4		80.5	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1000QZ-160

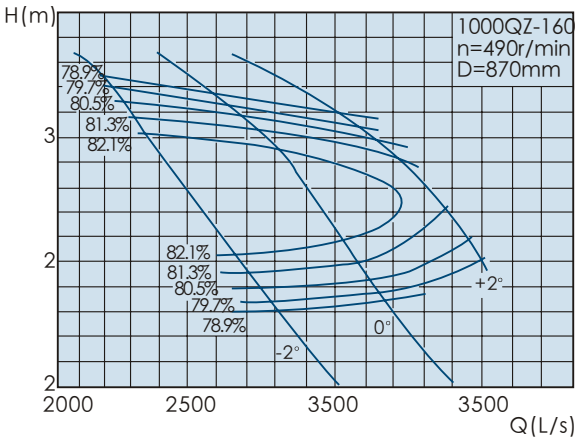

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	8054.9	2237.5	3.39	490	93.4	110	79.7	870
	9197.8	2555	2.39		71.9		83.4	
	10047.6	2791	1.69		58.1		79.7	
0°	9514.7	2643	3.25		105.6	132	79.7	
	10681.4	2967	2.4		84.7		82.6	
	11355.8	3154.4	1.75		67.9		79.7	
+2°	11050.2	3069.5	3.1		117.2		79.7	
	11927.5	3313.2	2.59		103.6		81.3	
	12583.5	3495.4	2.02		86.8		79.7	


1200QH-72

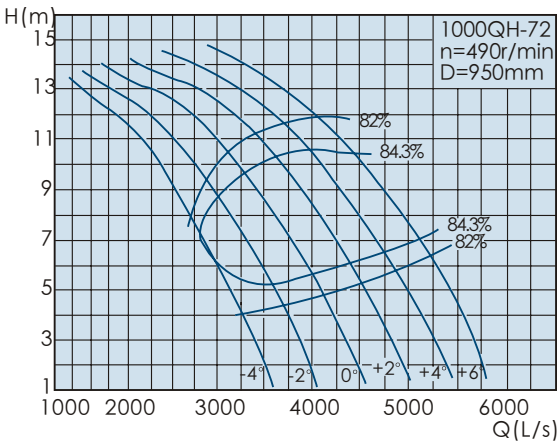

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	8769.3	2435.9	9.5	490	277	315	82	950
	10044.1	2790	7.21		234.1		84.3	
	10353.1	2875.9	6.69		223.4		84.5	
	10391.8	2886.6	6.58		221.1		84.3	
	11512.1	3197.8	4.47		170.9		82	
-2°	9619.2	2672	10.31		329.5	355	82	
	10469	2908.1	9.1		308		84.3	
	11550.7	3208.5	7.26		267.4		85.5	
	12709.6	3530.5	5.27		216.3		84.3	
	13173.2	3659.2	4.24		185.5		82	
0°	10932.6	3036.8	10.76		391.2	450	82	
	11821.1	3283.6	9.55		364.8		84.3	
	13289.1	3691.4	7.19		303.7		85.7	
	14139	3927.5	5.73		261.6		84.3	
	14641.2	4067	4.7		228.5		82	
+2°	11898.4	3305.1	11.46		453.4	500	82	
	12593.8	3498.3	10.65		433.4		84.3	
	14254.9	3959.7	8.25		371.8		86.1	
	15800.1	4388.9	5.73		292.3		84.3	
	16418.2	4560.5	4.81		262.5		82	
+4°	12980.1	3605.6	11.85		511.4	560	82	
	13907.2	3863.1	10.83		486.8		84.3	
	15607	4335.3	8.45		419.1		85.8	
	16997.37	4721.6	6.3		345.9		84.3	
	17770.3	4936.2	5.15		304.4		82	
+6°	14293.5	3970.4	12.02		571.3	630	82	
	15452.5	4292.4	10.54		526		84.3	
	16572.8	4603.5	9.32		492.5		85.5	
	18156.6	5043.5	7.1		416.5		84.3	
	18543	5150.8	6.41		395.3		82	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1200QZ-50

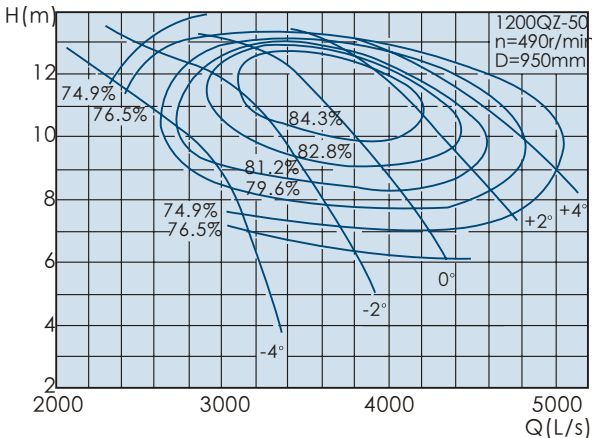

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	9412.9	2614.7	10.67	490	343.8	400	79.6	950
	9657.8	2682.7	10.65		342.5		81.8	
	10968.5	3046.8	8.22		308.6		79.6	
-2°	10029	2785.8	12.24		420.1	450	79.6	
	11318.9	3144.1	10.99		401		84.6	
	13030.7	3619.6	7.75		345.7		79.6	
0°	11092.2	3081.2	12.91		489.9	560	79.6	
	12593.8	3498.3	11.57		462.9		85.7	
	14907.8	4141	7.59		387.3		79.6	
+2°	12904.3	3584.5	12.94		571.4	630	79.6	
	14486.7	4024.1	11.45		528.7		85.5	
	16580.5	4605.7	8.23		467.2		79.6	
+4°	14294.3	3970.6	12.77		624.6	710	79.6	
	15916	4421.1	11.2		591.4		82.1	
	17233.4	4787	10.01		590.2		79.6	


1200QZ-75

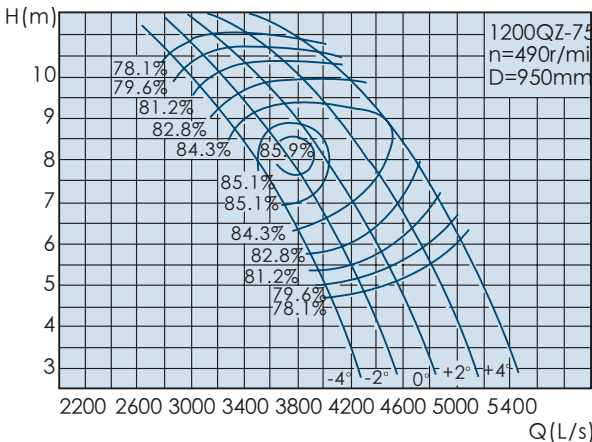

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	11502	3195	9.28	490	351.3	400	82.8	950
	13111.4	3642.1	7.26		303.1		85.6	
	14046.3	3901.7	5.76		266.4		82.8	
-2°	11890.3	3302.9	9.62		376.6	450	82.8	
	13687	3801.9	7.76		336.2		86.1	
	14877.2	4132.6	5.95		291.7		82.8	
0°	12792.7	3553.5	9.86		415.3	500	82.8	
	14328.3	3980.1	8.06		368.5		85.4	
	15612.8	4336.9	6.33		325.5		82.8	
+2°	13763.9	3823.3	9.95		451	560	82.8	
	15332.7	4259.1	8.2		405		84.9	
	16494.3	4581.8	7.05		383.1		82.8	
+4°	15204.4	4223.5	9.94		497.6	560	82.8	
	16043.5	4456.5	8.73		452.2		84.4	
	16900.4	4694.5	7.84		436.5		82.8	

QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION


1200QZ-100

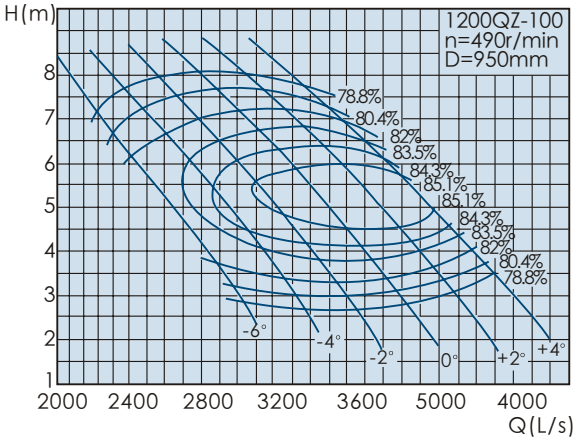

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	8865.5	2462.6	6.02	490	177.5	200	82	950
	9657.8	2682.7	4.61		145.4		83.5	
	10407.2	2890.9	3.72		128.7		82	
-4°	9411.7	2614.4	6.68		208.9	250	82	
	10816.7	3004.6	4.7		164		84.4	
	11812.2	3281.2	3.33		130.8		82	
-2°	10074.2	2798.4	7		234.3	280	82	
	11782.5	3272.9	4.81		181.9		84.9	
	12858	3571.7	3.37		143.9		82	
0°	10793.5	2998.2	7.16		256.8	315	82	
	12748.3	3541.2	4.82		196.8		85.1	
	13781.3	3828.1	3.41		156.3		82	
+2°	11784.8	3273.6	7.19		281.7	355	82	
	13520.9	3755.8	5.07		218.6		85.5	
	14595.2	4054.2	3.69		178.9		82	
+4°	12881.2	3578.1	6.94		297.1		82	
	14486.7	4024.1	5.1		235.9		85.3	
	15368.2	4269	4.03		205.9		82	


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1200QZ-160

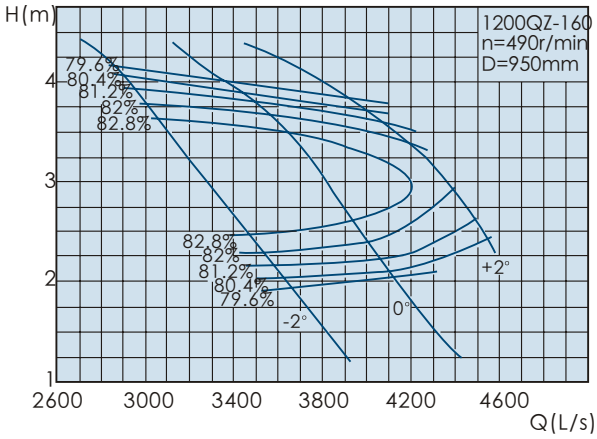


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	10487.6	2913.2	4.04	490	143.7	160	80.4	950
	11975.7	3326.6	2.85		110.9		83.9	
	13082.1	3633.9	2.02		89.3		80.4	
0°	12388.2	3441.2	3.87		162.5	185	80.4	
	13907.2	3863.1	2.86		130.5		83.2	
	14785.3	4107	2.08		104.4		80.4	
+2°	14387.4	3996.5	3.7		180.3	200	80.4	
	15529.7	4313.8	3.09		159.6		82	
	16383.9	4551.1	2.4		133.5		80.4	

1200QZ-135

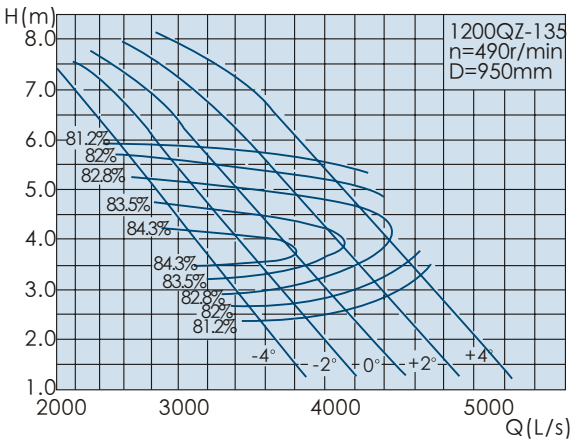

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	9275.7	2576.6	5.98	490	186.1	200	81.2	950
	11983.4	3328.7	3.3		126.8		85	
	12843.7	3567.7	2.37		102.2		81.2	
-2°	10347	2874.2	5.92		205.6	220	81.2	
	12883.5	3578.7	3.53		146.2		84.7	
	13952	3875.6	2.51		117.4		81.2	
0°	11424.8	3173.5	5.86		224.8	250	81.2	
	13737.2	3815.9	3.72		165.1		84.4	
	14919.4	4144.3	2.57		128.4		81.2	
+2°	13002.5	3611.8	5.54		241.9	280	81.2	
	14799.6	4111	3.86		185.8		83.8	
	15934.2	4426.2	2.83		151.3		81.2	
+4°	14319.4	3977.6	5.58		268	315	81.2	
	15842.6	4400.7	4.07		211.1		83.1	
	16778.7	4660.7	3.26		183.8		81.2	


1300QH-72

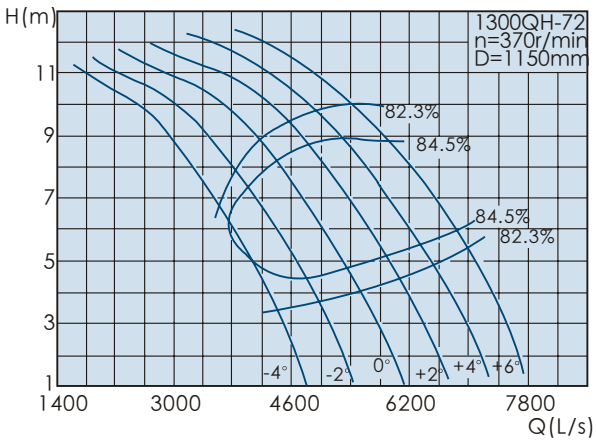

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	11746	3262.8	7.94	370	308.7	355	82.3	1150
	13453.6	3737.1	6.03		261.1		84.6	
	13867.6	3852.1	5.59		249.1		84.8	
	13919.3	3866.5	5.5		246.5		84.6	
-2°	12884.4	3579	8.61		367.2	400	82.3	
	14022.8	3895.2	7.61		343.4		84.6	
	15471.7	4297.7	6.07		298.2	500	85.8	
	17024	4728.9	4.4		241.2		84.6	
0°	10932.6	3036.8	10.76		435.9	560	82	
	11821.1	3283.6	9.55		406.8		84.6	
	13289.1	3691.4	7.19		338.8	630	86	
	14139	3927.5	5.73		291.7		84.6	
+2°	15937.4	4427	9.58		505.1	710	82.3	
	16868.8	4685.8	8.9		483.2		84.6	
	19093.8	5303.8	6.89		414.8		86.4	
	21163.6	5878.8	4.78		325.9		84.6	
+4°	21991.5	6108.8	4.02		292.5		82.3	
	17386.2	4829.5	9.9		569.8	630	82.3	
	18628.1	5174.5	9.05		542.8		84.6	
+6°	20904.9	5806.9	7.06		467.5	710	86	
	22767.7	6324.4	5.26		385.7		84.6	
	23802.6	6611.8	4.31		339.2		82.3	
	19145.5	5318.2	10.05		636.5		82.3	
	20697.9	5749.4	8.8		586.5		84.6	
	22198.5	6166.2	7.79		549.4		85.8	
	24320	6755.6	5.93		464.4		84.6	
	24837.5	6899.3	5.36		440.4		82.3	


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1300QZ-50

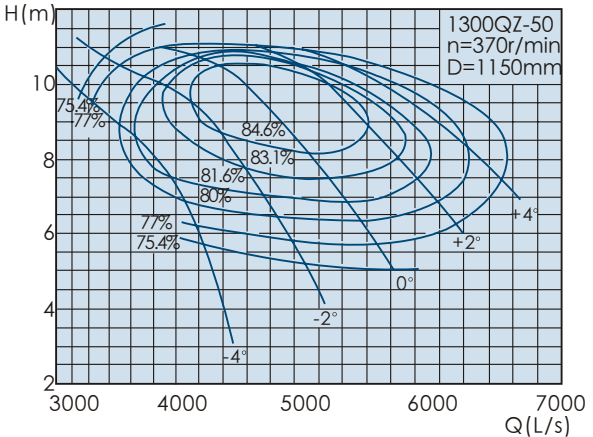

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	12608.1	3502.3	8.92	370	382.8	450	80	1150
	12936.2	3593.4	8.9		381.6		82.2	
	14691.9	4081.1	6.87		343.6		80	
-2°	13433.4	3731.5	10.23		467.8	560	80	
	15161.2	4211.4	9.19		447.1		84.9	
	17454	4848.3	6.48		384.9		80	
0°	14857.5	4127.1	10.78		545.4	630	80	
	16868.8	4685.8	9.66		516.4		86	
	19968.3	5546.7	6.34		431.3		80	
+2°	17284.8	4801.3	10.81		636.2	710	80	
	19404.3	5390.1	9.57		589.7		85.8	
	22208.8	6169.1	6.88		520.2		80	
+4°	19146.6	5318.5	10.67		695.4	800	80	
	21318.8	5921.9	9.36		659		82.5	
	23083.3	6412	8.36		657.2		80	


1300QZ-75

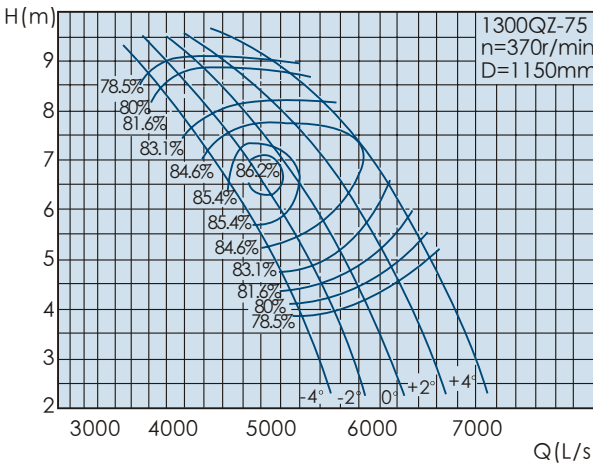

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	15406.5	4279.6	7.75	370	391.5	450	83.1	1150
	17562.2	4878.4	6.07		338.1		85.9	
	18814.4	5226.2	4.81		296.9		83.1	
-2°	15926.5	4424	8.04		419.7	500	83.1	
	18333.2	5092.5	6.49		375		86.4	
	19927.4	5535.4	4.98		325.1		83.1	
0°	17135.3	4759.8	8.24		462.8	560	83.1	
	19192.1	5331.1	6.74		411		85.7	
	20912.6	5809.1	5.29		362.8		83.1	
+2°	18436.1	5121.1	8.31		502.6	630	83.1	
	20537.5	5704.9	6.88		451.6		85.2	
	22093.4	6137.1	5.89		427		83.1	
+4°	20365.7	5657.1	8.31		554.6	800	83.1	
	21489.6	5969.3	7.29		504.2		84.7	
	22637.3	6288.1	6.55		486.5		83.1	


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1300QZ-100

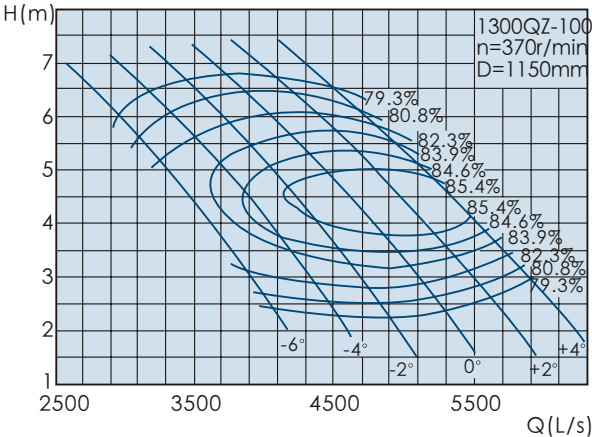

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	11874.9	3298.6	5.03	370	197.8	220	82.3	1150
	12936.2	3593.4	3.86		162.1		83.9	
	13940	3872.2	3.11		143.5		82.3	
-4°	12606.6	3501.8	5.58		232.7	250	82.3	
	14488.5	4024.6	3.92		182.8		84.7	
	15822	4395	2.78		145.8		82.3	
-2°	13494	3748.3	5.85		261.1	280	82.3	
	15782.1	4383.9	4.02		202.9		85.2	
	17222.7	4784.1	2.81		160.3		82.3	
0°	14457.5	4016	5.98		286.1	315	82.3	
	17075.8	4743.3	4.03		219.4		85.4	
	18459.4	5127.6	2.85		174.2		82.3	
+2°	15785.2	4384.8	6.01		313.9	355	82.3	
	18110.6	5030.7	4.24		243.8		85.8	
	19549.7	5430.5	3.08		199.3		82.3	
+4°	17253.8	4792.7	5.8		331.1	800	82.3	
	19404.3	5390.1	4.26		263.1		85.6	
	20585.1	5718.1	3.37		229.4		82.3	


1300QZ-135

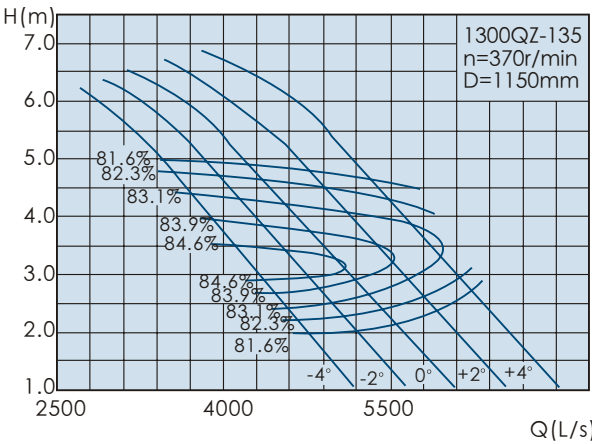

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	12424.4	3451.2	4.99	370	207.3	250	81.6	1150
	16051.2	4458.7	2.76		141.4		85.3	
	17203.6	4778.8	1.98		113.8		81.6	
-2°	13859.3	3849.8	4.95		229	280	81.6	
	17256.9	4793.6	2.95		163		85	
	18688.1	5191.1	2.1		130.8		81.6	
0°	15303	4250.8	4.9		250.4	315	81.6	
	18400.4	5111.2	3.11		184.1		84.7	
	19983.8	5551.1	2.14		143.1		81.6	
+2°	17416.2	4837.8	4.63		269.4	355	81.6	
	19823.4	5506.5	3.22		207.1		84.1	
	21343.1	5928.7	2.36		168.5		81.6	
+4°	19180.2	5327.8	4.66		298.5	800	81.6	
	21220.5	5894.6	3.4		235.3		83.5	
	22474.3	6242.9	2.73		204.7		81.6	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1300QZ-160

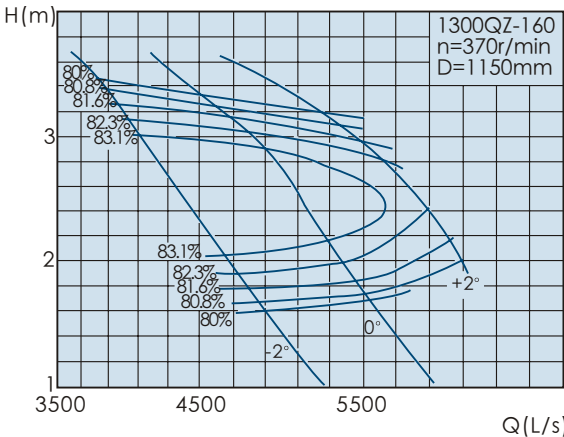

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	14047.7	3902.1	3.38	370	160	185	80.8	1150
	16040.9	4455.8	2.38		123.6		84.3	
	17522.8	4867.5	1.68		99.5		80.8	
0°	16593.5	4609.3	3.23		181	200	80.8	
	18628.1	5174.5	2.39		145.4		83.5	
	19804.3	5501.2	1.74		116.3		80.8	
+2°	19271.3	5353.1	3.09		200.8	220	80.8	
	20801.4	5778.2	2.58		177.8		82.3	
	21945.4	6096	2.01		148.7		80.8	


1400QH-72

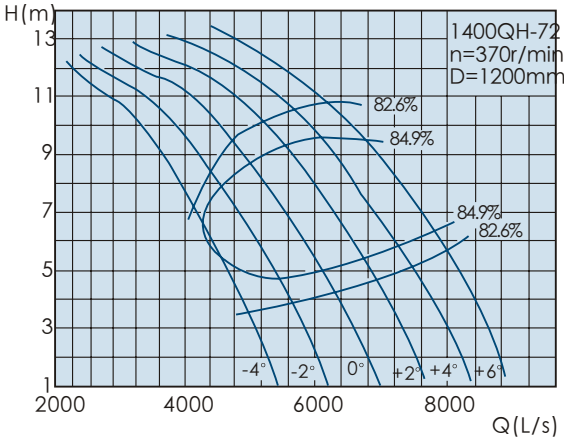

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	13345.7	3707.1	8.65	370	380.5		82.6	1200
	15285.8	4246.1	6.56		322	450	84.9	
	15756.2	4379.7	6.08		307.2		85	
	15815	4393	5.99		304.1		84.9	
-2°	14639.1	4066.4	9.38		452.6		82.6	
	15932.6	4425.7	8.28		423.5	500	84.9	
	17578.7	4883	6.61		367.9		86	
	19342.5	5372.9	4.79		297.5		84.9	
0°	16638.1	4621.7	9.79		537.3		82.6	
	17990.3	4997.3	8.69		501.7	630	84.9	
	20224.4	5617.9	6.54		417.9		86.3	
	21517.8	5977.2	5.21		359.7		84.9	
+2°	18107.8	5030	10.43		622.7		82.6	
	19166.1	5323.9	9.69		596	710	84.9	
	21694.1	6026.2	7.5		511.8		86.6	
	24045.8	6679.4	5.21		402		84.9	
+4°	24986.5	6940.7	4.38		360.5		82.6	
	19754	5487.2	10.78		702.4		82.6	
	21165	5879.2	9.86		669.5	800	84.9	
	23751.9	6597.7	7.69		576.8		86.3	
+6°	25868.4	7185.7	5.73		475.7		84.9	
	27044.2	7512.3	4.69		418.1		82.6	
	21752.9	6042.5	10.94		784.6		82.6	
	23516.7	6532.4	9.58		723.4	900	84.9	
	25221.6	7006	8.48		677.7		86	
	27632.1	7675.6	6.46		572.8		84.9	
	28220	7838.9	5.83		542.9		82.6	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1400QZ-75

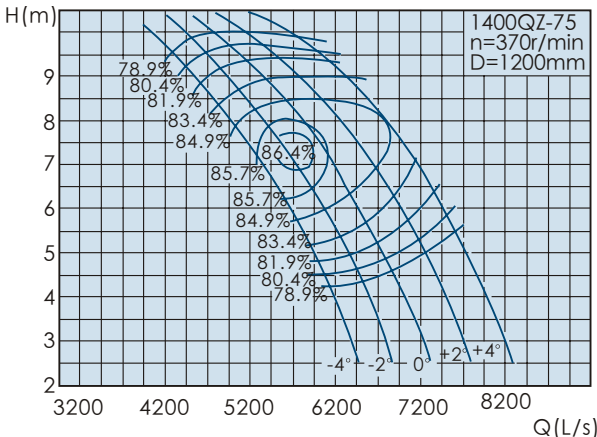

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	17504.6	4862.4	8.44	370	482.7		83.4	1200
	19953.9	5542.8	6.61		417.1		86.1	
	21376.7	5938	5.24		366	560	83.4	
-2°	18095.5	5026.5	8.75		517.4		83.4	
	20829.9	5786.1	7.06		462.7	630	86.6	
	22641.3	6289.2	5.42		400.8		83.4	
0°	19468.9	5408	8.97		570.6		83.4	
	21805.8	6057.2	7.33		507	630	86	
	23760.7	6600.2	5.76		447.3		83.4	
+2°	20946.9	5818.6	9.05		619.7		83.4	
	23334.4	6481.8	7.49		557.1	710	85.5	
	25102.3	6972.9	6.42		526.4		83.4	
+4°	23139.2	6427.6	9.04		683.7		83.4	
	24416.2	6782.3	7.94		621.9	800	84.9	
	25720.2	7144.5	7.14		599.8		83.4	


1400QZ-100

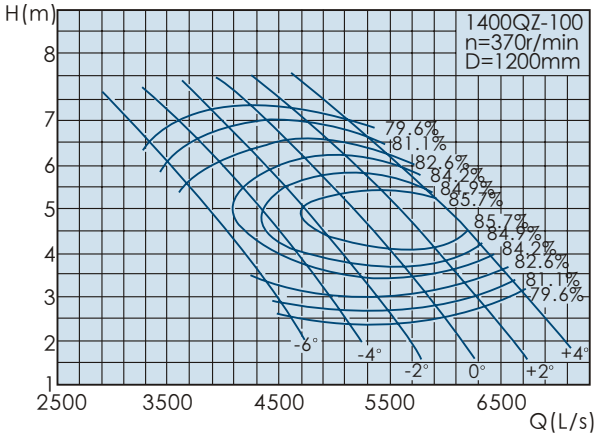

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia-meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	13492.1	3747.8	5.48	370	243.8		82.6	1200
	14697.9	4082.8	4.2		199.8	280	84.2	
	15838.5	4399.6	3.39		176.8		82.6	
-4°	14323.4	3978.7	6.07		286.9		82.6	
	16461.7	4572.7	4.27		225.5	315	85	
	17976.7	4993.5	3.03		179.7		82.6	
-2°	15331.7	4258.8	6.37		321.8		82.6	
	17931.5	4981	4.38		250.3	355	85.4	
	19568.2	5435.6	3.06		197.6		82.6	
0°	16426.4	4562.9	6.51		352.7		82.6	
	19401.3	5389.2	4.39		270.7	400	85.7	
	20973.4	5825.9	3.1		214.7		82.6	
+2°	17935	4981.9	6.54		386.9		82.6	
	20577.1	5715.9	4.62		300.8	450	86	
	22212.1	6170	3.35		245.7		82.6	
+4°	19603.5	5445.4	6.31		408.1		82.6	
	22046.9	6124.1	4.64		324.6		85.8	
	23388.5	6496.8	3.67		282.8		82.6	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1400QZ-135

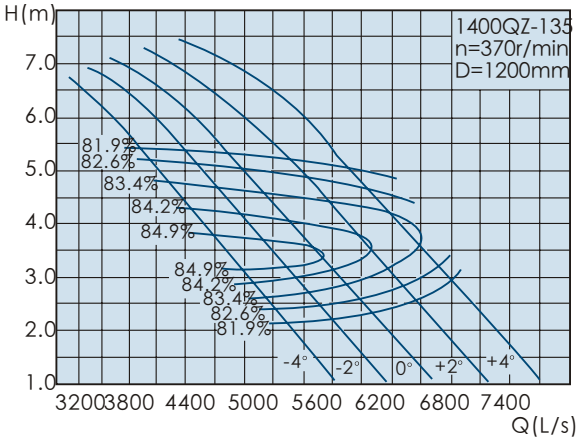

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	14116.5	3921.2	5.44	370	255.5	280	81.9	1200
	18237.2	5065.9	3		174.4		85.5	
	19546.5	5429.6	2.16		140.3		81.9	
-2°	15746.8	4374.1	5.39		282.2	315	81.9	
	19607	5446.4	3.21		201.1		85.3	
	21233.2	5898.1	2.28		161.2		81.9	
0°	17387.1	4829.7	5.33		308.6	355	81.9	
	20906.3	5807.3	3.39		227		85	
	22705.4	6307	2.33		176.3		81.9	
+2°	19788.1	5496.7	5.04		332	400	81.9	
	22523.1	6256.4	3.51		255.4		84.4	
	24249.8	6736.1	2.57		207.7		81.9	
+4°	21792.3	6053.4	5.07		367.9		81.9	
	24110.5	6697.4	3.7		290.1		83.8	
	25535	7093.1	2.97		252.3		81.9	


1400QZ-160

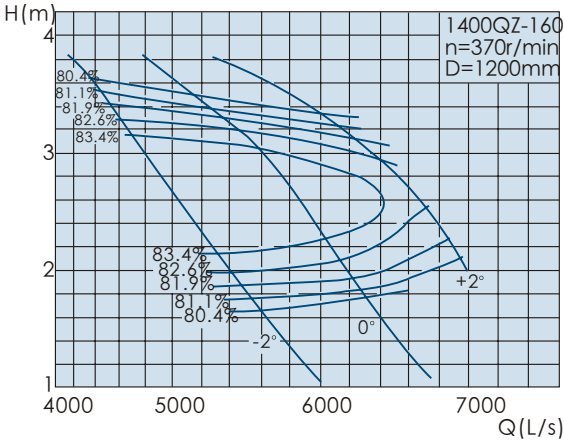

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	15960.8	4433.5	3.68	370	197.1	220	81.1	1200
	18225.4	5062.6	2.59		152.4		84.5	
	19909.2	5530.3	1.83		122.6		81.1	
0°	18853.3	5237	3.52		223	250	81.1	
	21165	5879.2	2.6		179.3		83.8	
	22501.4	6250.4	1.9		143.3		81.1	
+2°	21895.8	6082.2	3.37		247.5	280	81.1	
	23634.3	6565.1	2.81		219.2		82.6	
	24934.2	6926.2	2.19		183.2		81.1	


OZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1600QZ-75

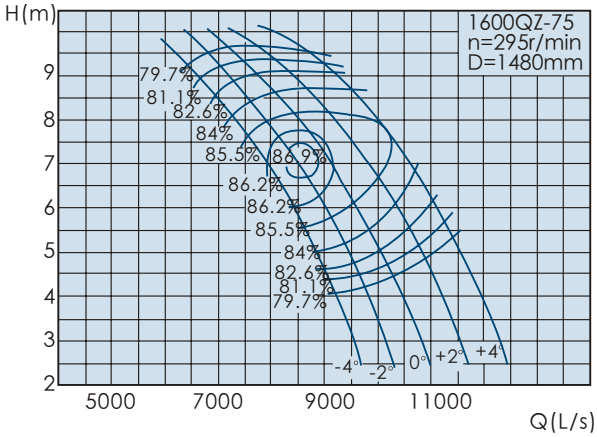

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	26182.7	7273	8.16	295	692.9	800	84	1480
	29846.2	8290.6	6.39		599.6		86.6	
	31974.4	8881.8	5.07		525.4		84	
-2°	27066.5	7518.5	8.46		742.8	900	84	
	31156.5	8654.6	6.83		665.3		87.2	
	33865.9	9407.2	5.24		575.3		84	
0°	29120.8	8089.1	8.67		819.1	1000	84	
	32616.3	9060.1	7.09		728.8		86.5	
	35540.3	9872.3	5.57		642.1		84	
+2°	31331.5	8703.2	8.75		889.5	1120	84	
	34902.7	9695.2	7.24		800.6		86	
	37547	10429.7	6.21		755.6		84	
+4°	34610.7	9614.1	8.74		981.5	1120	84	
	36520.8	10144.7	7.68		893.4		85.5	
	38471.2	10686.5	6.9		861		84	


1600QZ-100

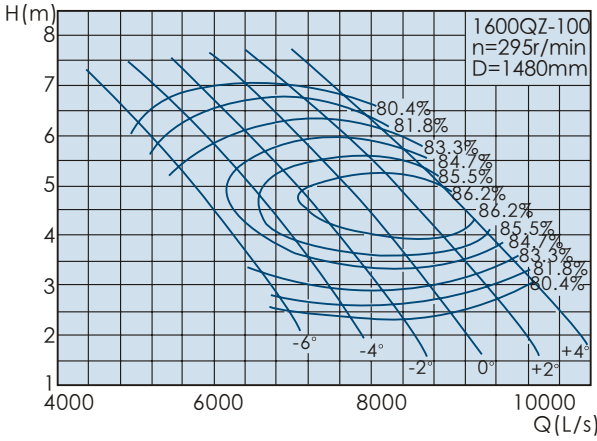

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer dia- meter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	20181	5605.8	5.3	295	349.8	400	83.3	1480
	21984.6	6106.8	4.06		287		84.7	
	23690.6	6580.7	3.27		253.7		83.3	
-4°	21424.4	5951.2	5.87		411.6	450	83.3	
	24622.7	6839.6	4.13		323.9		85.5	
	26888.9	7469.1	2.93		257.9		83.3	
-2°	22932.5	6370.2	6.16		461.8	500	83.3	
	26821.2	7450.3	4.23		359.6		86	
	29269.4	8130.4	2.96		283.6		83.3	
0°	24569.9	6825	6.3		506.1	560	83.3	
	29019.6	8061	4.24		389.1		86.2	
	31371.1	8714.2	3		308.1		83.3	
+2°	26826.4	7451.8	6.33		555.2	630	83.3	
	30778.4	8549.6	4.46		432.4		86.6	
	33224	9228.9	3.24		352.6		83.3	
+4°	29322.1	8145	6.1		585.6		83.3	
	32976.9	9160.2	4.48		466.5		86.3	
	34983.6	9717.7	3.55		405.8		83.3	


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1600QZ-135

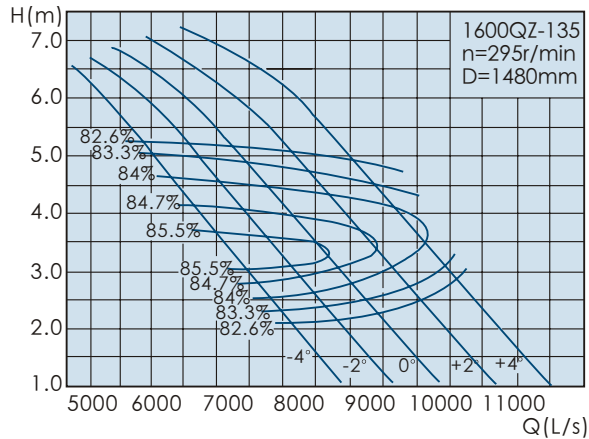

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	21114.9	5865.2	5.26	295	366.4	400	82.6	1480
	27278.5	7577.3	2.9		250.6		86.1	
	29236.8	8121.3	2.09		201.2		82.6	
-2°	23553.4	6542.6	5.21		404.8	450	82.6	
	29327.4	8146.5	3.1		288.9		85.8	
	31759.8	8822.2	2.21		231.2		82.6	
0°	26006.9	7224.1	5.16		442.7	500	82.6	
	31270.8	8686.3	3.27		326.1		82.5	
	33961.8	9433.8	2.26		252.9		82.6	
+2°	29598.3	8221.7	4.88		476.3	560	82.6	
	33689.2	9358.1	3.39		366.9		85	
	36271.9	10075.5	2.49		297.8		82.6	
+4°	32596.1	9054.5	4.91		527.7	630	82.6	
	36063.5	10017.6	3.58		416.5		84.4	
	38194.2	10609.5	2.87		361.9		82.6	

1600QZ-160

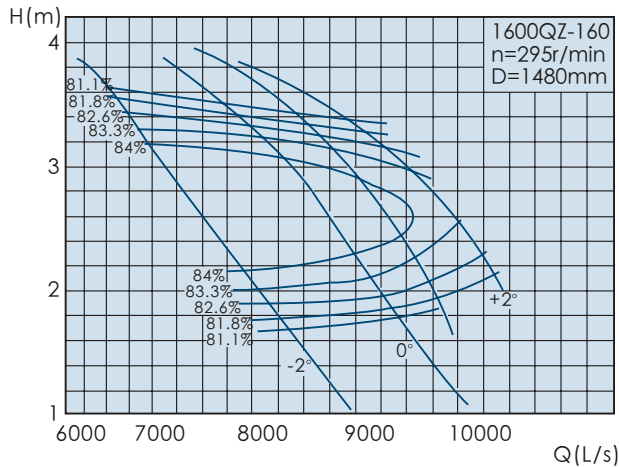

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	23873.5	6631.5	3.56	295	282.7	315	81.8	1480
	27260.9	7572.5	2.51		218.9		85.1	
	29779.4	8272.1	1.77		175.8		81.8	
0°	28200	7833.3	3.4		319.7	355	81.8	
	31657.8	8793.8	2.52		257.5		84.4	
	33656.6	9349.1	1.83		205.4		81.8	
+2°	32750.8	9097.5	3.25		354.8	400	81.8	
	35351.2	9819.8	2.72		314.6		83.3	
	37295.5	10359.9	2.12		2627.7		81.8	

QZ、QH系列泵安装形式及尺寸 QZ、QH SERIES PUMP INSTALLATION AND DIMENSION

较小的QZ系列潜水轴油泵、QH系列潜水混流泵采用开敞式进水，安装形式为悬吊式安装、钢制井筒式安装、混凝土预制井筒式安装。悬吊式安装、钢制井筒式安装由本公司提供整套井筒，混凝土预制井筒式安装由本公司提供安装底座（含防转装置），井盖装置。

安装时，将潜水电泵吊入井筒盖底为止，导叶体上的斜面与支座斜面配合，止水橡皮（O形圈）起密封作用。

较大的潜水泵（一般叶轮直径在1米以上），采用带封闭进水流道的安装形式。


1、悬吊式安装

The smaller QZ Series submersible axial-flow pump and QH series submersible mixed-flow pump use the open-type for water-in and the way of instalation of suspension, steel-made well-drum and concrete pre-made well-drum. For the former two ways, this Company supplies a wholeset of the well-drum and for the latter, and erection foundation (covering a rotation preventing device) and a well cover.

To install, lift the submersible electric pump and put it in the well-drum till to is bottom, with the inclined plane on the guide vane fitted with the one of the support, the watrer-baffle rubber (O-ring) functions sealing.

The bigger Submersible pump (the impeller diameter is over 1 m in general) uses ther way of installation with a closed water-in flow-path.

1.Suspension installation

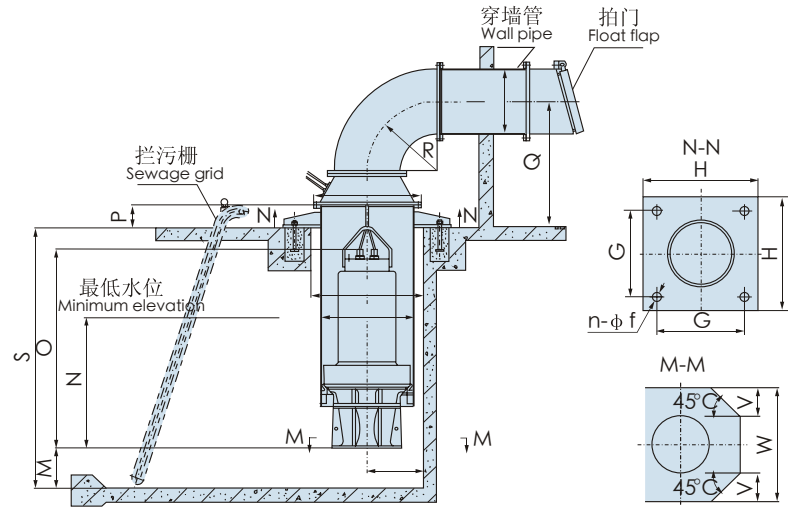


- 注：①表中尺寸为泵的安装尺寸、泵站设计的水力控制尺寸，其中泵站设计的水力尺寸为参考值。
②尺寸A依据泵流量确定，以控制流速，减少水力损失，表中尺寸为参考值，如需要，可适当加大；尺寸S、Q依据泵站具体条件确定；尺寸R为最小参考尺寸，如条件许可，可适当加大。
上述尺寸均依据用户要求确定。
③泵中心距后池壁不大于尺寸T。
④同池内两泵中心距不小于尺寸Z。

- Note: 1) The dimensions in the table are those for pump installation and the hydraulic control in pump station design, of which the hydraulic control ones are values for reference.
2) Dimension A is determined upon the pump's flow to control the flowrate and reduce the head loss. The dimensions in the table are values for reference and can be properly enlarged if necessary; dimensions S, Q are determined upon the detailed conditions of the pump station; dimension R is the smallest reference one and can be properly enlarged if permitted upon the conditions.
The above dimensions can all be determined upon the requirements of users.
3) The distance between the pump center and the rear pool wall not larger than dimension T.
4) The central distance between two pumps in a same pool not less than dimension Z.

QZ、QH系列泵安装形式及尺寸 QZ、QH SERIES PUMP INSTALLATION AND DIMENSION

2、钢制井筒式安装

2.Steel-made well-drum way of installation

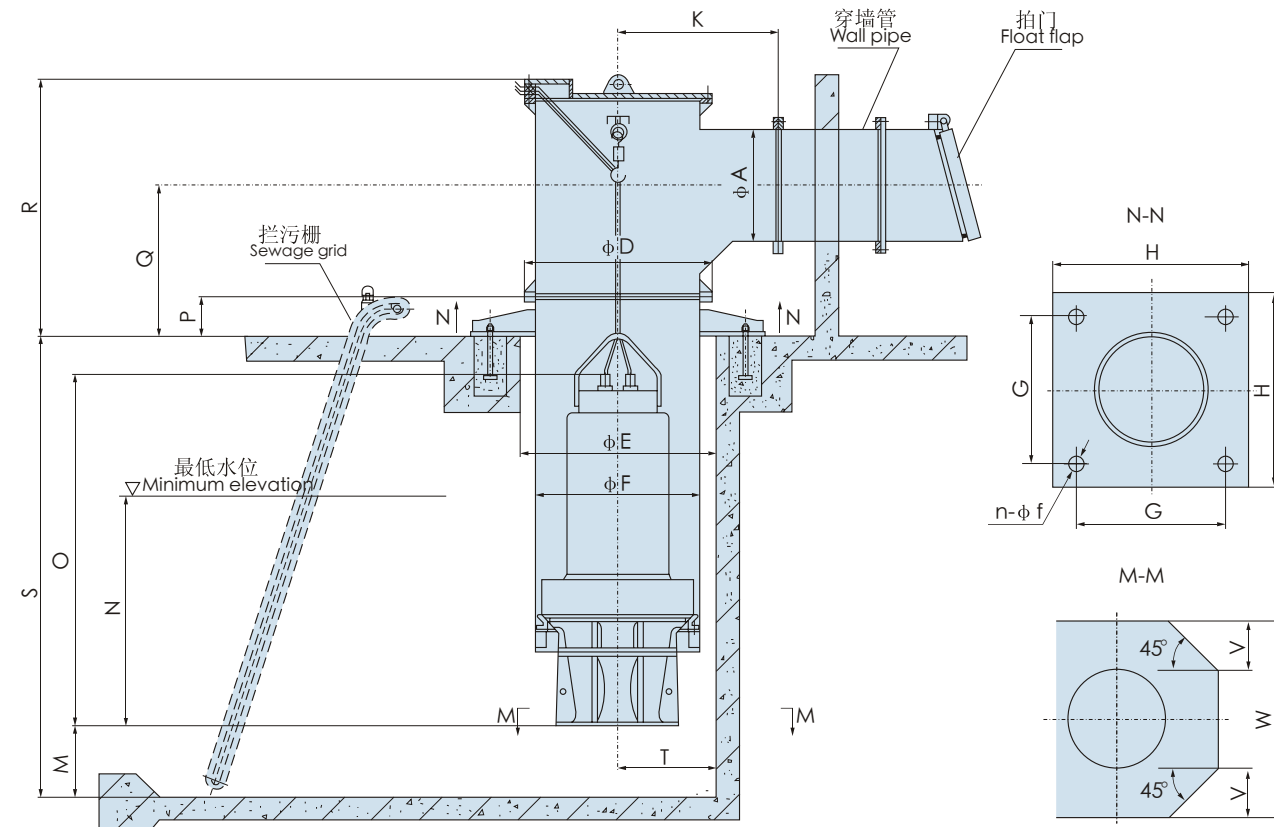


- 注：①表中尺寸为泵的安装尺寸、泵站设计的水力控制尺寸，其中泵站设计的水力尺寸为参考值。
②尺寸A依据泵流量确定，以控制流速，减少水力损失，表中尺寸为参考值，如需要，可适当加大；尺寸S、Q、R依据泵站具体条件确定。
上述尺寸均依据用户要求确定。
③泵中心距后池壁不大于尺寸T。
④同池内两泵中心距不小于尺寸Z。

- Note: 1) The dimensions in the table are those for pump installation and the hydraulic control in pump station design, of which the hydraulic control ones are values for reference.
2) Dimension A is determined upon the pump's flow to control the flow rate and reduce the head loss. The dimensions in the table are values for reference and can be properly enlarged if necessary; dimensions S, Q, R are determined upon the detailed conditions of the pump station.
The above dimensions can all be determined upon the requirements of users.
3) The distance between the pump center and the rear pool wall not larger than dimension T.
4) The central distance between two pumps in a same pool not less than dimension Z.

QZ、QH系列泵安装形式及尺寸 QZ、QH SERIES PUMP INSTALLATION AND DIMENSION

3、混凝土预制井筒式安装

3.Concrete pre-made well-drum way of installation

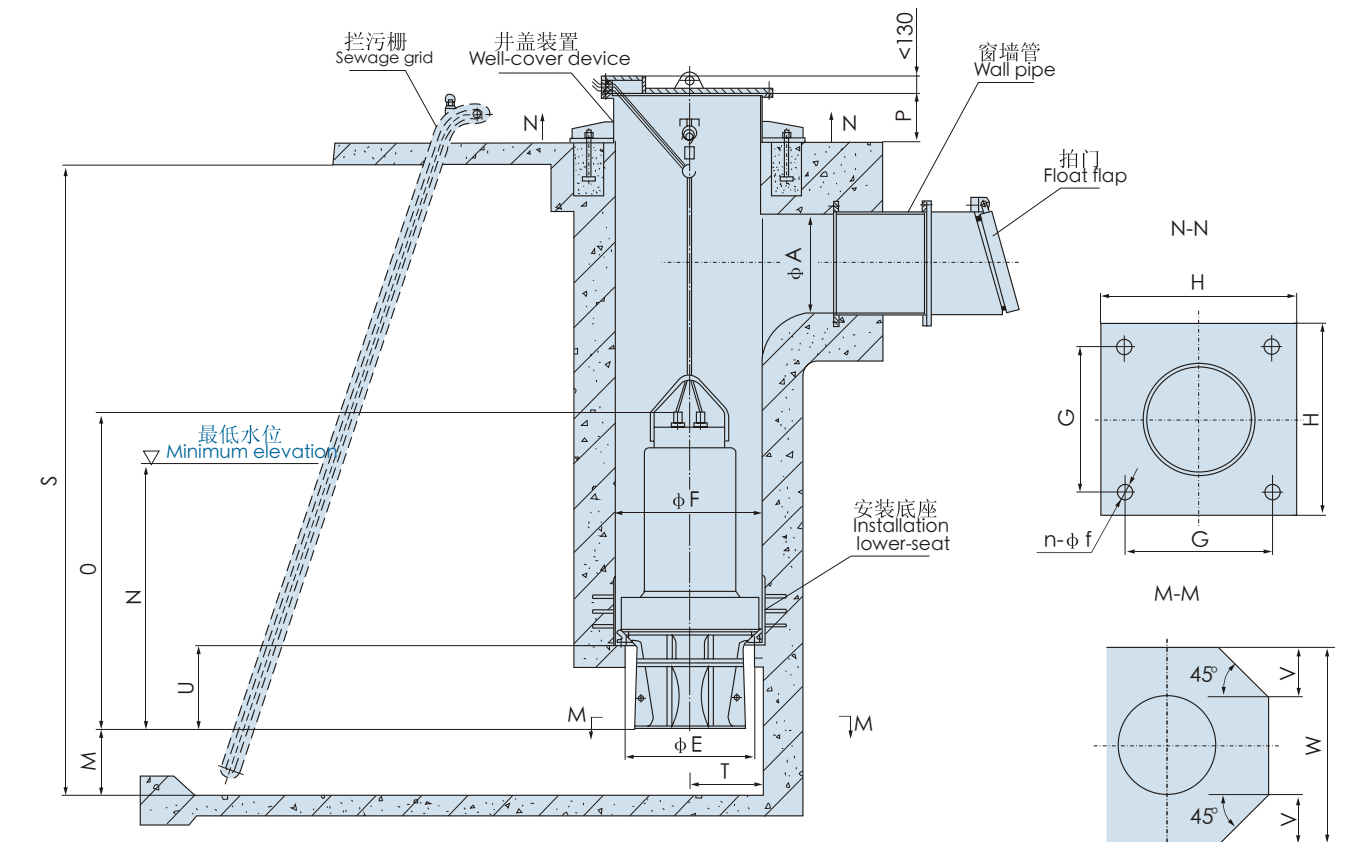


- 注：①表中尺寸为泵的安装尺寸、泵站设计的水力控制尺寸，其中泵站设计的水力尺寸为参考值。
②尺寸A依据泵流量确定，以控制流速，减少水力损失，表中尺寸为参考值，如需要，可适当加大；尺寸S依据泵站具体条件确定。
上述尺寸均依据用户要求确定。
③泵中心距后池壁不大于尺寸T。
④同池内两泵中心距不小于尺寸Z。

- Note: 1) The dimensions in the table are those for pump installation and the hydraulic control in pump station design, of which the hydraulic control ones are values for reference.
2) Dimension A is determined upon the pump's flow to control the flow rate and reduce the head loss. The dimensions in the table are values for reference and can be properly enlarged if necessary; dimensions S are determined upon the detailed conditions of the pump station.
The above dimensions can all be determined upon the requirements of users.
3) The distance between the pump center and the rear pool wall not larger than dimension T.
4) The central distance between two pumps in a same pool not less than dimension Z.

OZ、QH系列泵安装形式及尺寸 QZ、QH SERIES PUMP INSTALLATION AND DIMENSION

4、封闭进水流道的混凝土预制井筒式安装 4.Concrete pre-made well-drum way of installation of closed water-in flow-path

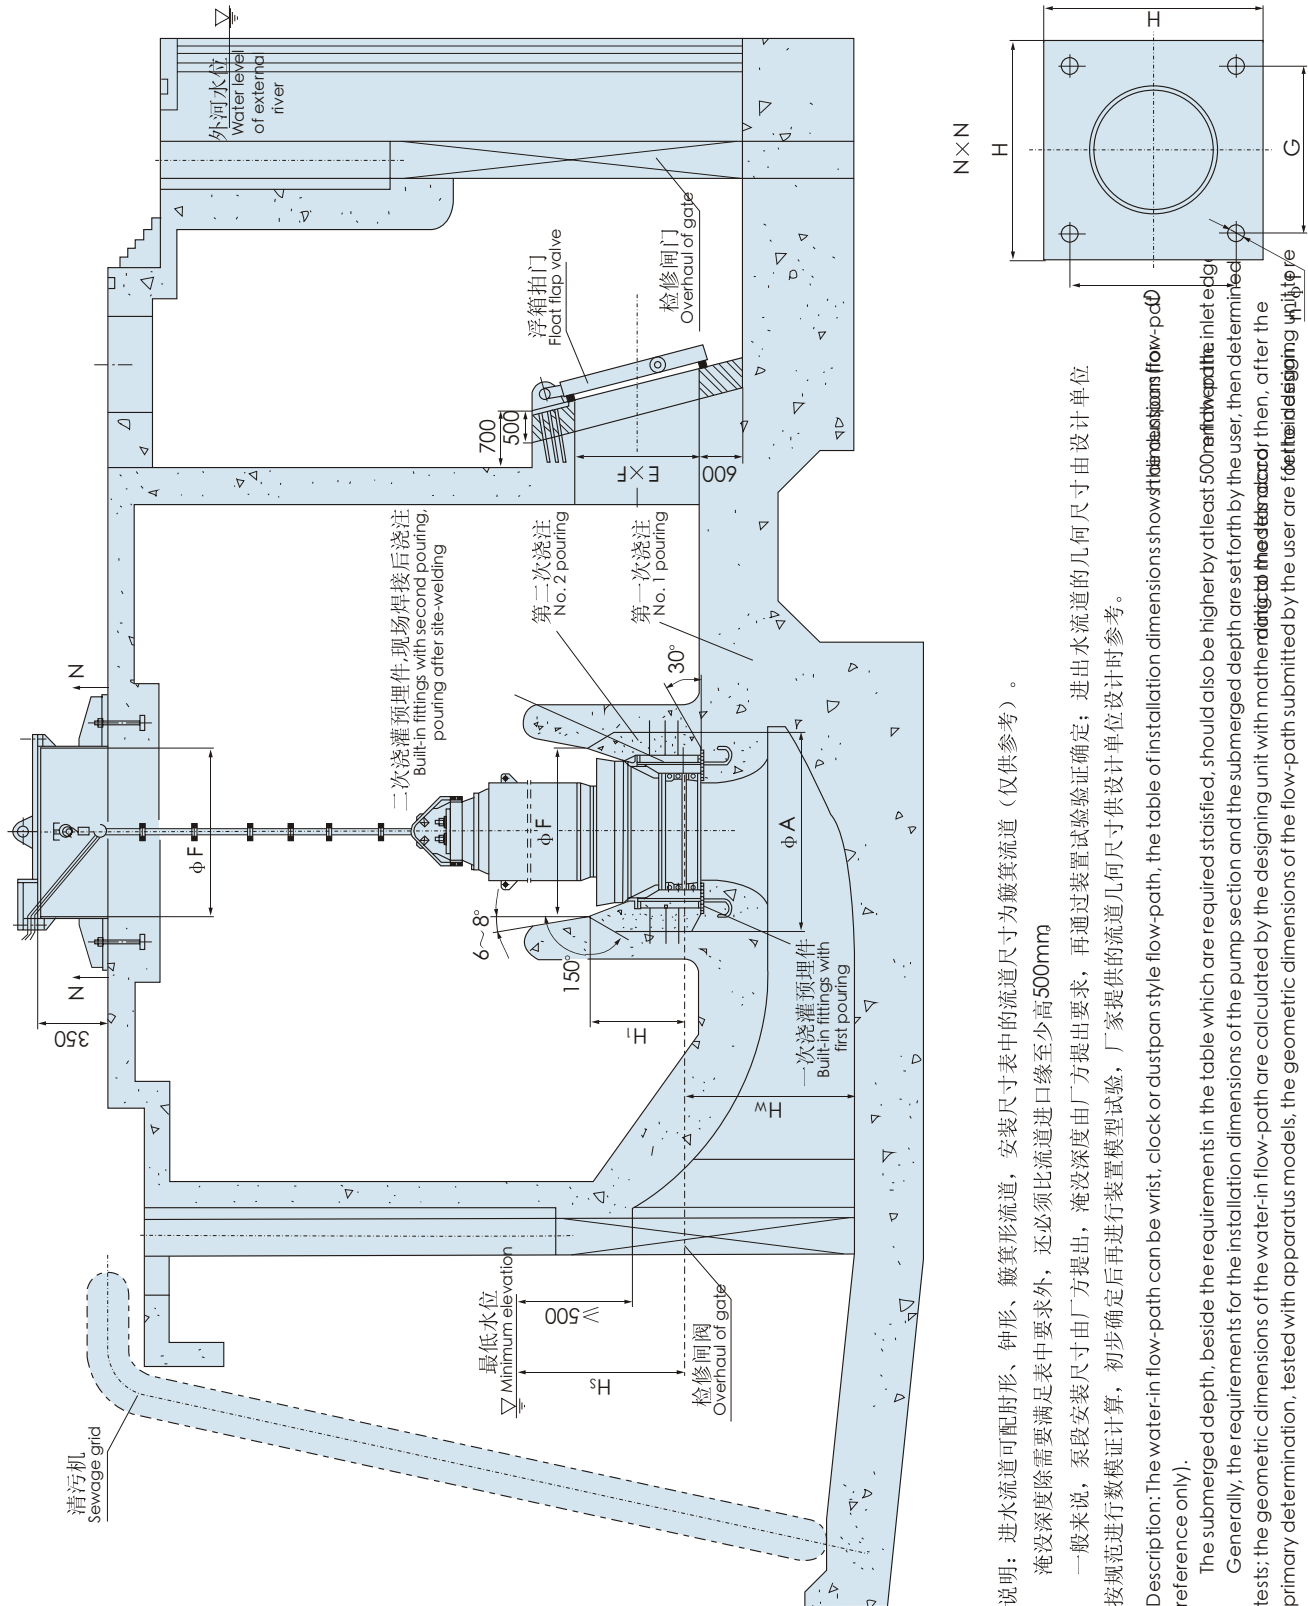

说明：进水流道可配肘形、钟形、簸箕形流道，安装尺寸表中的流道尺寸为簸箕流道（仅供参考）。

淹没深度除需要满足表中要求外，还必须比流道进口缘至少高500mm

一般来说，泵段安装尺寸由厂方提出，淹没深度由厂方提出要求，再通过装置试验验证确定；进出水流道的几何尺寸由设计单位按规范进行数模验证计算，初步确定后再进行装置模型试验，厂家提供的流道几何尺寸供设计单位设计时参考。

Description: The water-in flow-path can be wrist, clock or dustpan style flow-path, the table of installation dimensions show st their classisg flow-pcd reference only).

The submerged depth, beside the requirements in the table which are required staisfied, should also be higher by at least 500mm at the inlet edge. Generally, the requirements for the installation dimensions of the pump section and the submerged depth are set forth by the user, then determined tests; the geometric dimensions of the water-in flow-path are calculated by the designing unit with matering to the designator then, after the primary determination, tested with apparatus models, the geometric dimensions of the flow-path submitted by the user are for the designing unit type

OZ、QH系列泵各种附件附图 QZ、QH SERIES PUMP VARIOUS OF ATTACHMENTS DRAWING

根据客户需要，我公司可供应下列附件：

1、拦污栅

视泵站规模，有自动出污及机械出污（去除拦栅上杂质）多种系列供用户选用，尺寸需现场确定。下图为拦栅除污机。

GS为钢丝绳式格栅除污机。

GSE为移动式格栅除污机。



We can support attachment follow attachments on customer's request.

1.Sewage Grid

Several kinds of series of automatic removing waste and mechanical removing waste(remove the impurity on the trashrack) will be supplied in accordance with the scale of pump station. The dimension should be decided on the spot. See the drawing of the grille waste removers below.

GS pattern steel cable grille waste remover.

GSE pattern movable grille waste remover.

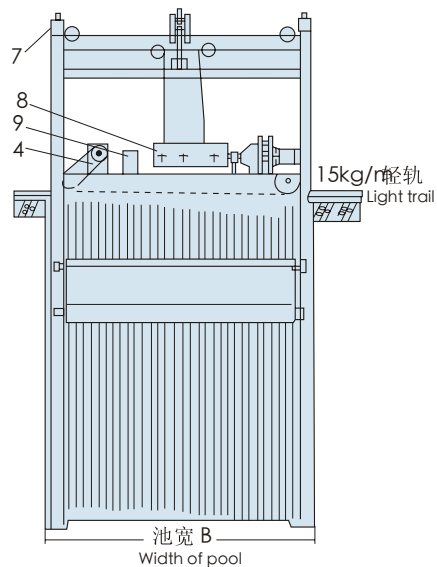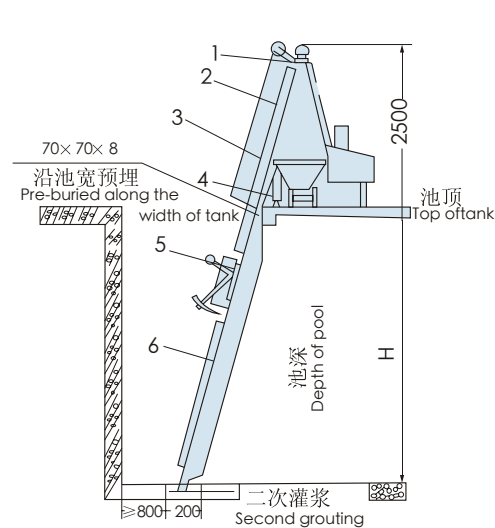

1	油压系统 Hydraulic press system
2	门形架 Gate frame
3	垃圾车 Rubbish vehicle
4	行车装置 Walking device
5	抓门 Grab bucket
6	栅条 Bar
7	保险装置 Insurance device
8	升降装置 Elevator
9	电气控制部分 Electric control part


主要规格及技术参数 MAIN SPECIFICATION AND TECHNICAL PARAMETER

型号 Model	格栅宽度 Grid	井深 (m) Well depth	栅条间距 (mm) Space between bars	安装角度 Installing angle	电机功率 Motor power
GS GSE -1000	1000	2~12	20~100	60°~75°, 特殊情况时可用90° 60°~75°, 90° for special condition	升降电机 1.1~1.5kW, 控制电机 0.75kW, 行走电机 0.8/0.4kW(双速) Elevting motor 1~1.5kW, Control motor 0.75kW, Walking motor 0.8/0.4kW(Double-speed)
GS GSE -1250	1250				
GS GSE -1500	1500				
GS GSE -1750	1750				
GS GSE -2000	2000				

OZ、QH系列泵各种附件附图 QZ、QH SERIES PUMP VARIOUS OF ATTACHMENTS DRAWING

2、拍门

A.浮箱式拍门外形及联接尺寸表

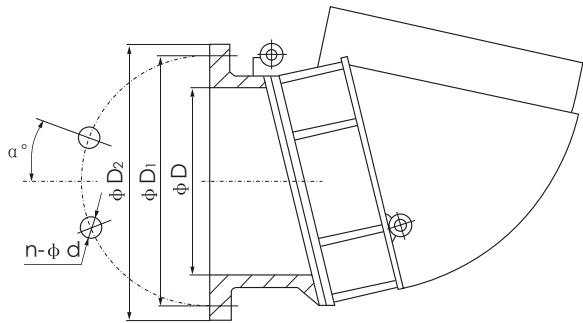


2.Flag valve

A.Appearance and connection dimension table for flap valve

井筒出水中径 Discharge caliber of well pipe	φ D	φ D ₁	φ D ₂	n-φ d	α °
400	400	495	540	8-23	22.5
500	500	655	710	6-27	30
600	600	705	755	10-27	18
700	700	810	860	12-27	15
800	800	920	980	12-27	15
900	900	1020	1075	12-27	15
1000	1000	1120	1175	12-27	15
1200	1220	1320	1380	12-27	15
1300	1300	1430	1500	10-27	18
1400	1400	1560	1630	12-36	15

B.配重式拍门外形图及联接尺寸表

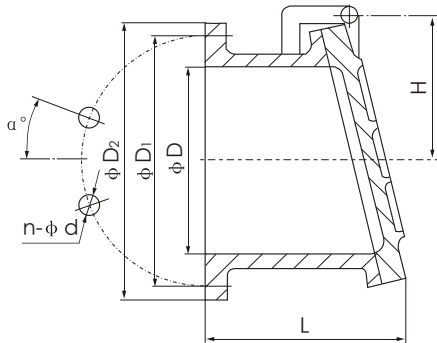


B.Appearance and connection dimension for Alocated heavy flap valve

井筒出水中径 Discharge caliber of well pipe	φ D	φ D ₁	φ D ₂	L	H	n-φ d	α °
400	400	495	540	230	260	8-23	22.5
500	500	655	710	280	310	6-27	30
600	600	705	755	330	360	10-27	18
700	700	810	860	420	410	12-27	15
800	800	920	980	420	460	12-27	15
900	900	1020	1075	420	510	12-27	15
1000	1000	1120	1175	420	560	12-27	15
1200	1200	1320	1380	420	700	12-27	15
1400	1400	1560	1630	480	790	12-36	15

OZ、QH系列泵各种附件附图 QZ、QH SERIES PUMP VARIOUS OF ATTACHMENTS DRAWING

3.预埋管

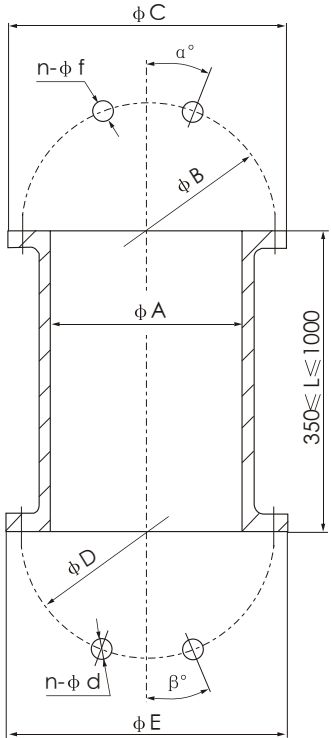

3.Pre-buried pipe

预埋管联接尺寸表 Connection Dimension Table For Pre-buried Pipe

穿墙管规格 Wall Pipe Specification	φ A	φ B	φ C	n-φ f	α °	φ D	φ E	n-φ d	β °
400× L	400	495	540	16-22	11.25	495	540	8-23	22.5
500× L	500	600	645	20-22	9	655	710	6-27	30
600× L	600	705	755	20-26	9	705	755	10-27	18
700× L	700	810	860	24-26	7.5	810	860	12-27	15
800× L	800	920	975	24-30	7.5	920	980	12-27	15
900× L	900	1020	1075	24-30	7.5	1020	1075	12-27	15
1000× L	1000	1120	1175	28-30	6.429	1120	1175	12-27	15
1200× L	1200	1340	1405	32-33	5.625	1320	1380	12-27	15
1300× L	1300	1450	1520	32-36	5.625	1430	1500	10-27	18
1400× L	1400	1560	1630	36-36	5	1560	1630	12-36	15


注：L为预埋管长、由用户确定（350≤L≤1000）
Note: L is the length of pre-buried pipe and delided by customers(350 L 1000)

4. 液位开关

高性能Key液位开关，可实现按液位高低的变化自动控制泵的运行。

4. Water Level Switch

The key water level switch of high performance can control theoperation of pump automatically according to fluc tuation of water level.

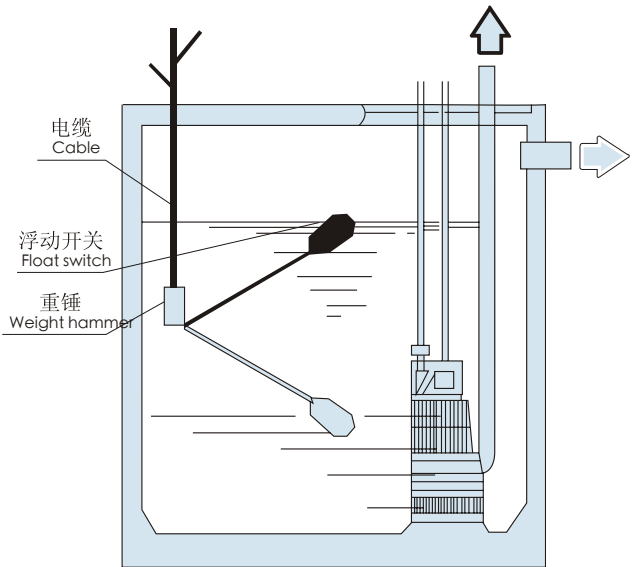

QZ、QH系列泵各种附件附图 QZ、QH SERIES PUMP VARIOUS OF ATTACHMENTS DRAWING

5. 控制柜

- ①用途：专用控制柜可实行全自动保护，具有主回路短路、缺相、过载保护及泵门的无人看管，备泵自投及信号输出。具有单控型、手动切换一用一备型，定时自动切换一用一备型、交替自动切换一用一备型、手动切换二用一备型、手动切换三用一备型等多种控制方式，可满足用户的多种需要。
- ②适应范围：a.环境温度-25℃～+40℃； b空气相对湿度不超过85%； c.无爆炸危险的场合，且介质中无足以腐蚀金属和破坏绝缘的气体 and 导电尘埃。
- ③配套成套的中高压电控柜，实现泵站的电气动力自动控制。具体选用时参见连成样成。

6. 端子箱

设置端子箱的原意是便于安装施工操作。因此泵与电控柜之间的联接载体，现扩展为可带若干信号指示及部分控制功能的附加控制柜（仍称为端子箱），以解决中央控制室远离泵房时操作上的不便。在联接型和控制型基础上，又分为户内型和户外型共四种类型。


5. Control panel

- ① Usage: Special control panel for QZ series axial flow pump has automatic protection system. It can check out mistakes like short circuit of main electric wires, lacking phase, overload and can operate standby pump automatically and send out signal. All these can be done without human beings supervision. We have single control handle change type, handle change type with one running and one standby, automatic change fixed time with one running and one standby, alternatively automatic change type with one running and one standby, handle change type with two running and one standby, handle change type with three running and one standby, and so on. We can meet different requirements of customers.
- ② Application conditions: a. Ambient temperature from -25 to +40℃; b. Relative humidity below 85%; c. Operation place with no explosion risk, no metalerosion and isolation against gases, conductive dust.

6. Terminal box

Using terminal box is for easy installation. The connection carrier between pump and control panel is expanded as an appendix control panel (still is a terminal box) which can carry signals and have some control functions. This can solve the problem of long distance between central control room and pump housing. Based on connection type and control type. We also have indoor type.

泵房布置简图 Pump station arrangement

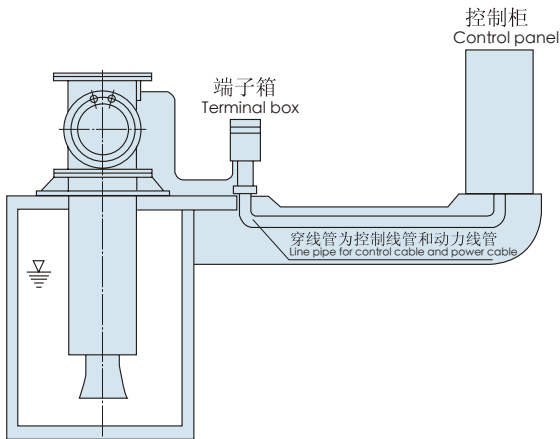

说明：

- 1.所有信号线可埋一根穿线管。
- 2.动力线按提供的电缆线直径、数量自行确定预埋管的大小。
- 3.动力线和信号线必须分别埋设管道，不可混穿。
- 4.端子箱与控制柜之间采用直流电流信号，可长距离输送，无衰减。
- 7. 根据用户需求，我公司亦可供应闸阀、启闭机等其它附件。

Notes:

- 1.All signal cables allowed in a line pipe.
- 2.Power cable pipe diameter is decided by power cable diameter and number.
- 3.Signal cables must be separated from power cables.
- 4.Signal transmitted between the cabinet and the terminal box are DC signals and is allowed to long distance transfer without attenuation.
- 7.We can also support sluice gate headstock gate etc. Attachments on customer's request.

订货须知 INSTRUMENT TO ORDER

- 1、订货时应注明准确的产品型号、产品名称、性能参数（流量、扬程、电机功率、使用电压），安装形式弯管（弯管悬吊式、井筒悬吊式、预制井筒式、开式、闭式）。
- 2、控制柜应注明：起动方式（直接起动、自耦降压起动、可控硅软起动），控制数量（一控一、一控二、一控三、一控四等各种控制方式），液位控制方式（浮球液位、压力传感液位及其他方式），如配端子箱，应注明是控制型，还是接线型，是户外型，还是户内型。
- 3、本公司潜水电缆正常供货长度10m，若用户特殊要求，请予以注明。
- 4、若有其他特殊要求，签订合同前请与本公司生产技术部联系，签订合同时应明确注明。

- 1.Please give clear indication of correct product model, product description, characteristic (capacity, head, motor power, applicable voltage), installation mode (circular cantilever type, right-angle cantilever type, prefabricated type, open type, shut type).
- 2.The control cabinet should be given clear indication of start mode (direct start, decreasing voltage start, control silicon soft start), number of controlled pump (1 cabinet controls 1 pump, 1 cabinet controls 2 pumps, 1 cabinet controls 3 pumps, 1 cabinet controls 4 pumps, etc), elevation control mode (floating ball elevation, pressure sensor elevation and others). If you need terminal box, please give clear indication of whether it is used for control or connecting cables and whether it is used for indoor or outdoor.
- 3.The length of submersible cable we should supply is 10 meters long, please give clear indication if you have special requirement.
- 4.If you have other particular requests, please contact with technical department of our company without hesitation before signing contract and give clear indication when signing contract.

精益求精，无限进步！
Keep improving, Infinite progress