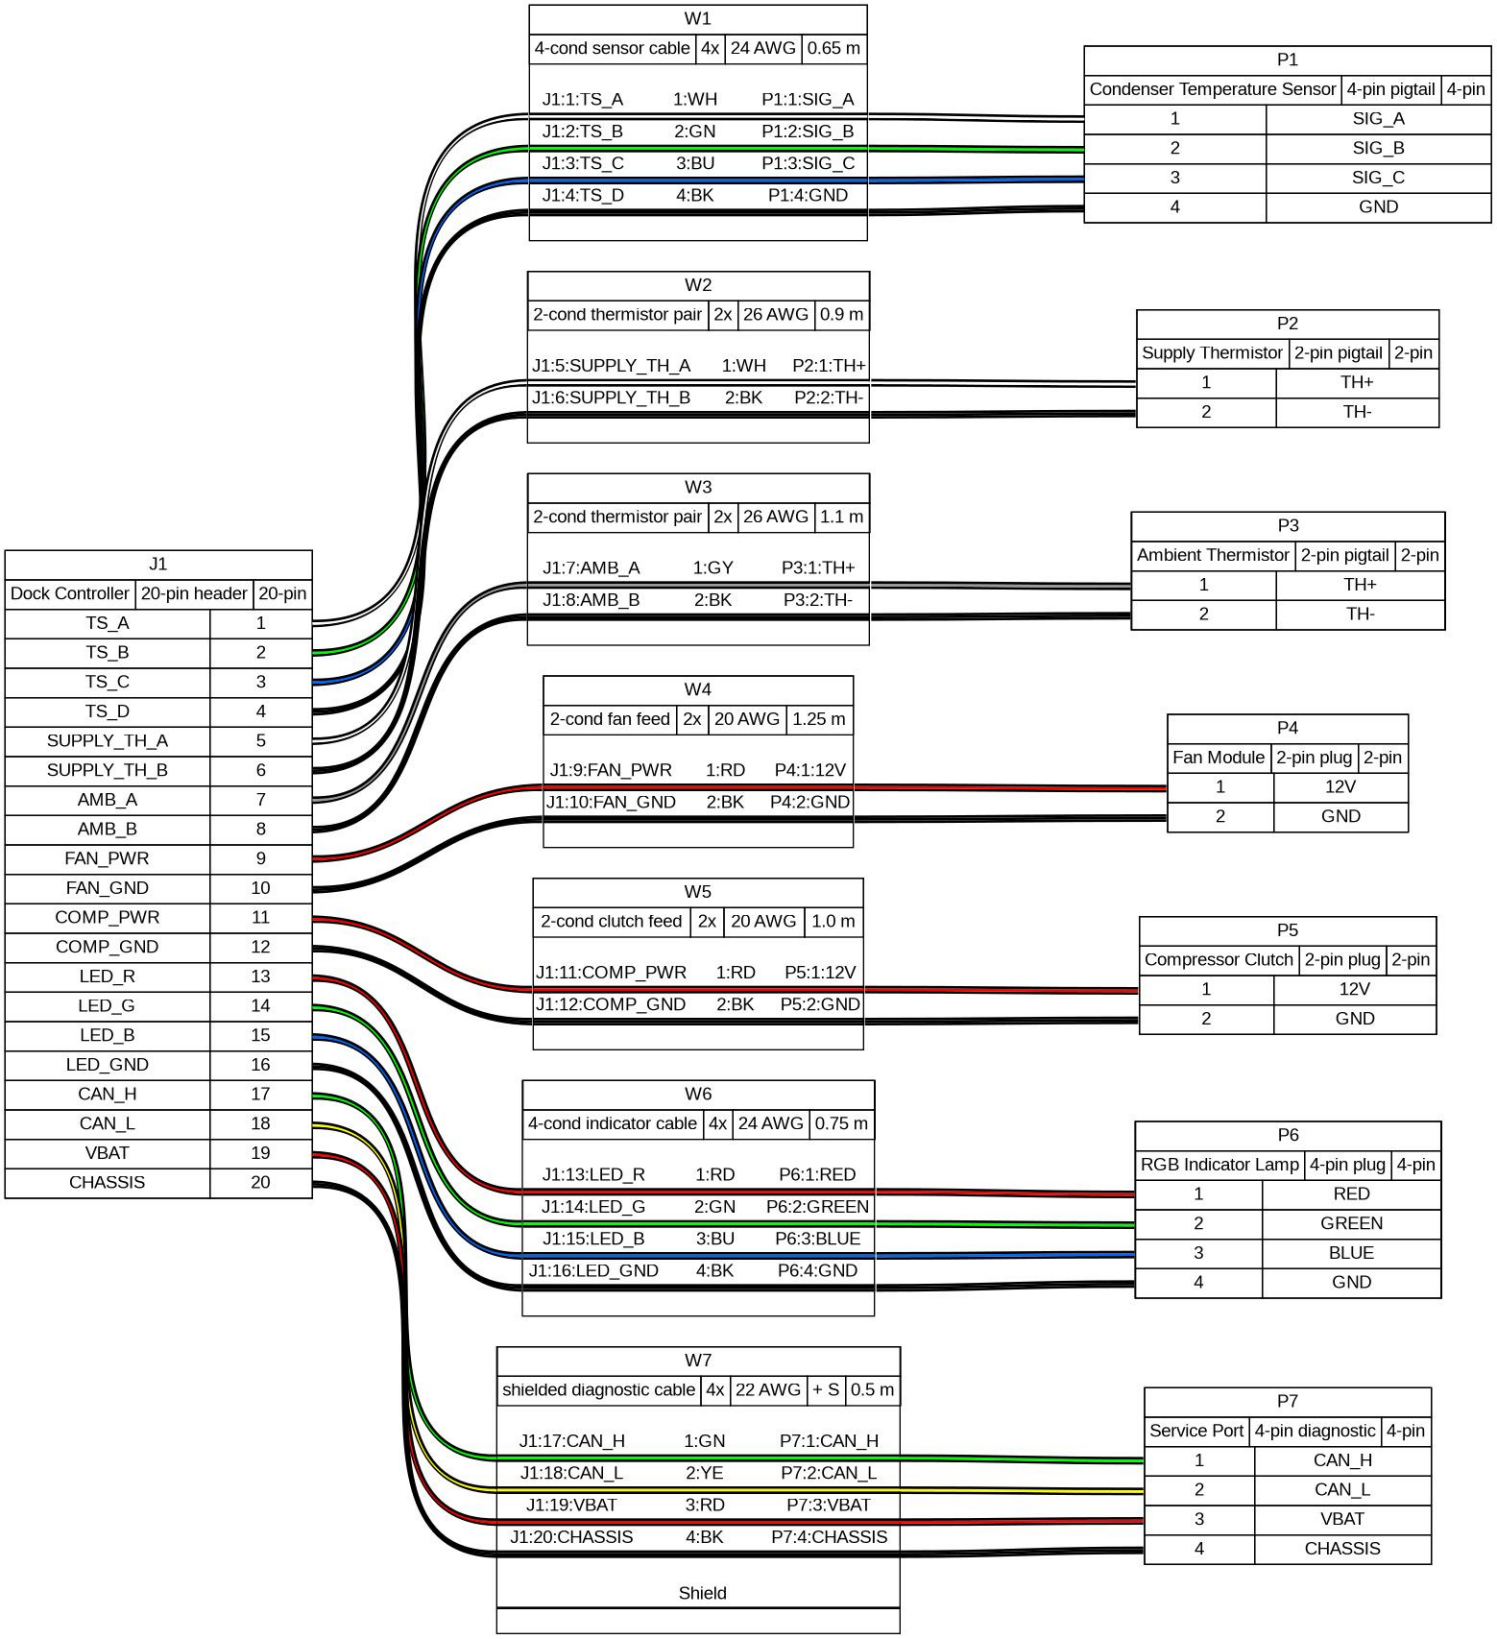
W1
4-cond sensor cable 4x 24 AWG 0.65 m
J1:1:TS_A 1:WH P1:1:SIG_A
J1:2:TS_B 2:GN P1:2:SIG_B
J1:3:TS_C 3:BU P1:3:SIG_C
J1:4:TS_D 4:BK P1:4:GND
P1
Condenser Temperature Sensor 4-pin pigtail 4-pin
1 SIG_A
2 SIG_B
3 SIG_C
4 GND
W2
2-cond thermistor pair 2x 26 AWG 0.9 m
J1:5:SUPPLY_TH_A 1:WH P2:1:TH+
J1:6:SUPPLY_TH_B 2:BK P2:2:TH-
P2
Supply Thermistor 2-pin pigtail 2-pin
1 TH+
2 TH-
W3
2-cond thermistor pair 2x 26 AWG 1.1 m
J1:7:AMB_A 1:GY P3:1:TH+
J1:8:AMB_B 2:BK P3:2:TH-
P3
Ambient Thermistor 2-pin pigtail 2-pin
1 TH+
2 TH-
J1
Dock Controller 20-pin header 20-pin
TS_A 1
TS_B 2
TS_C 3
TS_D 4
SUPPLY_TH_A 5
SUPPLY_TH_B 6
AMB_A 7
AMB_B 8
FAN_PWR 9
FAN_GND 10
COMP_PWR 11
COMP_GND 12
LED_R 13
LED_G 14
LED_B 15
LED_GND 16
CAN_H 17
CAN_L 18
VBAT 19
CHASSIS 20
W4
2-cond fan feed 2x 20 AWG 1.25 m
J1:9:FAN_PWR 1:RD P4:1:12V
J1:10:FAN_GND 2:BK P4:2:GND
P4
Fan Module 2-pin plug 2-pin
1 12V
2 GND
W5
2-cond clutch feed 2x 20 AWG 1.0 m
J1:11:COMP_PWR 1:RD P5:1:12V
J1:12:COMP_GND 2:BK P5:2:GND
P5
Compressor Clutch 2-pin plug 2-pin
1 12V
2 GND
W6
4-cond indicator cable 4x 24 AWG 0.75 m
J1:13:LED_R 1:RD P6:1:RED
J1:14:LED_G 2:GN P6:2:GREEN
J1:15:LED_B 3:BU P6:3:BLUE
J1:16:LED_GND 4:BK P6:4:GND
P6
RGB Indicator Lamp 4-pin plug 4-pin
1 RED
2 GREEN
3 BLUE
4 GND
W7
shielded diagnostic cable 4x 22 AWG + S 0.5 m
J1:17:CAN_H 1:GN P7:1:CAN_H
J1:18:CAN_L 2:YE P7:2:CAN_L
J1:19:VBAT 3:RD P7:3:VBAT
J1:20:CHASSIS 4:BK P7:4:CHASSIS
Shield
P7
Service Port 4-pin diagnostic 4-pin
1 CAN_H
2 CAN_L
3 VBAT
4 CHASSIS