

2-3 A题测评所使用的三个被测输入信号



A题 “测评表” 规定的三个被测输入信号：

$$u_1 = 200 \sin(2\pi ft) + 40 \sin(6\pi ft) + 30 \sin(10\pi ft)$$

$$u_2 = 100 \sin(2\pi ft) + 15 \sin(8\pi ft) + 8 \sin(10\pi ft)$$

$$u_3 = 20 \sin(2\pi ft) + 2 \sin(10\pi ft)$$

(单位：mV)

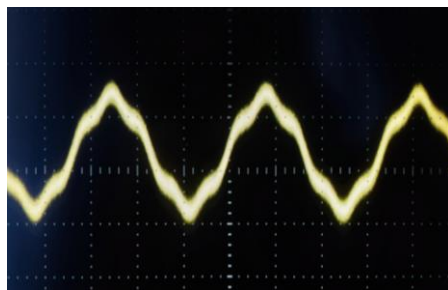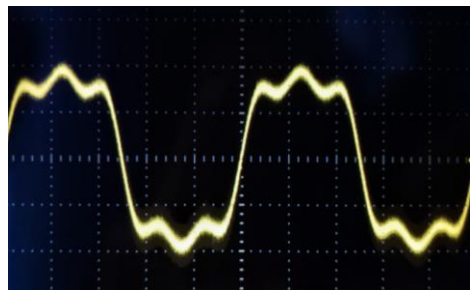

- a) u_1 的基频为 1kHz, 失真度标称值 $\text{THD}_0 = 25\%$
- b) u_2 的基频为 50kHz, 失真度标称值 $\text{THD}_0 = 17\%$
- c) u_3 的基频为 100kHz, 失真度标称值 $\text{THD}_0 = 10\%$