


1. Powers Sensor and has current sourcing/sinking
2. Interprets Current reading from Sensor via Shunt
3. Outputs Lambda value from 0V (lean) thru 5V (rich); 2.5V ($\lambda = 1$)

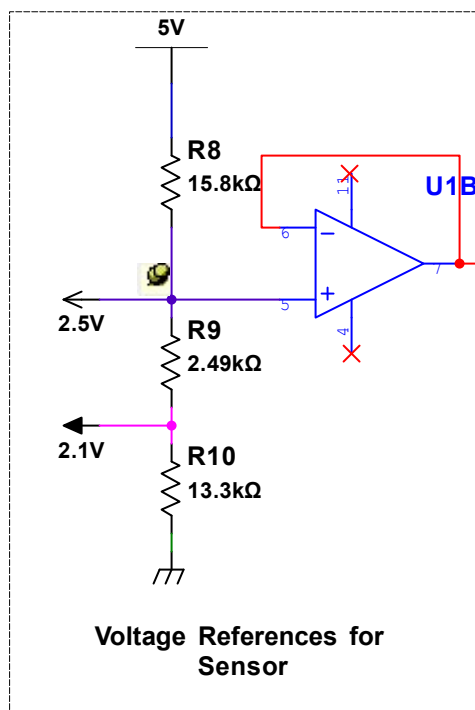

A
B
C
D
E
F
G
H
I