



MREL Drive Signal

Using Battery power and the UAEFI Low Side Output, we can replicate the MREL signal the OEM ECU produces.

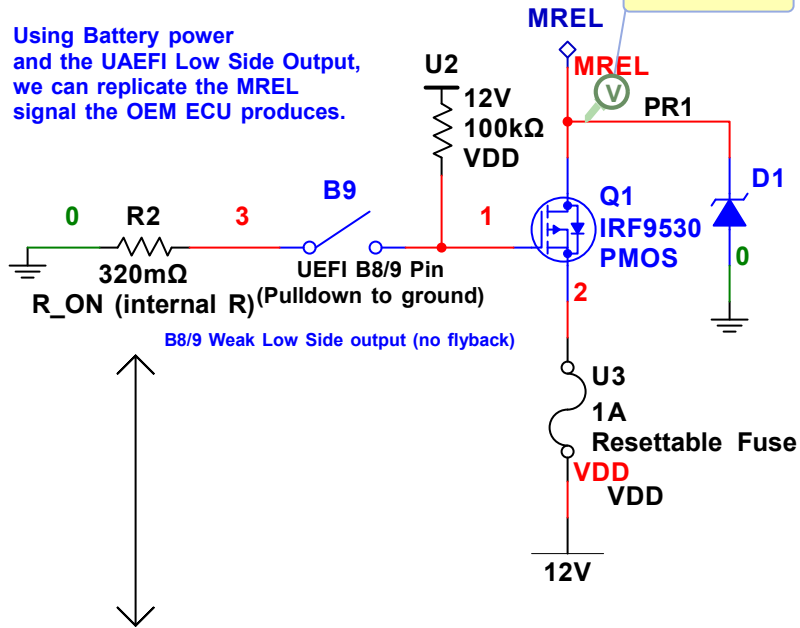

Relay + Simulation Dummy load

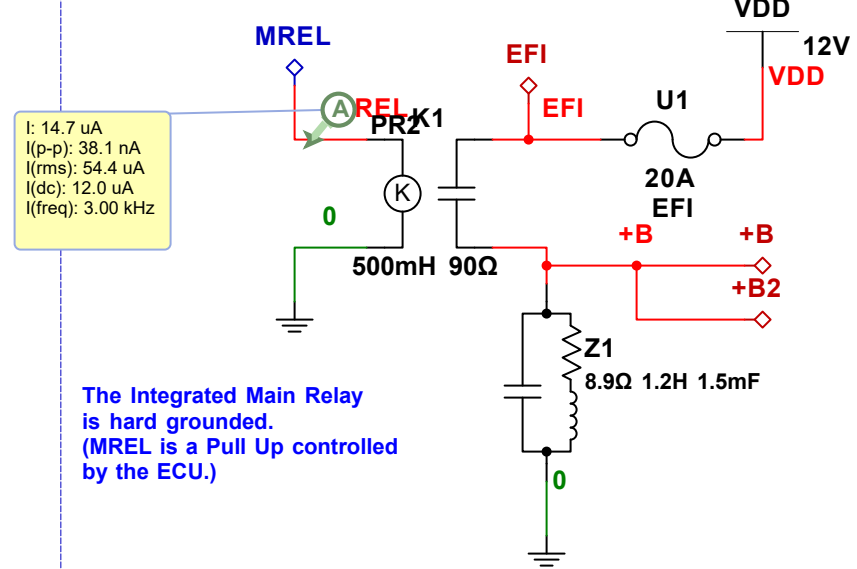

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
R _{ON}	ON-state resistance	I _D = 1 A; T _J = 25 °C, V _{supply} = V _{IN} = 5 V		160		mΩ
		I _D = 1 A; T _J = 150 °C, V _{supply} = V _{IN} = 5 V			320	

UAEFI B8/9 Pins

