

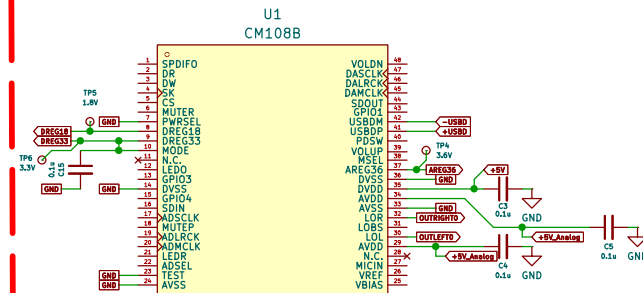


2. Digital to Analog (DAC or D2A) Stage

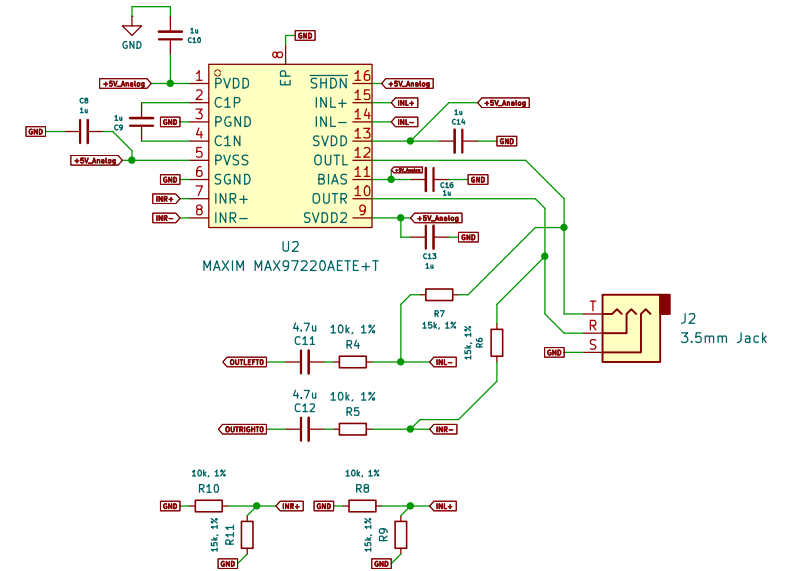

1. USB Input

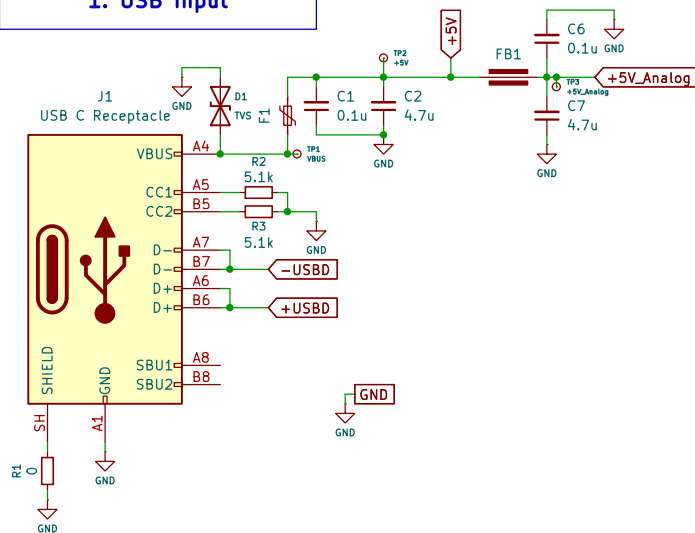

3. Line Driver (Amplifier) Stage

The MAX97220A is running in the Pseudo Differential Configuration as seen in the datasheet (Figure 3).