

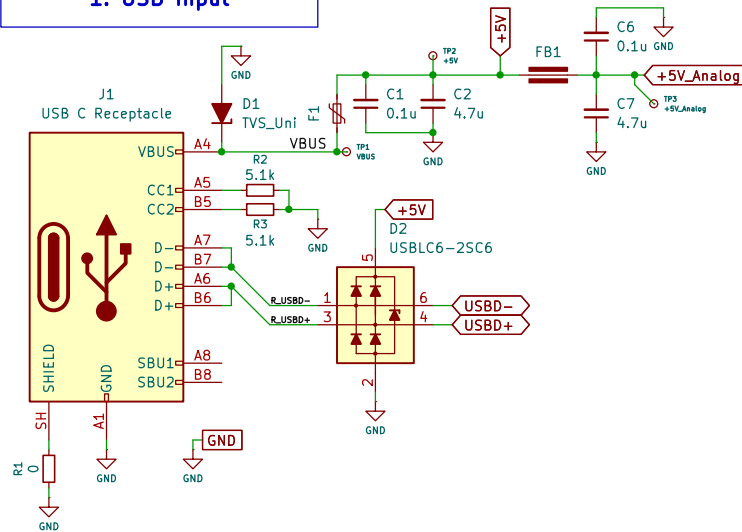


1. USB Input

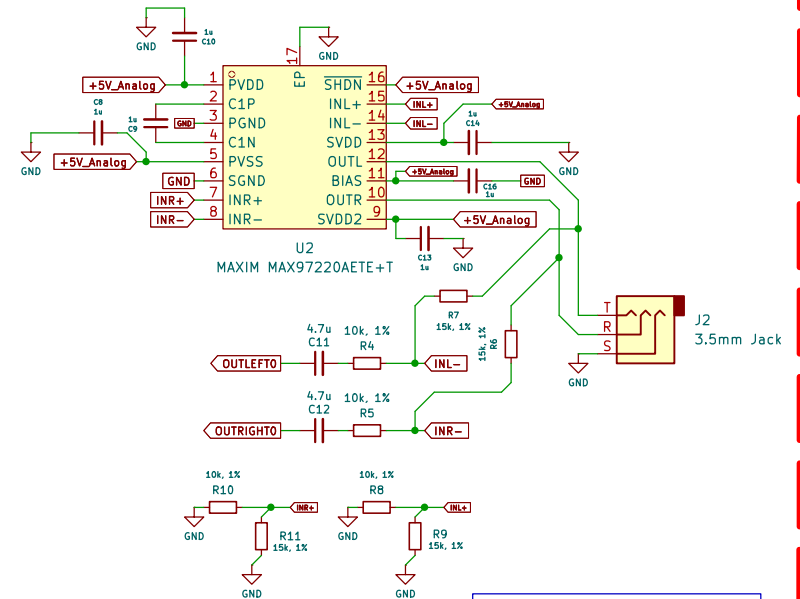

2. Digital to Analog (DAC or D2A) Stage

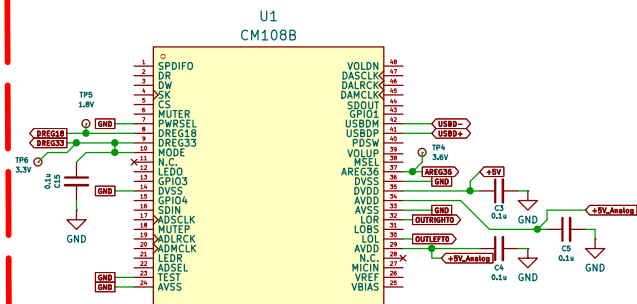

3. Line Driver (Amplifier) Stage

The MAX97220A is running in the Pseudo Differential Configuration as seen in the datasheet (Figure 3).