


DEMO · six installations per configuration and schedule


○ T1: 25-80-25 °C

◆ T2: 25-140-25 °C

a Cooled drift (μm)

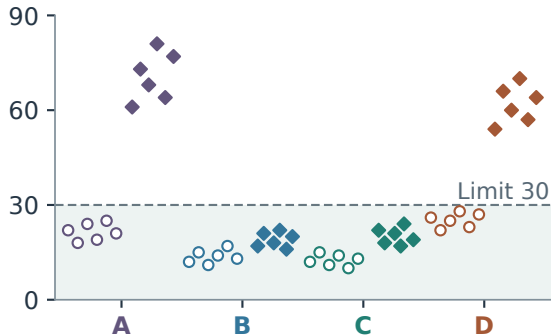

b Hot lift (μm)

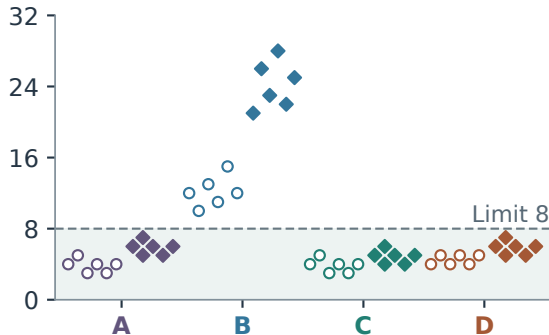

Both criteria + no fracture:

T1 A 6/6 · B 0/6 · C 6/6 · D 6/6

T2 A 0/6 · B 0/6 · C 6/6 · D 0/6