

Sequence Report



Summary

Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 FAILED

Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K FAILED

Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 FAILED

Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 PASSED

Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 FAILED

Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 FAILED

Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 FAILED

Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 FAILED

Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 FAILED

Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW FAILED

Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	⚠ FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	⚠ FAILED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

Sequence Report



Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00

Sequence Report



Port C (hex): 00
Port D (hex): 00
• Clocks
Output Rate: Track Output SR
Sync Out Level: 3.300 V
Sync Out Polarity: Normal
Timebase Reference: Internal
Jitter: Disabled
• Triggers
Source: Off
Input Logic Level: 3.300 V
Edge: Rising

Mic500 200k Termination : Verify Connections

Waveform: Sine
Generator Level: -42.300 dBu
DC Offset: 0.000 V
Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:38:58.954 PM)

Ch1 285.0 mVrms

Gain (5/15/2023 7:38:58.954 PM)

Ch1 33.614 dB

THD+N Ratio (5/15/2023 7:38:58.954 PM)

Ch1 ---- %

Frequency (5/15/2023 7:38:58.954 PM)

Ch1 ---- Hz

Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 7:39:02 PM

RMS Level (5/15/2023 7:39:02.424 PM)

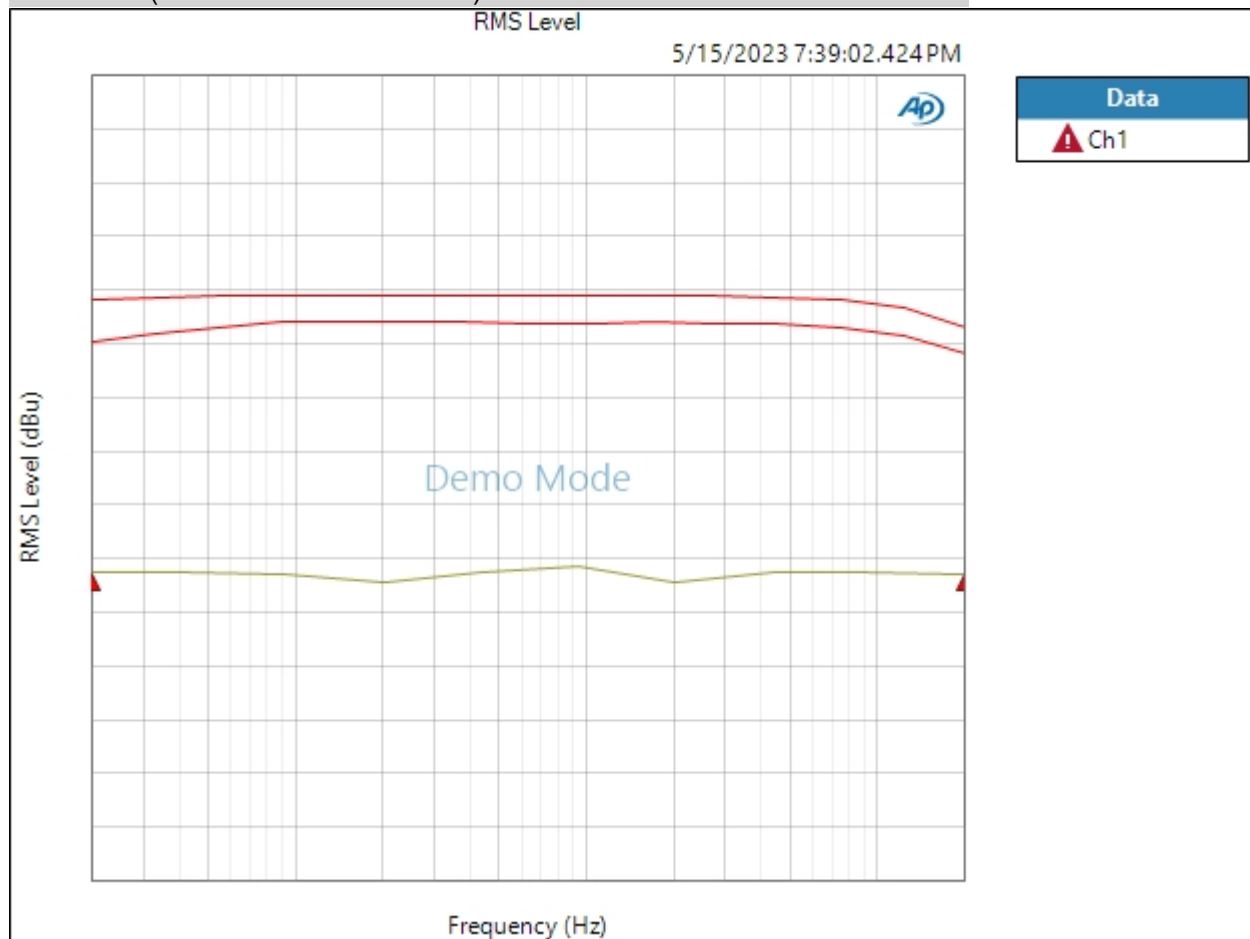

Ch1 ▲ Failed Lower Limit

5/15/2023 7:41 PM


Page 5 of 54

Sequence Report



Result: FAILED


THD+N Ratio (5/15/2023 7:39:02.424 PM)

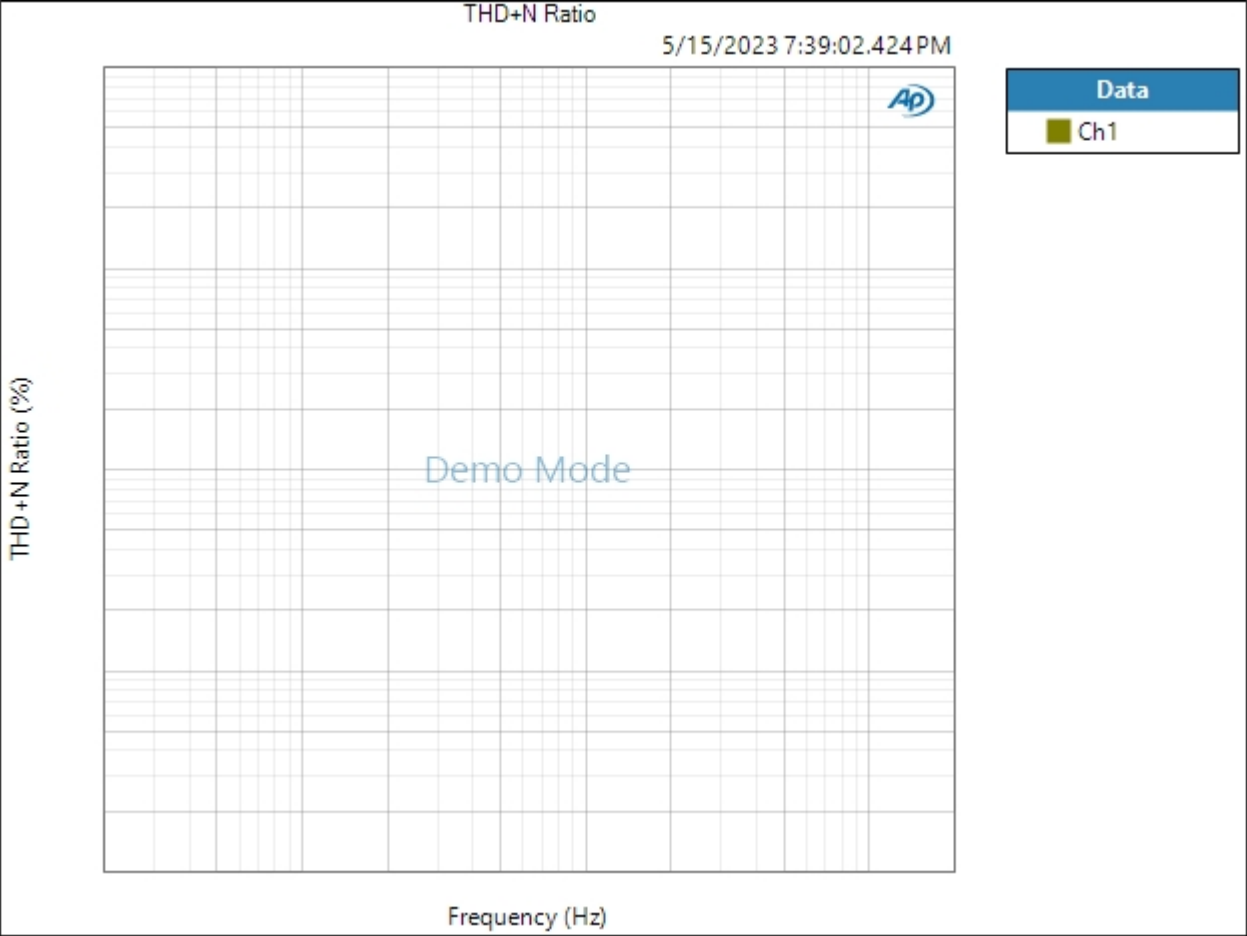

Result: PASSED

THD Ratio (5/15/2023 7:39:02.424 PM)

Sequence Report

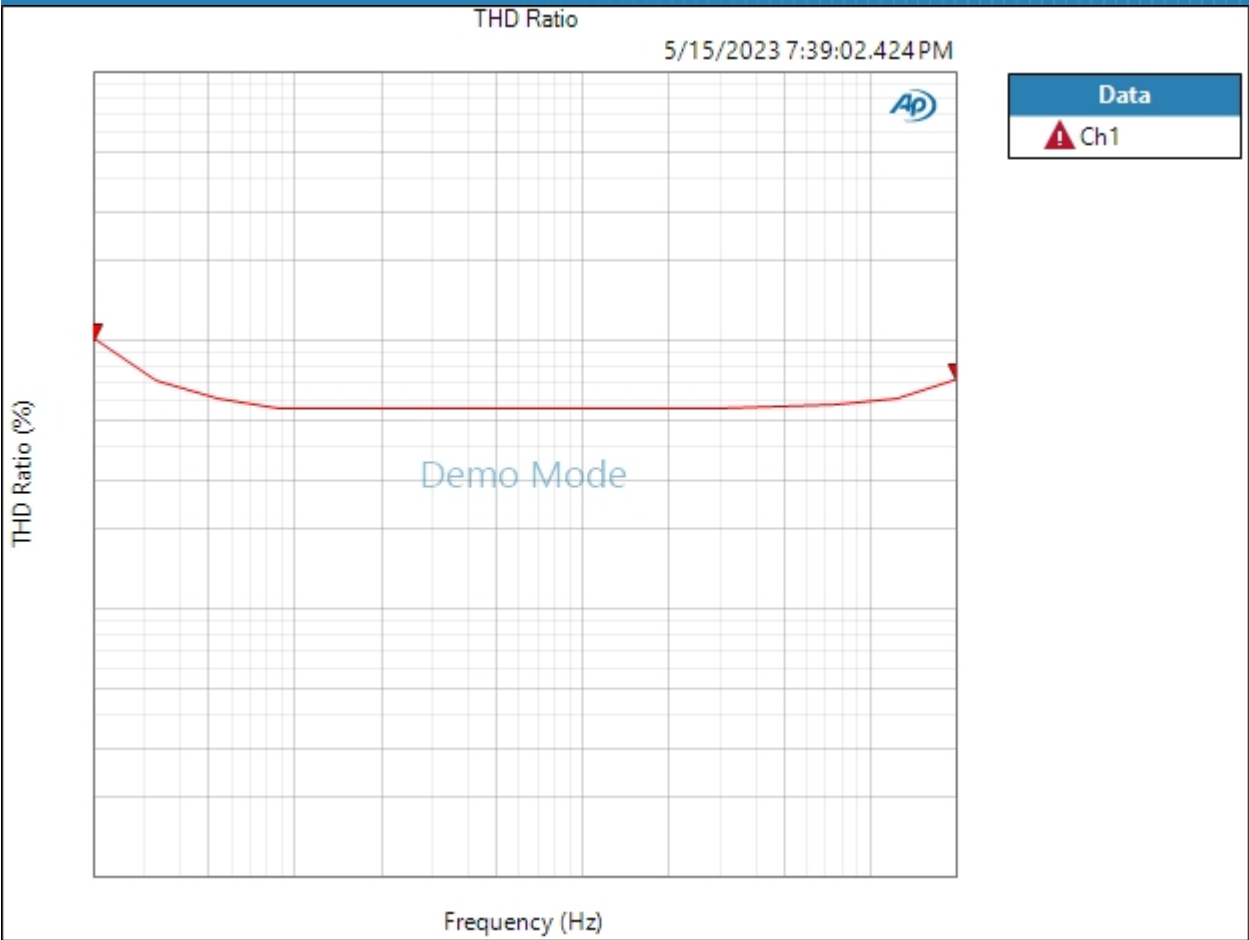

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:39:07.529 PM)

Ch1 285.2 mVrms

Gain (5/15/2023 7:39:07.529 PM)

Ch1 33.623 dB

THD+N Ratio (5/15/2023 7:39:07.529 PM)

Ch1 ---- %

Frequency (5/15/2023 7:39:07.529 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 7:39:11 PM

RMS Level (5/15/2023 7:39:11.252 PM)

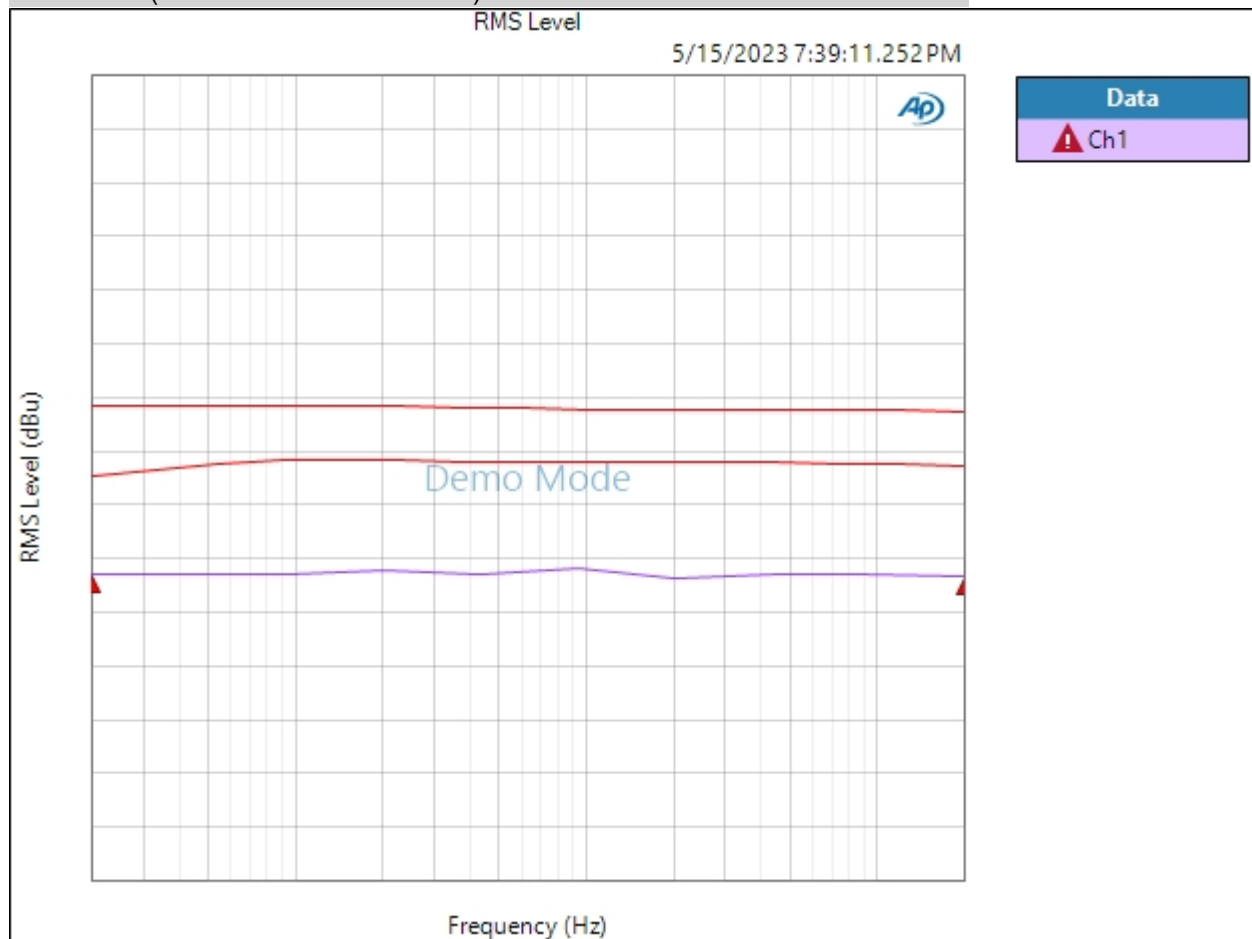

Ch1 Failed Lower Limit

5/15/2023 7:41 PM


Page 10 of 54

Sequence Report



Result: FAILED

THD Ratio (5/15/2023 7:39:11.252 PM)

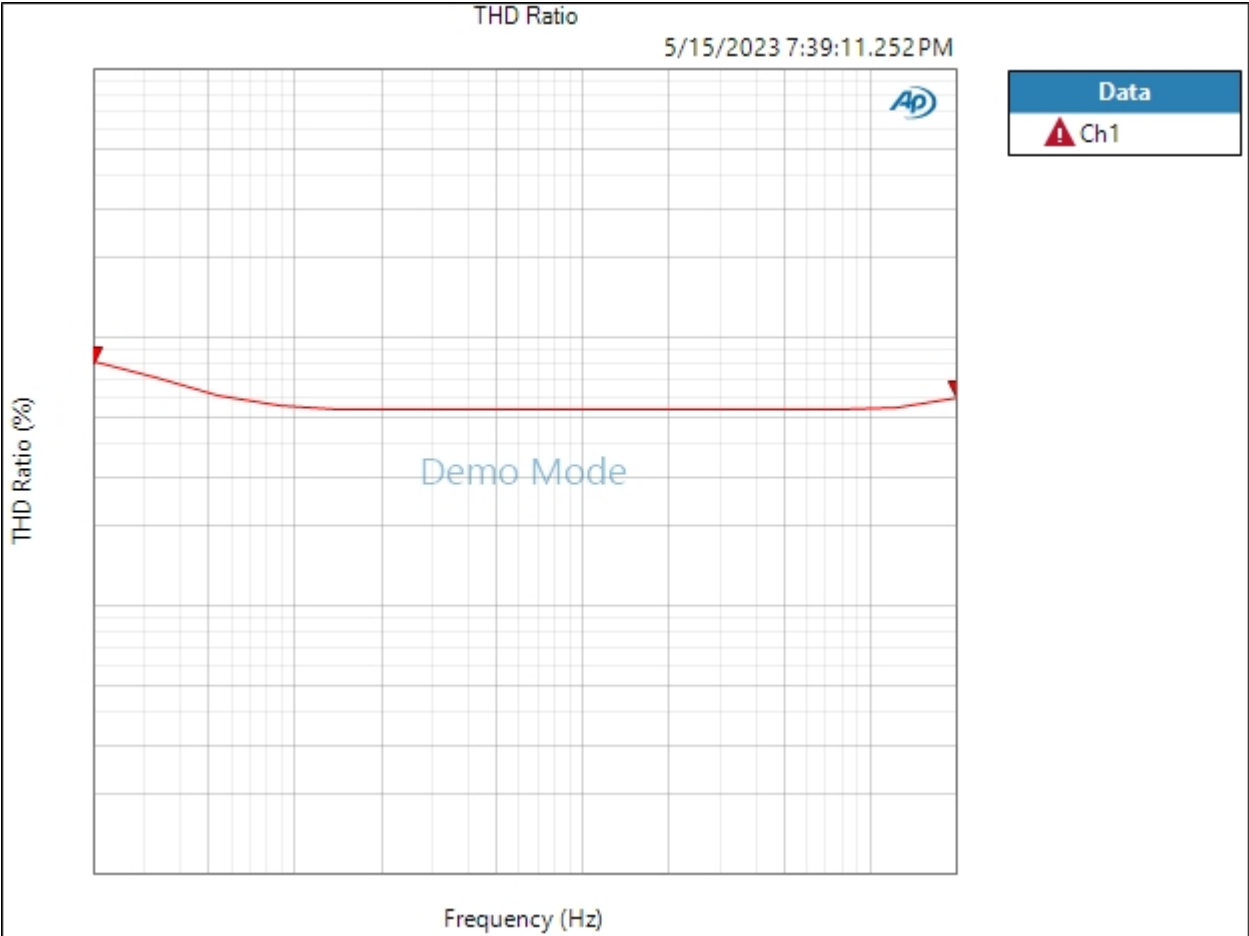

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:39:16.547 PM)

Ch1 279.1 mVrms

Gain (5/15/2023 7:39:16.547 PM)

Ch1 33.435 dB

THD+N Ratio (5/15/2023 7:39:16.547 PM)

Ch1 ---- %

Frequency (5/15/2023 7:39:16.547 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 7:39:20 PM

RMS Level (5/15/2023 7:39:20.773 PM)

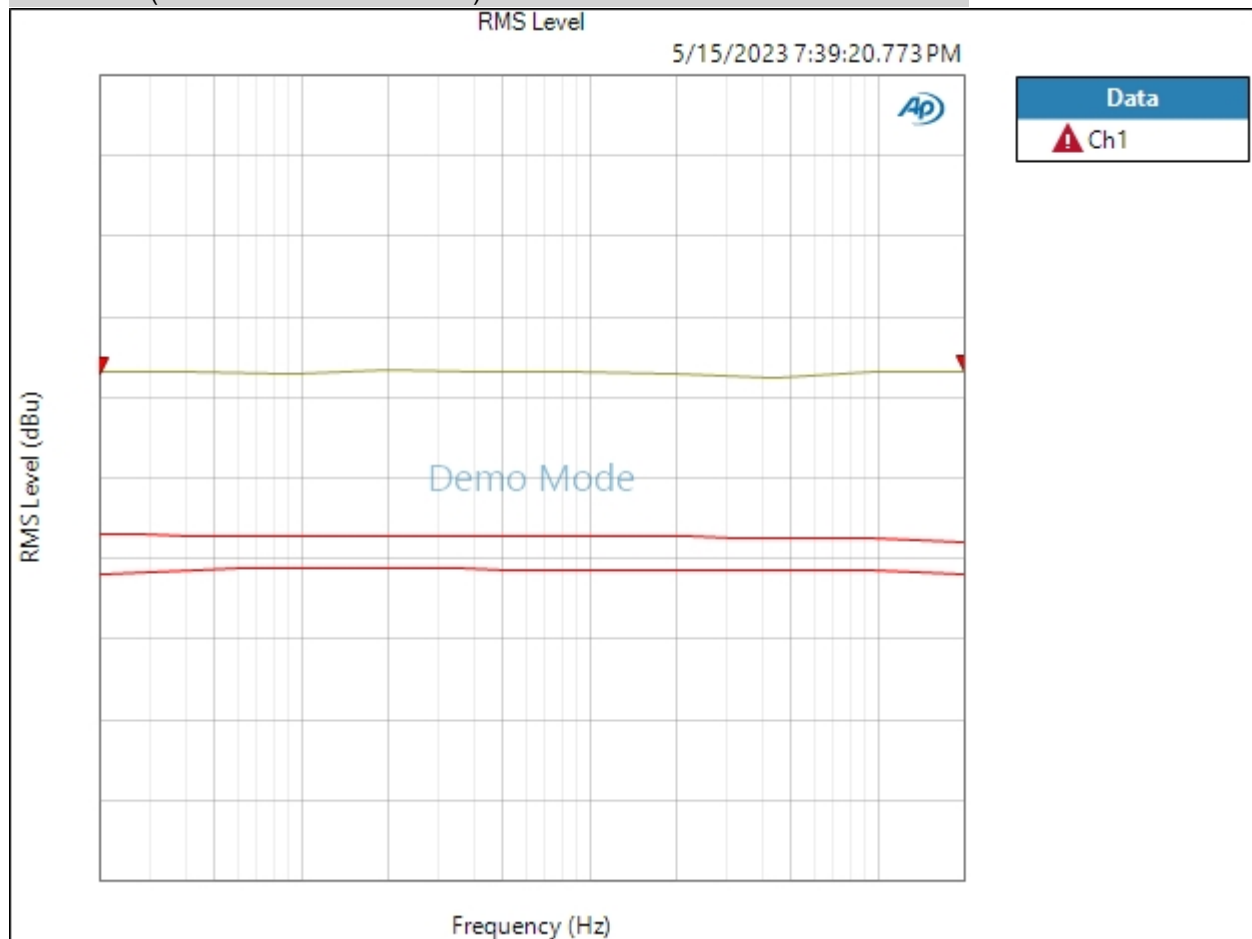

Ch1 ▲ Failed Upper Limit

5/15/2023 7:41 PM


Page 14 of 54

Sequence Report



Result: FAILED

THD Ratio (5/15/2023 7:39:20.773 PM)

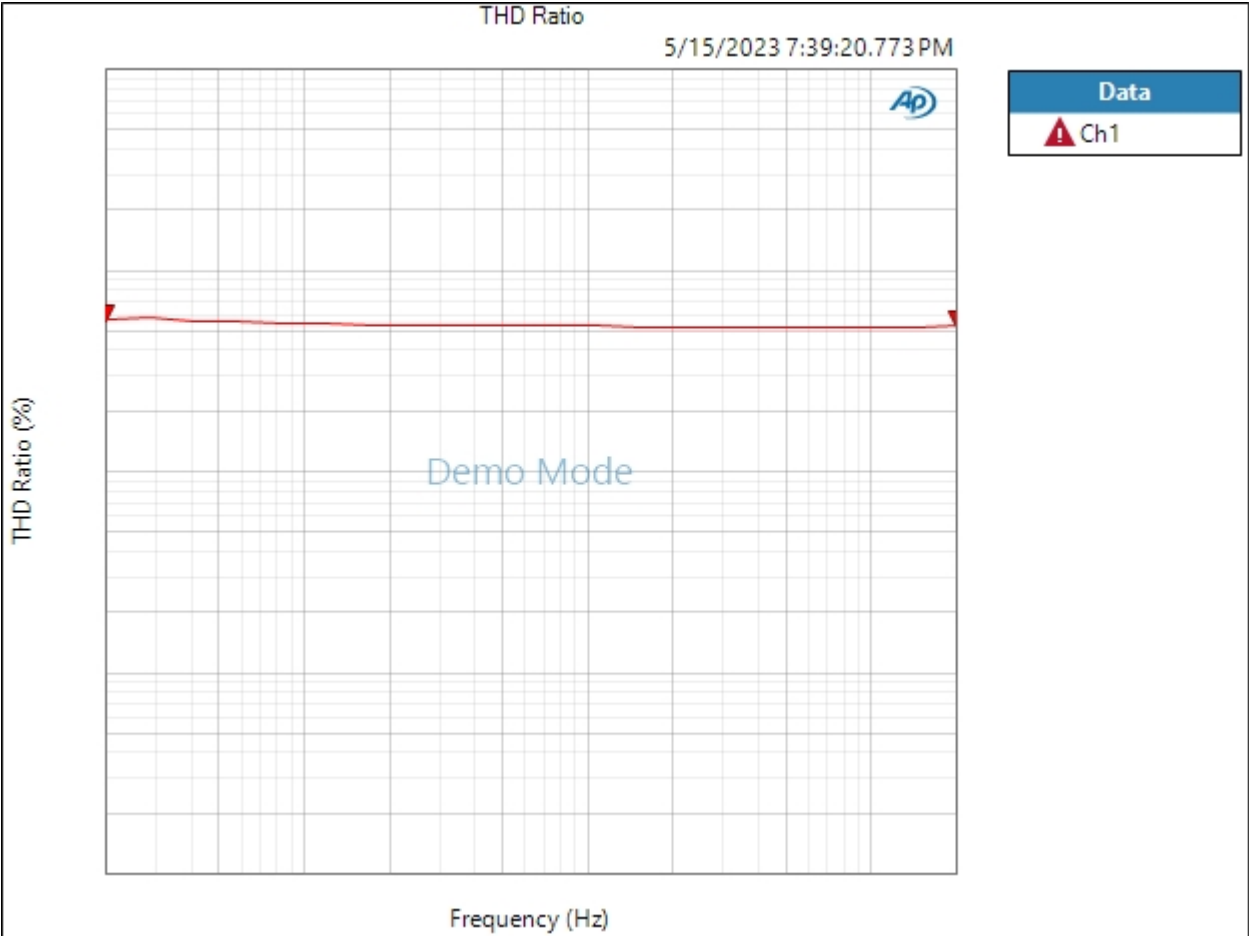

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Line Gain -10 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:39:26.080 PM)

Ch1 283.1 mVrms

Gain (5/15/2023 7:39:26.080 PM)

Ch1 -8.742 dB

THD+N Ratio (5/15/2023 7:39:26.080 PM)

Ch1 ---- %

Frequency (5/15/2023 7:39:26.080 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 7:39:30 PM

RMS Level (5/15/2023 7:39:30.537 PM)

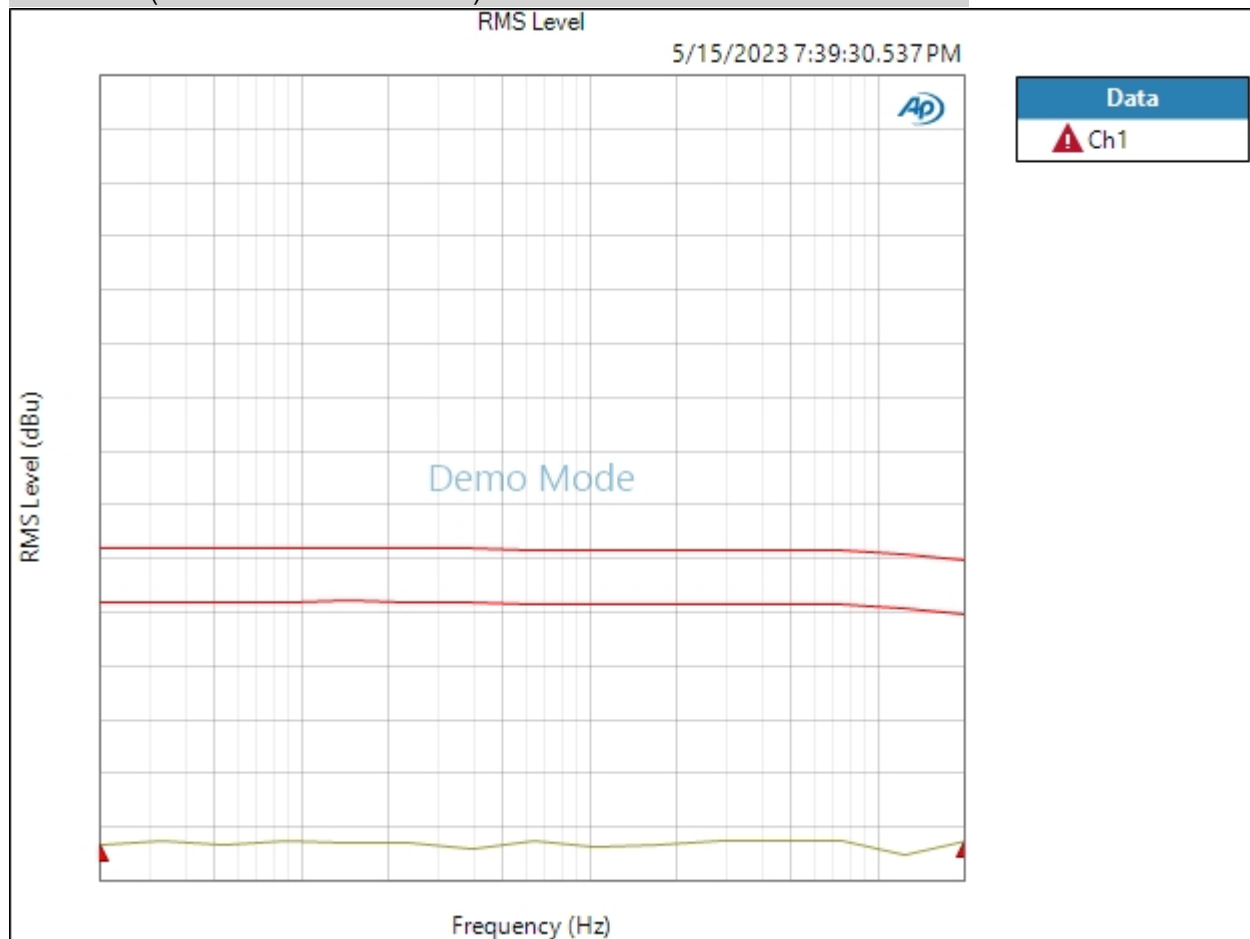

Ch1 Failed Lower Limit

5/15/2023 7:41 PM


Page 18 of 54

Sequence Report



Result: FAILED

THD+N Ratio (5/15/2023 7:39:30.537 PM)

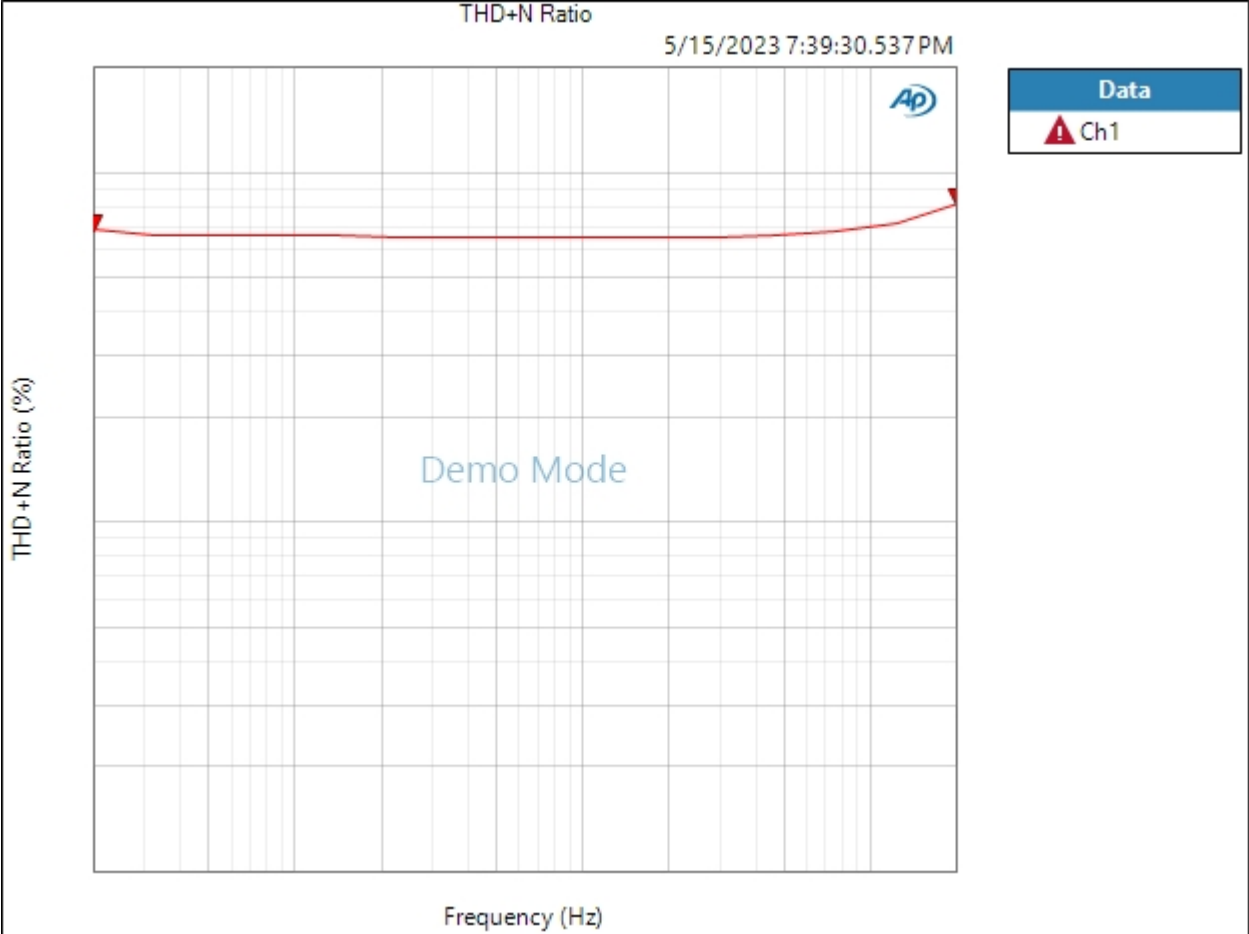

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Line Gain -10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:39:35.921 PM)

Ch1 287.3 mVrms

Gain (5/15/2023 7:39:35.921 PM)

Ch1 1.384 dB

THD+N Ratio (5/15/2023 7:39:35.921 PM)

Ch1 ---- %

Frequency (5/15/2023 7:39:35.921 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 600 Termination : Level and Gain -10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:39:38.798 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-8.597 dBu	-8.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +5 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:39:44.331 PM)

Ch1 294.6 mVrms

Gain (5/15/2023 7:39:44.331 PM)

Ch1 -8.396 dB

THD+N Ratio (5/15/2023 7:39:44.331 PM)

Ch1 ---- %

Frequency (5/15/2023 7:39:44.331 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 7:39:49 PM

RMS Level (5/15/2023 7:39:49.074 PM)

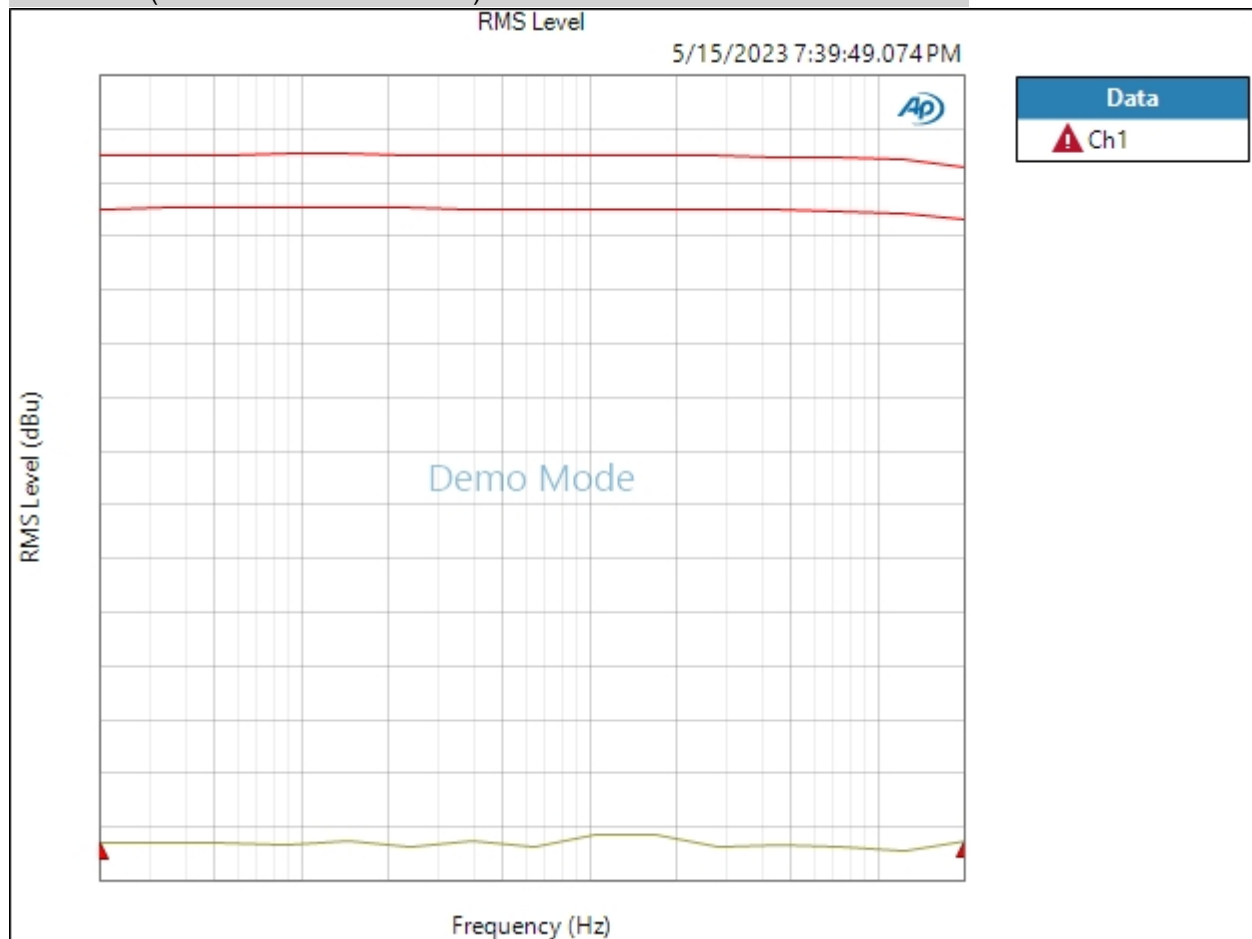


Ch1 Failed Lower Limit

Sequence Report



Result: ▲ FAILED

THD+N Ratio (5/15/2023 7:39:49.074 PM)

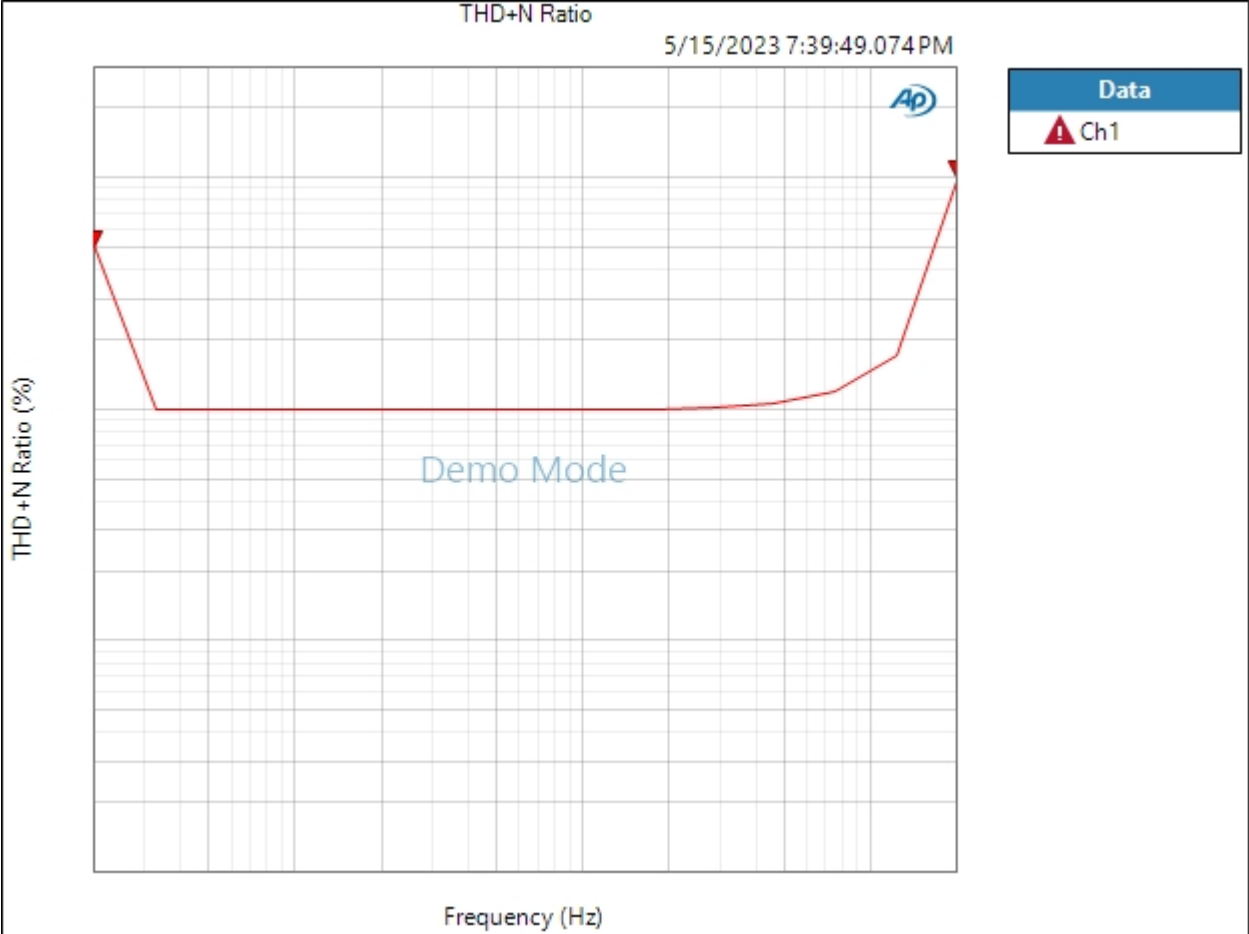

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:39:54.677 PM)

Ch1 293.0 mVrms

Gain (5/15/2023 7:39:54.677 PM)

Ch1 1.556 dB

THD+N Ratio (5/15/2023 7:39:54.677 PM)

Ch1 ---- %

Frequency (5/15/2023 7:39:54.677 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 600 Termination : Level and Gain +5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:39:57.567 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	-8.509 dBu	+6.500 dBu	

Result:  FAILED

Sequence Report



Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:03.247 PM)

Ch1 292.5 mVrms

Gain (5/15/2023 7:40:03.247 PM)

Ch1 1.542 dB

THD+N Ratio (5/15/2023 7:40:03.247 PM)

Ch1 ---- %

Frequency (5/15/2023 7:40:03.247 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -5 600 Termination : Level and Gain -5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:06.101 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-8.654 dBu	-3.500 dBu	

Result:  FAILED

Sequence Report



Line Gain 0 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:11.680 PM)

Ch1 288.0 mVrms

Gain (5/15/2023 7:40:11.680 PM)

Ch1 1.405 dB

THD+N Ratio (5/15/2023 7:40:11.680 PM)

Ch1 ---- %

Frequency (5/15/2023 7:40:11.680 PM)

Ch1 ---- Hz

Sequence Report



Line Gain 0 600 Termination : Level and Gain 0

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:14.511 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-8.541 dBu	+1.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:20.080 PM)

Ch1 289.3 mVrms

Gain (5/15/2023 7:40:20.080 PM)

Ch1 1.444 dB

THD+N Ratio (5/15/2023 7:40:20.080 PM)

Ch1 ---- %

Frequency (5/15/2023 7:40:20.080 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +10 600 Termination : Level and Gain +10


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:22.931 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	-8.542 dBu	+11.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:28.586 PM)

Ch1 278.2 mVrms

Gain (5/15/2023 7:40:28.586 PM)

Ch1 11.104 dB

THD+N Ratio (5/15/2023 7:40:28.586 PM)

Ch1 ---- %

Frequency (5/15/2023 7:40:28.586 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 5/15/2023 7:40:34 PM

RMS Level (5/15/2023 7:40:34.039 PM)

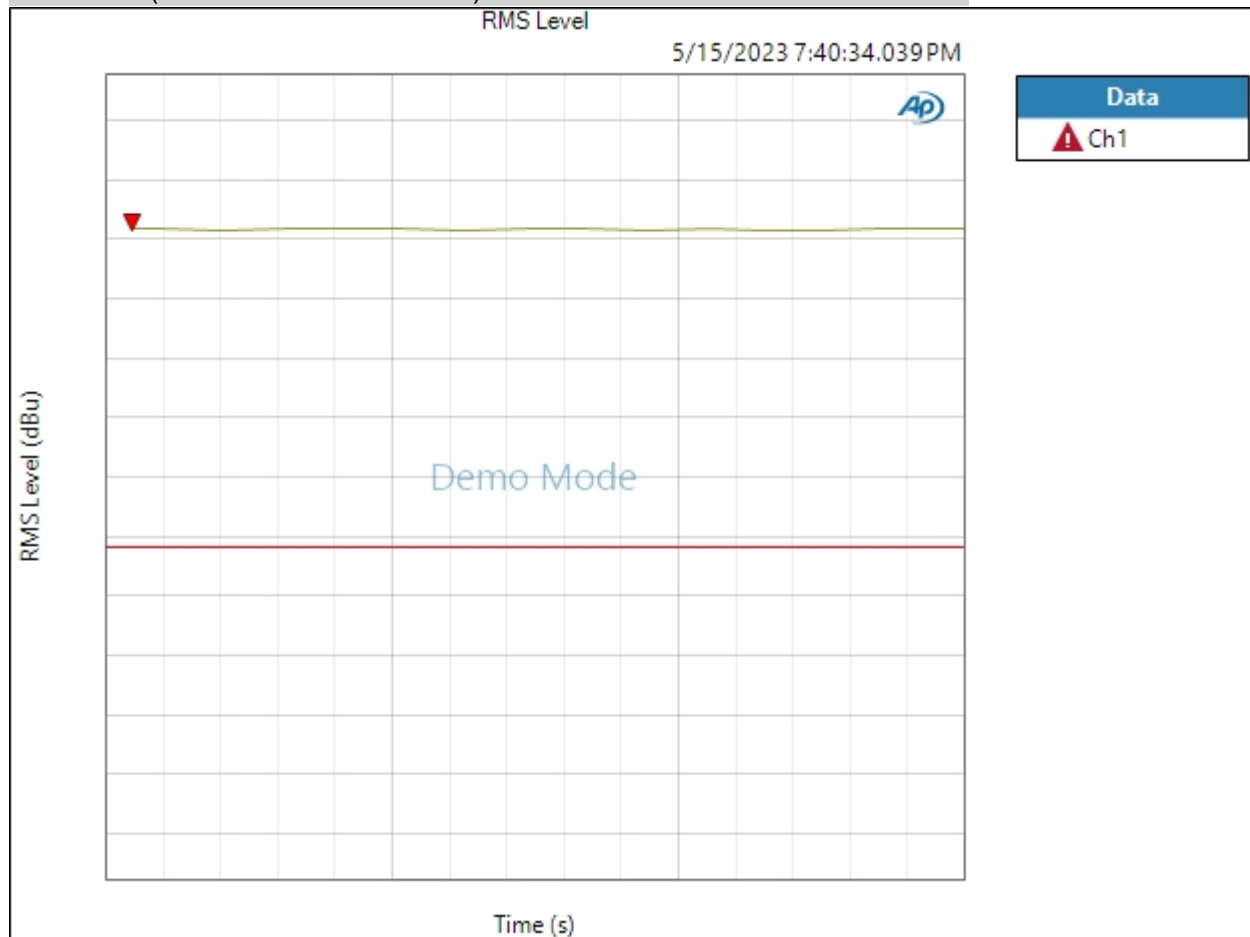

Ch1 Failed Upper Limit

Result: FAILED

5/15/2023 7:41 PM

Page 41 of 54

Sequence Report



Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:39.580 PM)

Ch1 292.5 mVrms

Gain (5/15/2023 7:40:39.580 PM)

Ch1 11.542 dB

THD+N Ratio (5/15/2023 7:40:39.580 PM)

Ch1 ---- %

Frequency (5/15/2023 7:40:39.580 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 5/15/2023 7:40:45 PM

RMS Level (5/15/2023 7:40:45.802 PM)

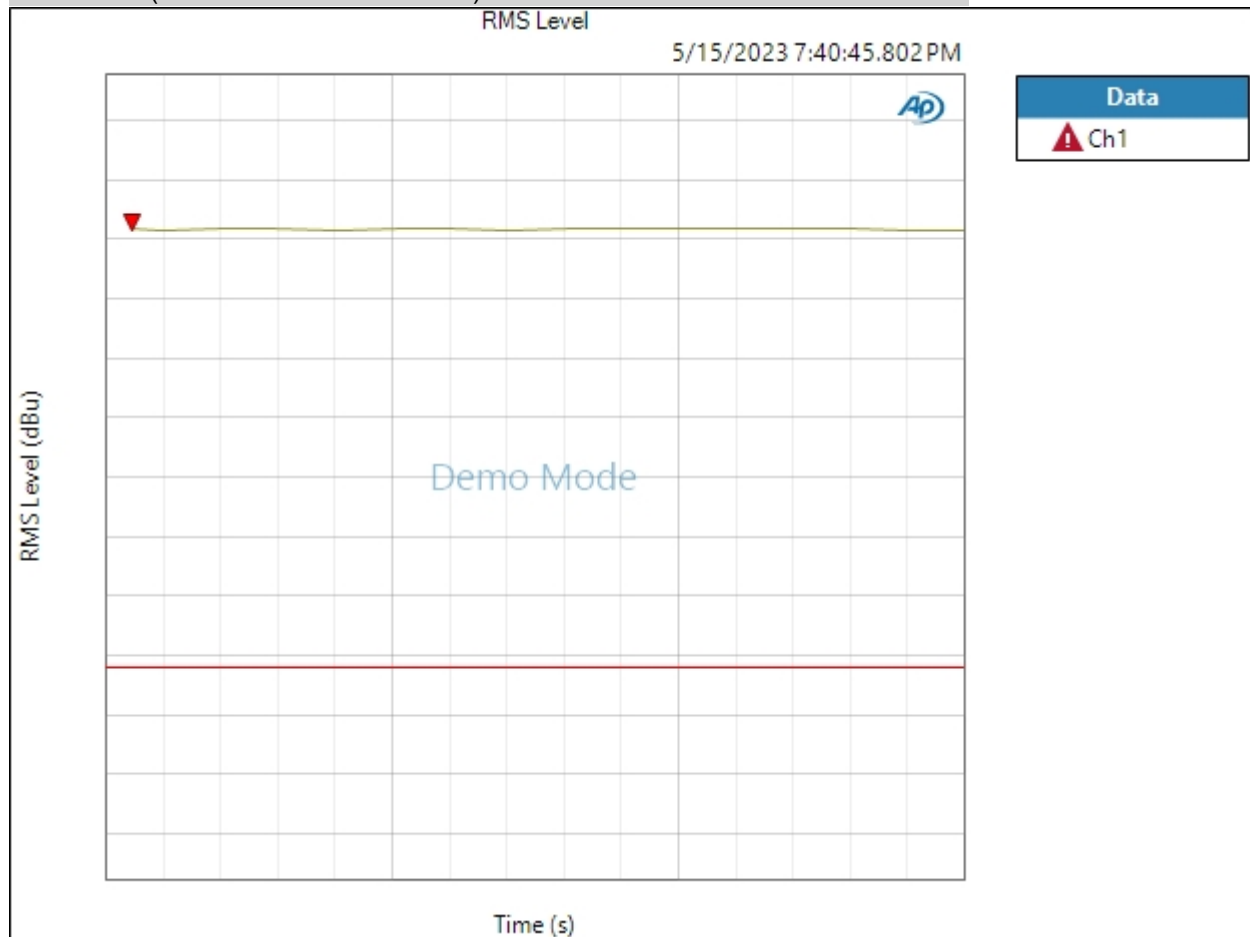

Ch1 Failed Upper Limit

Result: FAILED

5/15/2023 7:41 PM

Page 45 of 54

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:51.173 PM)

Ch1 293.0 mVrms

Gain (5/15/2023 7:40:51.173 PM)

Ch1 13.856 dB

THD+N Ratio (5/15/2023 7:40:51.173 PM)

Ch1 ---- %

Frequency (5/15/2023 7:40:51.173 PM)

Ch1 ---- Hz

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:54.597 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	-8.627 dBu	+2.000 dBu	

Result:  FAILED

Sequence Report



Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 2
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 7:41 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:40:59.907 PM)

Ch1 280.8 mVrms

Gain (5/15/2023 7:40:59.907 PM)

Ch1 13.486 dB

THD+N Ratio (5/15/2023 7:40:59.907 PM)

Ch1 ---- %

Frequency (5/15/2023 7:40:59.907 PM)

Ch1 ---- Hz

Sequence Report



Hi Z Gain -10 47k 200k Termination : Level and Gain 47K


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:41:02.776 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-8.866 dBu	-4.000 dBu	

Result:  FAILED

Sequence Report



Dummy Signal Path For Report : Signal Path Setup

Output Connector: Analog Unbalanced
Channels: 2
Source Impedance: 50 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Unbalanced
Channels: 2
Termination: 100 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00
Port D (hex): 00

5/15/2023 7:41 PM

Sequence Report



- Clocks

Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled

- Triggers

Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising

Dummy Signal Path For Report : Verify Connections

Waveform:	Sine
Generator Level:	100.0 mVrms
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/15/2023 7:41:06.556 PM)

Ch1	280.8 mVrms
Ch2	279.4 mVrms