

Sequence Report



Summary

Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 PASSED

Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K PASSED

Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 PASSED

Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 PASSED

Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 PASSED

Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 PASSED

Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 PASSED

Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 PASSED

Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 PASSED

Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW PASSED

Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	✓ PASSED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	✓ PASSED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

Sequence Report



Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Mic500 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:30:35.795 PM)

Ch1 2.179 mVrms

Gain (6/12/2023 12:30:35.795 PM)

Ch1 -8.722 dB

THD+N Ratio (6/12/2023 12:30:35.795 PM)

Ch1 56.294219 %

Frequency (6/12/2023 12:30:35.795 PM)

Ch1 119.968 Hz

Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/12/2023 12:30:45 PM

RMS Level (6/12/2023 12:30:45.214 PM)

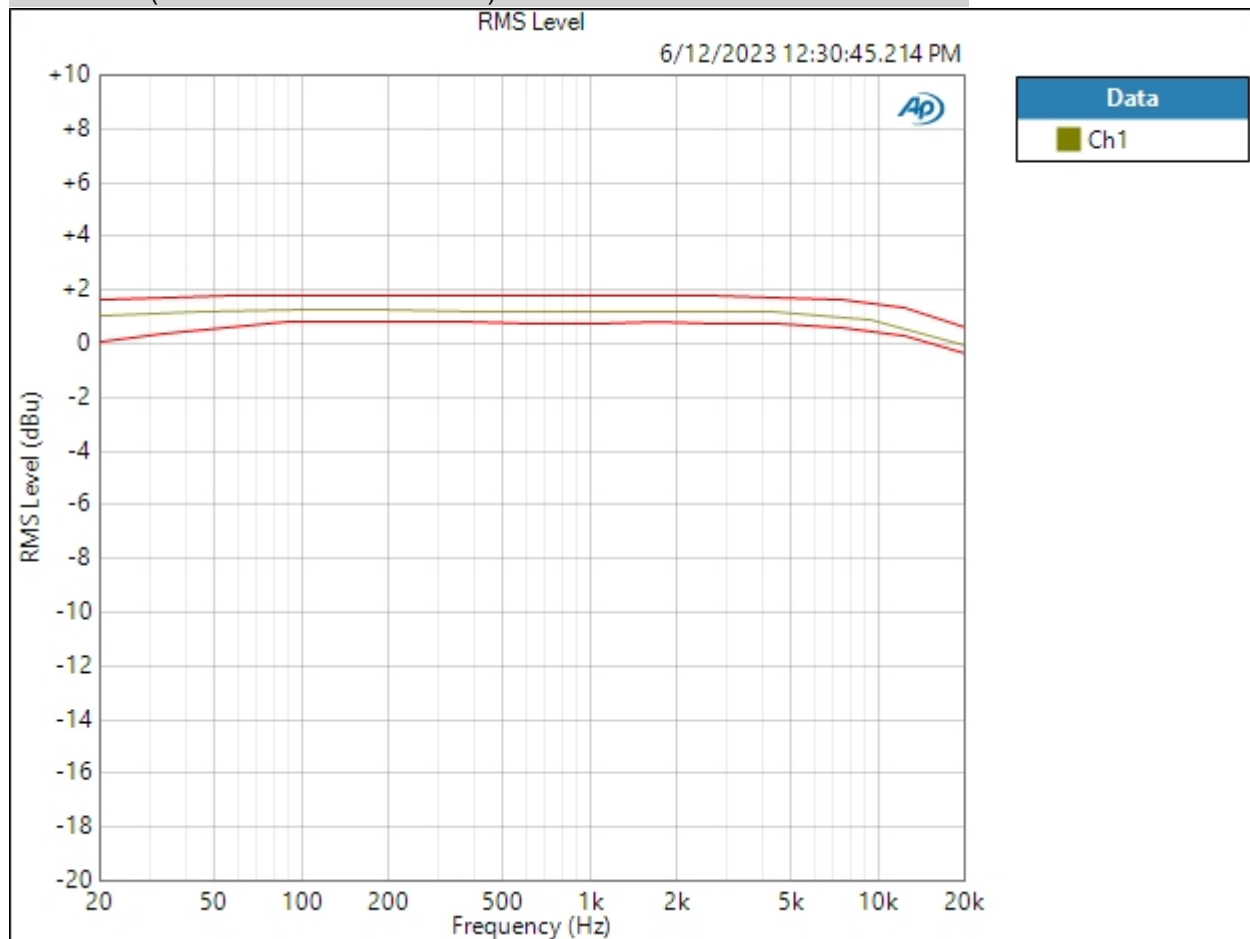

Ch1 PASSED

6/12/2023 12:33 PM


Page 5 of 45

Sequence Report



Result: PASSED


THD+N Ratio (6/12/2023 12:30:45.214 PM)

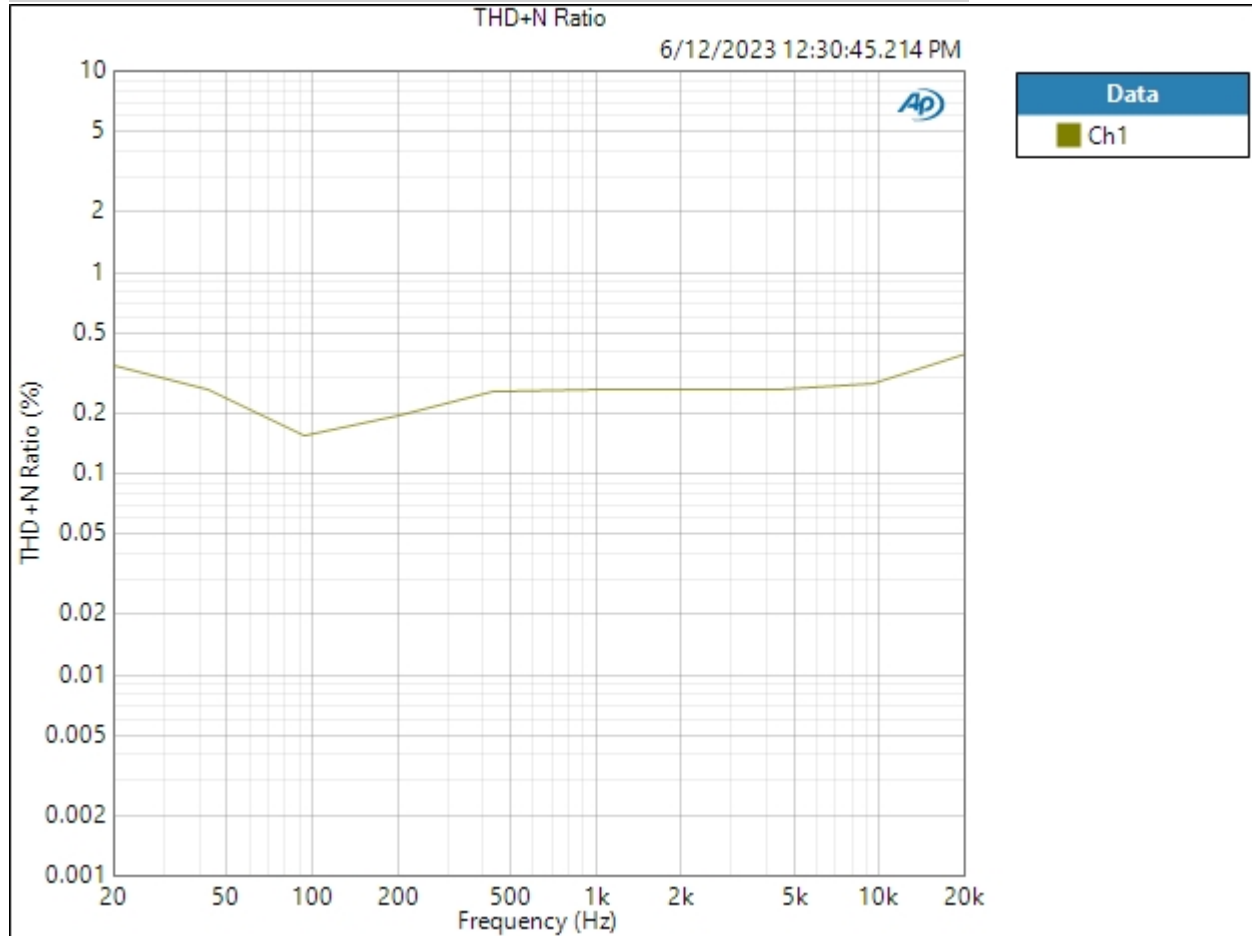

Result: PASSED

THD Ratio (6/12/2023 12:30:45.214 PM)

Sequence Report

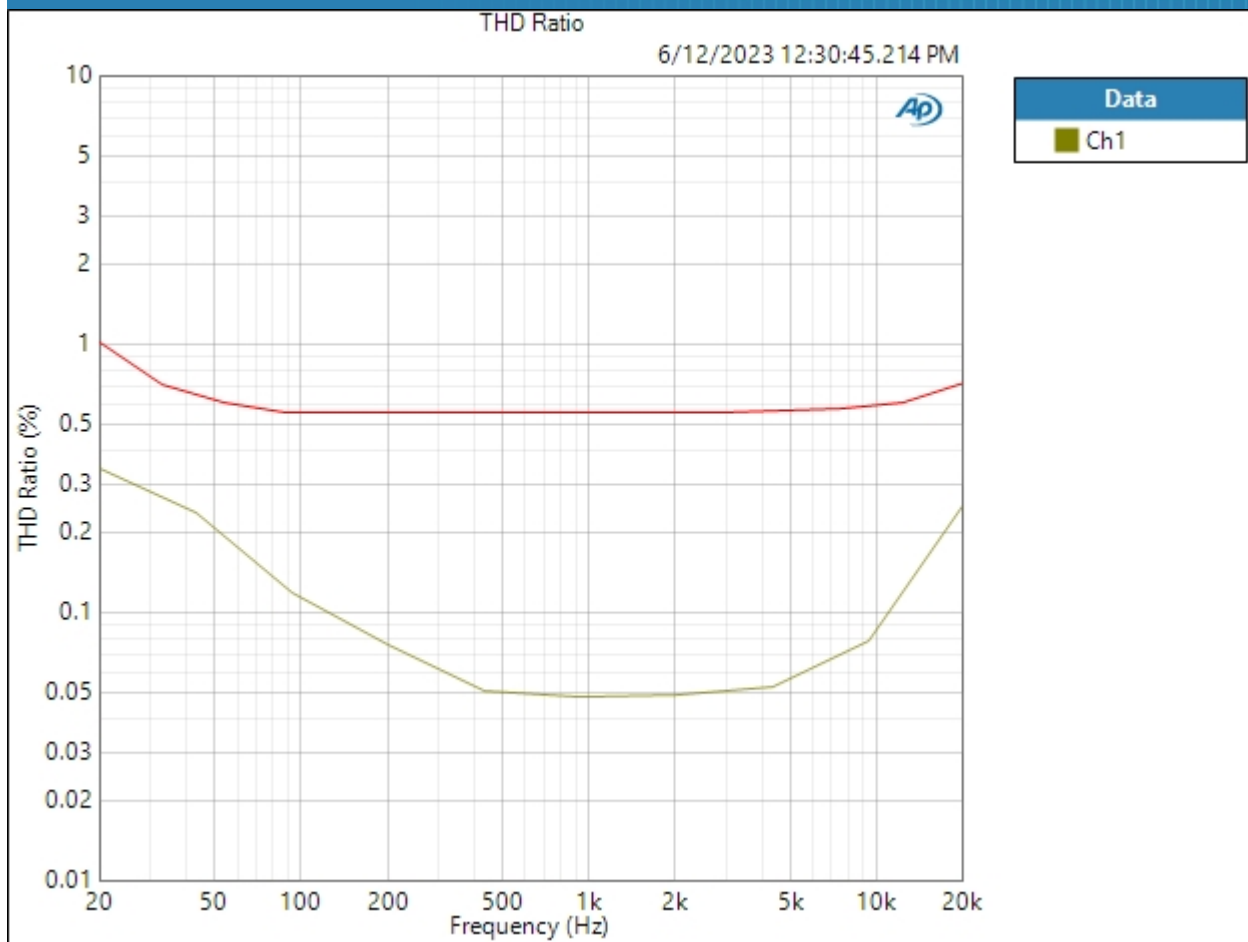

Ch1 PASSED

Result: PASSED

Sequence Report



Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:30:50.838 PM)

Ch1 514.3 mVrms

Gain (6/12/2023 12:30:50.838 PM)

Ch1 38.742 dB

THD+N Ratio (6/12/2023 12:30:50.838 PM)

Ch1 0.429218 %

Frequency (6/12/2023 12:30:50.838 PM)

Ch1 1.00000 kHz

Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/12/2023 12:30:56 PM

RMS Level (6/12/2023 12:30:56.899 PM)

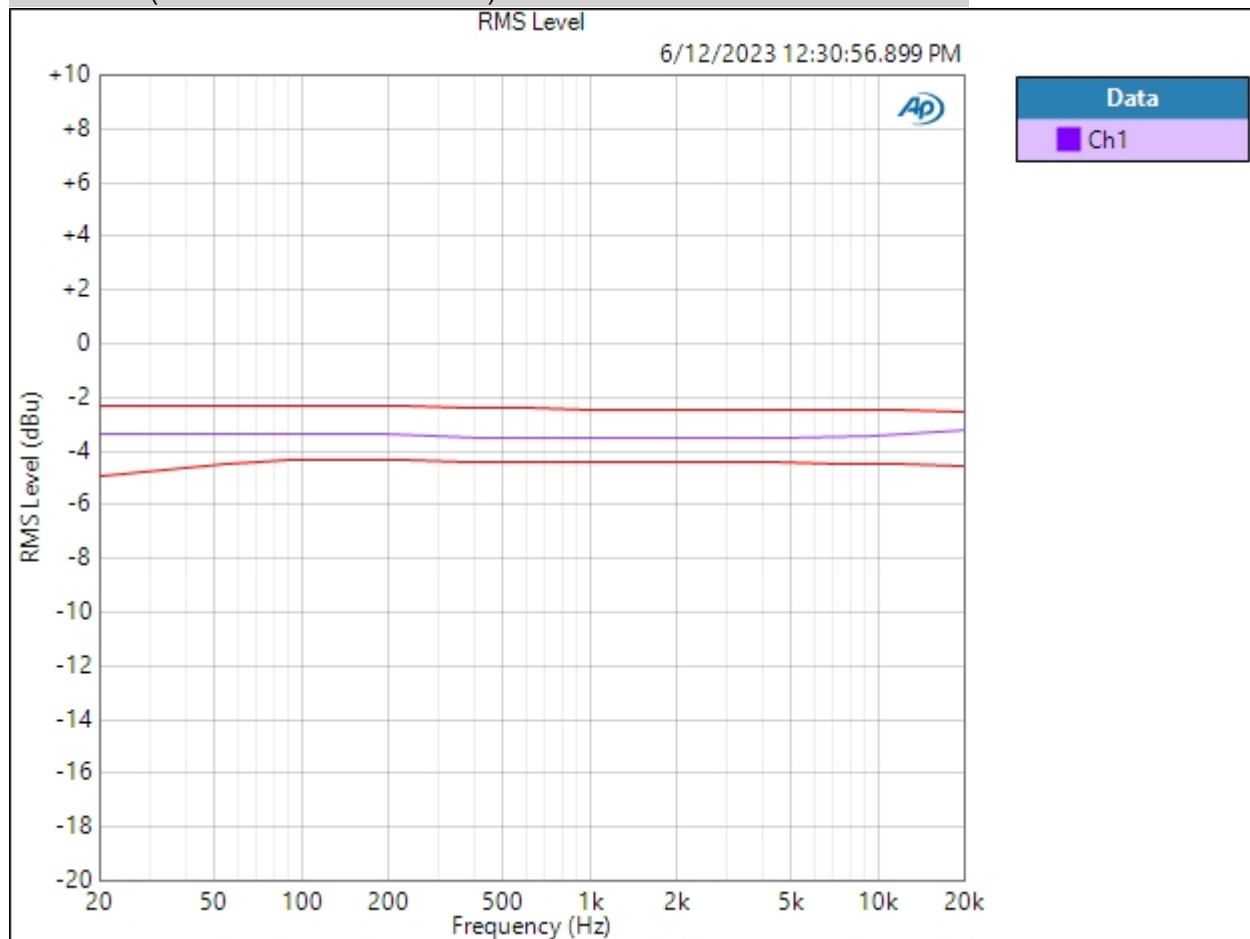

Ch1 PASSED

6/12/2023 12:33 PM


Page 10 of 45

Sequence Report



Result: ✔ PASSED

THD Ratio (6/12/2023 12:30:56.899 PM)

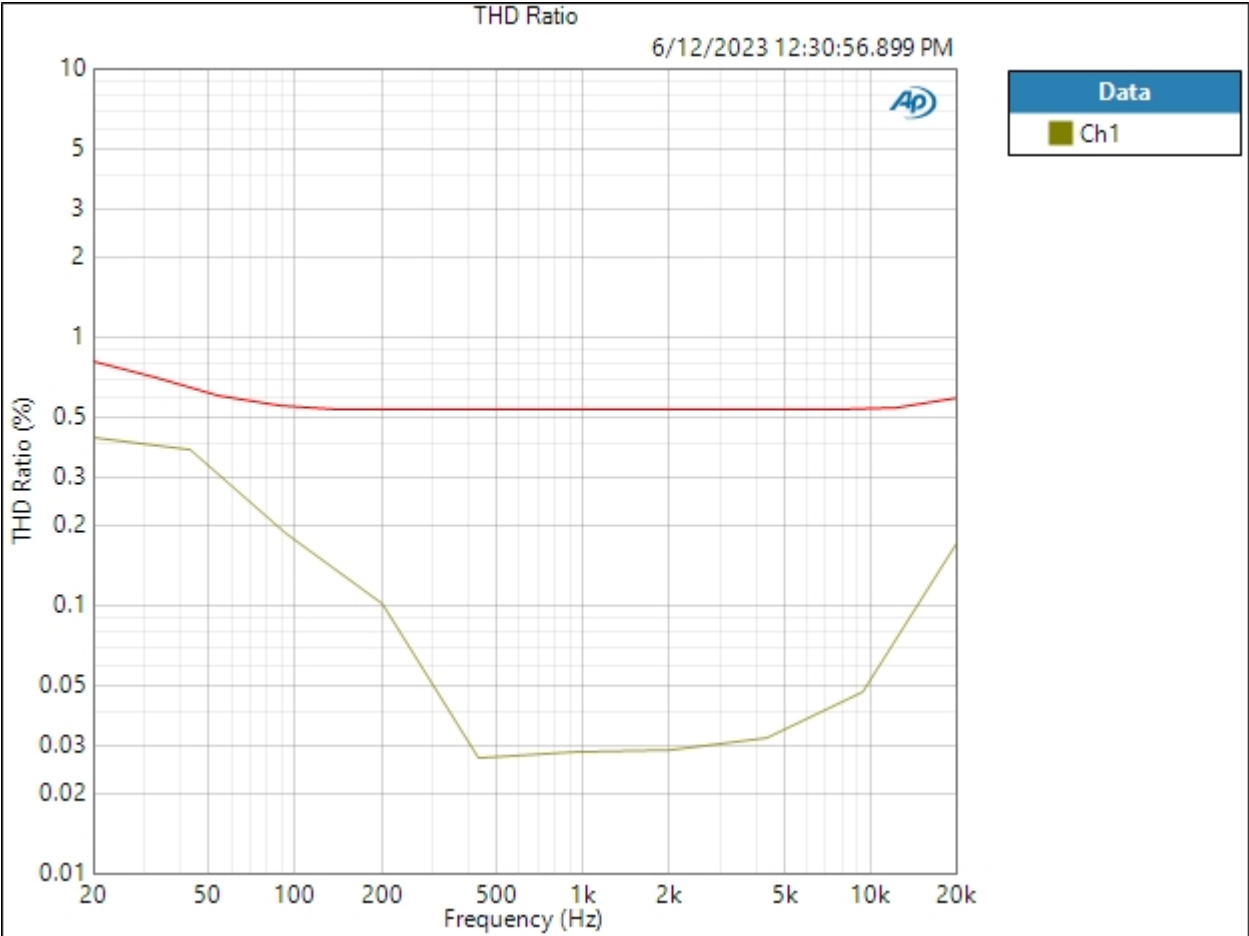

Ch1 ✔ PASSED

Result: ✔ PASSED

Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:31:02.469 PM)

Ch1 75.96 mVrms

Gain (6/12/2023 12:31:02.469 PM)

Ch1 22.130 dB

THD+N Ratio (6/12/2023 12:31:02.469 PM)

Ch1 3.051953 %

Frequency (6/12/2023 12:31:02.469 PM)

Ch1 1.00000 kHz

Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/12/2023 12:31:18 PM

RMS Level (6/12/2023 12:31:18.793 PM)

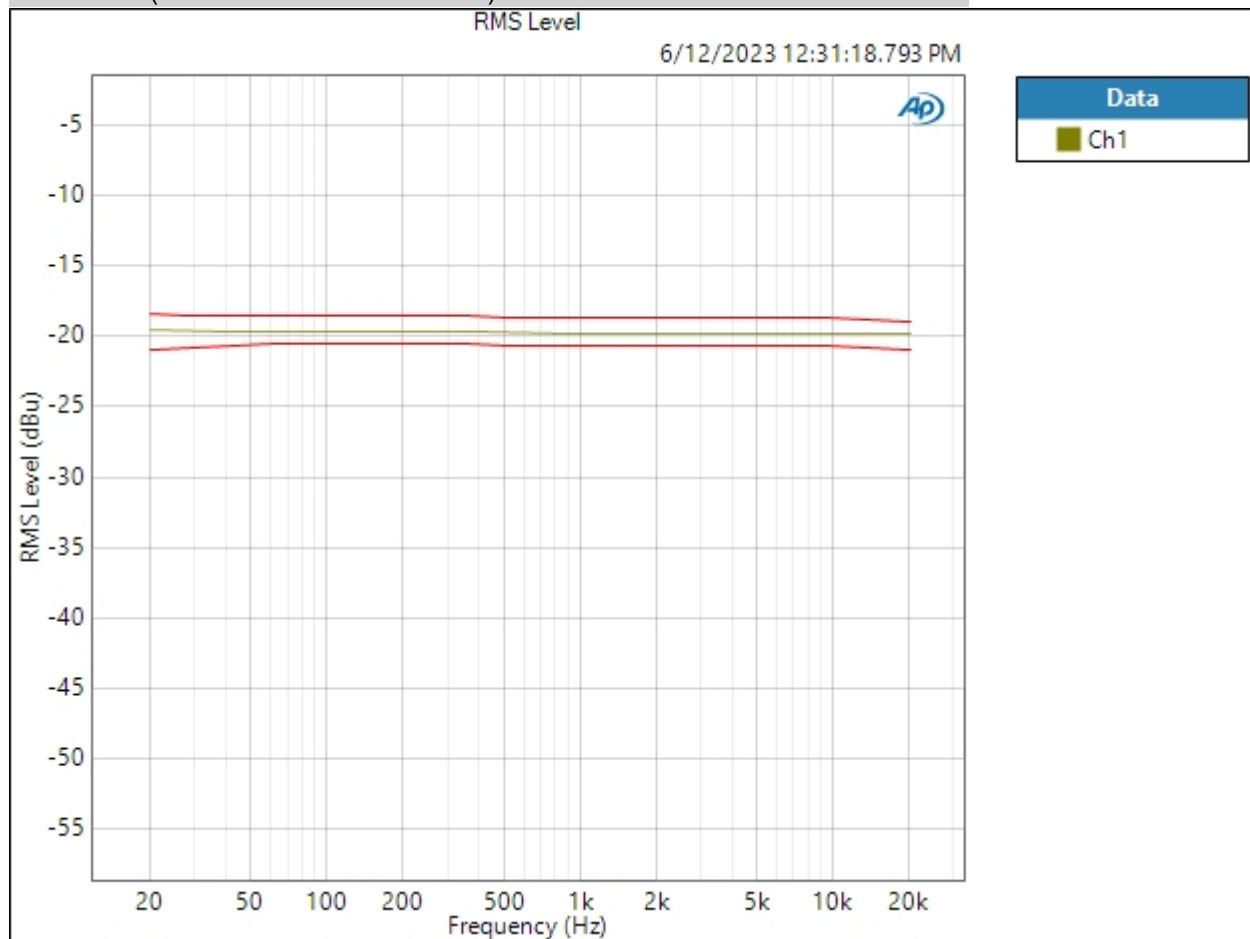

Ch1 PASSED

6/12/2023 12:33 PM


Page 14 of 45

Sequence Report



Result: PASSED

THD Ratio (6/12/2023 12:31:18.793 PM)

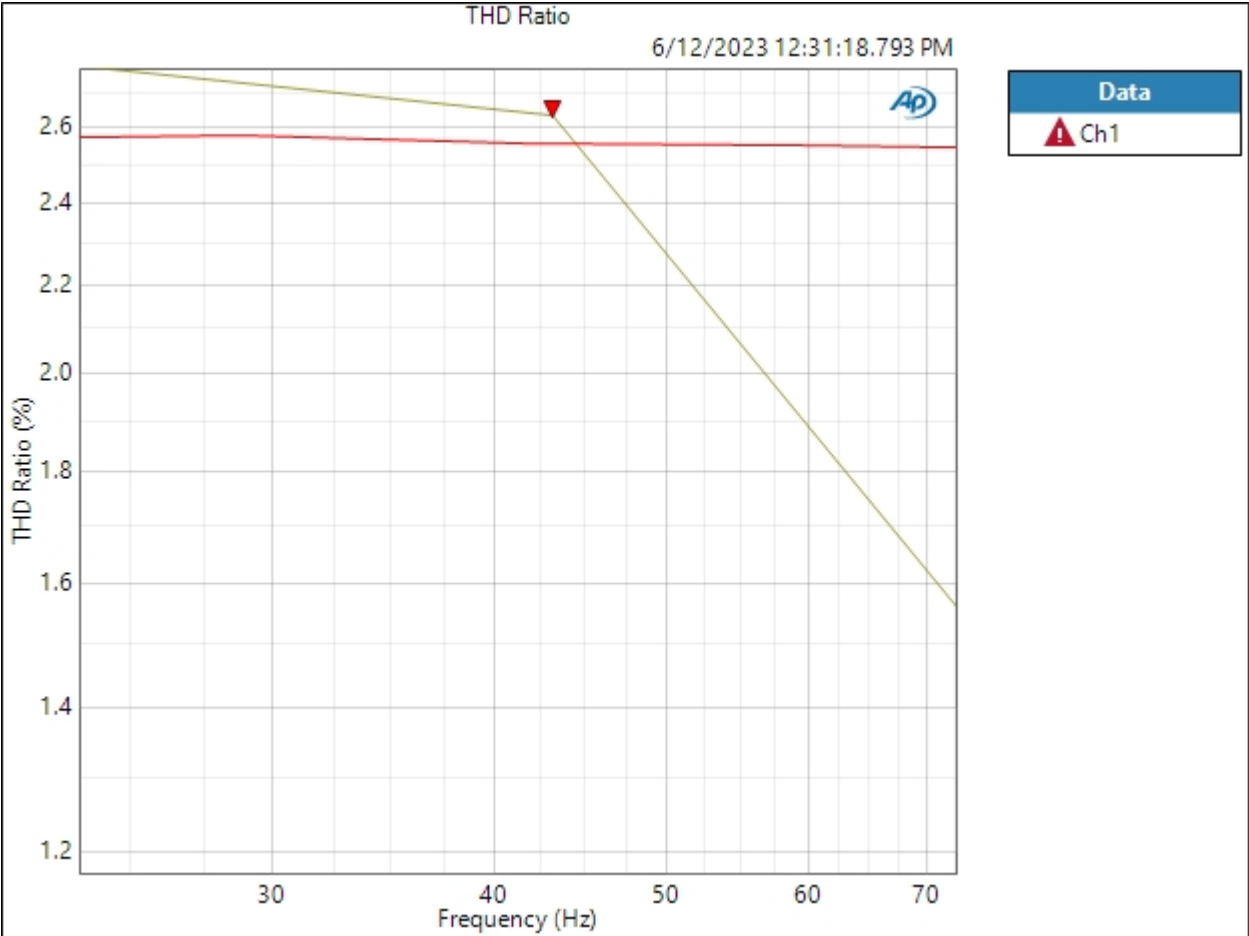

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Line Gain -10 200kTermination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:31:24.478 PM)

Ch1 0.906 Vrms

Gain (6/12/2023 12:31:24.478 PM)

Ch1 1.357 dB

THD+N Ratio (6/12/2023 12:31:24.478 PM)

Ch1 0.274858 %

Frequency (6/12/2023 12:31:24.478 PM)

Ch1 1.00000 kHz

Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/12/2023 12:31:32 PM

RMS Level (6/12/2023 12:31:32.992 PM)

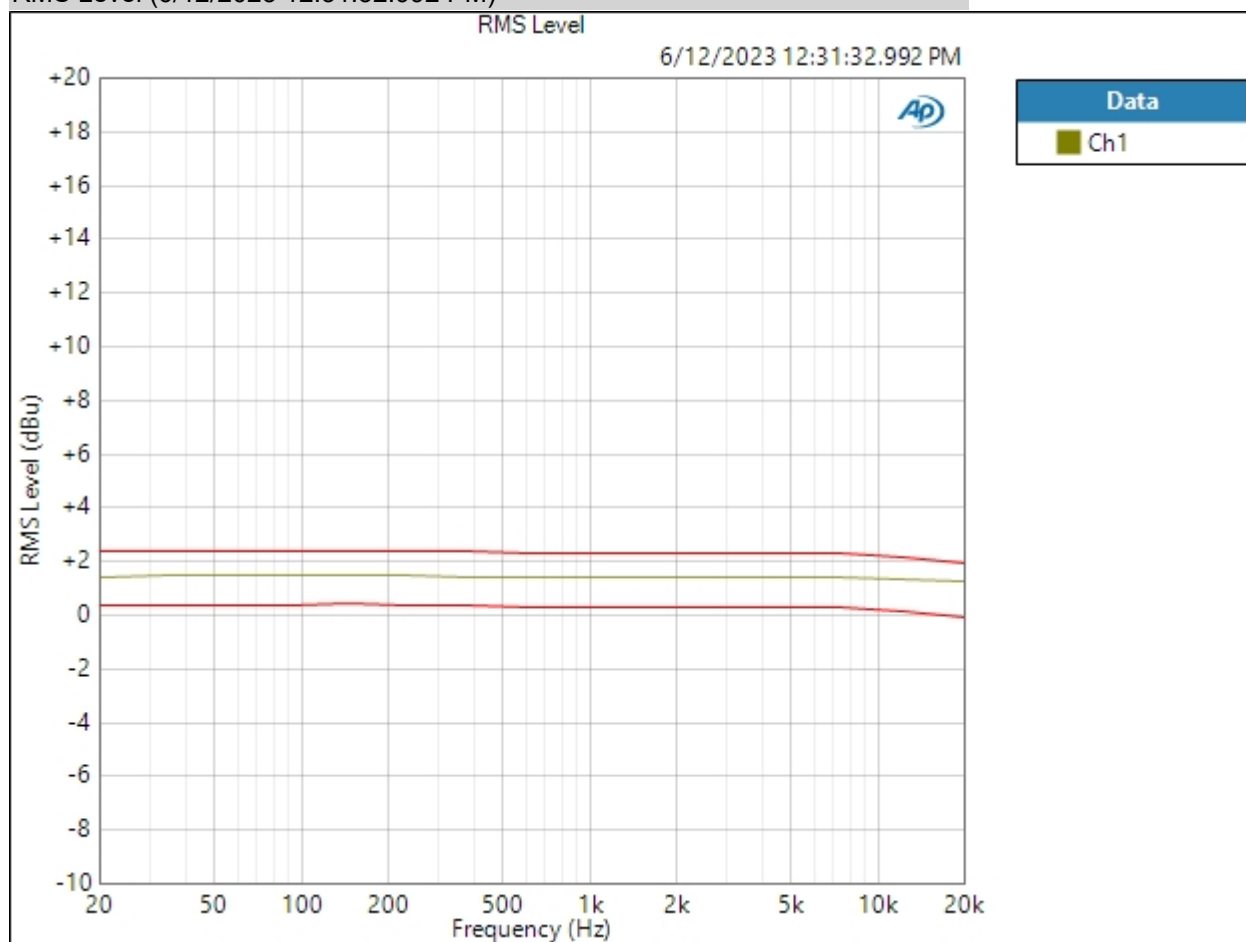

Ch1 PASSED

6/12/2023 12:33 PM


Page 18 of 45

Sequence Report



Result: ✔ PASSED

THD+N Ratio (6/12/2023 12:31:32.992 PM)

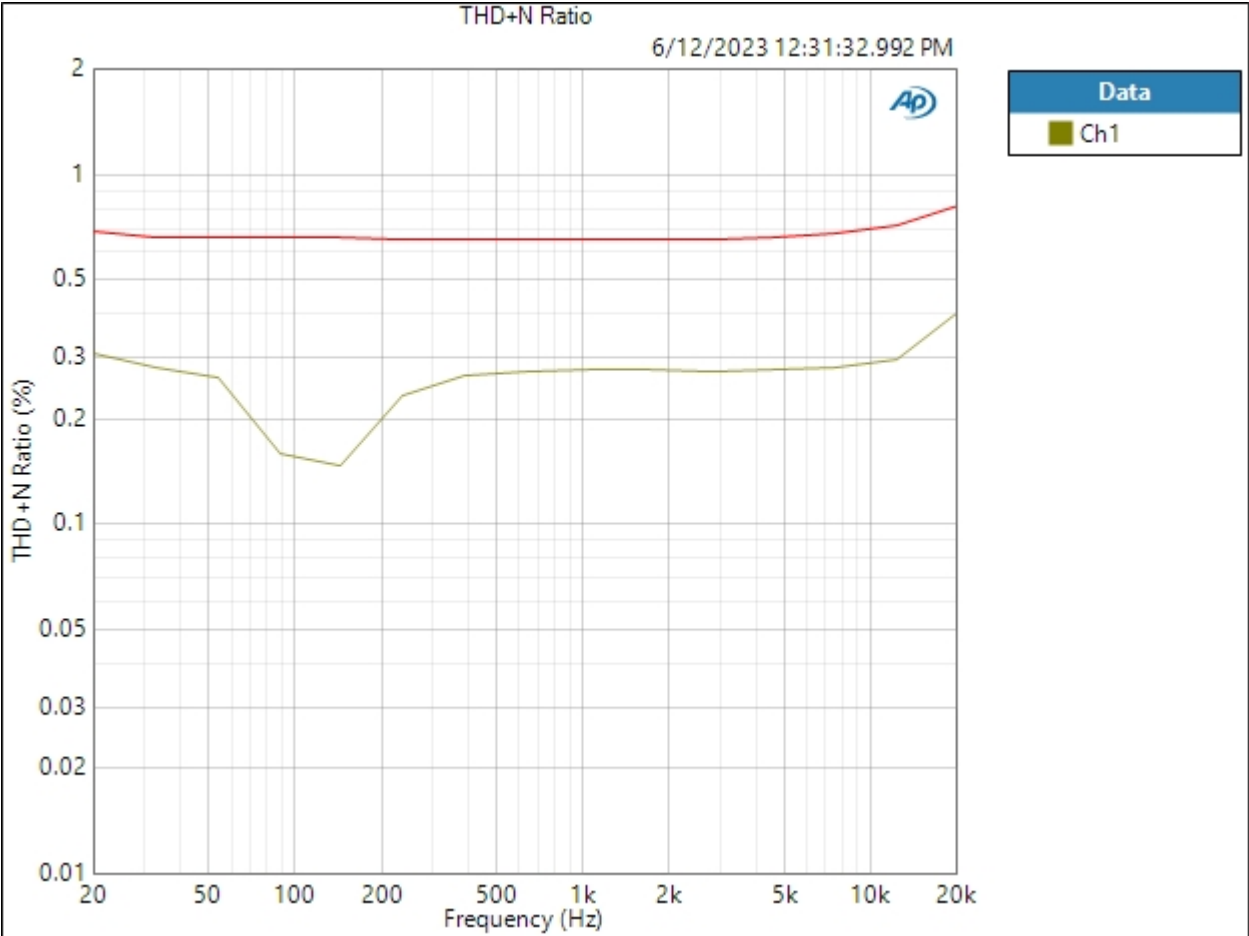

Ch1 ✔ PASSED

Result: ✔ PASSED

Sequence Report



Line Gain -10 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:31:39.050 PM)

Ch1 252.2 mVrms

Gain (6/12/2023 12:31:39.050 PM)

Ch1 0.252 dB

THD+N Ratio (6/12/2023 12:31:39.050 PM)

Ch1 0.850507 %

Frequency (6/12/2023 12:31:39.050 PM)

Ch1 1.00000 kHz

Line Gain -10 600 Termination : Level and Gain -10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:31:42.033 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-9.748 dBu	-8.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +5 200kTermination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:31:47.696 PM)

Ch1 4.892 Vrms

Gain (6/12/2023 12:31:47.696 PM)

Ch1 16.009 dB

THD+N Ratio (6/12/2023 12:31:47.696 PM)

Ch1 0.384783 %

Frequency (6/12/2023 12:31:47.696 PM)

Ch1 1.00000 kHz

Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/12/2023 12:31:56 PM

RMS Level (6/12/2023 12:31:56.788 PM)

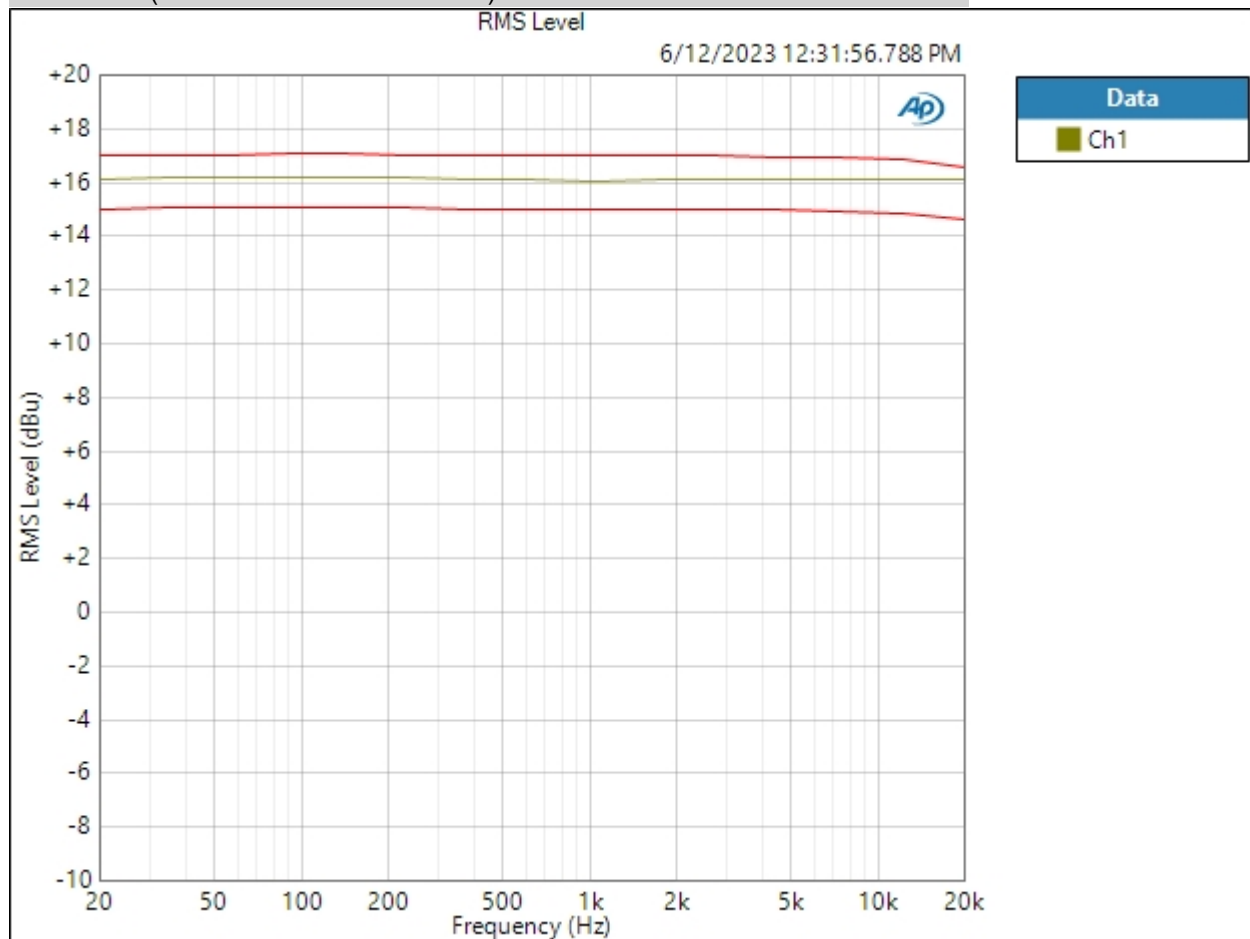

Ch1 PASSED

6/12/2023 12:33 PM


Page 24 of 45

Sequence Report



Result: ✔ PASSED

THD+N Ratio (6/12/2023 12:31:56.788 PM)

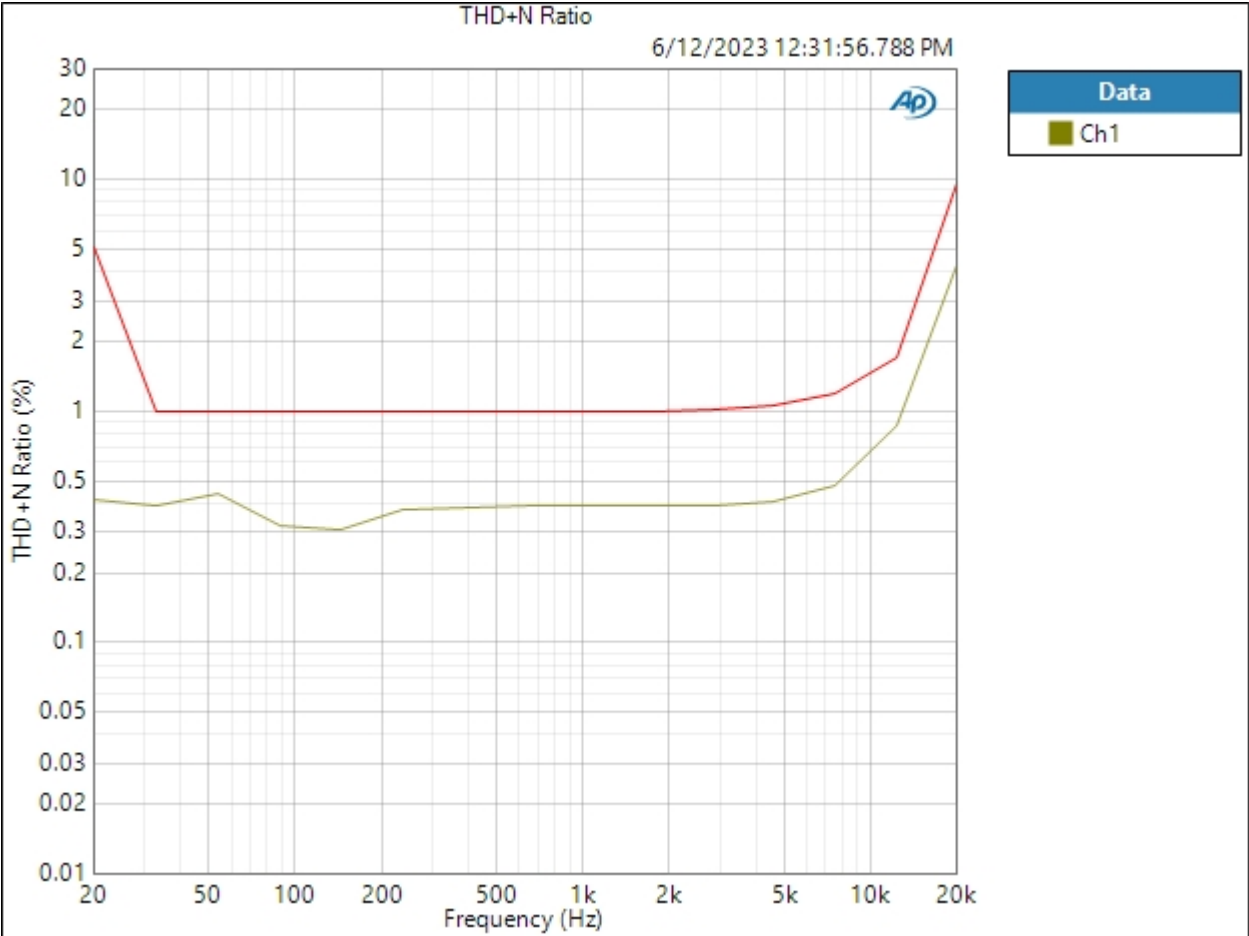

Ch1 ✔ PASSED

Result: ✔ PASSED

Sequence Report



Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:32:02.680 PM)

Ch1 1.362 Vrms

Gain (6/12/2023 12:32:02.680 PM)

Ch1 14.905 dB

THD+N Ratio (6/12/2023 12:32:02.680 PM)

Ch1 0.923566 %

Frequency (6/12/2023 12:32:02.680 PM)

Ch1 1.00000 kHz

Line Gain +5 600 Termination : Level and Gain +5

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:32:05.764 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	+4.904 dBu	+6.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain -5 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:32:11.606 PM)

Ch1 422.1 mVrms

Gain (6/12/2023 12:32:11.606 PM)

Ch1 4.728 dB

THD+N Ratio (6/12/2023 12:32:11.606 PM)

Ch1 0.873221 %

Frequency (6/12/2023 12:32:11.606 PM)

Ch1 1.00000 kHz

Line Gain -5 600 Termination : Level and Gain -5

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:32:14.762 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-5.272 dBu	-3.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain 0 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:32:20.604 PM)

Ch1 736.6 mVrms

Gain (6/12/2023 12:32:20.604 PM)

Ch1 9.563 dB

THD+N Ratio (6/12/2023 12:32:20.604 PM)

Ch1 0.882865 %

Frequency (6/12/2023 12:32:20.604 PM)

Ch1 1.00000 kHz

Line Gain 0 600 Termination : Level and Gain 0

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:32:23.854 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-0.437 dBu	+1.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +10 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dB SPL1: 10.00 mVrms
dB SPL2: 10.00 mVrms
dB SPL1 Calibrator Level: 94.000 dB SPL
dB SPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:32:29.665 PM)

Ch1 2.402 Vrms

Gain (6/12/2023 12:32:29.665 PM)

Ch1 19.830 dB

THD+N Ratio (6/12/2023 12:32:29.665 PM)

Ch1 0.947331 %

Frequency (6/12/2023 12:32:29.665 PM)

Ch1 1.00000 kHz

Line Gain +10 600 Termination : Level and Gain +10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:32:32.740 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	+9.828 dBu	+11.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:32:38.700 PM)

Ch1 862.9 mVrms

Gain (6/12/2023 12:32:38.700 PM)

Ch1 20.938 dB

THD+N Ratio (6/12/2023 12:32:38.700 PM)

Ch1 2.737028 %

Frequency (6/12/2023 12:32:38.700 PM)

Ch1 1.00000 kHz


Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 6/12/2023 12:32:50 PM

RMS Level (6/12/2023 12:32:50.327 PM)

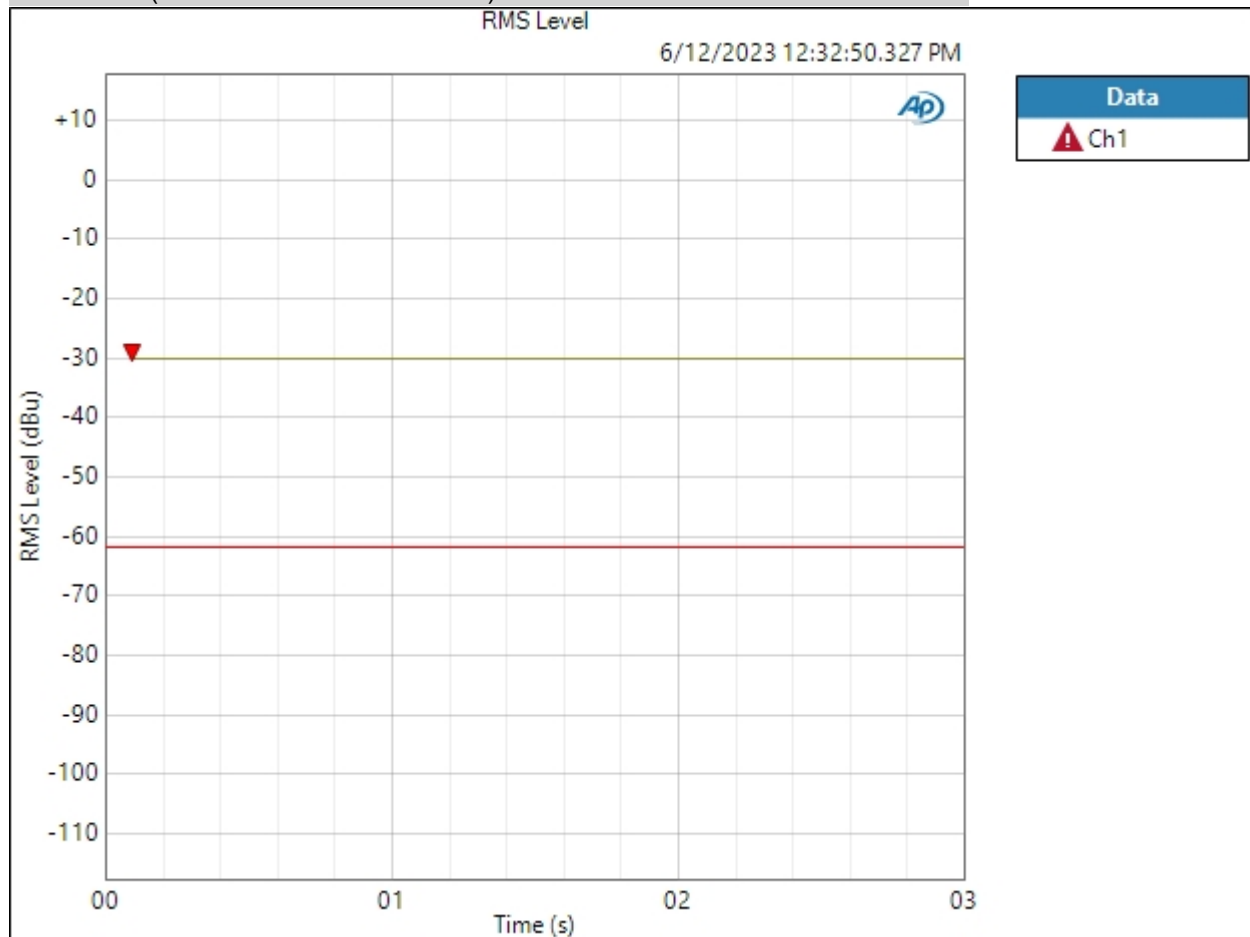

Ch1 Failed Upper Limit

Result: FAILED

6/12/2023 12:33 PM

Page 36 of 45

Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:32:56.294 PM)

Ch1 26.14 uVrms

Gain (6/12/2023 12:32:56.294 PM)

Ch1 -69.425 dB

THD+N Ratio (6/12/2023 12:32:56.294 PM)

Ch1 ---- %

Frequency (6/12/2023 12:32:56.294 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 6/12/2023 12:33:01 PM

RMS Level (6/12/2023 12:33:01.949 PM)

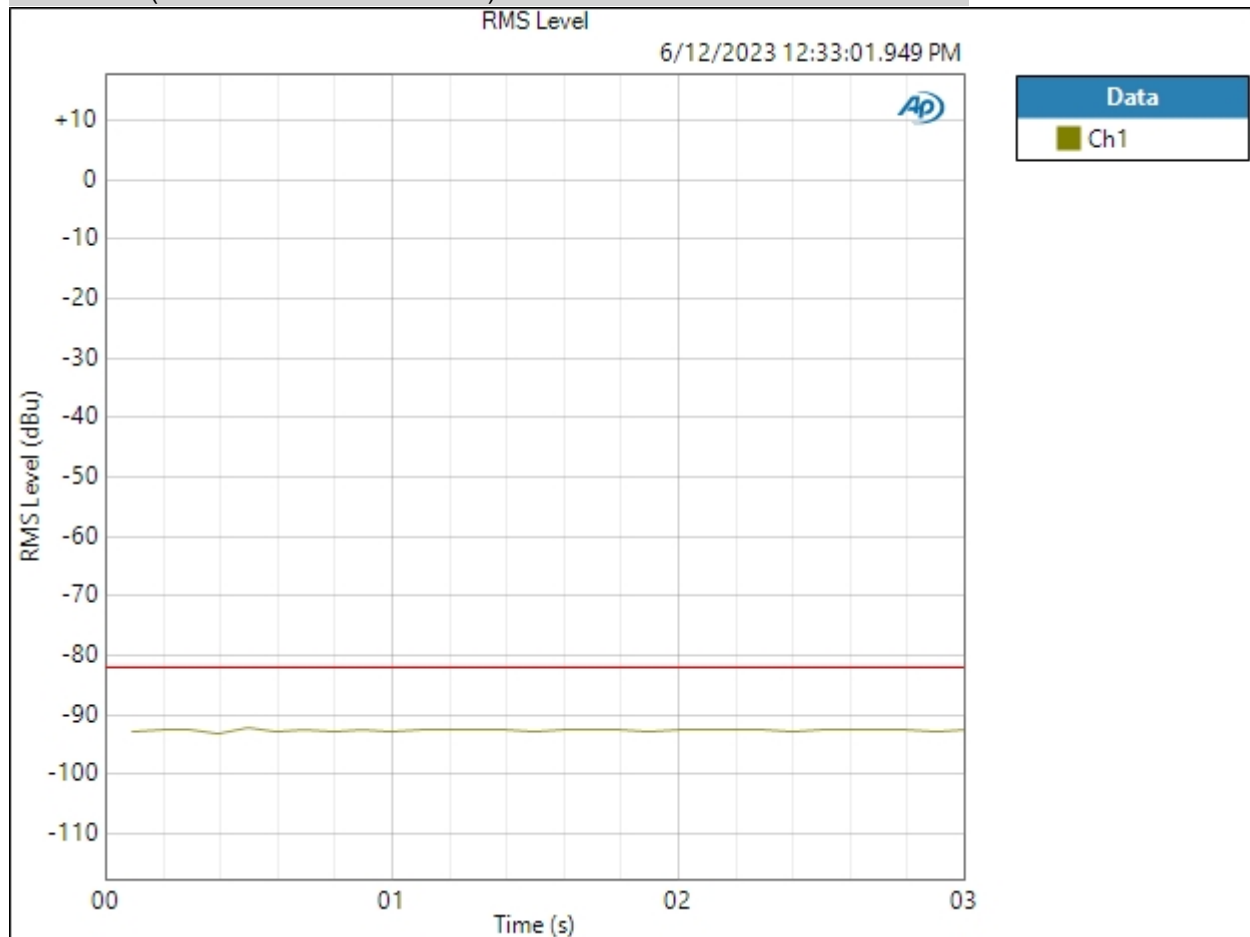

Ch1 PASSED

Result: PASSED

6/12/2023 12:33 PM

Page 39 of 45

Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:33:07.881 PM)

Ch1 3.496 mVrms

Gain (6/12/2023 12:33:07.881 PM)

Ch1 -24.610 dB

THD+N Ratio (6/12/2023 12:33:07.881 PM)

Ch1 77.746365 %

Frequency (6/12/2023 12:33:07.881 PM)

Ch1 59.9864 Hz

Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:33:11.771 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	+0.075 dBu	+2.000 dBu	✓

Result: ✓ PASSED

Sequence Report



Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Unbalanced

Channels: 2

Source Impedance: 50 ohm

Output EQ: None

Input Connector: Analog Balanced

Channels: 1

Channel: Ch1

Termination: 200 kohm

Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)

Device Delay: 0.000 s

Input EQ: None

• References

dBr G: 100.0 mVrms

dBm (Output Power): 600.0 ohm

W(watts) (Output Power): 8.000 ohm

Shared Frequency Reference: 1.00000 kHz

dBrA: 1.000 Vrms

dBrB: 1.000 Vrms

dBrA Offset: 0.000 dB

dBrB Offset: 0.000 dB

dB SPL1: 10.00 mVrms

dB SPL2: 10.00 mVrms

dB SPL1 Calibrator Level: 94.000 dB SPL

dB SPL2 Calibrator Level: 94.000 dB SPL

dBm (Input Power): 600.0 ohm

W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:33:17.659 PM)

Ch1 399.5 mVrms

Gain (6/12/2023 12:33:17.659 PM)

Ch1 16.548 dB

THD+N Ratio (6/12/2023 12:33:17.659 PM)

Ch1 0.705019 %

Frequency (6/12/2023 12:33:17.659 PM)

Ch1 1.00000 kHz

Hi Z Gain -10 47k 200k Termination : Level and Gain 47K

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:33:20.900 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-5.752 dBu	-4.000 dBu	✓

Result: ✓ PASSED

Sequence Report



Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Dummy Signal Path For Report : Verify Connections

Waveform: Sine

Generator Level: 100.0 mVrms

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/12/2023 12:33:24.957 PM)

Ch1 76.73 uVrms

Ch2 7.989 uVrms