

## Sequence Report



### Summary

#### Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 FAILED

#### Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K FAILED

#### Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

#### Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 FAILED

#### Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 FAILED

#### Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 FAILED

#### Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 FAILED

#### Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 FAILED

#### Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 FAILED

#### Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 FAILED

#### Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

#### Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW PASSED

#### Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	⚠ FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	⚠ FAILED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

## Sequence Report



### Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



Mic500 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:03:59.410 PM)

Ch1 0.969 mVrms

Gain (6/10/2023 7:03:59.410 PM)

Ch1 -15.788 dB

THD+N Ratio (6/10/2023 7:03:59.410 PM)

Ch1 22.129697 %

Frequency (6/10/2023 7:03:59.410 PM)

Ch1 59.9551 Hz

## Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/10/2023 7:04:21 PM

RMS Level (6/10/2023 7:04:21.478 PM)

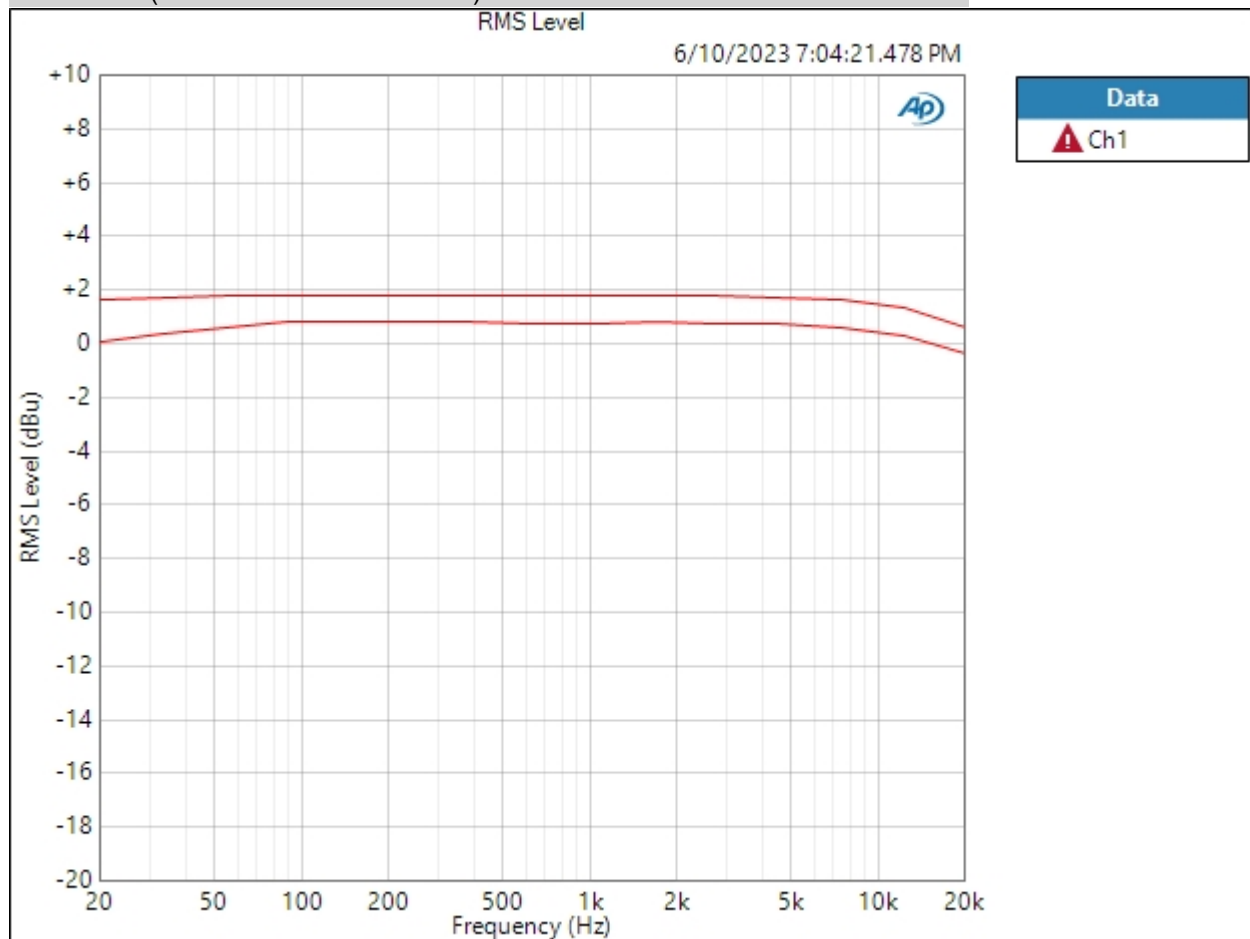


Ch1 Failed Lower Limit

## Sequence Report



Result: ▲ FAILED


THD+N Ratio (6/10/2023 7:04:21.478 PM)

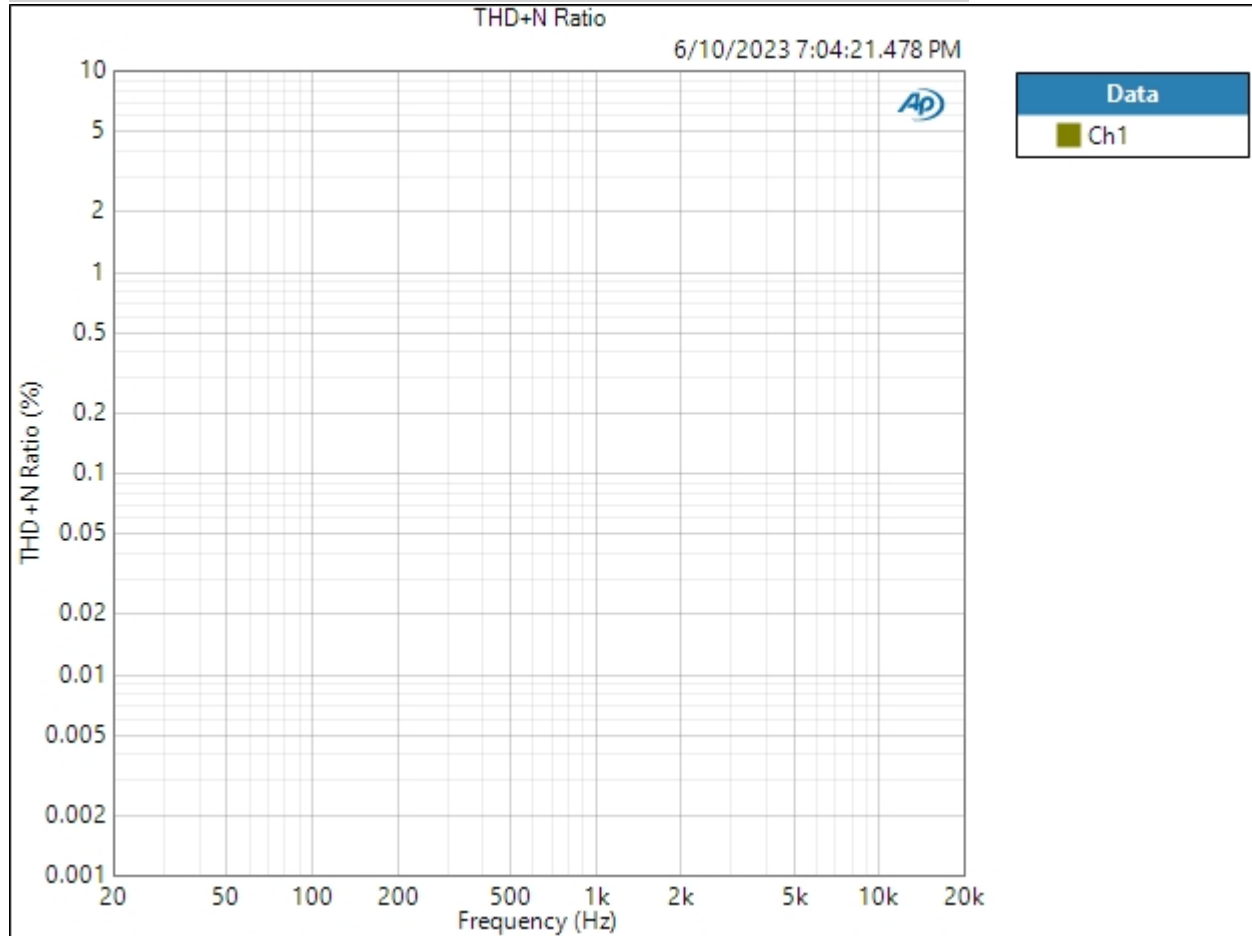

Result: ✔ PASSED

THD Ratio (6/10/2023 7:04:21.478 PM)

Sequence Report

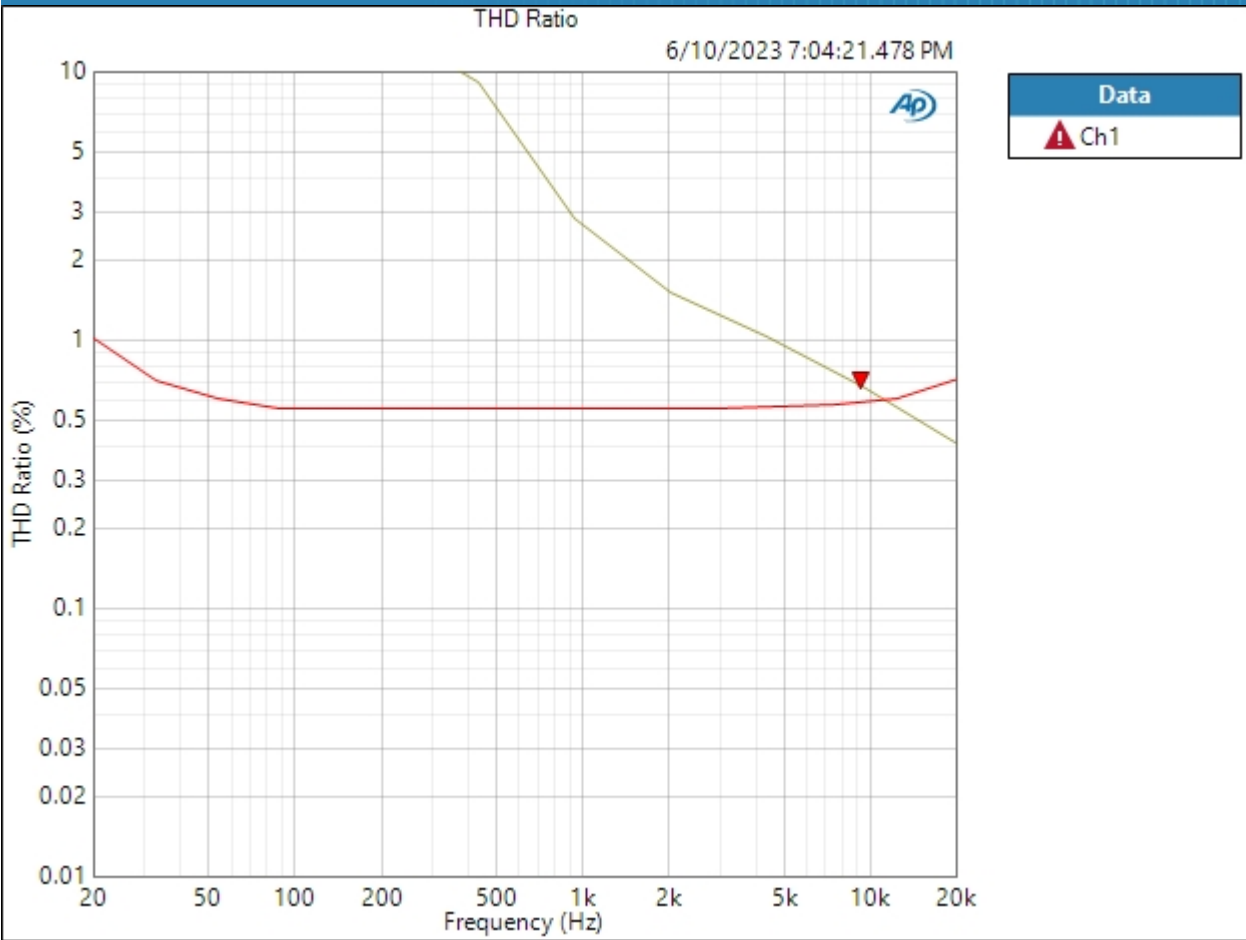

Ch1 Failed Upper Limit

Result: FAILED

## Sequence Report



### Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.



## Sequence Report



Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:04:27.184 PM)

Ch1 0.966 mVrms

Gain (6/10/2023 7:04:27.184 PM)

Ch1 -15.775 dB

THD+N Ratio (6/10/2023 7:04:27.184 PM)

Ch1 21.820110 %

Frequency (6/10/2023 7:04:27.184 PM)

Ch1 59.9546 Hz

## Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/10/2023 7:04:47 PM

RMS Level (6/10/2023 7:04:47.160 PM)

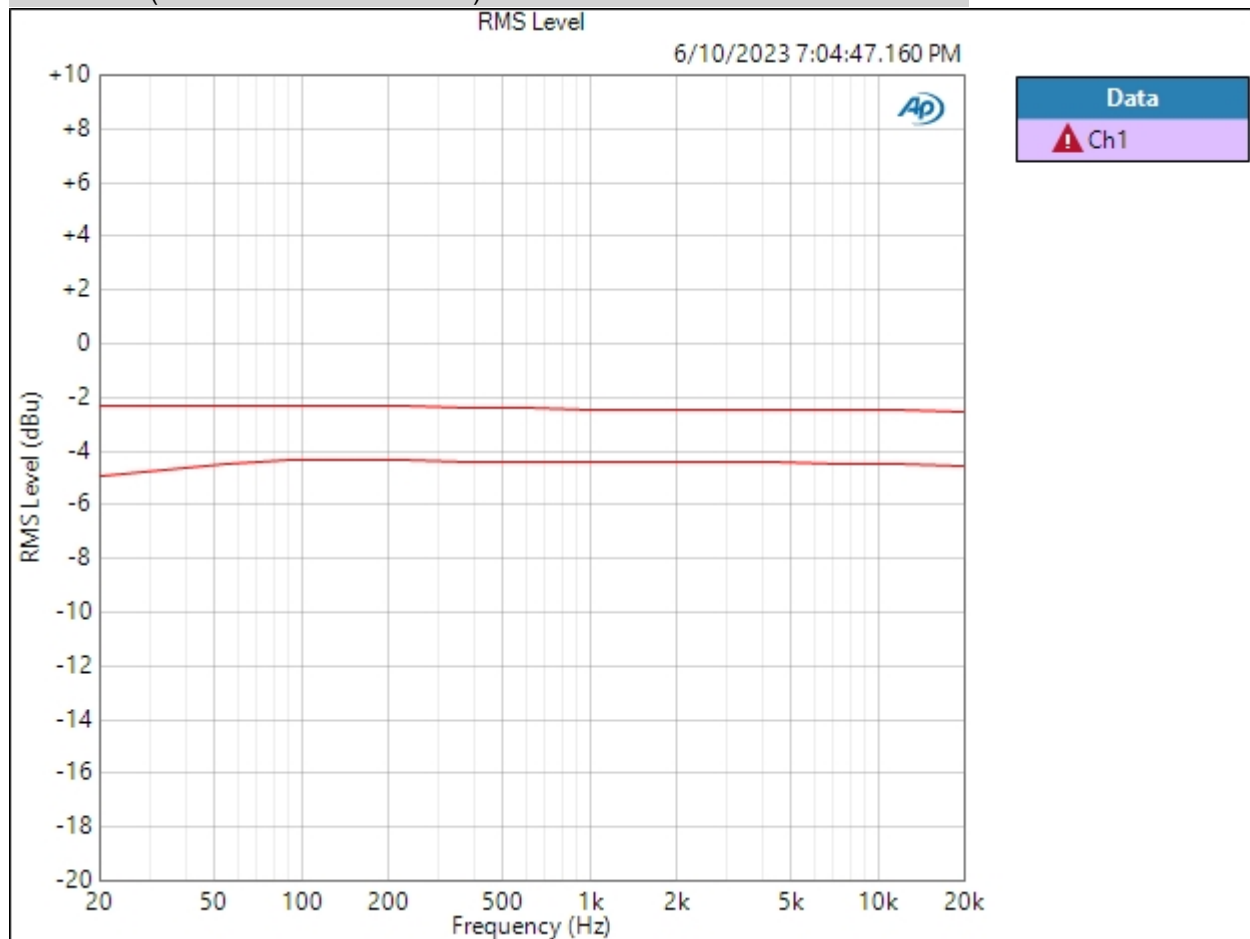


Ch1 Failed Lower Limit

# Sequence Report



Result: ▲ FAILED

THD Ratio (6/10/2023 7:04:47.160 PM)

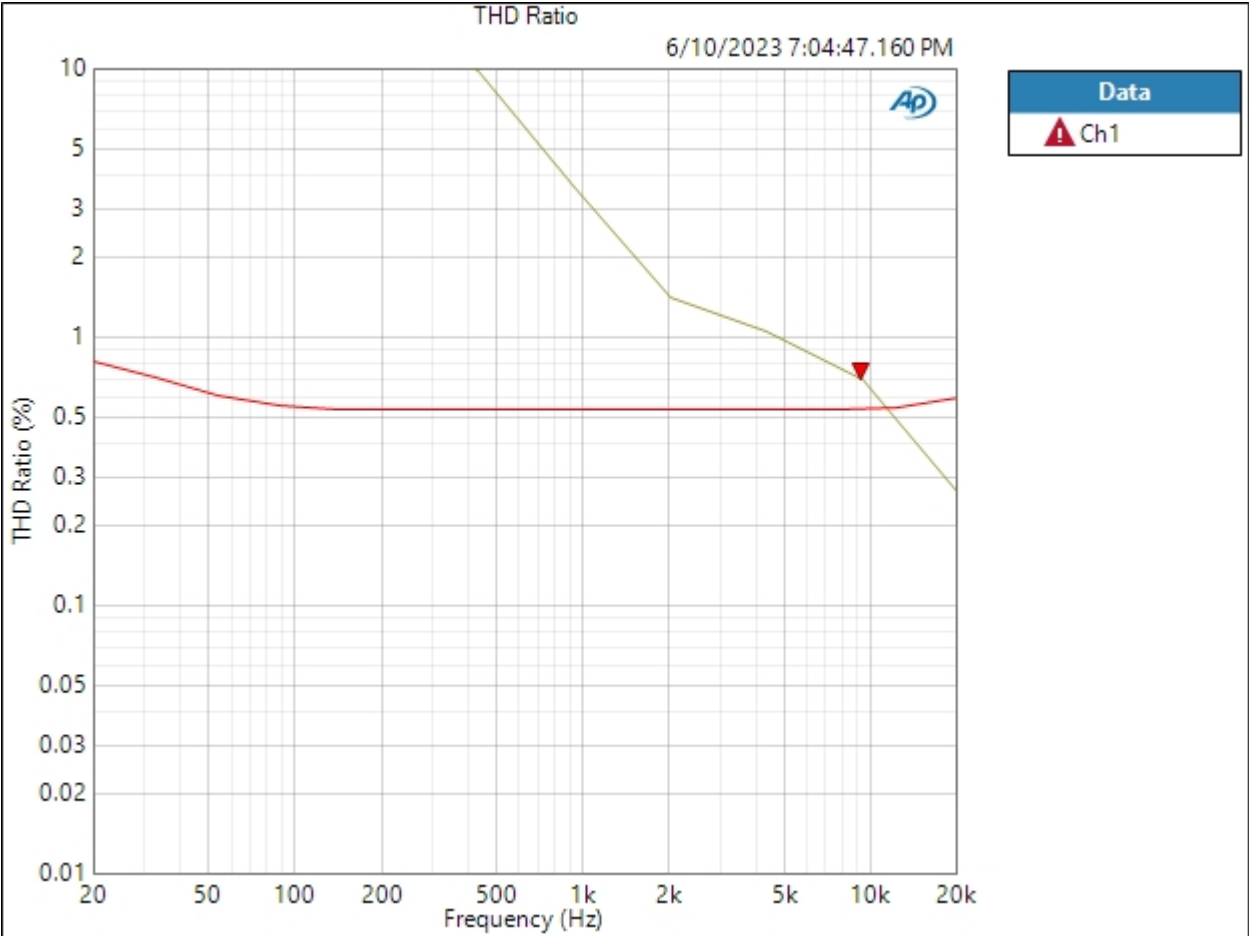

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

## Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

### • DCX

DCX is not detected.

## Sequence Report



Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:04:53.252 PM)

Ch1 0.969 mVrms

Gain (6/10/2023 7:04:53.252 PM)

Ch1 -15.744 dB

THD+N Ratio (6/10/2023 7:04:53.252 PM)

Ch1 21.794593 %

Frequency (6/10/2023 7:04:53.252 PM)

Ch1 59.9572 Hz

## Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/10/2023 7:05:15 PM

RMS Level (6/10/2023 7:05:15.587 PM)

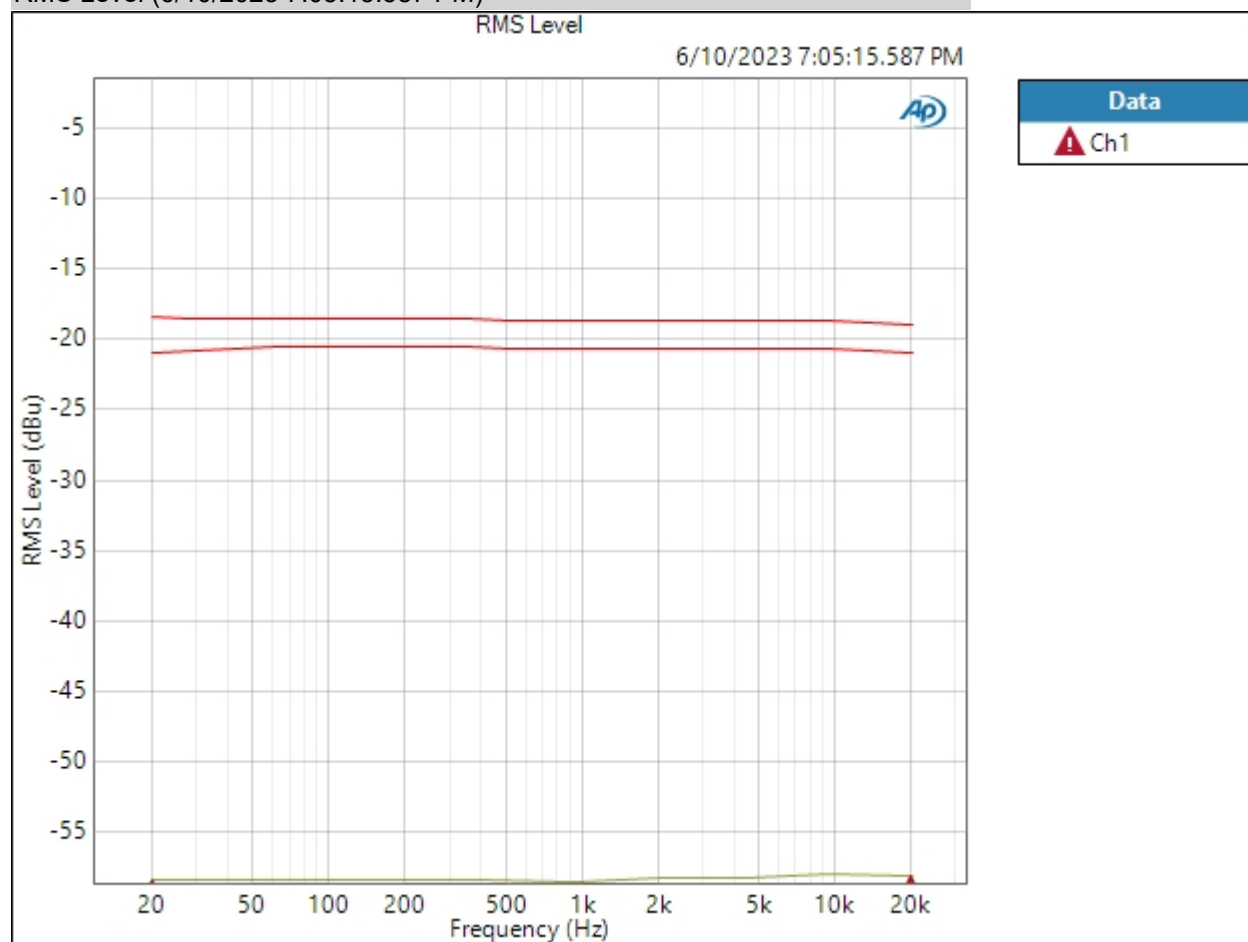

Ch1 Failed Lower Limit

6/10/2023 7:08 PM


Page 14 of 45

## Sequence Report



Result: ▲ FAILED

THD Ratio (6/10/2023 7:05:15.587 PM)

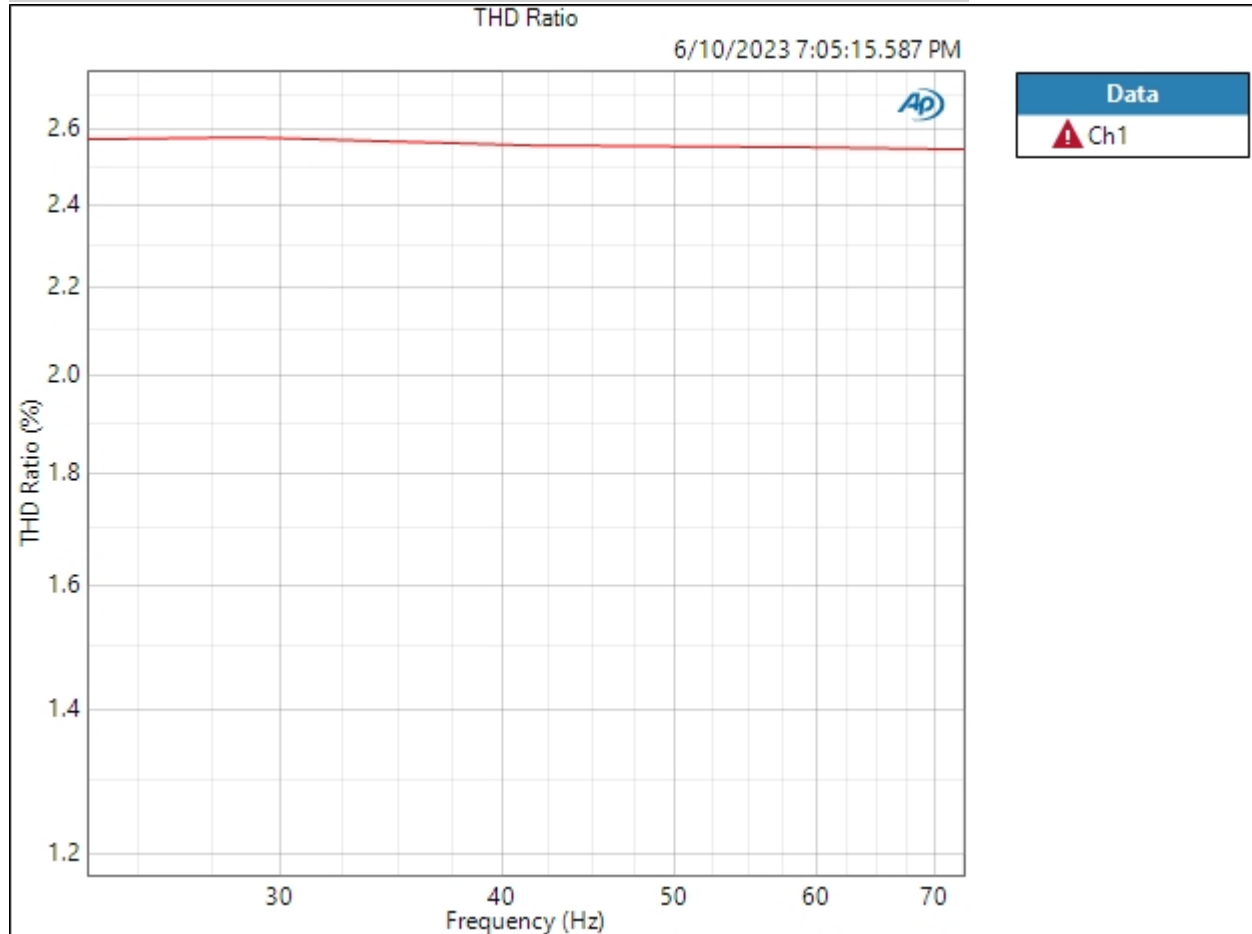

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

## Sequence Report



### Line Gain -10 200kTermination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.



## Sequence Report



Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:05:22.028 PM)

Ch1 0.926 mVrms

Gain (6/10/2023 7:05:22.028 PM)

Ch1 -58.475 dB

THD+N Ratio (6/10/2023 7:05:22.028 PM)

Ch1 22.798272 %

Frequency (6/10/2023 7:05:22.028 PM)

Ch1 59.9739 Hz

## Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/10/2023 7:05:54 PM

RMS Level (6/10/2023 7:05:54.860 PM)

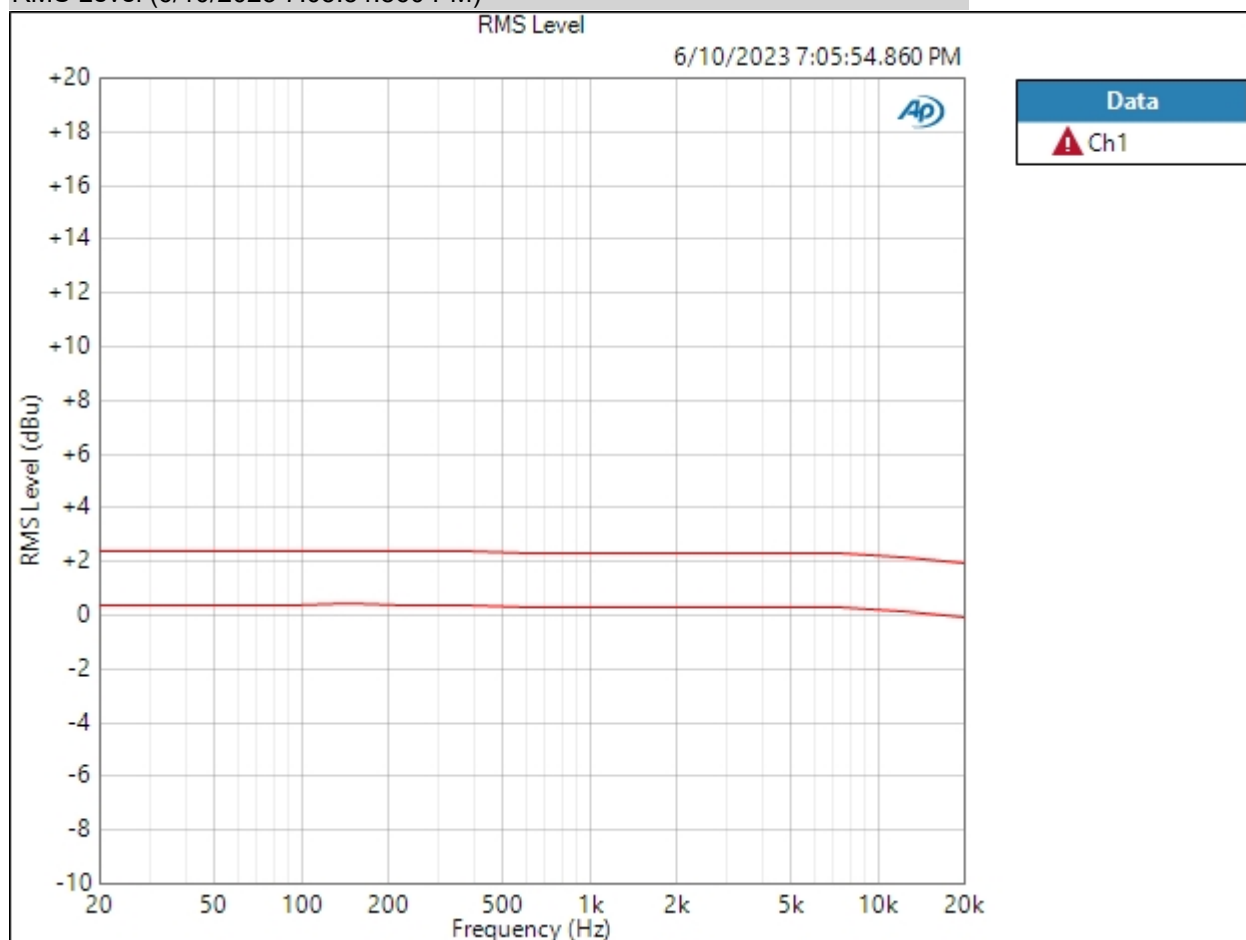


Ch1 Failed Lower Limit

# Sequence Report



Result: ▲ FAILED

THD+N Ratio (6/10/2023 7:05:54.860 PM)

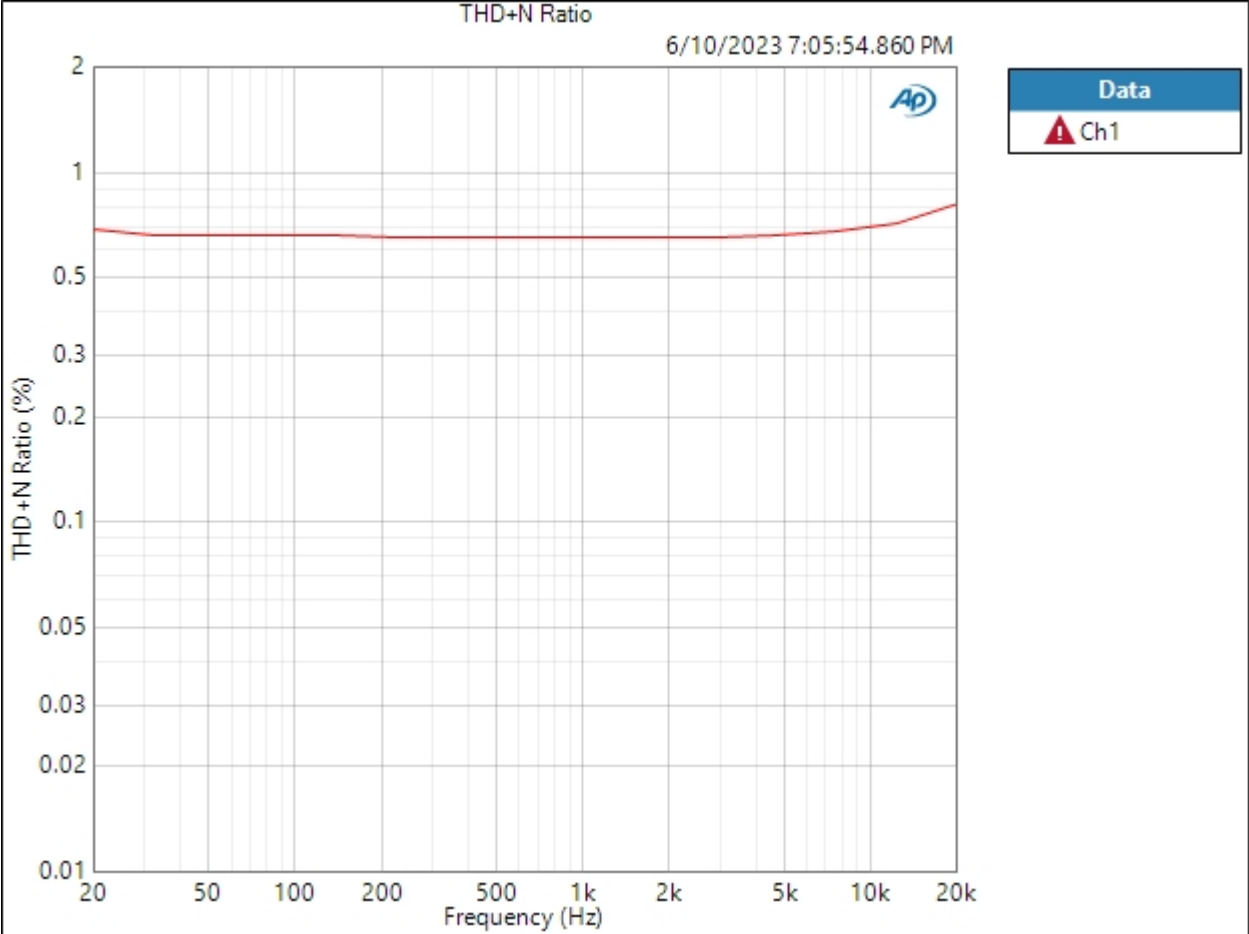

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

## Sequence Report



### Line Gain -10 600 Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 600 ohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:06:01.410 PM)

Ch1 813.3 uVrms

Gain (6/10/2023 7:06:01.410 PM)

Ch1 -49.556 dB

THD+N Ratio (6/10/2023 7:06:01.410 PM)

Ch1 22.221591 %

Frequency (6/10/2023 7:06:01.410 PM)

Ch1 59.9843 Hz

### Line Gain -10 600 Termination : Level and Gain -10


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:06:07.186 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-59.562 dBu	-8.500 dBu	

Result:  FAILED

## Sequence Report



### Line Gain +5 200kTermination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:06:13.249 PM)

Ch1 5.029 mVrms

Gain (6/10/2023 7:06:13.249 PM)

Ch1 -43.746 dB

THD+N Ratio (6/10/2023 7:06:13.249 PM)

Ch1 23.564894 %

Frequency (6/10/2023 7:06:13.249 PM)

Ch1 59.9612 Hz

## Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/10/2023 7:06:43 PM

RMS Level (6/10/2023 7:06:43.919 PM)

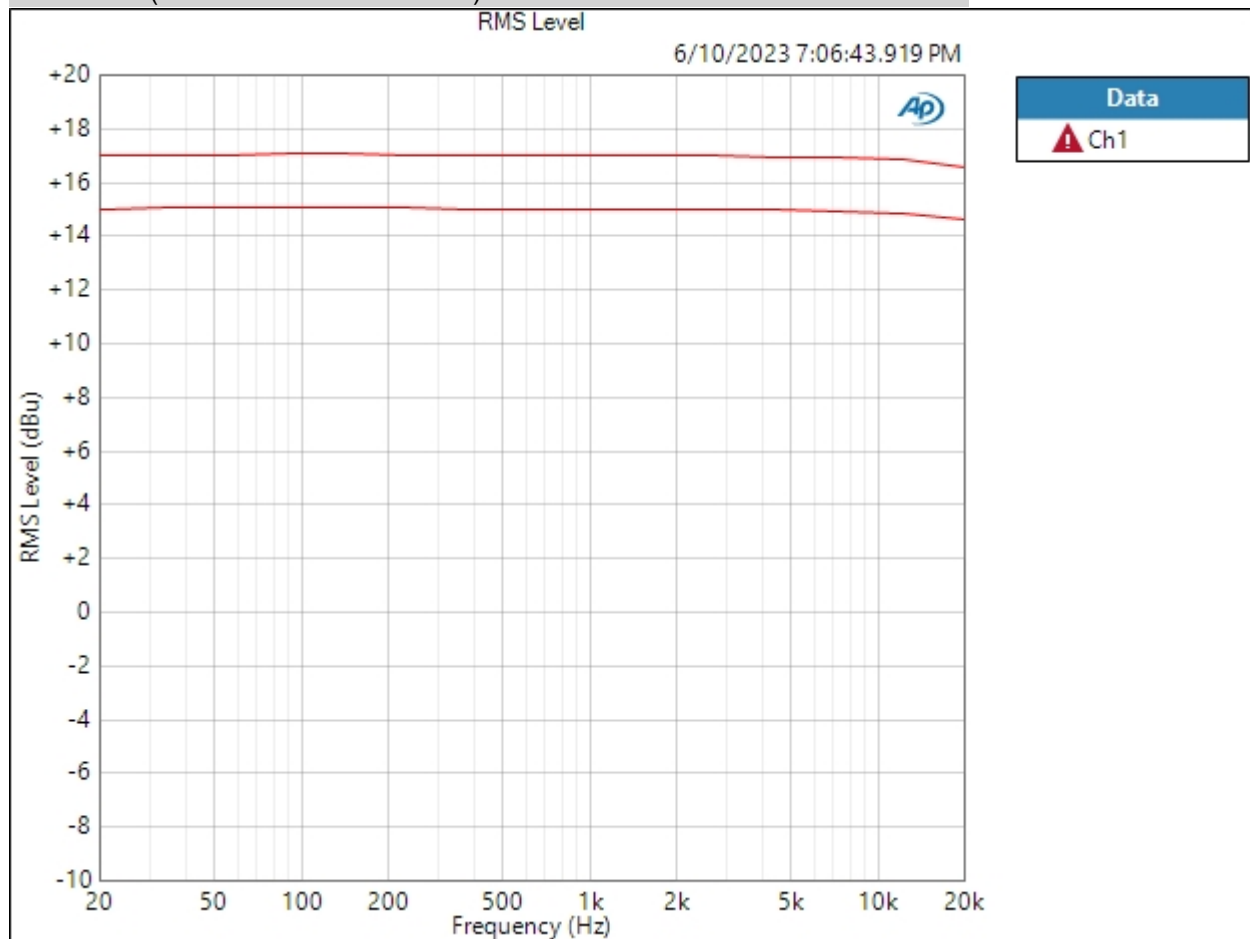

Ch1 Failed Lower Limit




# Sequence Report



Result: ▲ FAILED

THD+N Ratio (6/10/2023 7:06:43.919 PM)

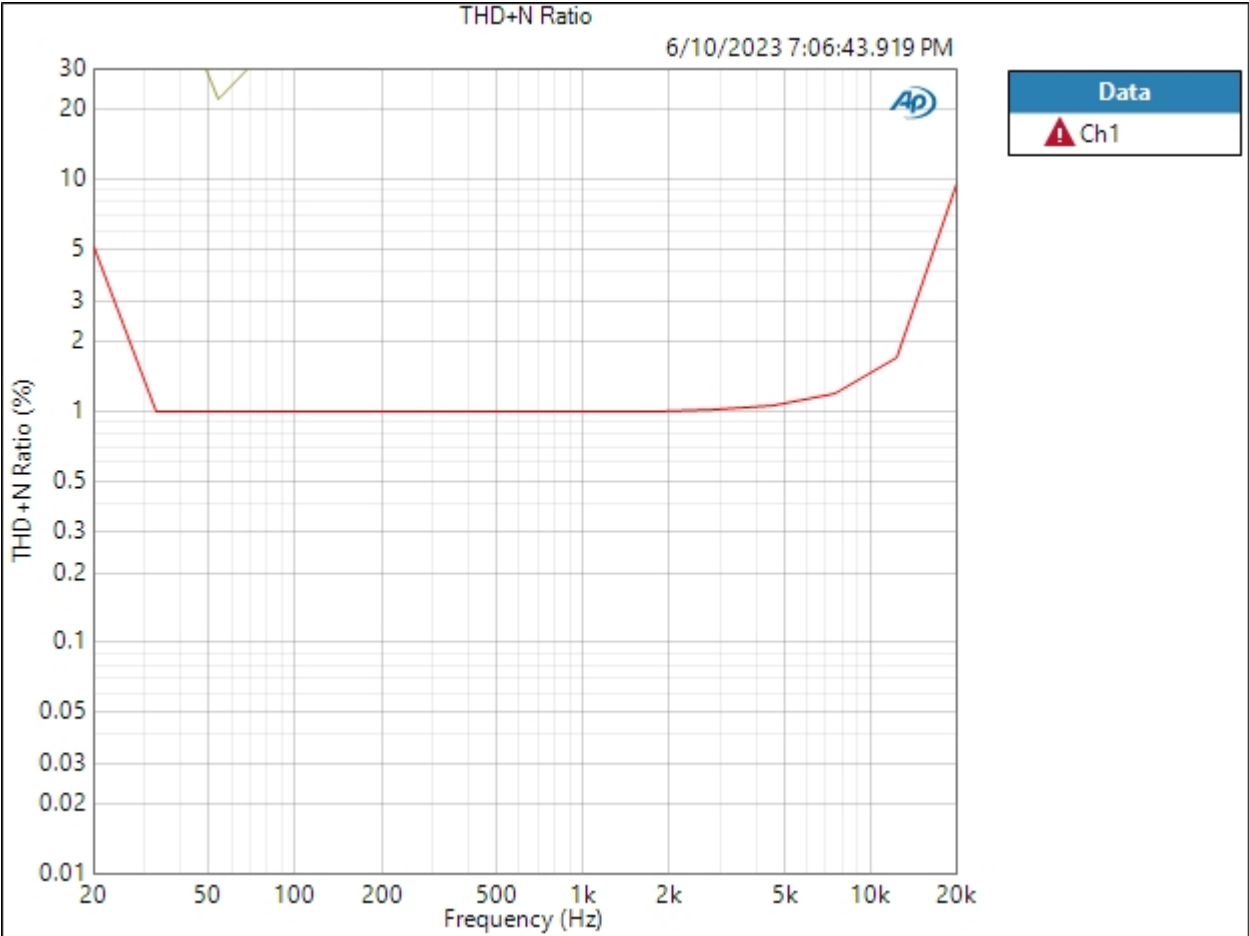

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

## Sequence Report



### Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:06:50.921 PM)

Ch1 4.444 mVrms

Gain (6/10/2023 7:06:50.921 PM)

Ch1 -34.848 dB

THD+N Ratio (6/10/2023 7:06:50.921 PM)

Ch1 21.435103 %

Frequency (6/10/2023 7:06:50.921 PM)

Ch1 59.9995 Hz

### Line Gain +5 600 Termination : Level and Gain +5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:06:56.919 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	-44.833 dBu	+6.500 dBu	

Result:  FAILED

## Sequence Report



### Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:07:02.828 PM)

Ch1 1.363 mVrms

Gain (6/10/2023 7:07:02.828 PM)

Ch1 -45.045 dB

THD+N Ratio (6/10/2023 7:07:02.828 PM)

Ch1 22.000177 %

Frequency (6/10/2023 7:07:02.828 PM)

Ch1 59.9622 Hz

### Line Gain -5 600 Termination : Level and Gain -5

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:07:08.845 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-55.063 dBu	-3.500 dBu	

Result:  FAILED

## Sequence Report



### Line Gain 0 600 Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 600 ohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:07:15.221 PM)

Ch1 2.390 mVrms

Gain (6/10/2023 7:07:15.221 PM)

Ch1 -40.166 dB

THD+N Ratio (6/10/2023 7:07:15.221 PM)

Ch1 21.828598 %

Frequency (6/10/2023 7:07:15.221 PM)

Ch1 59.9363 Hz

### Line Gain 0 600 Termination : Level and Gain 0

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:07:21.243 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-50.217 dBu	+1.500 dBu	

Result:  FAILED

## Sequence Report



### Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.



## Sequence Report



### Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:07:27.587 PM)

Ch1 7.826 mVrms

Gain (6/10/2023 7:07:27.587 PM)

Ch1 -29.895 dB

THD+N Ratio (6/10/2023 7:07:27.587 PM)

Ch1 22.426465 %

Frequency (6/10/2023 7:07:27.587 PM)

Ch1 60.0149 Hz

### Line Gain +10 600 Termination : Level and Gain +10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:07:34.024 PM)

Channel	Lower Limit	Value	Upper Limit
Ch1	+8.500 dBu	-39.807 dBu	+11.500 dBu



Result: FAILED

## Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

### • DCX

DCX is not detected.

## Sequence Report



Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:07:40.693 PM)

Ch1 8.953 mVrms

Gain (6/10/2023 7:07:40.693 PM)

Ch1 -18.738 dB

THD+N Ratio (6/10/2023 7:07:40.693 PM)

Ch1 22.712678 %

Frequency (6/10/2023 7:07:40.693 PM)

Ch1 59.9846 Hz


## Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None  
Low-pass Filter: 20 kHz  
Weighting Filter: Signal Path  
High-pass Filter: 20 Hz  
Sweep Time: 0.00:00:03.000  
Reading Rate: 10/sec  
Input Bandwidth: Use Signal Path  
Record Acquisition: False  
Measured 1 6/10/2023 7:07:52 PM

RMS Level (6/10/2023 7:07:52.965 PM)

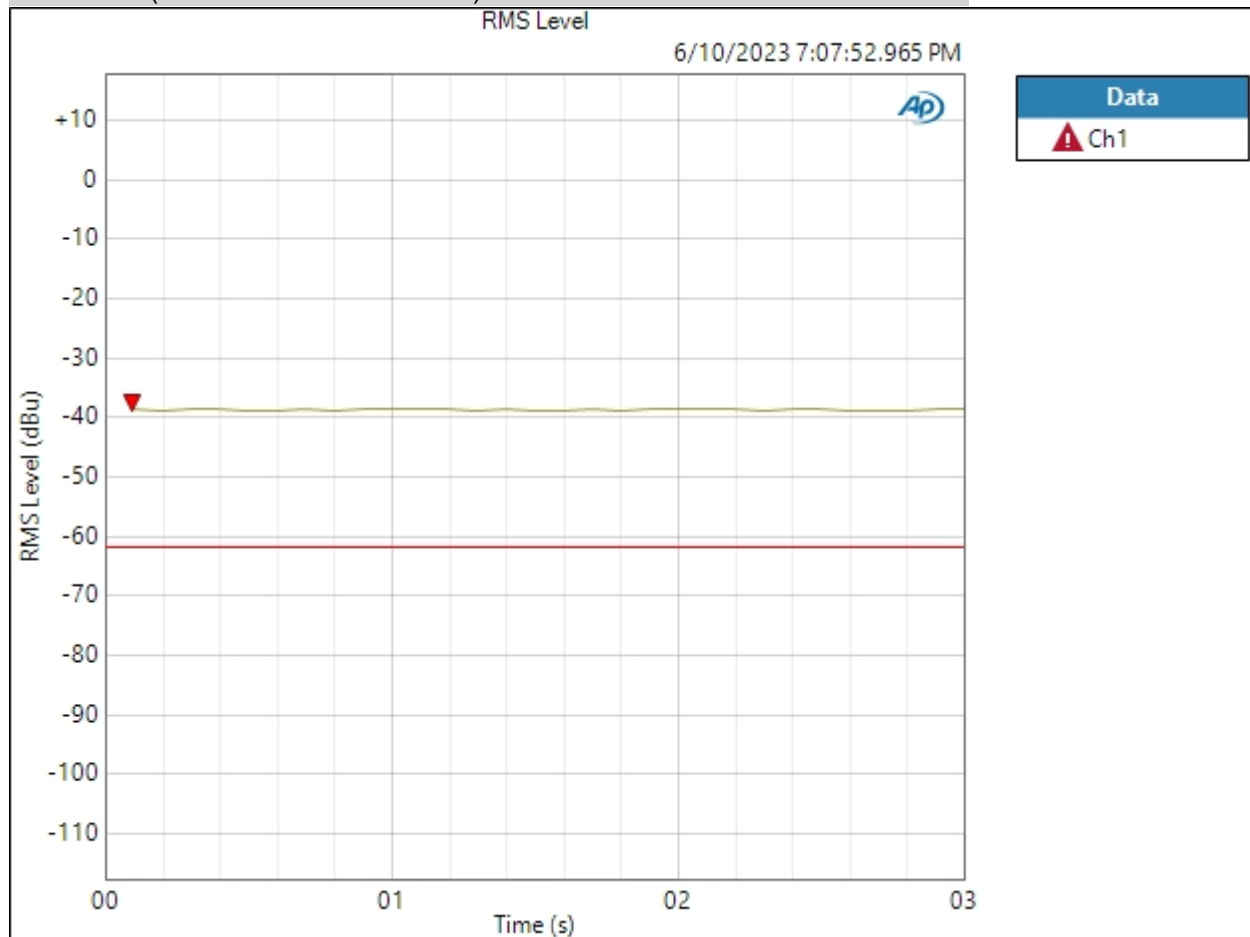

Ch1 Failed Upper Limit

Result: FAILED

6/10/2023 7:08 PM

Page 36 of 45

## Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

## • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

## • DCX

DCX is not detected.

## Sequence Report



Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:07:59.444 PM)

Ch1 25.62 uVrms

Gain (6/10/2023 7:07:59.444 PM)

Ch1 -69.626 dB

THD+N Ratio (6/10/2023 7:07:59.444 PM)

Ch1 ---- %

Frequency (6/10/2023 7:07:59.444 PM)

Ch1 ---- Hz


## Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None  
Low-pass Filter: 20 kHz  
Weighting Filter: Signal Path  
High-pass Filter: 20 Hz  
Sweep Time: 0.00:00:03.000  
Reading Rate: 10/sec  
Input Bandwidth: Use Signal Path  
Record Acquisition: False  
Measured 1 6/10/2023 7:08:05 PM

RMS Level (6/10/2023 7:08:05.438 PM)

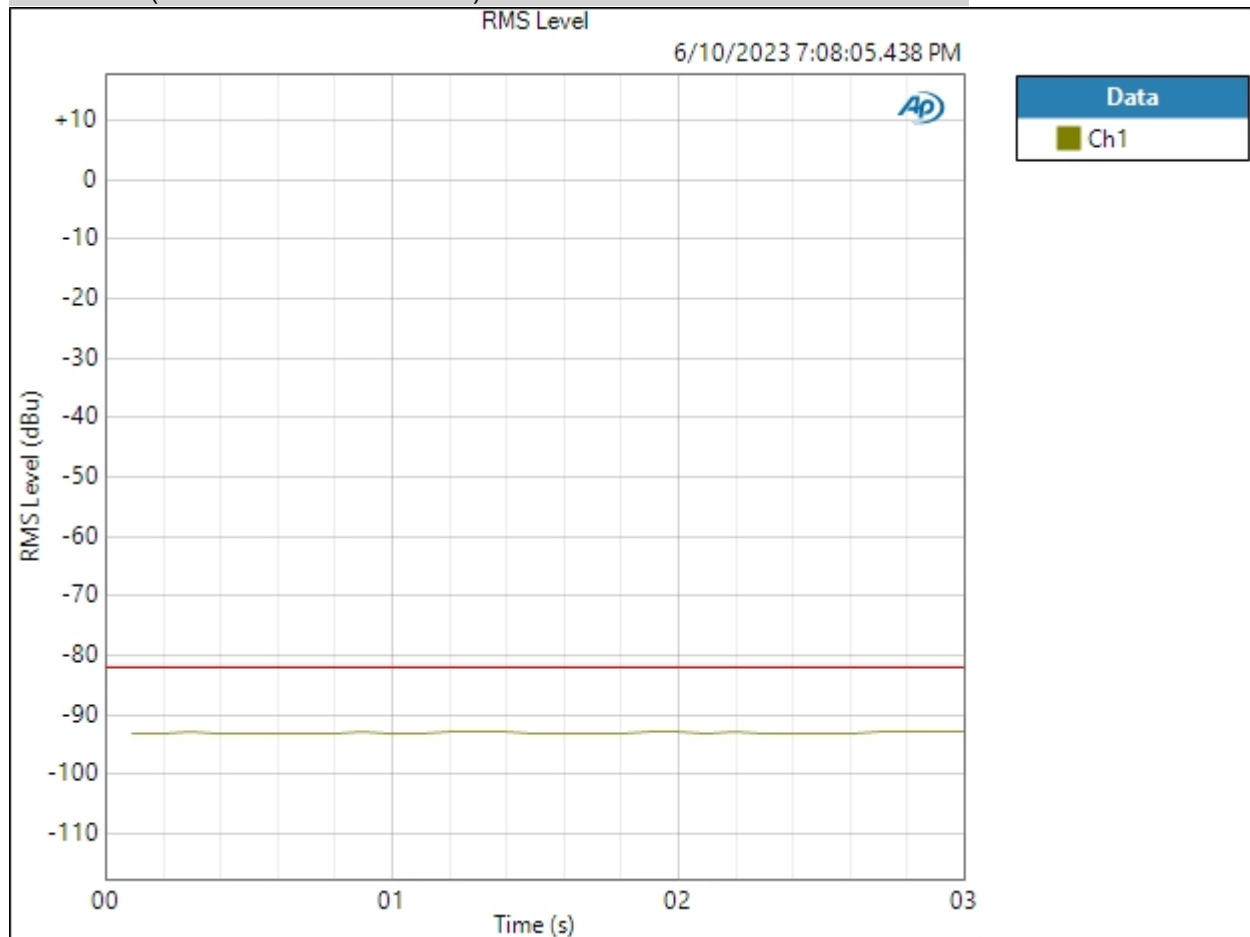

Ch1 PASSED

Result: PASSED

6/10/2023 7:08 PM

Page 39 of 45

## Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

## • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

## • DCX

DCX is not detected.



## Sequence Report



### Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:08:11.967 PM)

Ch1 0.924 mVrms

Gain (6/10/2023 7:08:11.967 PM)

Ch1 -36.167 dB

THD+N Ratio (6/10/2023 7:08:11.967 PM)

Ch1 22.628797 %

Frequency (6/10/2023 7:08:11.967 PM)

Ch1 59.9163 Hz

### Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:08:19.515 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	-58.472 dBu	+2.000 dBu	

Result:  FAILED

## Sequence Report



Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Unbalanced

Channels: 2

Source Impedance: 50 ohm

Output EQ: None

Input Connector: Analog Balanced

Channels: 1

Channel: Ch1

Termination: 200 kohm

Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)

Device Delay: 0.000 s

Input EQ: None

### • References

dBr G: 100.0 mVrms

dBm (Output Power): 600.0 ohm

W(watts) (Output Power): 8.000 ohm

Shared Frequency Reference: 1.00000 kHz

dBrA: 1.000 Vrms

dBrB: 1.000 Vrms

dBrA Offset: 0.000 dB

dBrB Offset: 0.000 dB

dB SPL1: 10.00 mVrms

dB SPL2: 10.00 mVrms

dB SPL1 Calibrator Level: 94.000 dB SPL

dB SPL2 Calibrator Level: 94.000 dB SPL

dBm (Input Power): 600.0 ohm

W(watts) (Input Power): 8.000 ohm

### • DCX

DCX is not detected.

## Sequence Report



### Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:08:25.733 PM)

Ch1 0.918 mVrms

Gain (6/10/2023 7:08:25.733 PM)

Ch1 -36.187 dB

THD+N Ratio (6/10/2023 7:08:25.733 PM)

Ch1 22.473083 %

Frequency (6/10/2023 7:08:25.733 PM)

Ch1 59.9414 Hz

### Hi Z Gain -10 47k 200k Termination : Level and Gain 47K

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:08:31.589 PM)

Channel	Lower Limit	Value	Upper Limit
Ch1	-8.000 dBu	-58.582 dBu	-4.000 dBu



Result: FAILED

## Sequence Report



### Dummy Signal Path For Report : Signal Path Setup

Output Connector: Analog Unbalanced  
Channels: 2  
Source Impedance: 50 ohm  
Output EQ: None  
Input Connector: Analog Unbalanced  
Channels: 2  
Termination: 100 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



Dummy Signal Path For Report : Verify Connections

Waveform: Sine

Generator Level: 100.0 mVrms

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/10/2023 7:08:36.191 PM)

Ch1 7.486 uVrms

Ch2 7.336 uVrms