Sequence Report

Summary

Mic500 200k Termination	
Signal Path Setup	PASSED
Stepped Frequency Sweep MIC 500	FAILED
Mic 2k 200k termination	
Signal Path Setup	PASSED
Stepped Frequency Sweep MIC 2K	PASSED
Mic 2k 15dB PAD 200k termination	
Signal Path Setup	PASSED
Stepped Frequency Sweep 15dB PAD	FAILED
Line Gain -10 200kTermination	
Signal Path Setup	PASSED
Stepped Frequency Sweep -10	PASSED
Line Gain -10 600 Termination	
Signal Path Setup	PASSED
Level and Gain -10	PASSED
Line Gain +5 200kTermination	
Signal Path Setup	PASSED
Stepped Frequency Sweep +5	PASSED
Line Gain +5 600 Termination	
Signal Path Setup	PASSED
Level and Gain +5	PASSED
Line Gain -5 600 Termination	
Signal Path Setup	PASSED
Level and Gain -5	PASSED
Line Gain 0 600 Termination	
Signal Path Setup	PASSED
Level and Gain 0	PASSED
Line Gain +10 600 Termination	
Signal Path Setup	PASSED
Level and Gain +10	PASSED
Line Gain +10 200k Termination Level Hi	
Signal Path Setup	PASSED
Noise Recorder (RMS) CW	FAILED
Line Gain +10 200k Termination Level Low	
Signal Path Setup	PASSED
Noise Recorder (RMS) CCW	FAILED
Hi Z Gain -10 2.2M 200k Termination	

Signal Path Setup	PASSED
Level and Gain 2.2M	FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	PASSED
Level and Gain 47K	FAILED
Dummy Signal Path For Report	
Signal Path Setup	PASSED

Sequence Result:

Sequence Result: FAILED

Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Mic500 200k Termination : Verify Connections

Waveform:	Sine
Generator Level:	-42.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:10:53.872 PM)

Ch1 880.6 mVrms

Gain (5/14/2023 3:10:53.872 PM)

Ch1 43.413 dB

THD+N Ratio (5/14/2023 3:10:53.872 PM)

Ch1 0.406290 %

Frequency (5/14/2023 3:10:53.872 PM)

Ch1 1.00000 kHz

Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level:	-42.300 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	10
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/14/2023 3:11:00 PM

RMS Level (5/14/2023 3:11:00.243 PM)

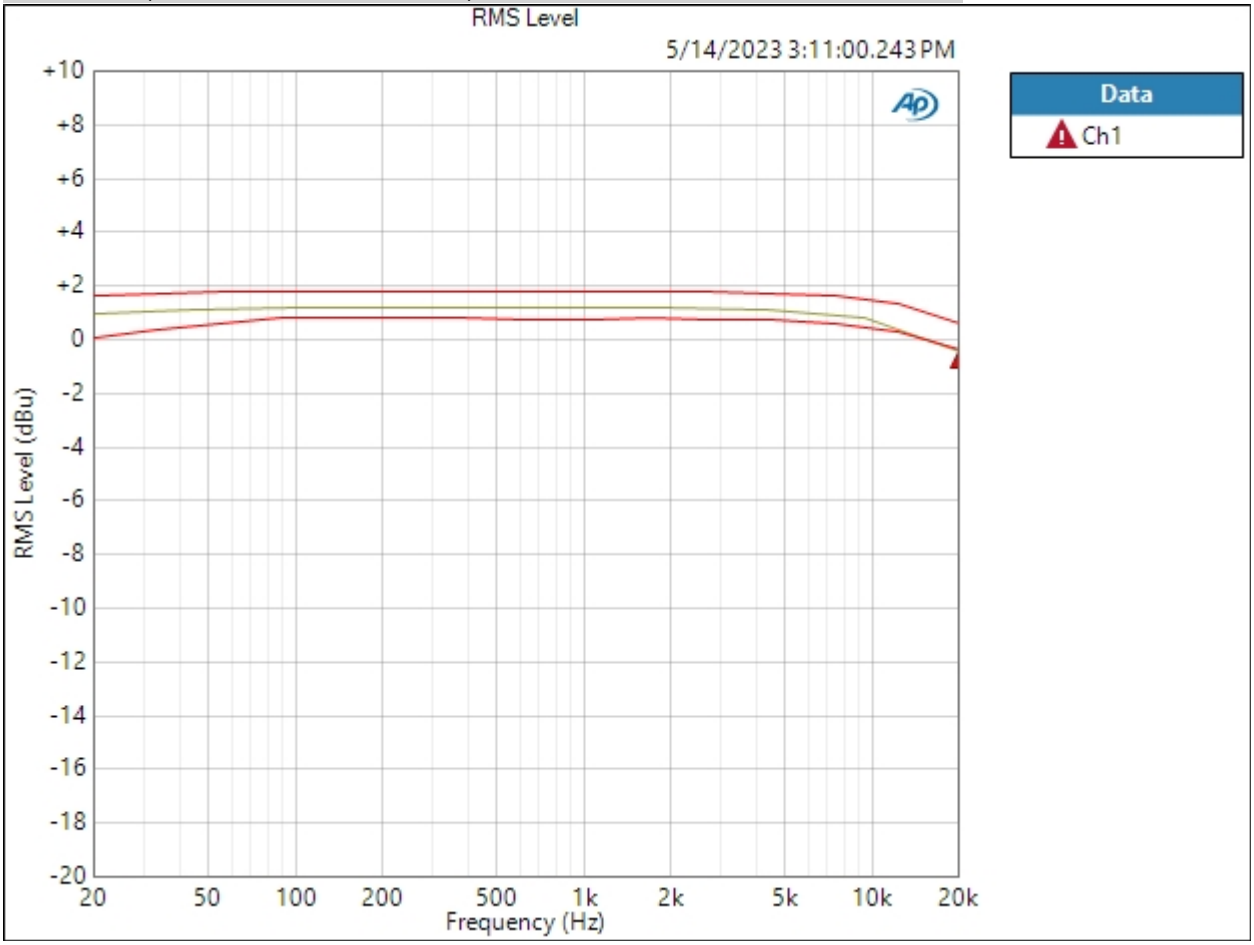

Ch1 ⚠ Failed Lower Limit

Result: FAILED

THD+N Ratio (5/14/2023 3:11:00.243 PM)

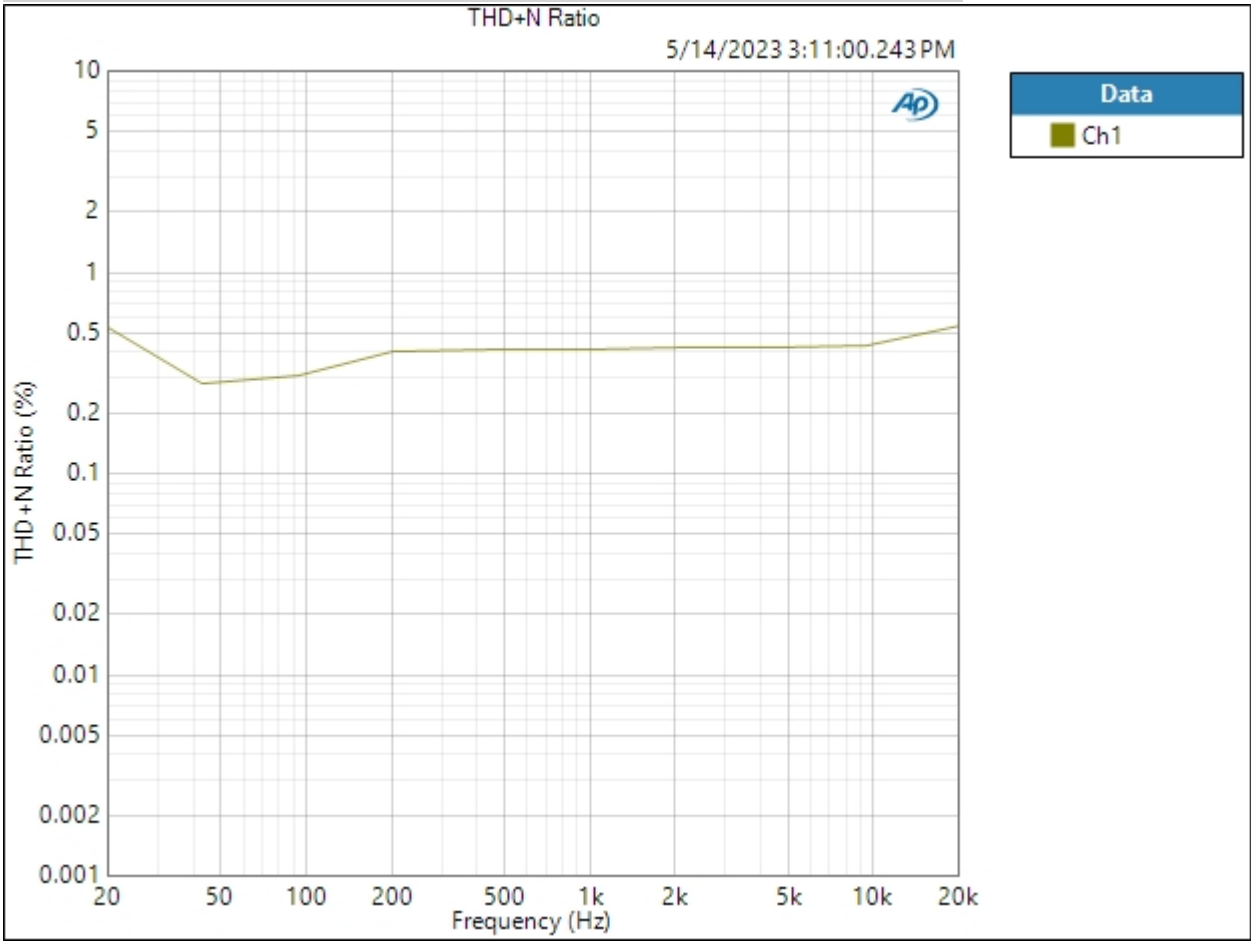

Result: PASSED

THD Ratio (5/14/2023 3:11:00.243 PM)

Ch1 PASSED

Result: PASSED

Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Mic 2k 200k termination : Verify Connections

Waveform:	Sine
Generator Level:	-42.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:11:06.194 PM)

Ch1 514.1 mVrms

Gain (5/14/2023 3:11:06.194 PM)

Ch1 38.741 dB

THD+N Ratio (5/14/2023 3:11:06.194 PM)

Ch1 0.402405 %

Frequency (5/14/2023 3:11:06.194 PM)

Ch1 1.00000 kHz

Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level:	-42.300 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	10
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/14/2023 3:11:12 PM

RMS Level (5/14/2023 3:11:12.710 PM)

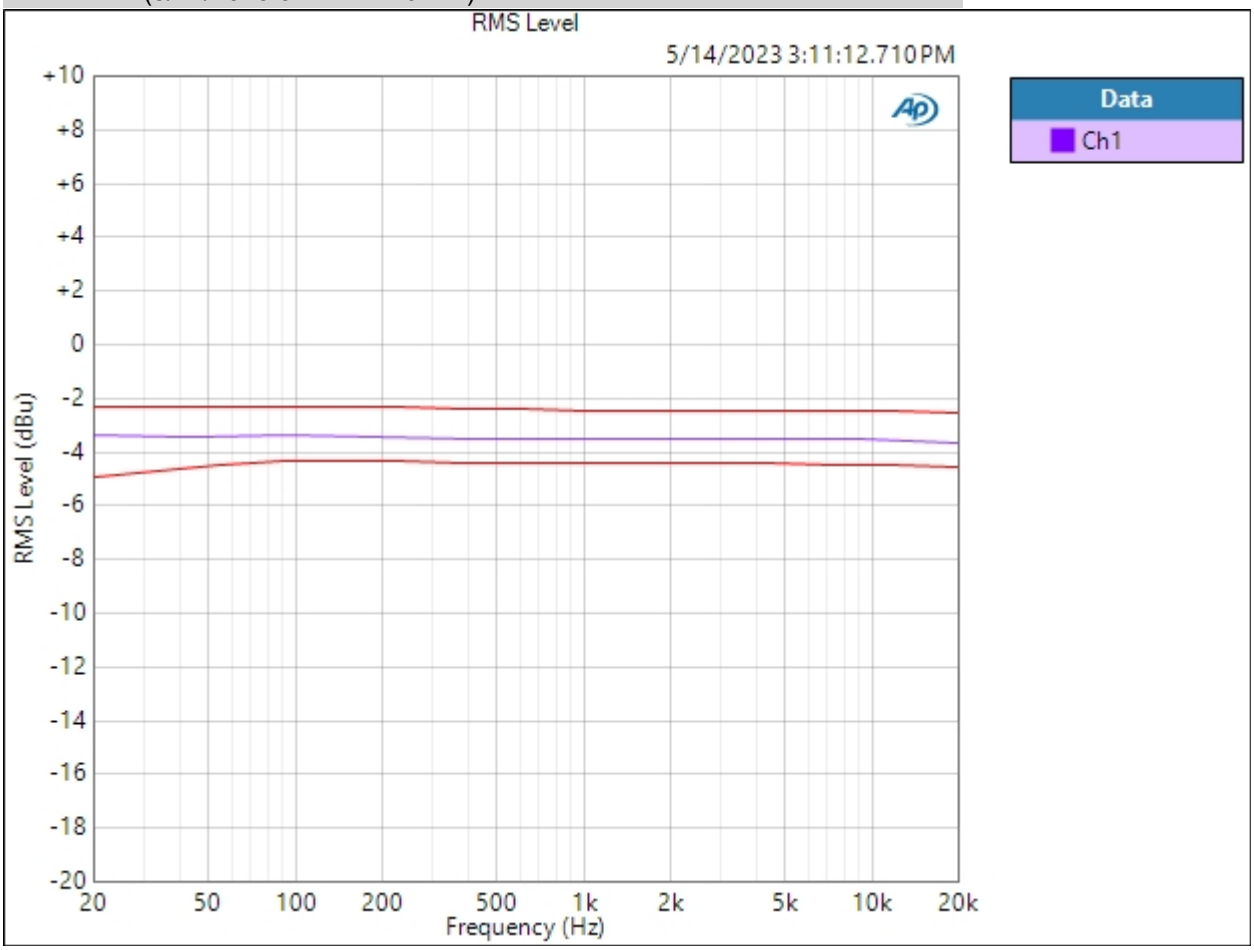

Ch1 PASSED

Result: PASSED

THD Ratio (5/14/2023 3:11:12.710 PM)

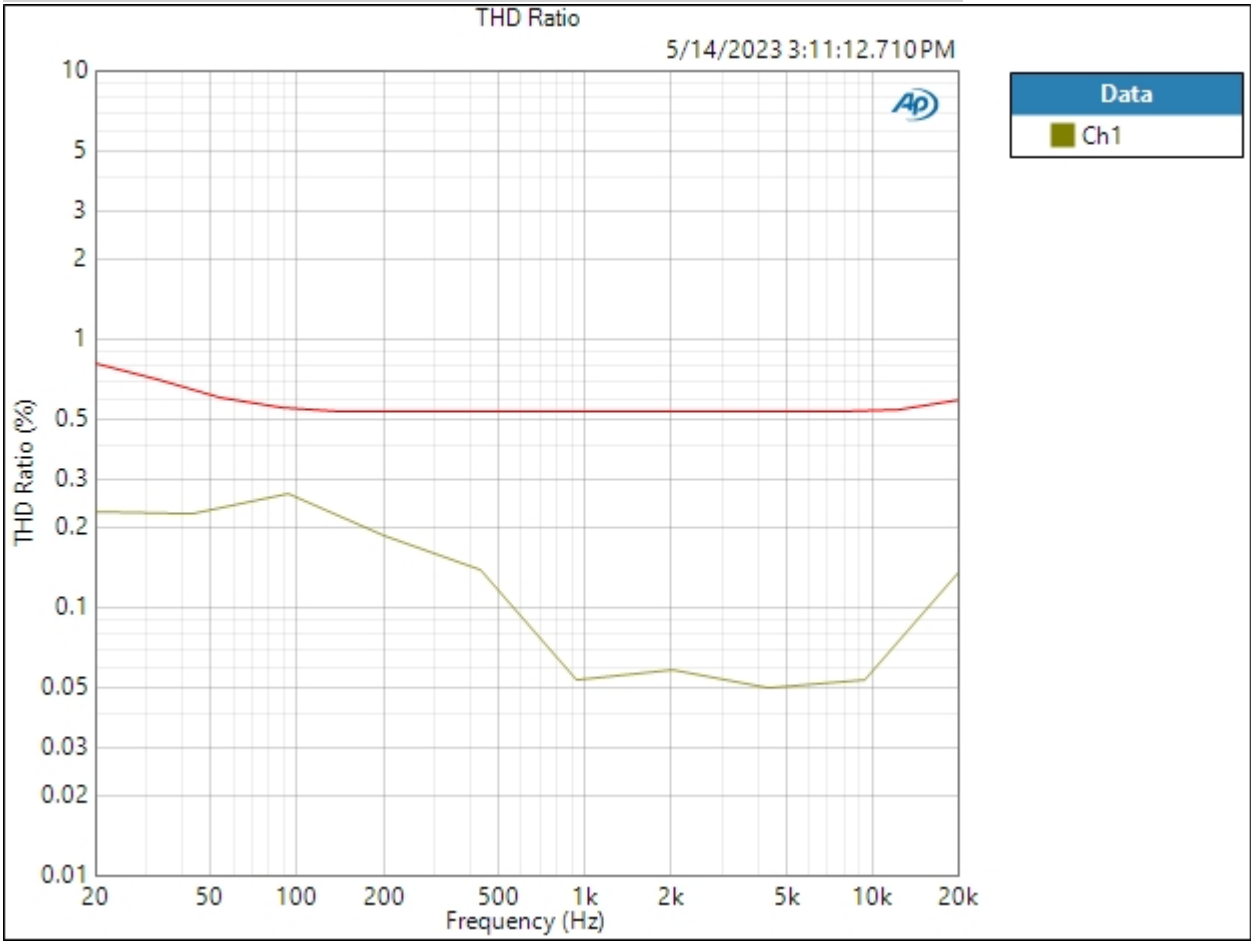

Ch1 PASSED

Result: PASSED

Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform:	Sine
Generator Level:	-42.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:11:18.536 PM)

Ch1 76.86 mVrms

Gain (5/14/2023 3:11:18.536 PM)

Ch1 22.232 dB

THD+N Ratio (5/14/2023 3:11:18.536 PM)

Ch1 3.074796 %

Frequency (5/14/2023 3:11:18.536 PM)

Ch1 1.00000 kHz

Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level:	-42.000 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	10
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/14/2023 3:11:25 PM

RMS Level (5/14/2023 3:11:25.454 PM)

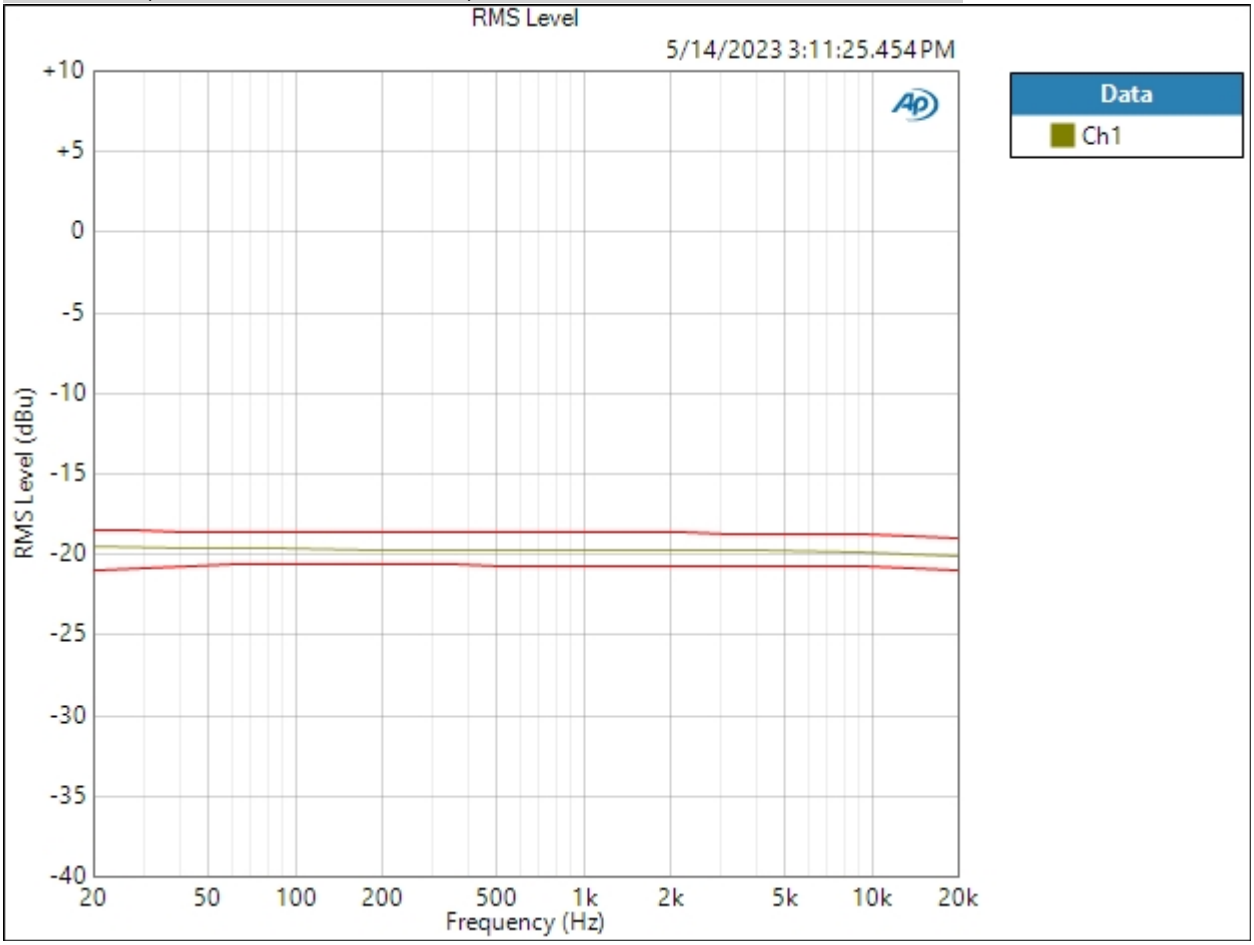

Ch1 PASSED

Result: PASSED

THD Ratio (5/14/2023 3:11:25.454 PM)

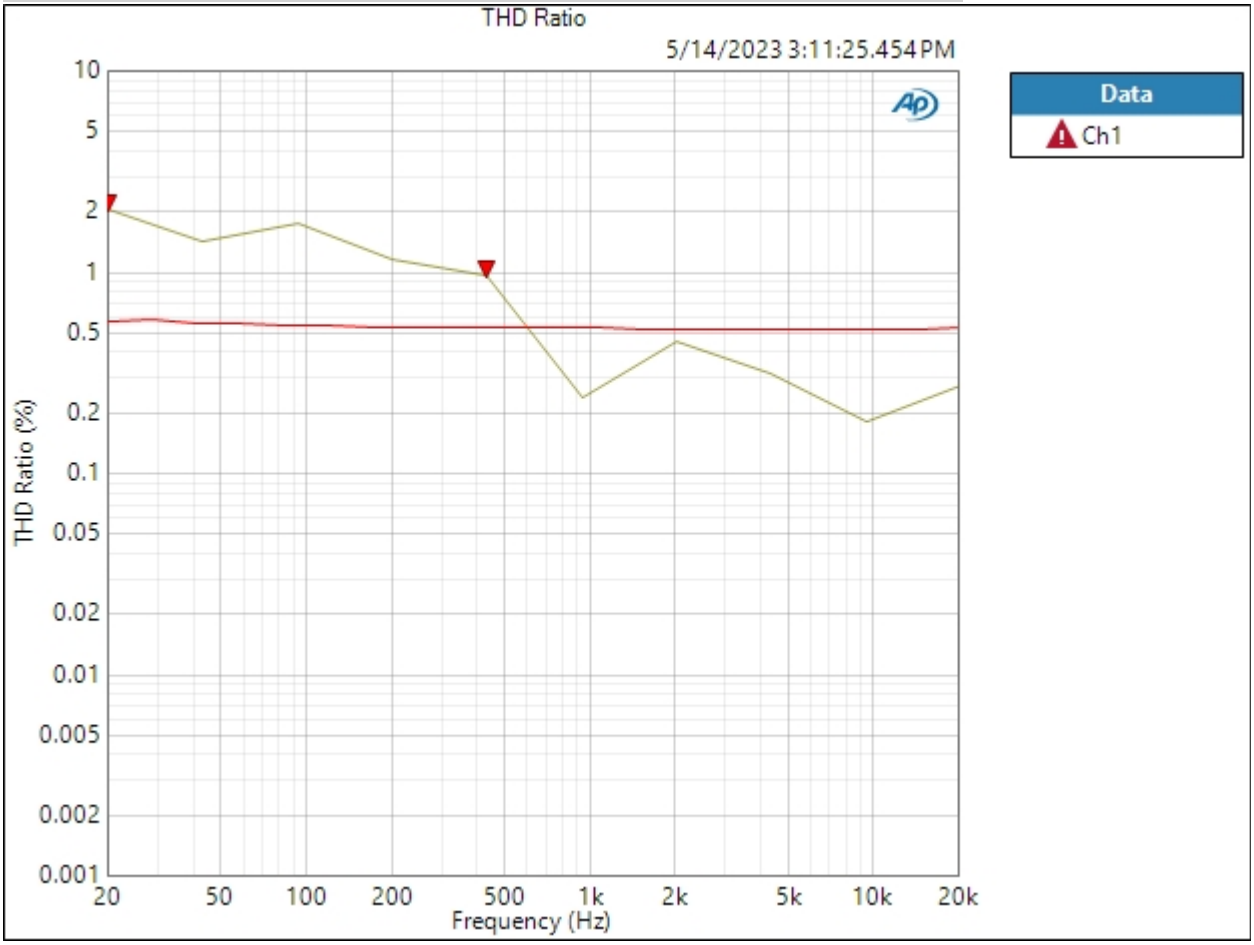

Ch1 Failed Upper Limit

Result: FAILED

Line Gain -10 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain -10 200kTermination : Verify Connections

Waveform:	Sine
Generator Level:	0.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:11:31.213 PM)

Ch1 0.904 Vrms

Gain (5/14/2023 3:11:31.213 PM)

Ch1 1.346 dB

THD+N Ratio (5/14/2023 3:11:31.213 PM)

Ch1 0.296602 %

Frequency (5/14/2023 3:11:31.213 PM)

Ch1 1.00000 kHz

Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level:	0.000 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	15
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/14/2023 3:11:41 PM

RMS Level (5/14/2023 3:11:41.093 PM)

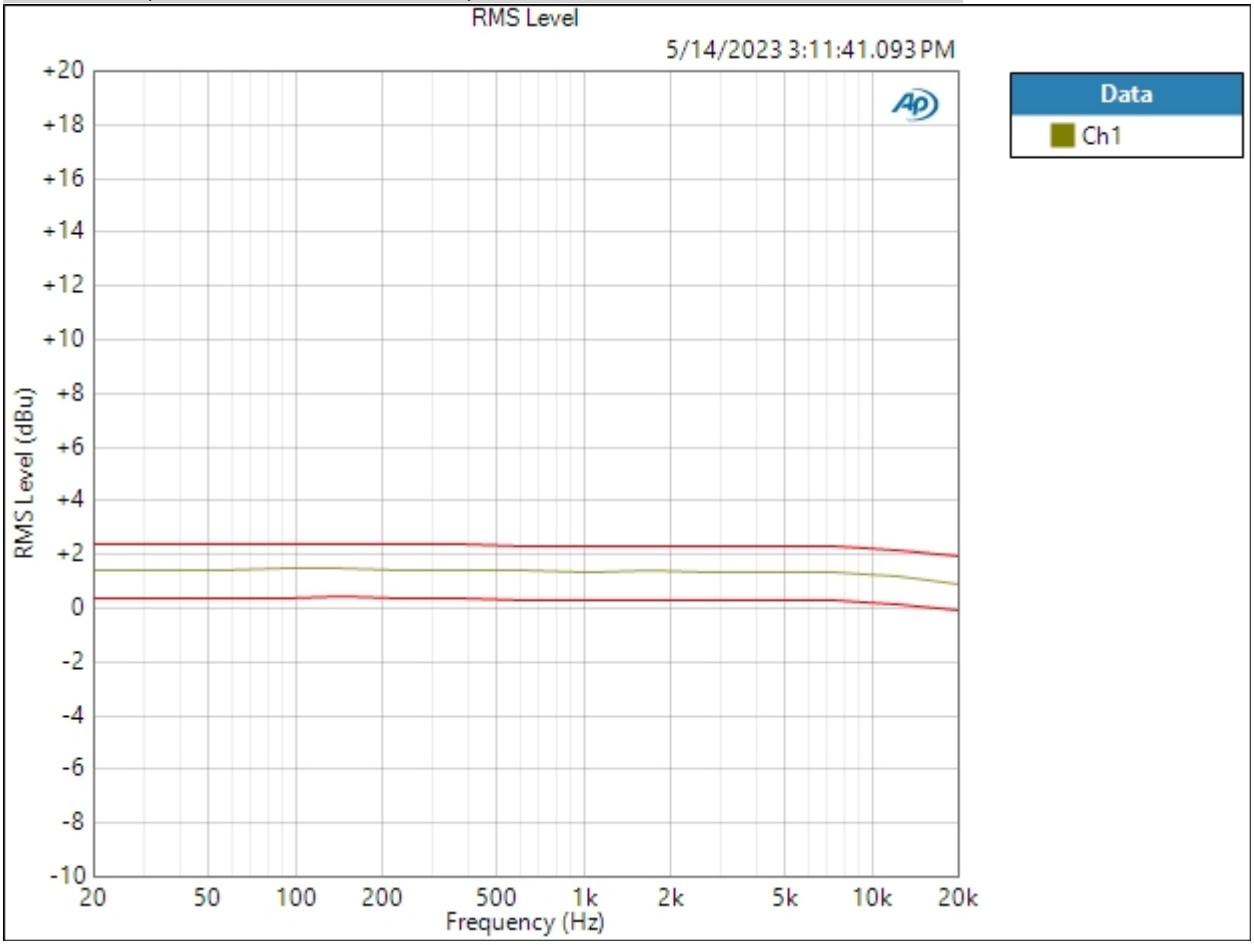

Ch1 PASSED

Result: PASSED

THD+N Ratio (5/14/2023 3:11:41.093 PM)

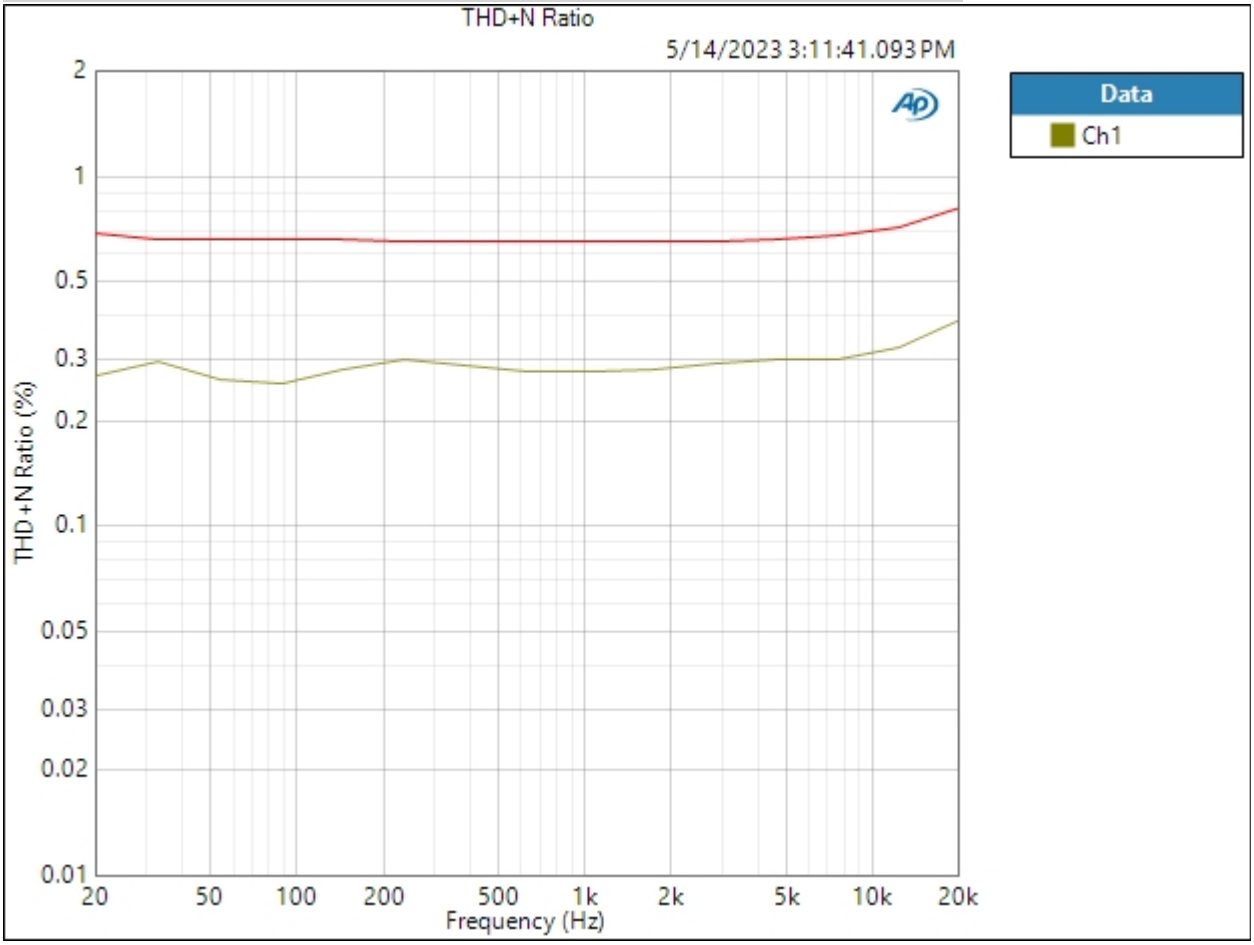

Ch1 PASSED

Result: PASSED

Line Gain -10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain -10 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:11:47.189 PM)

Ch1 251.6 mVrms

Gain (5/14/2023 3:11:47.189 PM)

Ch1 0.232 dB

THD+N Ratio (5/14/2023 3:11:47.189 PM)

Ch1 0.862698 %

Frequency (5/14/2023 3:11:47.189 PM)

Ch1 1.00000 kHz

Line Gain -10 600 Termination : Level and Gain -10

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:11:50.487 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-9.767 dBu	-8.500 dBu	✓

Result: ✓ PASSED

Line Gain +5 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +5 200kTermination : Verify Connections

Waveform:	Sine
Generator Level:	0.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:11:56.353 PM)

Ch1 4.883 Vrms

Gain (5/14/2023 3:11:56.353 PM)

Ch1 15.993 dB

THD+N Ratio (5/14/2023 3:11:56.353 PM)

Ch1 0.380579 %

Frequency (5/14/2023 3:11:56.353 PM)

Ch1 1.00000 kHz

Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level:	0.000 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	15
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/14/2023 3:12:06 PM

RMS Level (5/14/2023 3:12:06.914 PM)

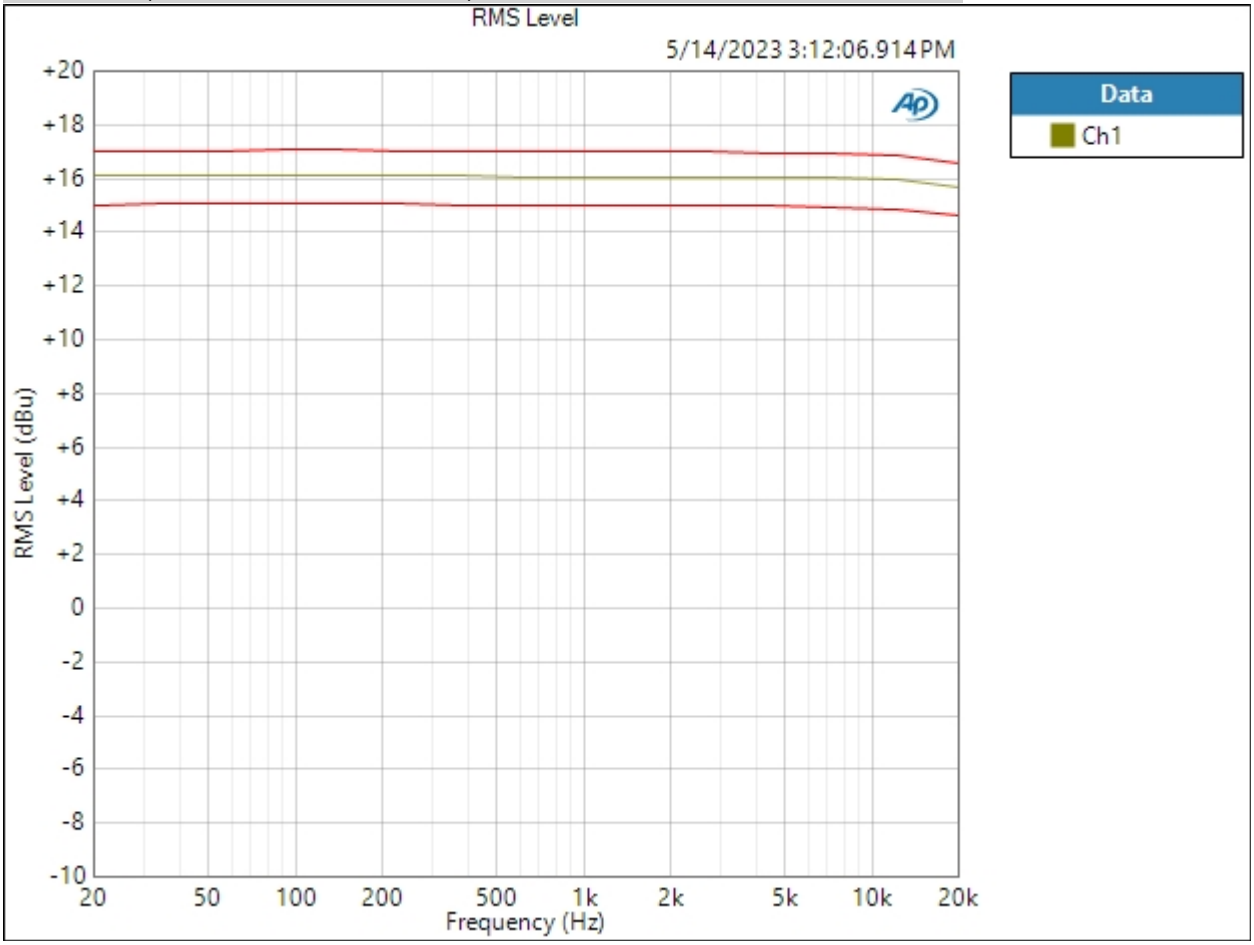

Ch1 PASSED

Result: PASSED

THD+N Ratio (5/14/2023 3:12:06.914 PM)

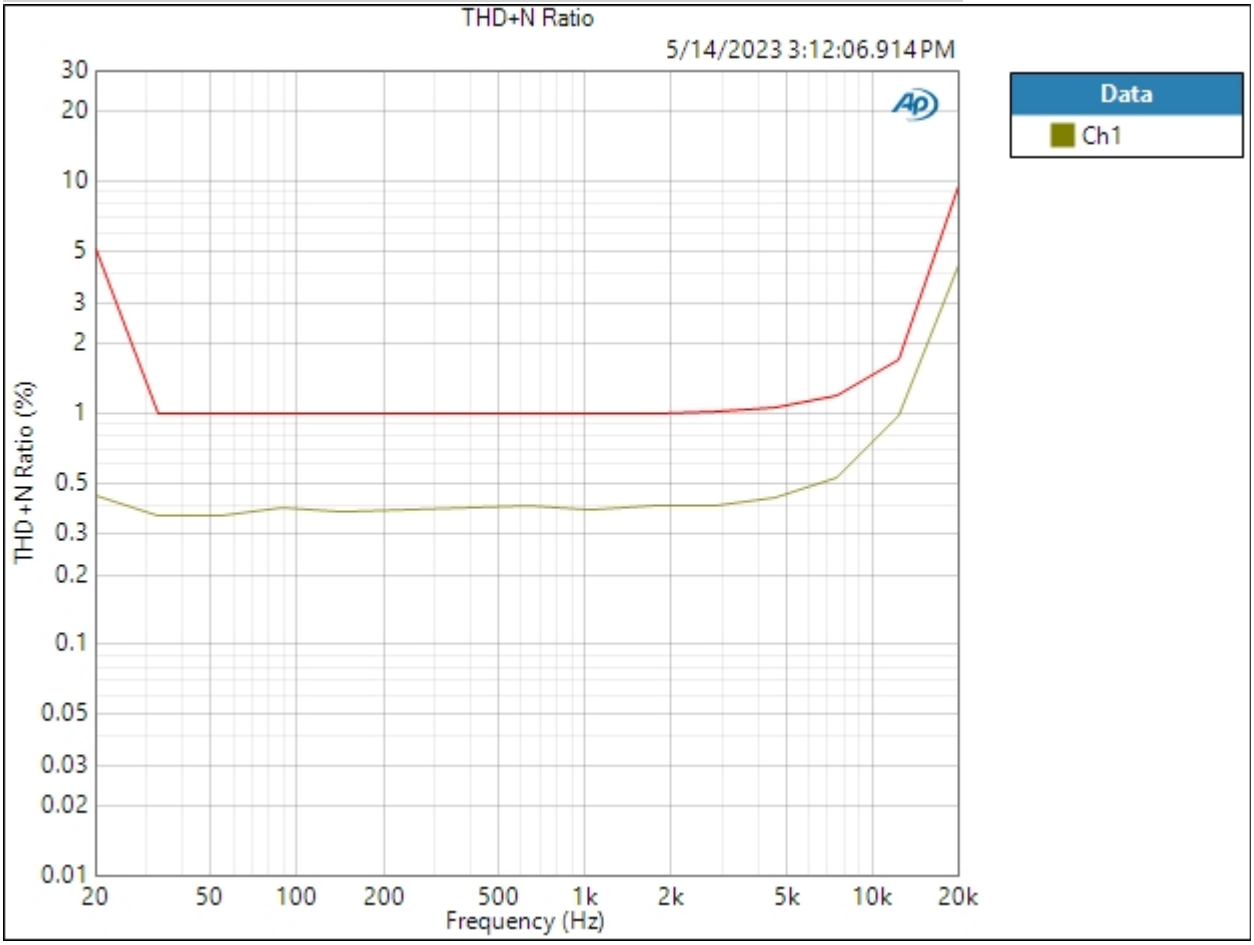

Ch1 PASSED

Result: PASSED

Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +5 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:12:13.129 PM)

Ch1 1.361 Vrms

Gain (5/14/2023 3:12:13.129 PM)

Ch1 14.898 dB

THD+N Ratio (5/14/2023 3:12:13.129 PM)

Ch1 0.905633 %

Frequency (5/14/2023 3:12:13.129 PM)

Ch1 1.00000 kHz

Line Gain +5 600 Termination : Level and Gain +5

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:12:16.462 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	+4.898 dBu	+6.500 dBu	✓

Result: ✓ PASSED

Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain -5 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:12:22.552 PM)

Ch1 421.7 mVrms

Gain (5/14/2023 3:12:22.552 PM)

Ch1 4.719 dB

THD+N Ratio (5/14/2023 3:12:22.552 PM)

Ch1 0.857386 %

Frequency (5/14/2023 3:12:22.552 PM)

Ch1 1.00000 kHz

Line Gain -5 600 Termination : Level and Gain -5

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:12:25.955 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-5.282 dBu	-3.500 dBu	✓

Result: ✓ PASSED

Line Gain 0 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain 0 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:12:32.030 PM)

Ch1 735.7 mVrms

Gain (5/14/2023 3:12:32.030 PM)

Ch1 9.551 dB

THD+N Ratio (5/14/2023 3:12:32.030 PM)

Ch1 0.896729 %

Frequency (5/14/2023 3:12:32.030 PM)

Ch1 1.00000 kHz

Line Gain 0 600 Termination : Level and Gain 0

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:12:35.401 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-0.447 dBu	+1.500 dBu	✓

Result: ✓ PASSED

Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +10 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:12:41.503 PM)

Ch1 2.405 Vrms

Gain (5/14/2023 3:12:41.503 PM)

Ch1 19.842 dB

THD+N Ratio (5/14/2023 3:12:41.503 PM)

Ch1 1.055493 %

Frequency (5/14/2023 3:12:41.503 PM)

Ch1 1.00000 kHz

Line Gain +10 600 Termination : Level and Gain +10

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:12:44.946 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	+9.842 dBu	+11.500 dBu	✓

Result: ✓ PASSED

Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform:	Sine
Generator Level:	-20.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:12:51.098 PM)

Ch1 866.7 mVrms

Gain (5/14/2023 3:12:51.098 PM)

Ch1 20.974 dB

THD+N Ratio (5/14/2023 3:12:51.098 PM)

Ch1 3.545130 %

Frequency (5/14/2023 3:12:51.098 PM)

Ch1 1.00000 kHz

Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform:	None
Low-pass Filter:	20 kHz
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Sweep Time:	0.00:00:03.000
Reading Rate:	10/sec
Input Bandwidth:	Use Signal Path
Record Acquisition:	False
Measured 1	5/14/2023 3:12:56 PM

RMS Level (5/14/2023 3:12:56.243 PM)

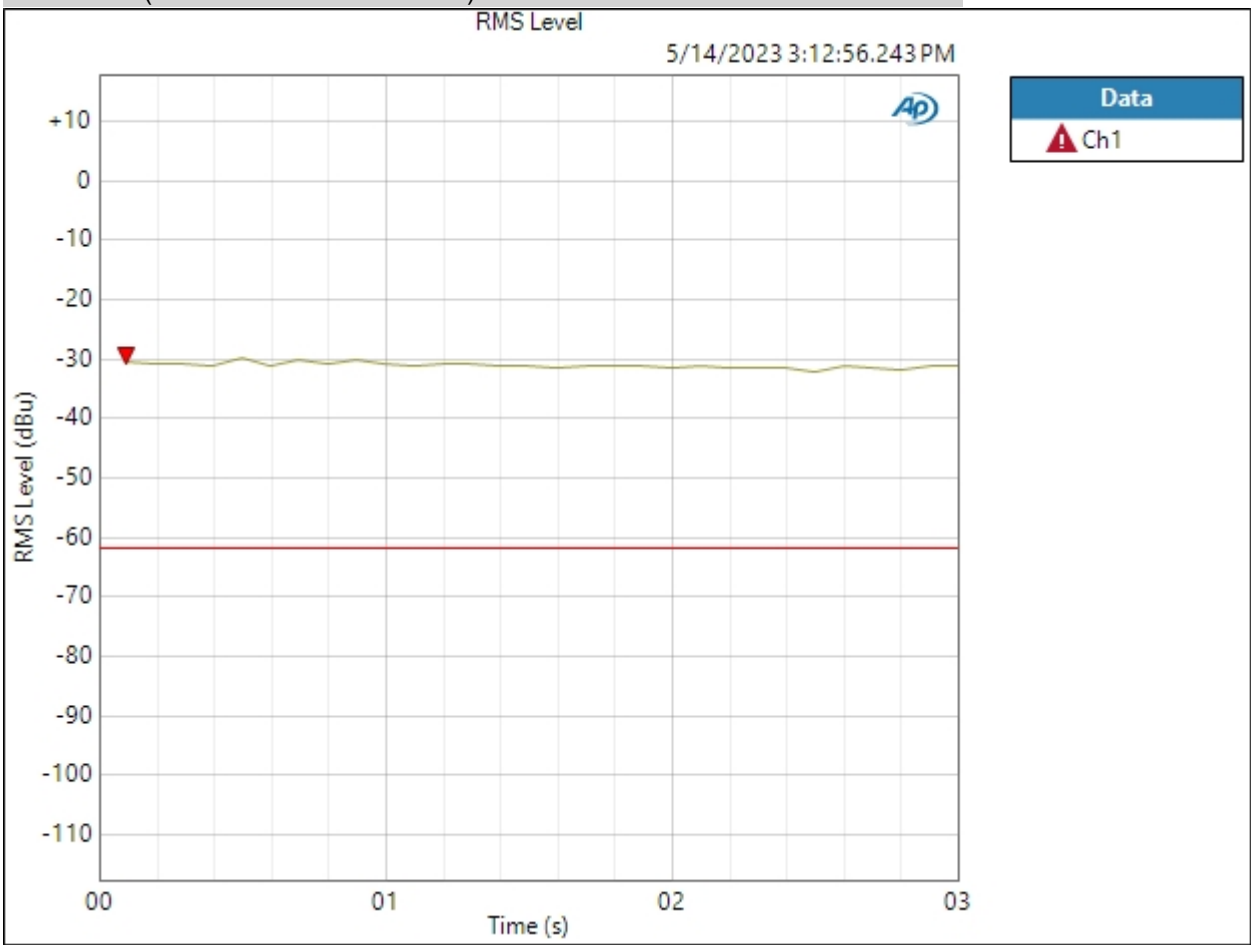

Ch1 ⚠ Failed Upper Limit

Result: ⚠ FAILED

Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +10 200k Termination Level Low : Verify Connections

Waveform:	Sine
Generator Level:	-20.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:13:02.433 PM)

Ch1 867.8 mVrms

Gain (5/14/2023 3:13:02.433 PM)

Ch1 20.985 dB

THD+N Ratio (5/14/2023 3:13:02.433 PM)

Ch1 3.775190 %

Frequency (5/14/2023 3:13:02.433 PM)

Ch1 1.00000 kHz

Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform:	None
Low-pass Filter:	20 kHz
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Sweep Time:	0.00:00:03.000
Reading Rate:	10/sec
Input Bandwidth:	Use Signal Path
Record Acquisition:	False
Measured 1	5/14/2023 3:13:08 PM

RMS Level (5/14/2023 3:13:08.287 PM)

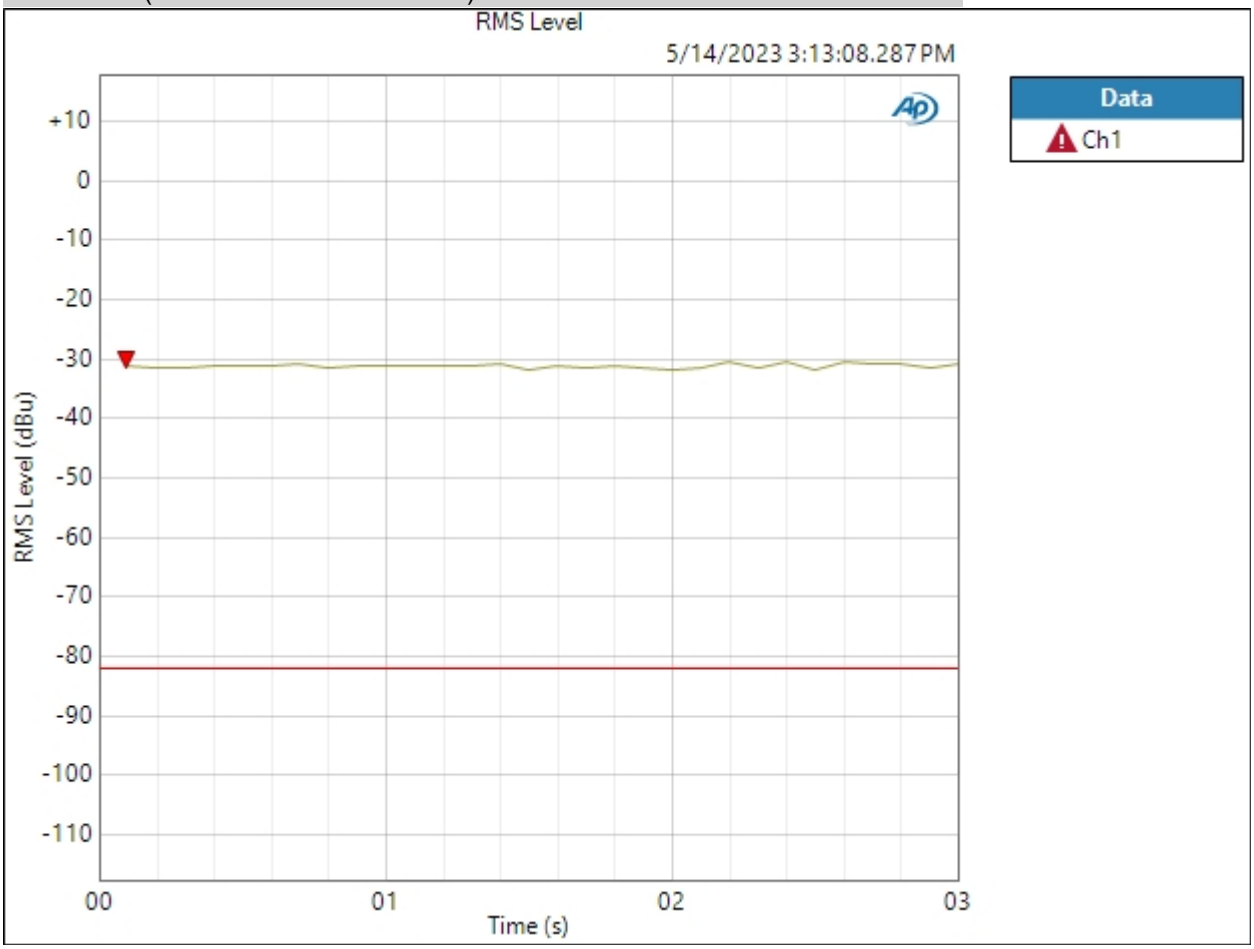

Ch1 ⚠ Failed Upper Limit

Result: ⚠ FAILED

Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:13:14.417 PM)

Ch1 6.593 mVrms

Gain (5/14/2023 3:13:14.417 PM)

Ch1 -19.129 dB

THD+N Ratio (5/14/2023 3:13:14.417 PM)

Ch1 ---- %

Frequency (5/14/2023 3:13:14.417 PM)

Ch1 ---- Hz

Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:13:18.534 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	-30.805 dBu	+2.000 dBu	⚠

Result: ⚠ FAILED

Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:13:24.646 PM)

Ch1 2.762 mVrms

Gain (5/14/2023 3:13:24.646 PM)

Ch1 -26.636 dB

THD+N Ratio (5/14/2023 3:13:24.646 PM)

Ch1 ---- %

Frequency (5/14/2023 3:13:24.646 PM)

Ch1 ---- Hz

Hi Z Gain -10 47k 200k Termination : Level and Gain 47K

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:13:28.089 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-49.010 dBu	-4.000 dBu	⚠

Result: ⚠ FAILED

Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Dummy Signal Path For Report : Verify Connections

Waveform:	Sine
Generator Level:	100.0 mVrms
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 3:13:32.459 PM)

Ch1 7.305 uVrms

Ch2 7.349 uVrms