Sequence Report

Summary

Mic500 200k Termination	
Signal Path Setup	PASSED
Stepped Frequency Sweep MIC 500	FAILED
Mic 2k 200k termination	
Signal Path Setup	PASSED
Stepped Frequency Sweep MIC 2K	FAILED
Mic 2k 15dB PAD 200k termination	
Signal Path Setup	PASSED
Stepped Frequency Sweep 15dB PAD	FAILED
Line Gain -10 200kTermination	
Signal Path Setup	PASSED
Stepped Frequency Sweep -10	FAILED
Line Gain -10 600 Termination	
Signal Path Setup	PASSED
Level and Gain -10	FAILED
Line Gain +5 200kTermination	
Signal Path Setup	PASSED
Stepped Frequency Sweep +5	FAILED
Line Gain +5 600 Termination	
Signal Path Setup	PASSED
Level and Gain +5	FAILED
Line Gain -5 600 Termination	
Signal Path Setup	PASSED
Level and Gain -5	FAILED
Line Gain 0 600 Termination	
Signal Path Setup	PASSED
Level and Gain 0	FAILED
Line Gain +10 600 Termination	
Signal Path Setup	PASSED
Level and Gain +10	FAILED
Line Gain +10 200k Termination Level Hi	
Signal Path Setup	PASSED
Noise Recorder (RMS) CW	PASSED
Line Gain +10 200k Termination Level Low	
Signal Path Setup	PASSED
Noise Recorder (RMS) CCW	FAILED
Hi Z Gain -10 2.2M 200k Termination	

Signal Path Setup	PASSED
Level and Gain 2.2M	FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	PASSED
Level and Gain 47K	FAILED
Dummy Signal Path For Report	
Signal Path Setup	PASSED

Sequence Result:	
Sequence Result:	FAILED

Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Mic500 200k Termination : Verify Connections

Waveform:	Sine
Generator Level:	-42.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:16:22.305 PM)

Ch1 404.9 uVrms

Gain (5/25/2023 4:16:22.305 PM)

Ch1 -23.384 dB

THD+N Ratio (5/25/2023 4:16:22.305 PM)

Ch1 49.696604 %

Frequency (5/25/2023 4:16:22.305 PM)

Ch1 1.00000 kHz

Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level:	-42.300 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	10
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/25/2023 4:16:31 PM

RMS Level (5/25/2023 4:16:31.713 PM)

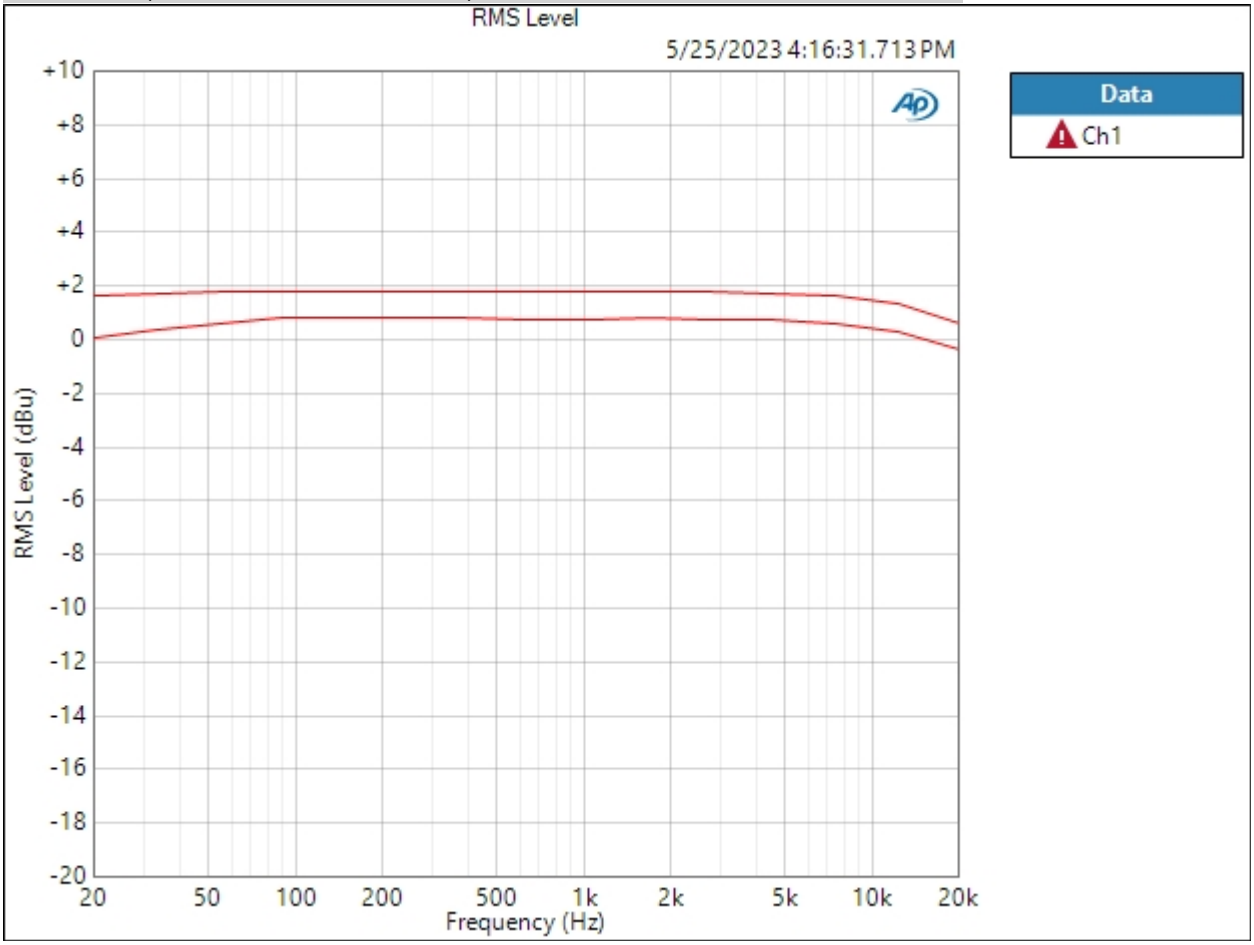

Ch1 ⚠ Failed Lower Limit

Result: FAILED

THD+N Ratio (5/25/2023 4:16:31.713 PM)

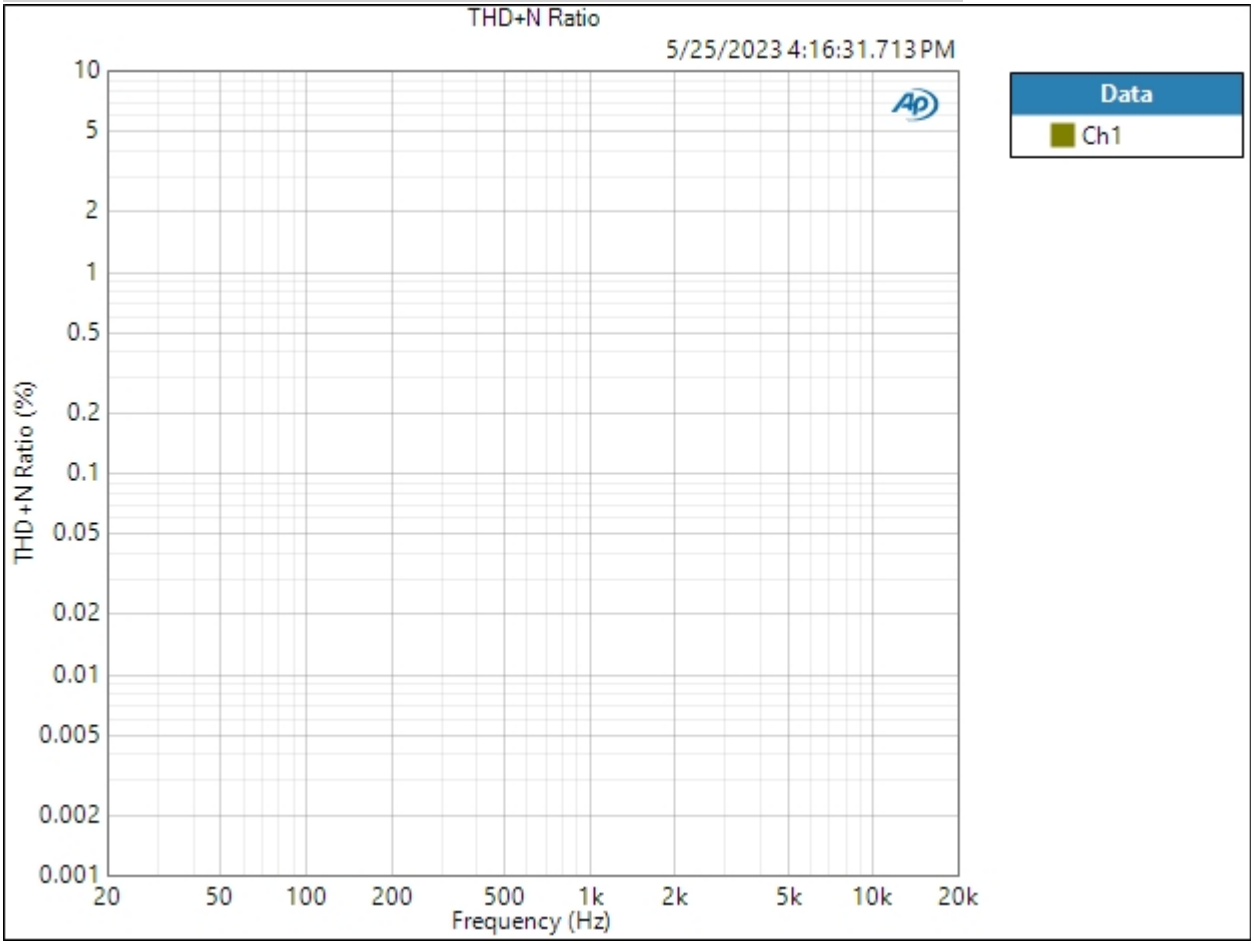

Result: PASSED

THD Ratio (5/25/2023 4:16:31.713 PM)

Ch1 ⚠ Failed Upper Limit

Result: ⚠ FAILED

Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Mic 2k 200k termination : Verify Connections

Waveform:	Sine
Generator Level:	-42.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:16:37.395 PM)

Ch1 290.6 uVrms

Gain (5/25/2023 4:16:37.395 PM)

Ch1 -26.189 dB

THD+N Ratio (5/25/2023 4:16:37.395 PM)

Ch1 72.781056 %

Frequency (5/25/2023 4:16:37.395 PM)

Ch1 0.99998 kHz

Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level:	-42.300 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	10
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/25/2023 4:16:47 PM

RMS Level (5/25/2023 4:16:47.627 PM)

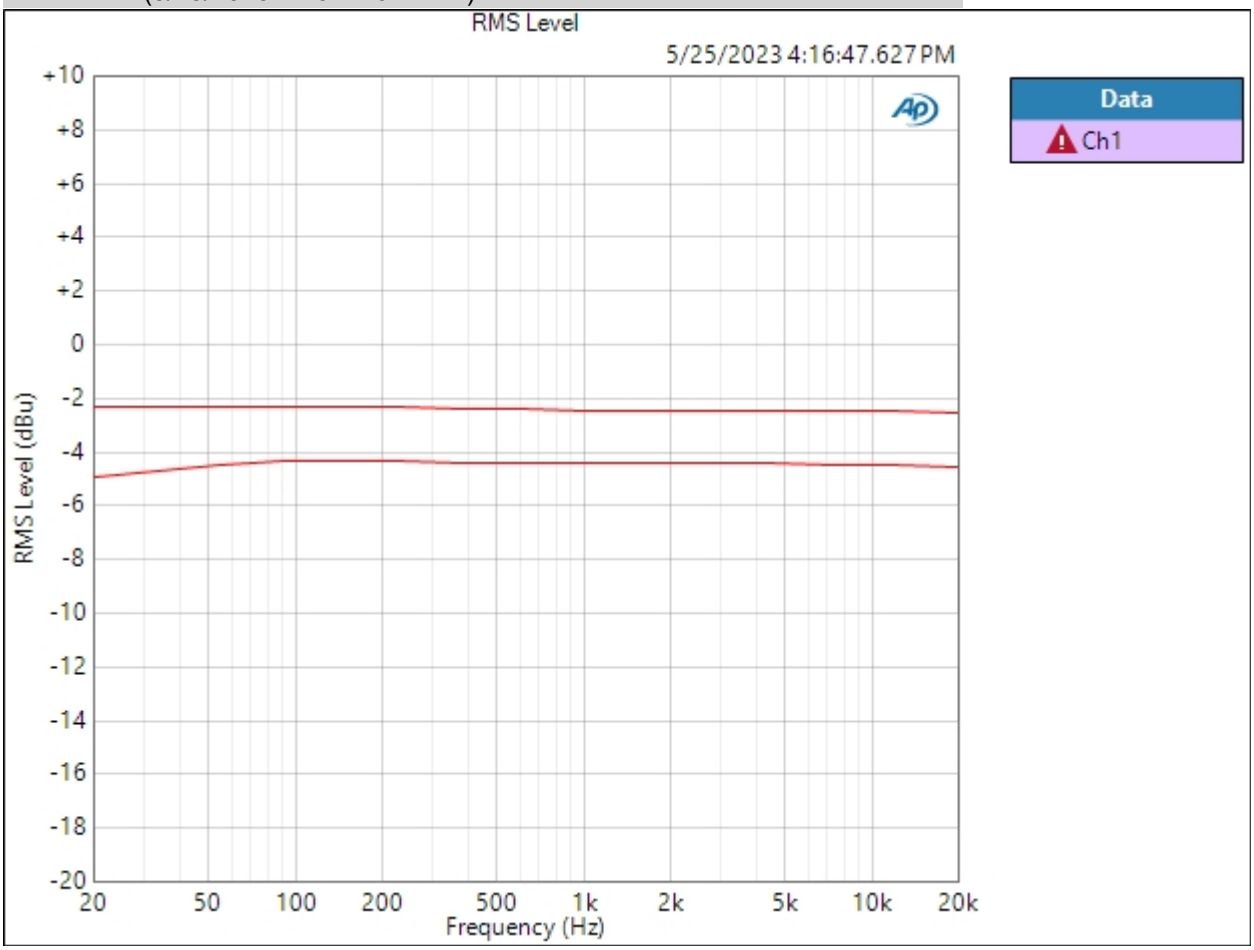

Ch1 ⚠ Failed Lower Limit

Result: FAILED

THD Ratio (5/25/2023 4:16:47.627 PM)

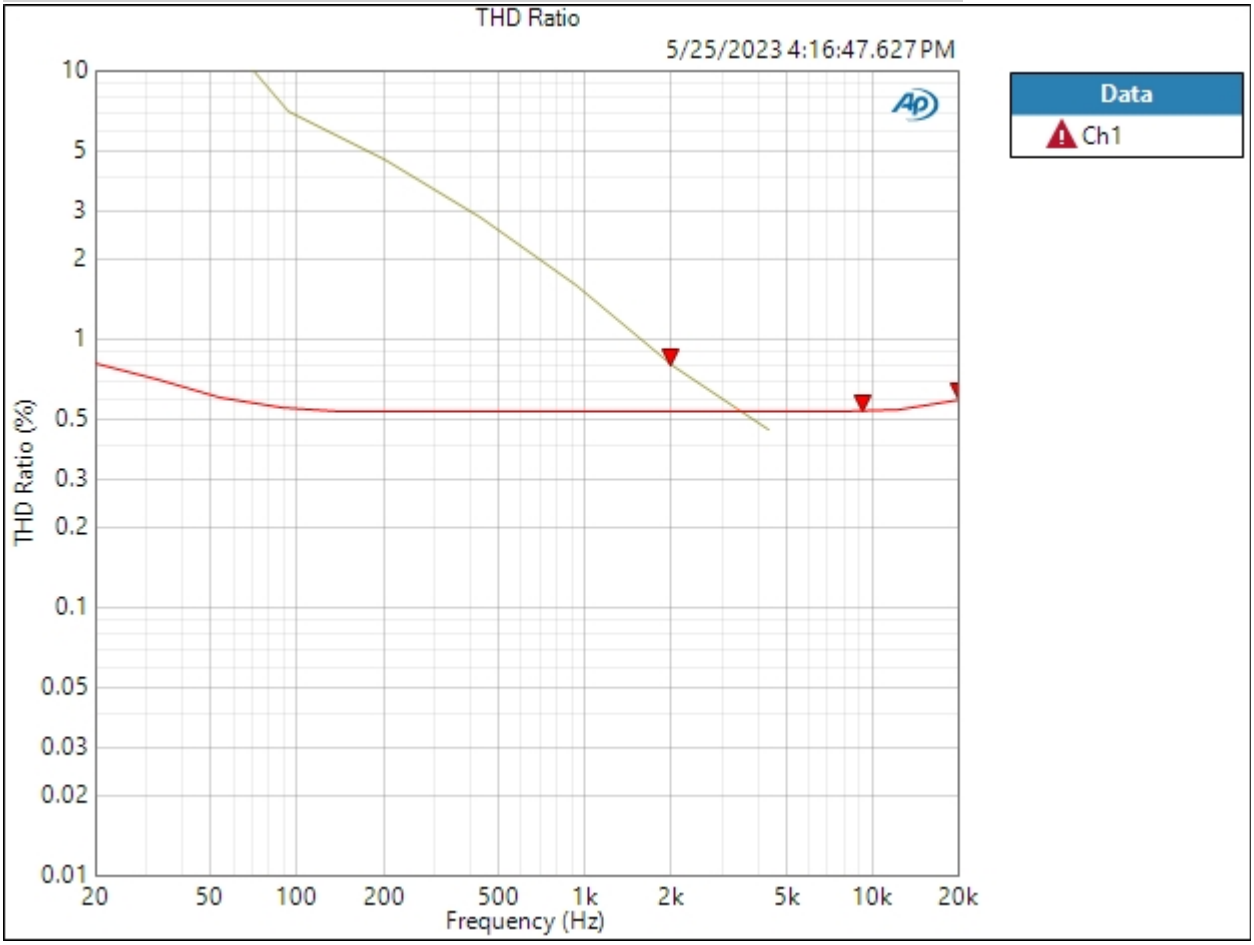

Ch1 Failed Upper Limit

Result: FAILED

Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform:	Sine
Generator Level:	-42.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:16:53.550 PM)

Ch1 202.8 uVrms

Gain (5/25/2023 4:16:53.550 PM)

Ch1 -29.379 dB

THD+N Ratio (5/25/2023 4:16:53.550 PM)

Ch1 25.317510 %

Frequency (5/25/2023 4:16:53.550 PM)

Ch1 59.9238 Hz

Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level:	-42.000 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	10
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/25/2023 4:17:05 PM

RMS Level (5/25/2023 4:17:05.002 PM)

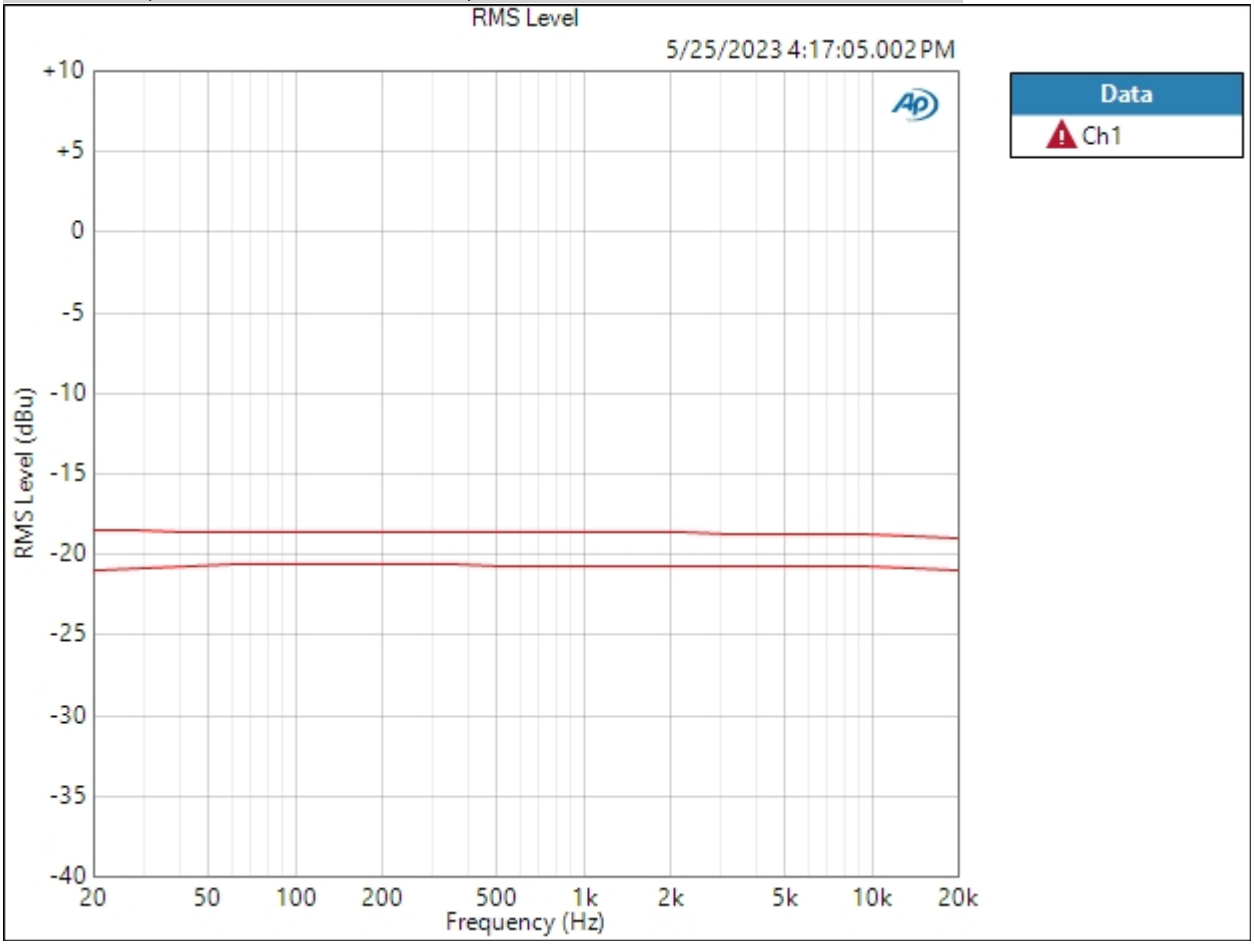

Ch1 ⚠ Failed Lower Limit

Result: FAILED

THD Ratio (5/25/2023 4:17:05.002 PM)

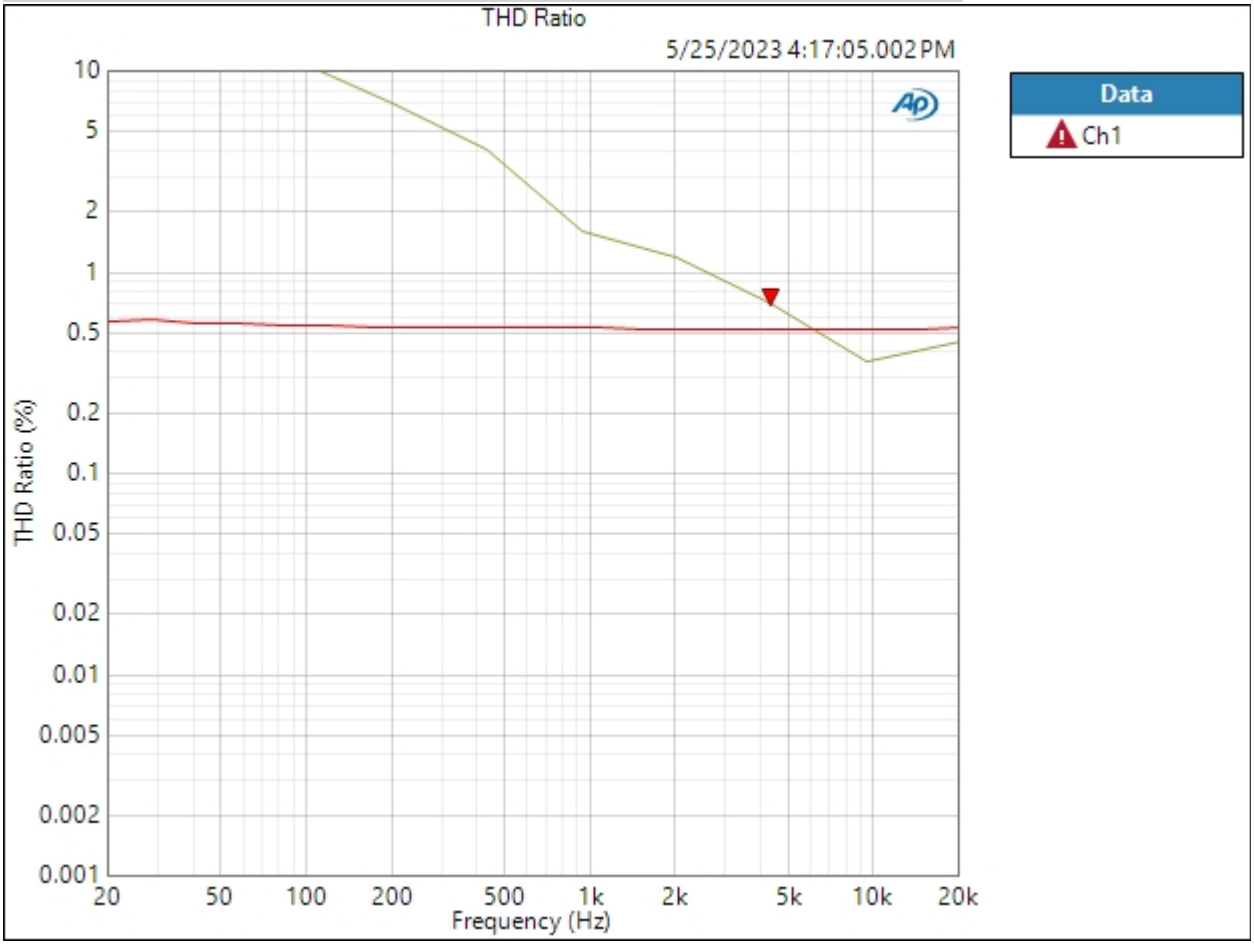

Ch1 Failed Upper Limit

Result: FAILED

Line Gain -10 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain -10 200kTermination : Verify Connections

Waveform:	Sine
Generator Level:	0.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:17:10.961 PM)

Ch1 414.6 uVrms

Gain (5/25/2023 4:17:10.961 PM)

Ch1 -65.469 dB

THD+N Ratio (5/25/2023 4:17:10.961 PM)

Ch1 47.816993 %

Frequency (5/25/2023 4:17:10.961 PM)

Ch1 1.00000 kHz

Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level:	0.000 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	15
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/25/2023 4:17:27 PM

RMS Level (5/25/2023 4:17:27.019 PM)

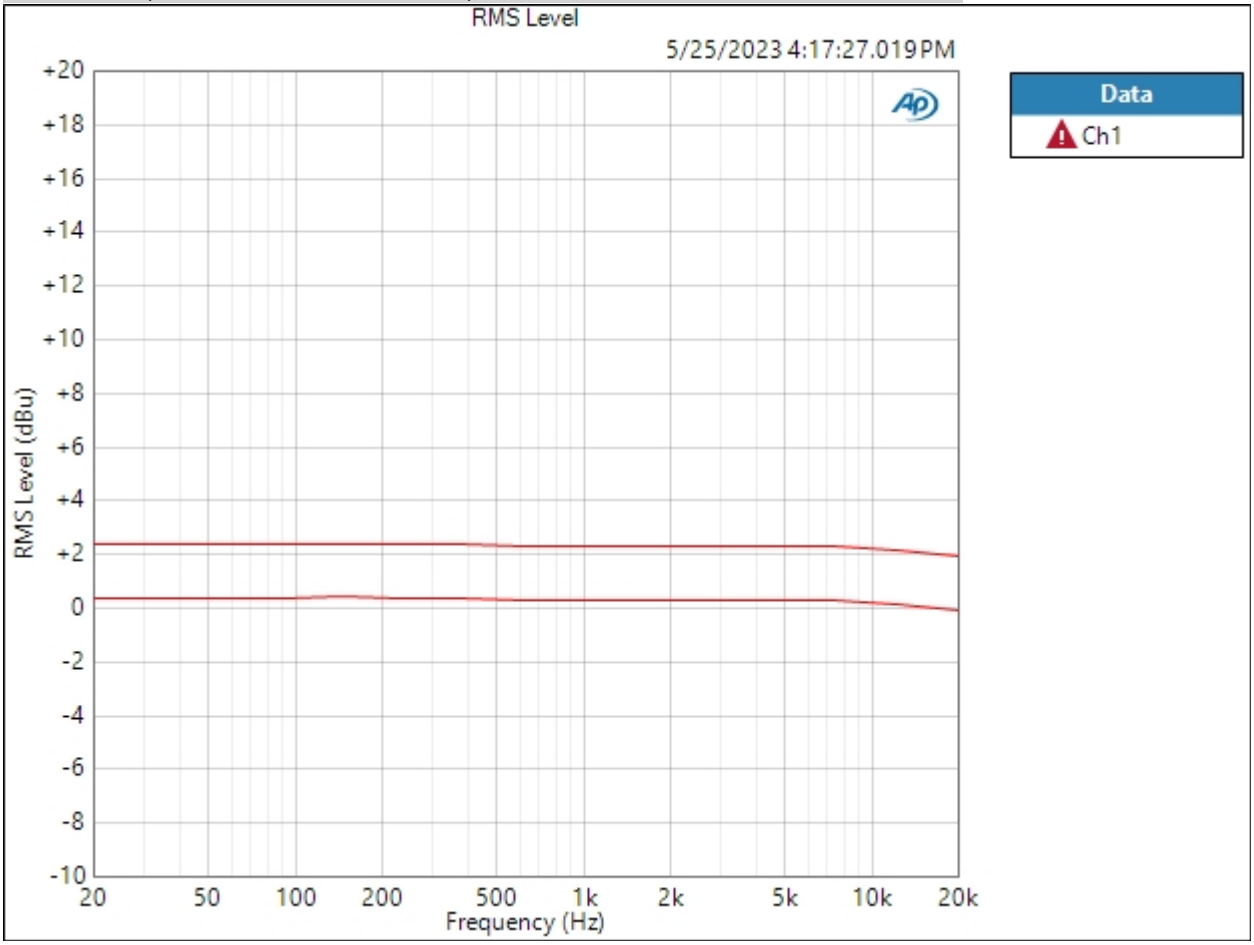

Ch1 ⚠ Failed Lower Limit

Result: FAILED

THD+N Ratio (5/25/2023 4:17:27.019 PM)

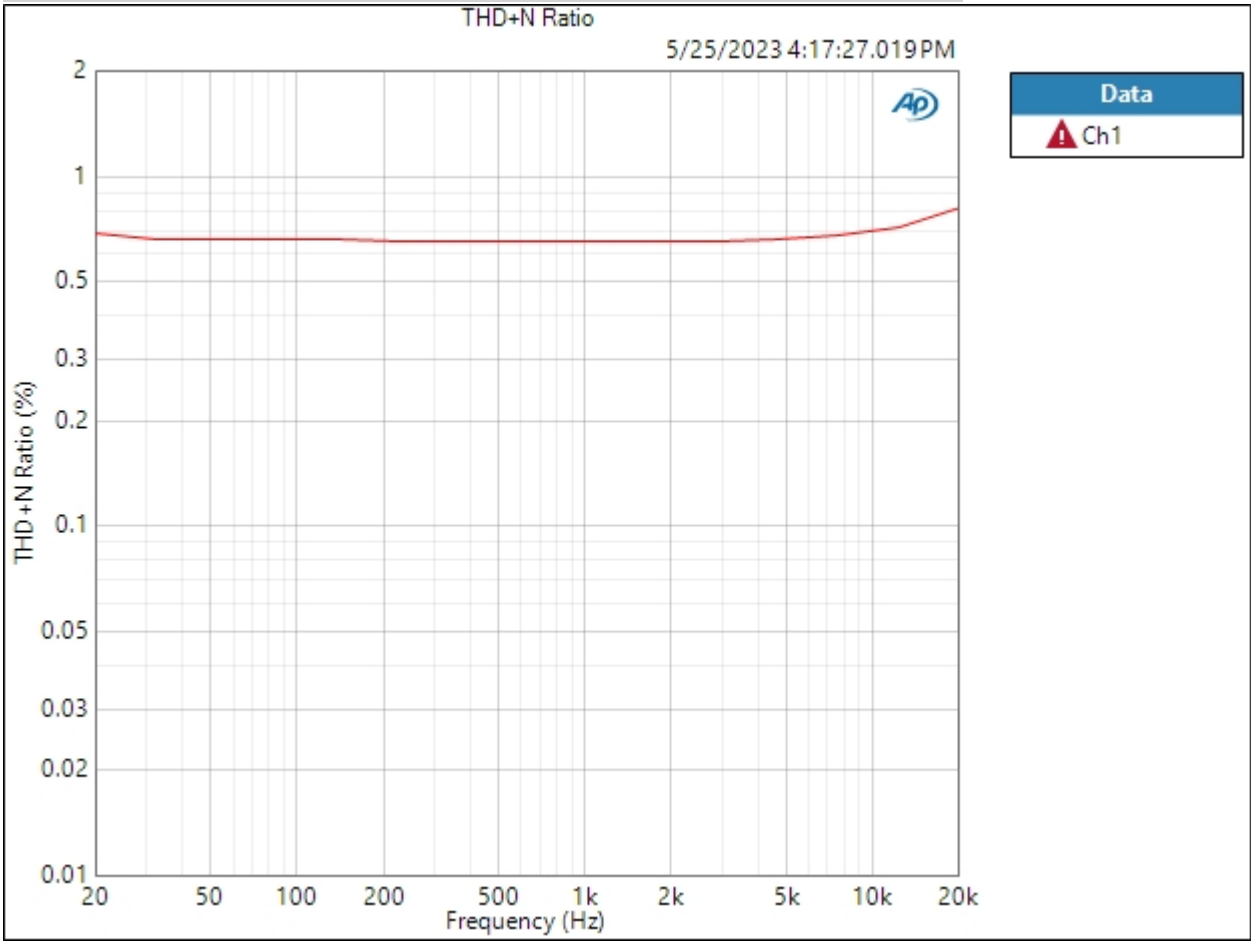

Ch1 Failed Upper Limit

Result: FAILED

Line Gain -10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain -10 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:17:33.154 PM)

Ch1 140.7 uVrms

Gain (5/25/2023 4:17:33.154 PM)

Ch1 -64.816 dB

THD+N Ratio (5/25/2023 4:17:33.154 PM)

Ch1 39.796045 %

Frequency (5/25/2023 4:17:33.154 PM)

Ch1 59.9579 Hz

Line Gain -10 600 Termination : Level and Gain -10

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:17:36.431 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-74.768 dBu	-8.500 dBu	⚠

Result: ⚠ FAILED

Line Gain +5 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +5 200kTermination : Verify Connections

Waveform:	Sine
Generator Level:	0.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:17:42.309 PM)

Ch1 321.2 uVrms

Gain (5/25/2023 4:17:42.309 PM)

Ch1 -67.589 dB

THD+N Ratio (5/25/2023 4:17:42.309 PM)

Ch1 62.119084 %

Frequency (5/25/2023 4:17:42.309 PM)

Ch1 1.00001 kHz

Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level:	0.000 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	15
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/25/2023 4:17:56 PM

RMS Level (5/25/2023 4:17:56.434 PM)

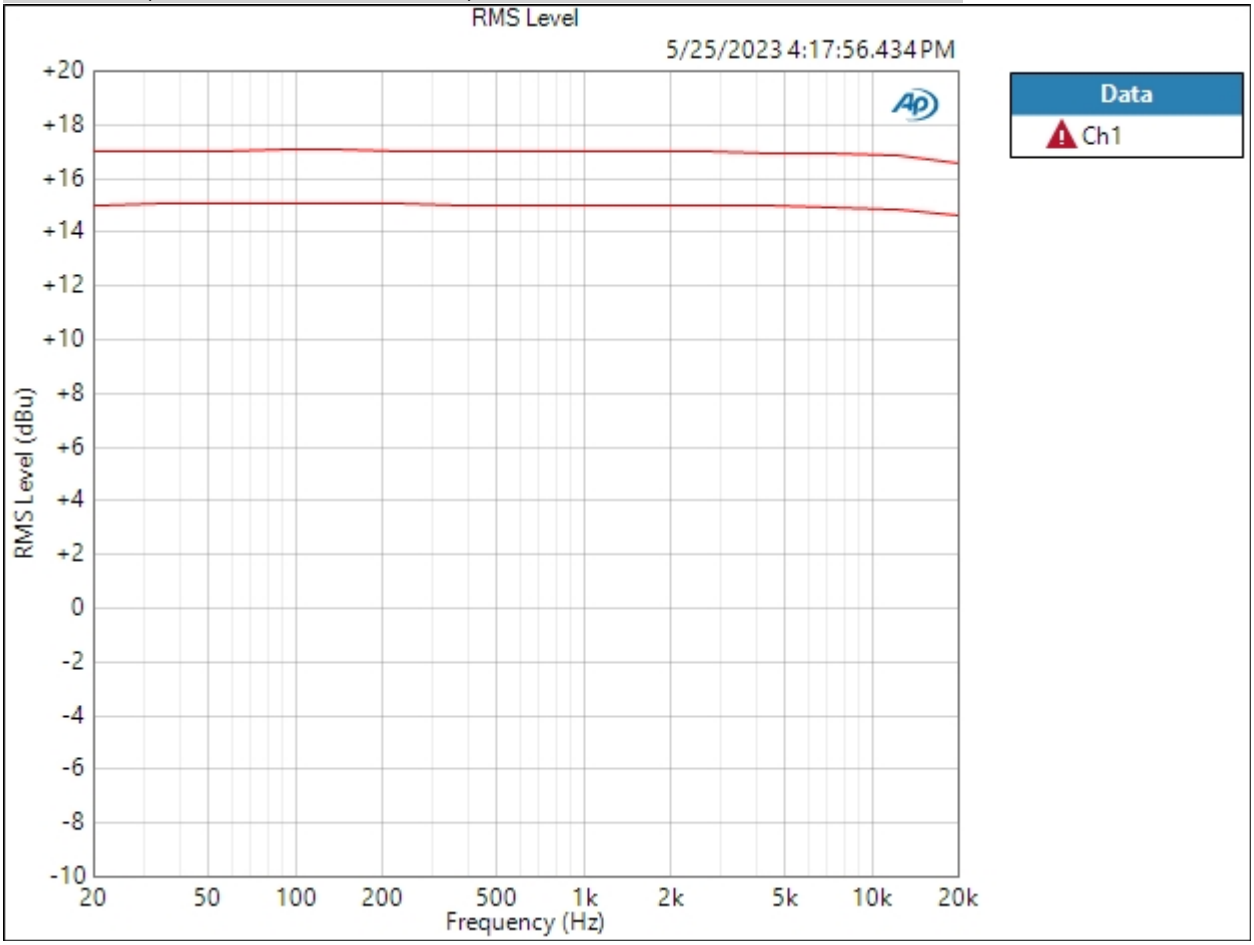

Ch1 ⚠ Failed Lower Limit

Result: FAILED

THD+N Ratio (5/25/2023 4:17:56.434 PM)

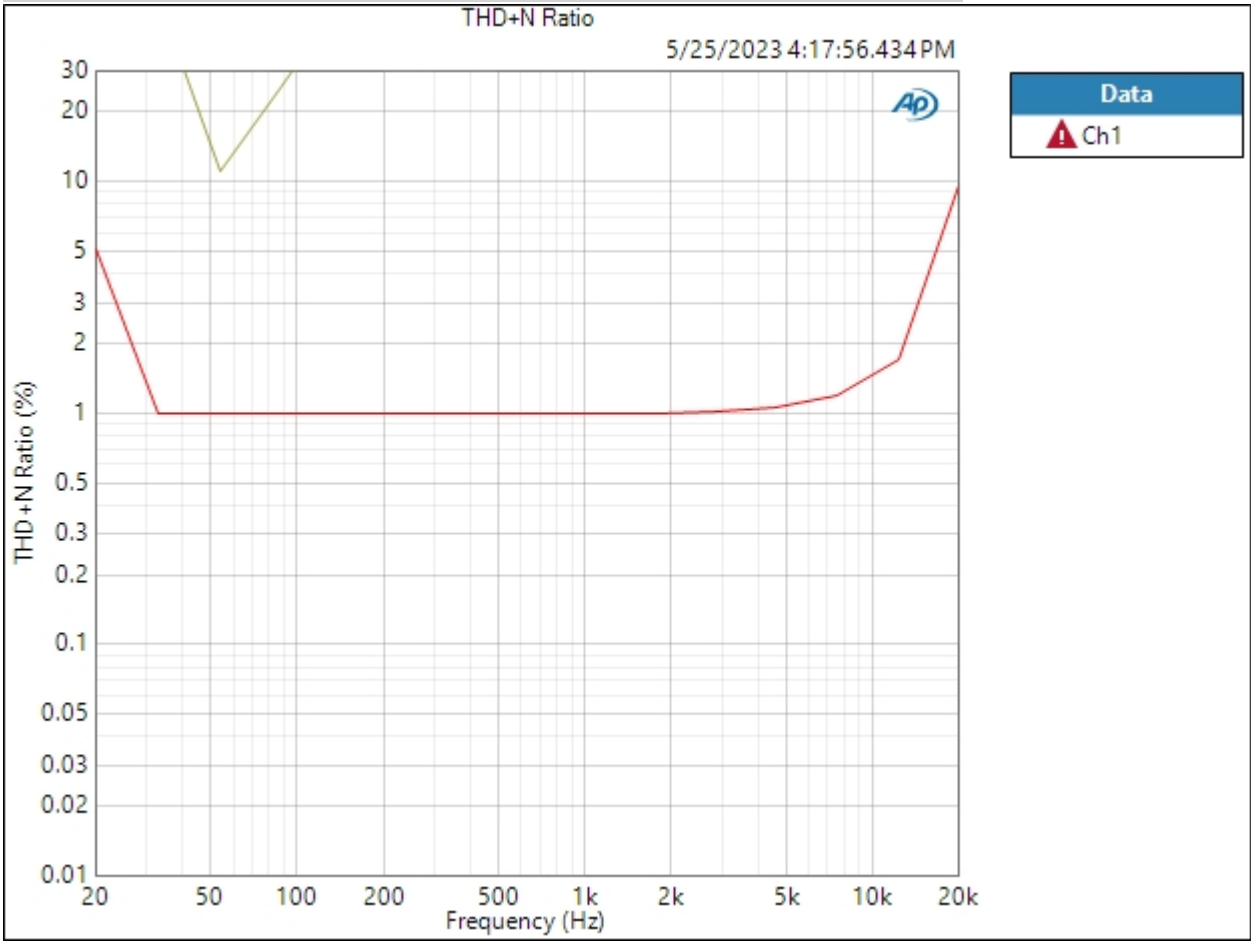

Ch1 Failed Upper Limit

Result: FAILED

Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +5 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:18:02.683 PM)

Ch1 143.5 uVrms

Gain (5/25/2023 4:18:02.683 PM)

Ch1 -64.646 dB

THD+N Ratio (5/25/2023 4:18:02.683 PM)

Ch1 40.842780 %

Frequency (5/25/2023 4:18:02.683 PM)

Ch1 60.0707 Hz

Line Gain +5 600 Termination : Level and Gain +5

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:18:05.937 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	-74.575 dBu	+6.500 dBu	⚠

Result: ⚠ FAILED

Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain -5 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:18:11.823 PM)

Ch1 141.5 uVrms

Gain (5/25/2023 4:18:11.823 PM)

Ch1 -64.677 dB

THD+N Ratio (5/25/2023 4:18:11.823 PM)

Ch1 43.162948 %

Frequency (5/25/2023 4:18:11.823 PM)

Ch1 60.1009 Hz

Line Gain -5 600 Termination : Level and Gain -5

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:18:15.116 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-74.621 dBu	-3.500 dBu	⚠

Result: ⚠ FAILED

Line Gain 0 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain 0 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:18:21.076 PM)

Ch1 149.7 uVrms

Gain (5/25/2023 4:18:21.076 PM)

Ch1 -64.053 dB

THD+N Ratio (5/25/2023 4:18:21.076 PM)

Ch1 44.862880 %

Frequency (5/25/2023 4:18:21.076 PM)

Ch1 59.9480 Hz

Line Gain 0 600 Termination : Level and Gain 0

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:18:24.276 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-74.610 dBu	+1.500 dBu	⚠

Result: ⚠ FAILED

Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +10 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:18:30.217 PM)

Ch1 149.2 uVrms

Gain (5/25/2023 4:18:30.217 PM)

Ch1 -64.222 dB

THD+N Ratio (5/25/2023 4:18:30.217 PM)

Ch1 46.322977 %

Frequency (5/25/2023 4:18:30.217 PM)

Ch1 59.9804 Hz

Line Gain +10 600 Termination : Level and Gain +10

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:18:33.626 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	-74.421 dBu	+11.500 dBu	⚠

Result: ⚠ FAILED

Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform:	Sine
Generator Level:	-20.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:18:39.608 PM)

Ch1 201.2 uVrms

Gain (5/25/2023 4:18:39.608 PM)

Ch1 -51.781 dB

THD+N Ratio (5/25/2023 4:18:39.608 PM)

Ch1 26.114656 %

Frequency (5/25/2023 4:18:39.608 PM)

Ch1 60.0140 Hz

Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform:	None
Low-pass Filter:	20 kHz
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Sweep Time:	0.00:00:03.000
Reading Rate:	10/sec
Input Bandwidth:	Use Signal Path
Record Acquisition:	False
Measured 1	5/25/2023 4:18:44 PM

RMS Level (5/25/2023 4:18:44.723 PM)

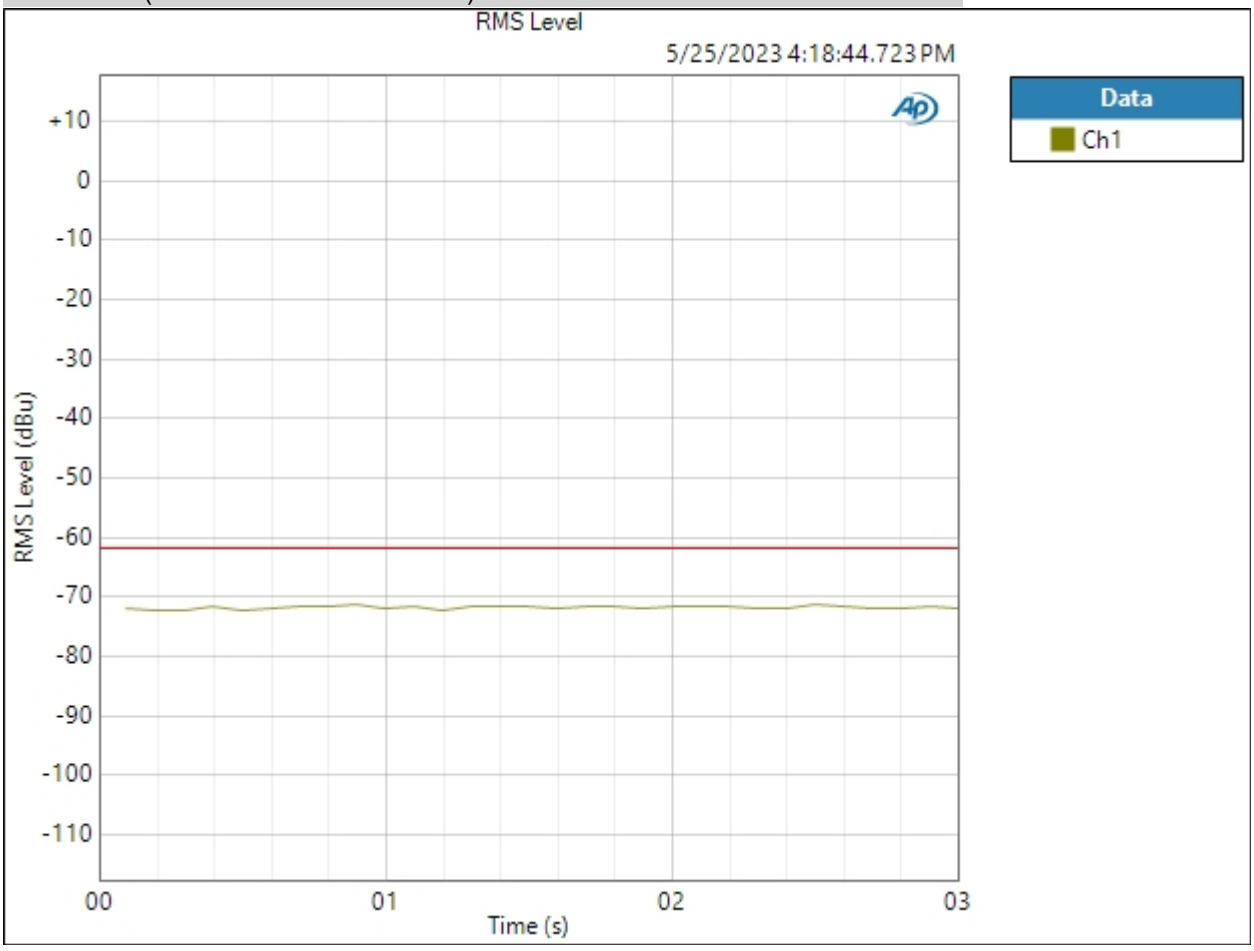

Ch1 PASSED

Result: PASSED

Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +10 200k Termination Level Low : Verify Connections

Waveform:	Sine
Generator Level:	-20.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:18:51.088 PM)

Ch1 206.4 uVrms

Gain (5/25/2023 4:18:51.088 PM)

Ch1 -51.540 dB

THD+N Ratio (5/25/2023 4:18:51.088 PM)

Ch1 29.920754 %

Frequency (5/25/2023 4:18:51.088 PM)

Ch1 59.9094 Hz

Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform:	None
Low-pass Filter:	20 kHz
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Sweep Time:	0.00:00:03.000
Reading Rate:	10/sec
Input Bandwidth:	Use Signal Path
Record Acquisition:	False
Measured 1	5/25/2023 4:18:56 PM

RMS Level (5/25/2023 4:18:56.825 PM)

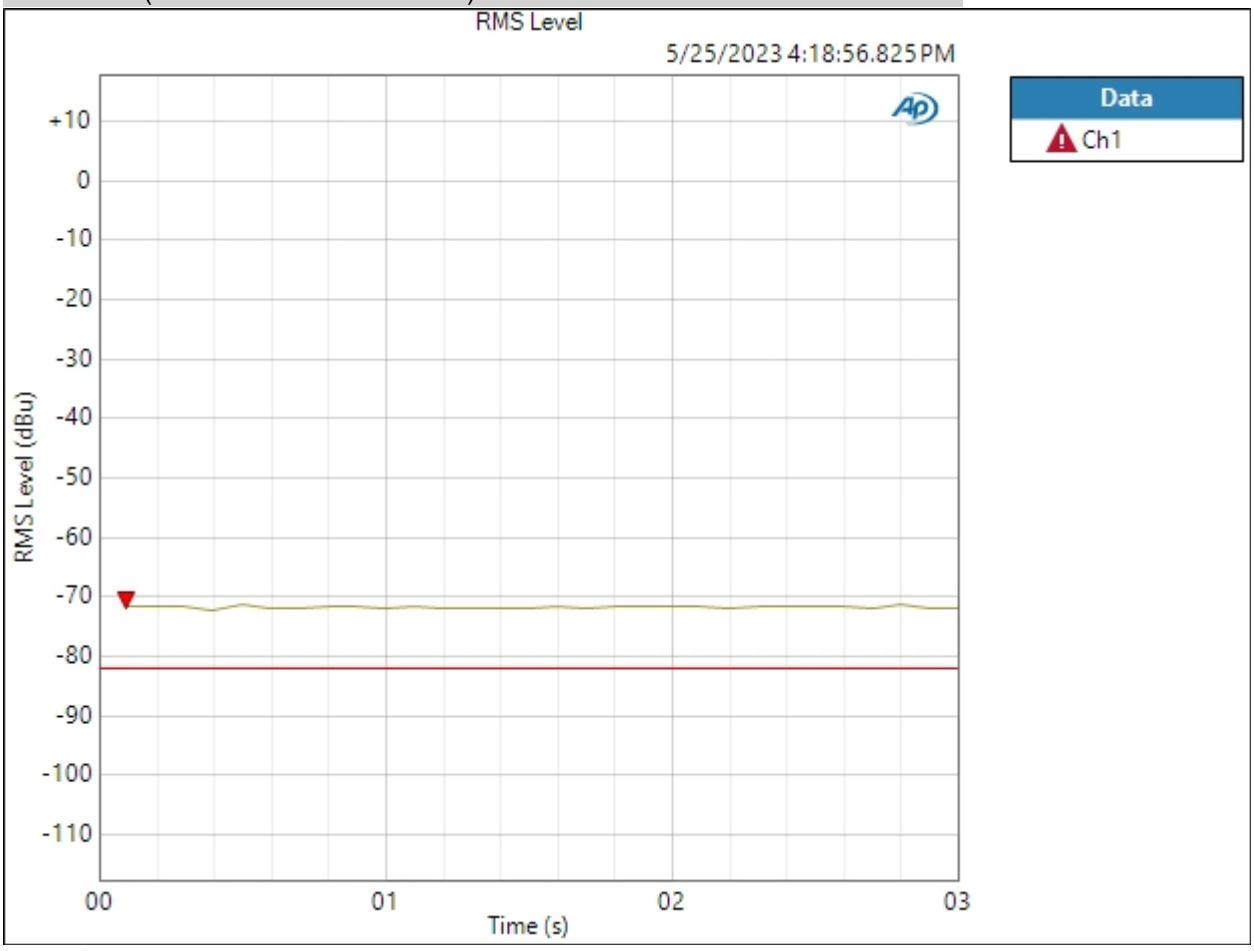

Ch1 ⚠ Failed Upper Limit

Result: ⚠ FAILED

Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:19:02.788 PM)

Ch1 196.2 uVrms

Gain (5/25/2023 4:19:02.788 PM)

Ch1 -49.835 dB

THD+N Ratio (5/25/2023 4:19:02.788 PM)

Ch1 25.856085 %

Frequency (5/25/2023 4:19:02.788 PM)

Ch1 60.1722 Hz

Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:19:06.705 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	-71.647 dBu	+2.000 dBu	⚠

Result: ⚠ FAILED

Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:19:12.685 PM)

Ch1 198.1 uVrms

Gain (5/25/2023 4:19:12.685 PM)

Ch1 -49.572 dB

THD+N Ratio (5/25/2023 4:19:12.685 PM)

Ch1 23.541277 %

Frequency (5/25/2023 4:19:12.685 PM)

Ch1 60.0579 Hz

Hi Z Gain -10 47k 200k Termination : Level and Gain 47K

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:19:16.025 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-71.691 dBu	-4.000 dBu	⚠

Result: ⚠ FAILED

Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Dummy Signal Path For Report : Verify Connections

Waveform:	Sine
Generator Level:	100.0 mVrms
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/25/2023 4:19:20.234 PM)

Ch1 7.274 uVrms
Ch2 7.362 uVrms