

Sequence Report



Summary

Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 FAILED

Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K FAILED

Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 FAILED

Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 PASSED

Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 FAILED

Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 FAILED

Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 FAILED

Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 FAILED

Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 FAILED

Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW FAILED

Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	⚠ FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	⚠ FAILED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

Sequence Report



Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00

5/2/2023 8:53 PM

Page 3 of 54

Sequence Report



Port C (hex): 00
Port D (hex): 00
• Clocks
Output Rate: Track Output SR
Sync Out Level: 3.300 V
Sync Out Polarity: Normal
Timebase Reference: Internal
Jitter: Disabled
• Triggers
Source: Off
Input Logic Level: 3.300 V
Edge: Rising

Mic500 200k Termination : Verify Connections

Waveform: Sine
Generator Level: -42.300 dBu
DC Offset: 0.000 V
Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:50:14.314 PM)

Ch1 296.5 mVrms

Gain (5/2/2023 8:50:14.314 PM)

Ch1 33.959 dB

THD+N Ratio (5/2/2023 8:50:14.314 PM)

Ch1 ---- %

Frequency (5/2/2023 8:50:14.314 PM)

Ch1 ---- Hz

Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/2/2023 8:50:21 PM

RMS Level (5/2/2023 8:50:21.757 PM)

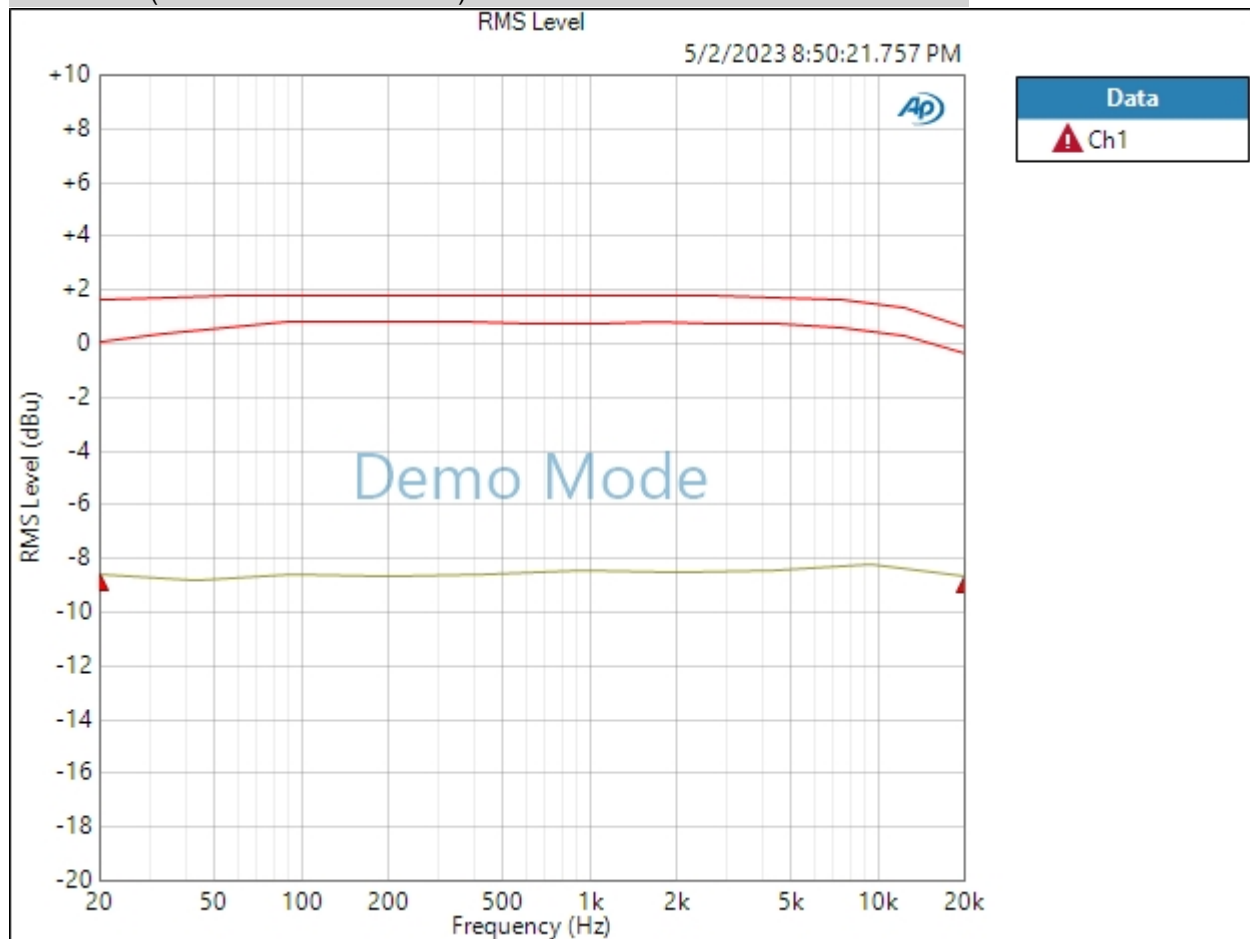

Ch1 Failed Lower Limit

5/2/2023 8:53 PM


Page 5 of 54

Sequence Report



Result: ▲ FAILED


THD+N Ratio (5/2/2023 8:50:21.757 PM)

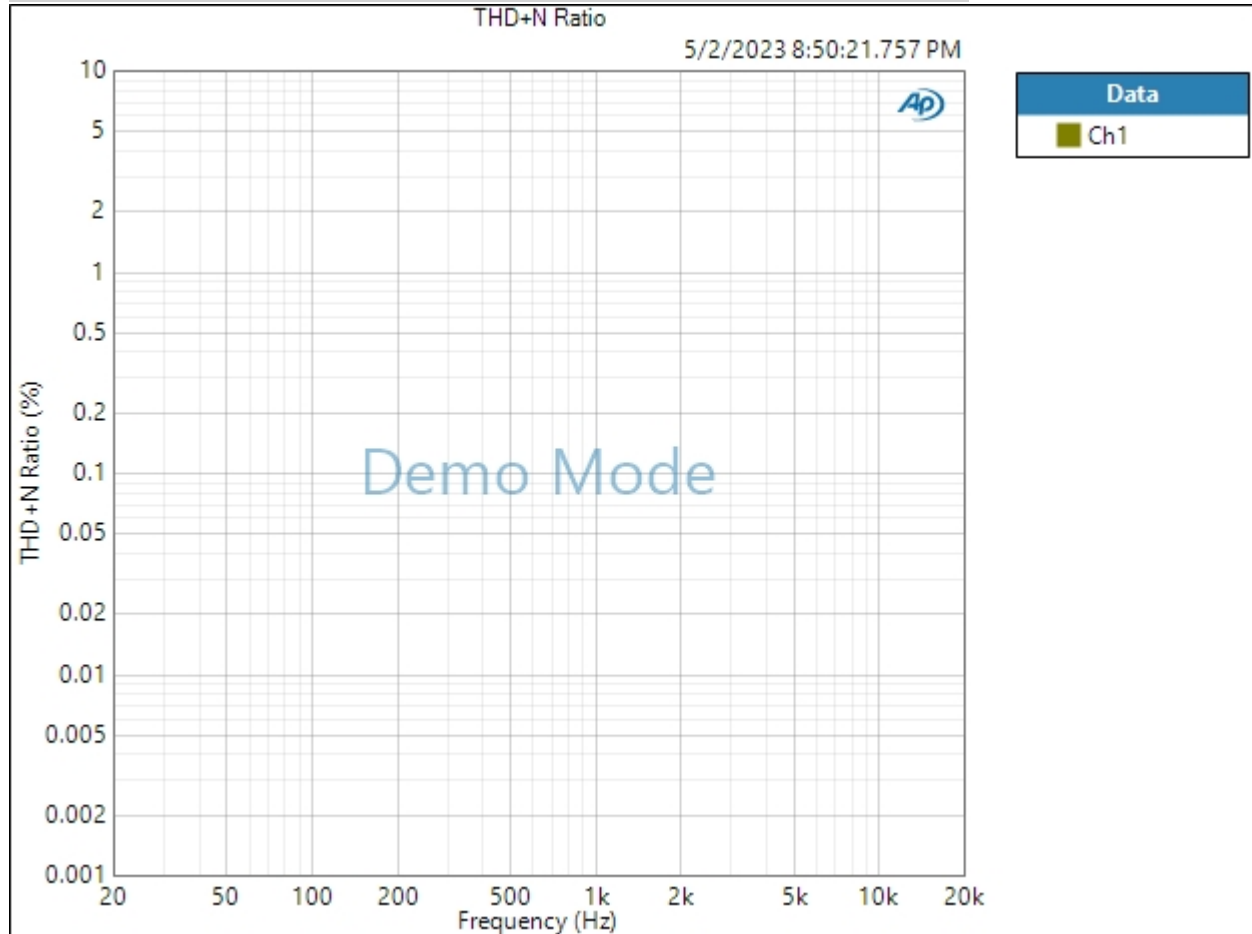

Result: ✔ PASSED

THD Ratio (5/2/2023 8:50:21.757 PM)

Sequence Report

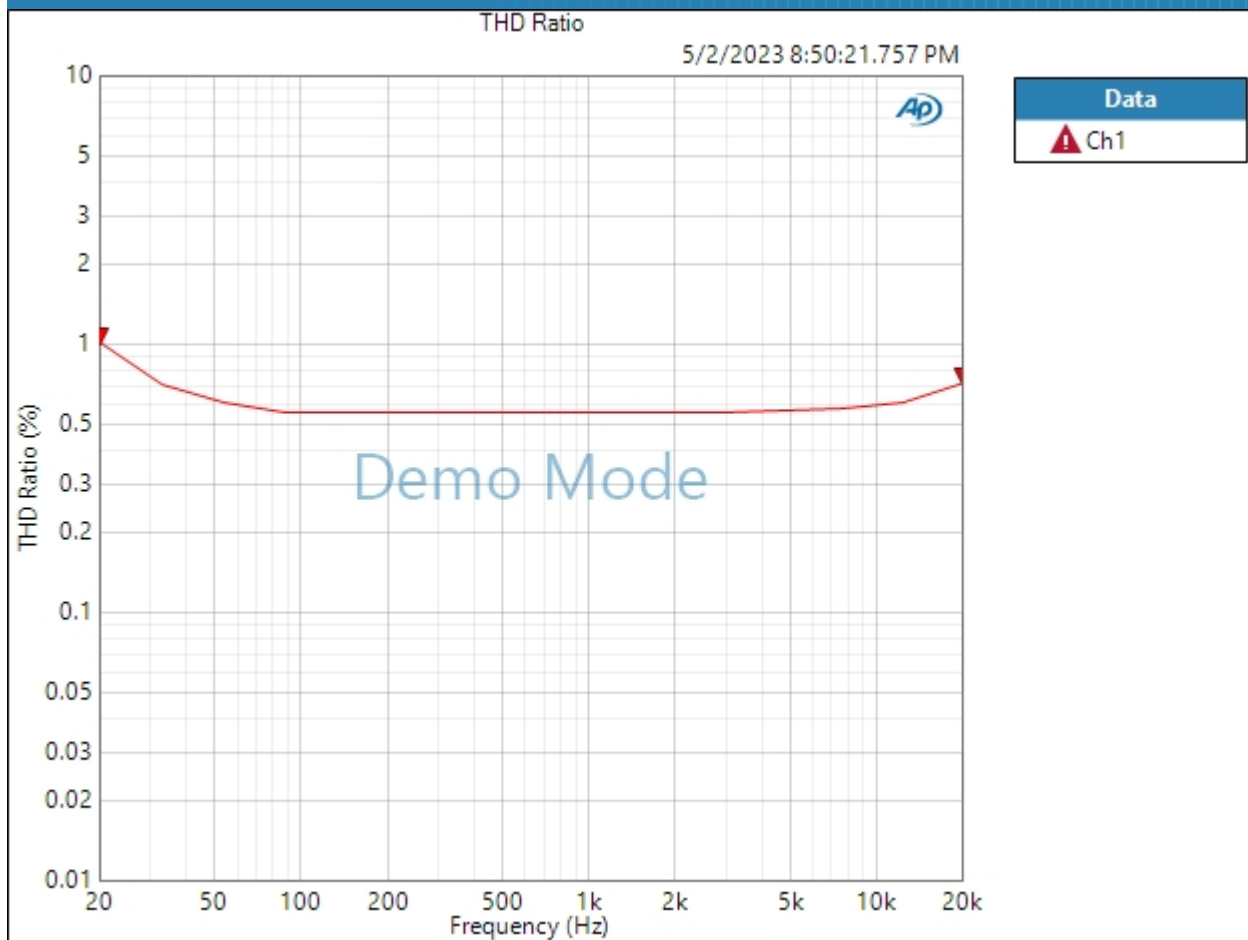

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:50:26.769 PM)

Ch1 293.2 mVrms

Gain (5/2/2023 8:50:26.769 PM)

Ch1 33.860 dB

THD+N Ratio (5/2/2023 8:50:26.769 PM)

Ch1 ---- %

Frequency (5/2/2023 8:50:26.769 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/2/2023 8:50:34 PM

RMS Level (5/2/2023 8:50:34.654 PM)

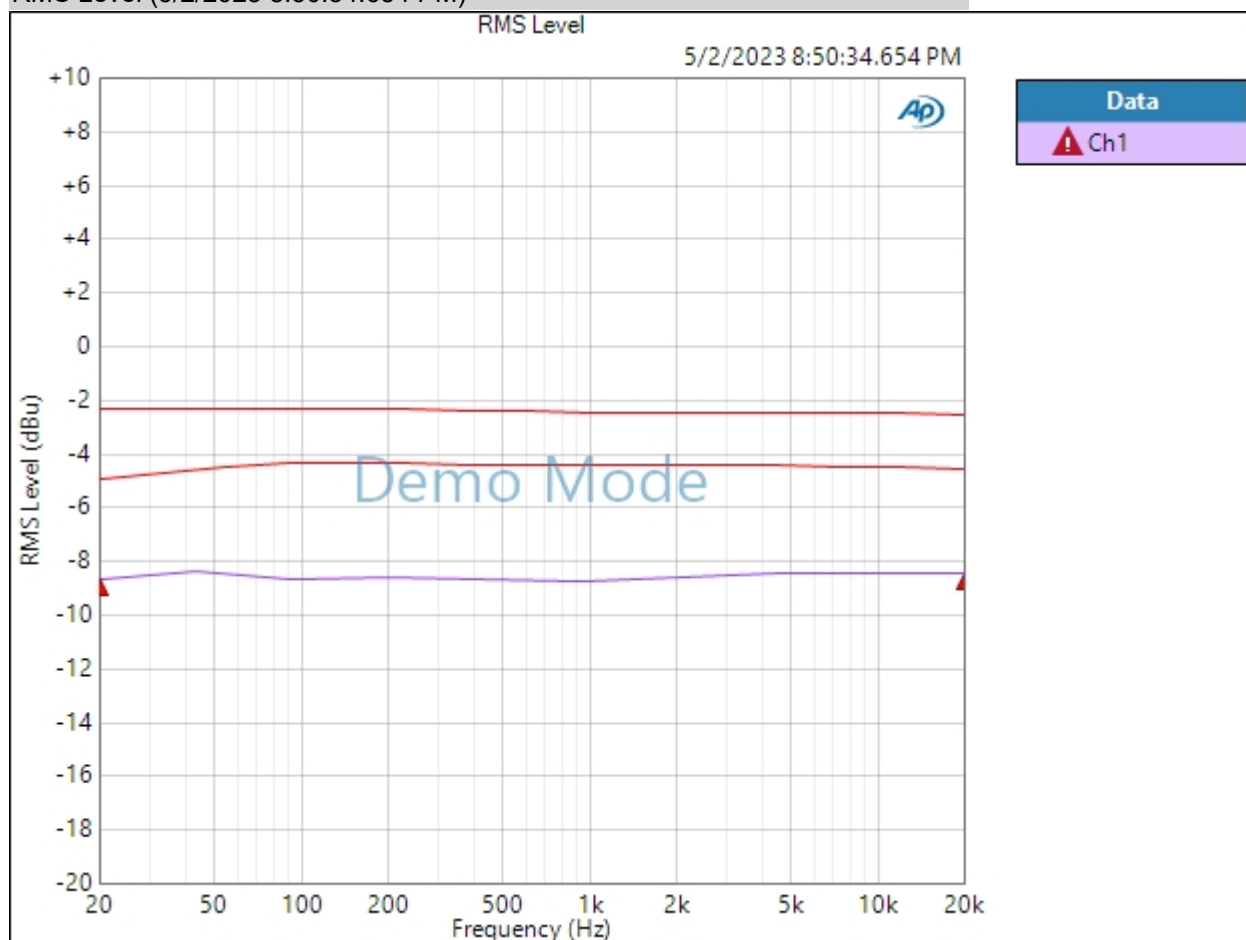

Ch1 Failed Lower Limit

5/2/2023 8:53 PM


Page 10 of 54

Sequence Report



Result: ▲ FAILED

THD Ratio (5/2/2023 8:50:34.654 PM)

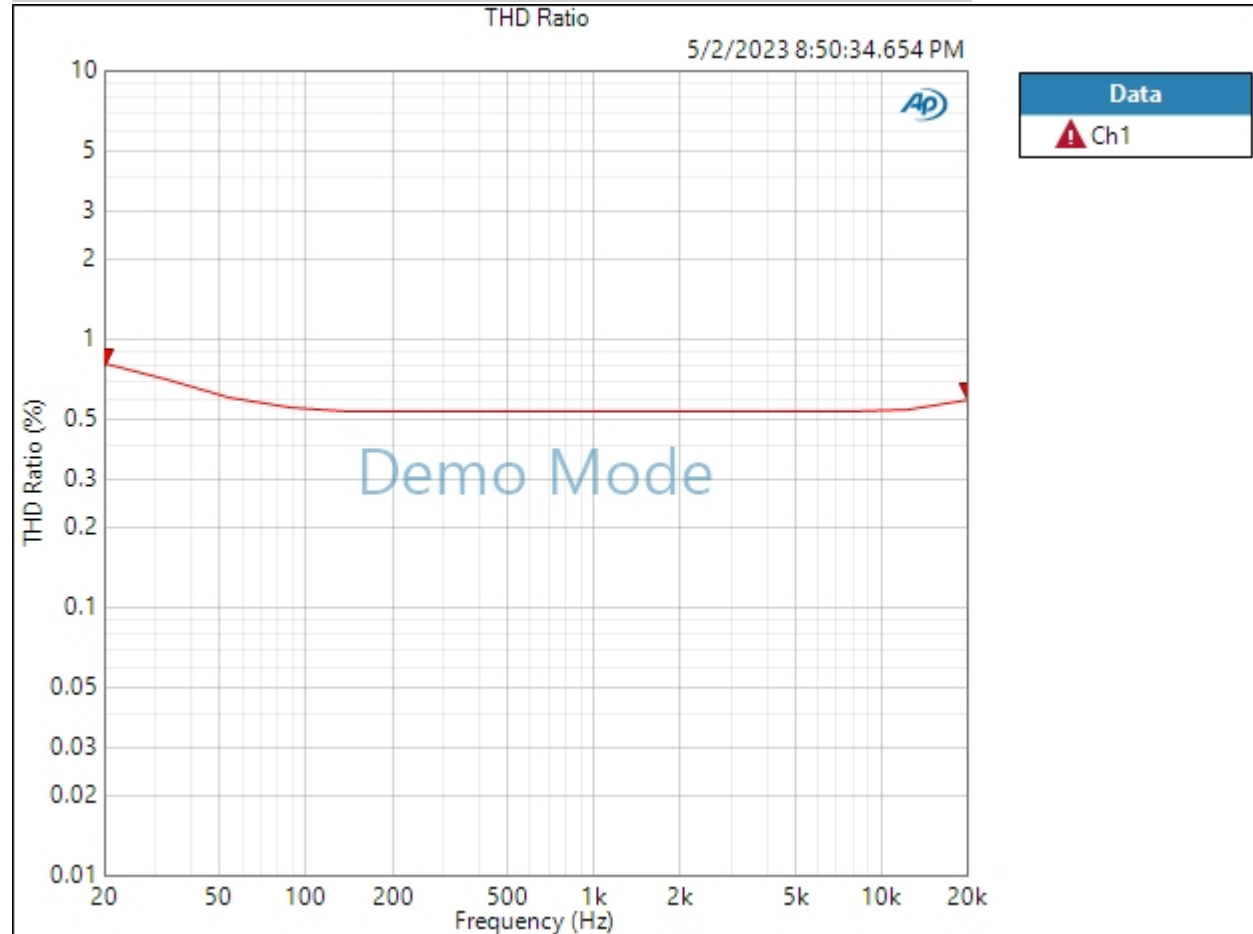

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:50:39.654 PM)

Ch1 288.8 mVrms

Gain (5/2/2023 8:50:39.654 PM)

Ch1 33.732 dB

THD+N Ratio (5/2/2023 8:50:39.654 PM)

Ch1 ---- %

Frequency (5/2/2023 8:50:39.654 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/2/2023 8:50:48 PM

RMS Level (5/2/2023 8:50:48.960 PM)

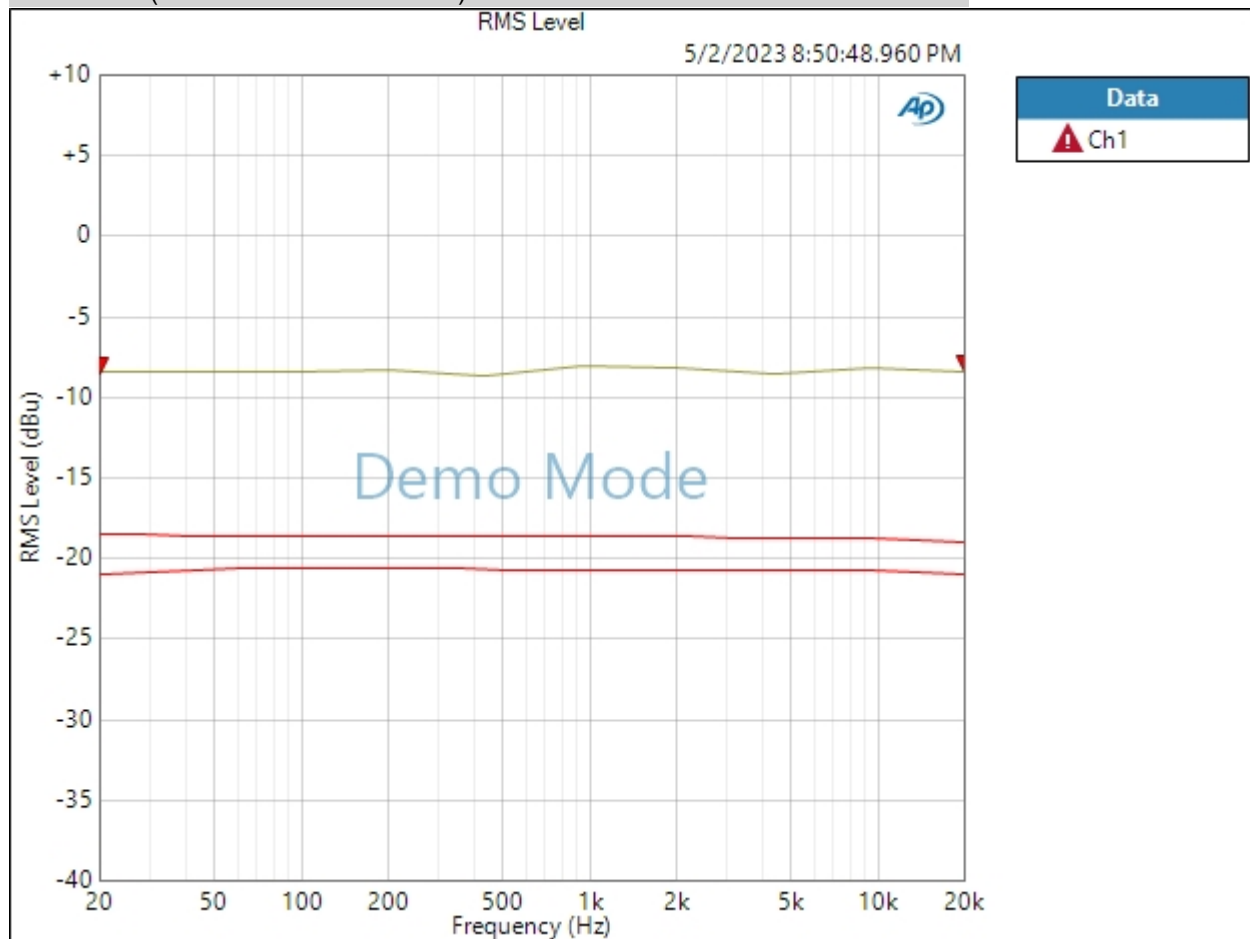

Ch1 Failed Upper Limit

5/2/2023 8:53 PM


Page 14 of 54

Sequence Report



Result: ▲ FAILED

THD Ratio (5/2/2023 8:50:48.960 PM)

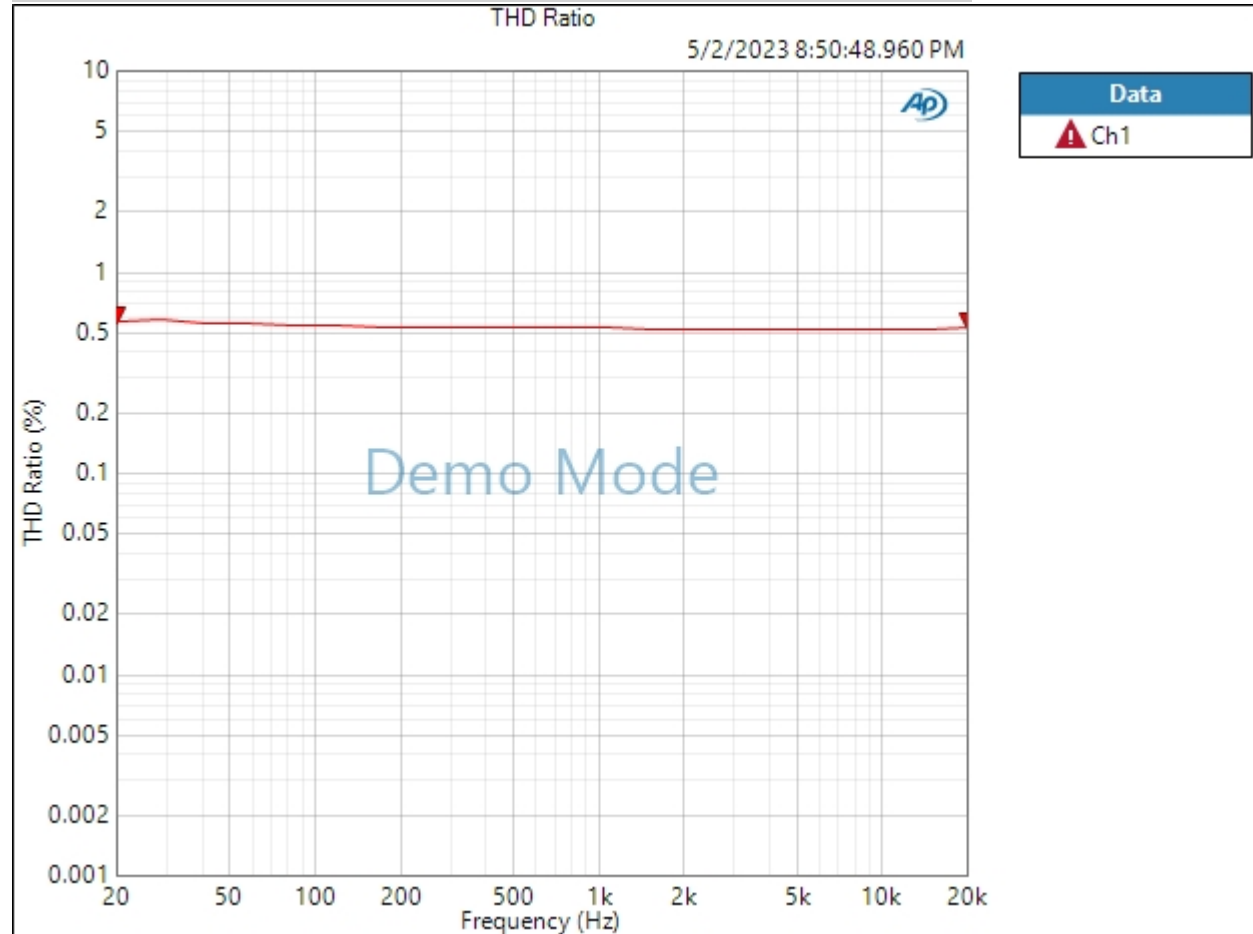

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain -10 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBra Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:50:54.138 PM)

Ch1 287.5 mVrms

Gain (5/2/2023 8:50:54.138 PM)

Ch1 -8.609 dB

THD+N Ratio (5/2/2023 8:50:54.138 PM)

Ch1 ---- %

Frequency (5/2/2023 8:50:54.138 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/2/2023 8:51:04 PM

RMS Level (5/2/2023 8:51:04.430 PM)

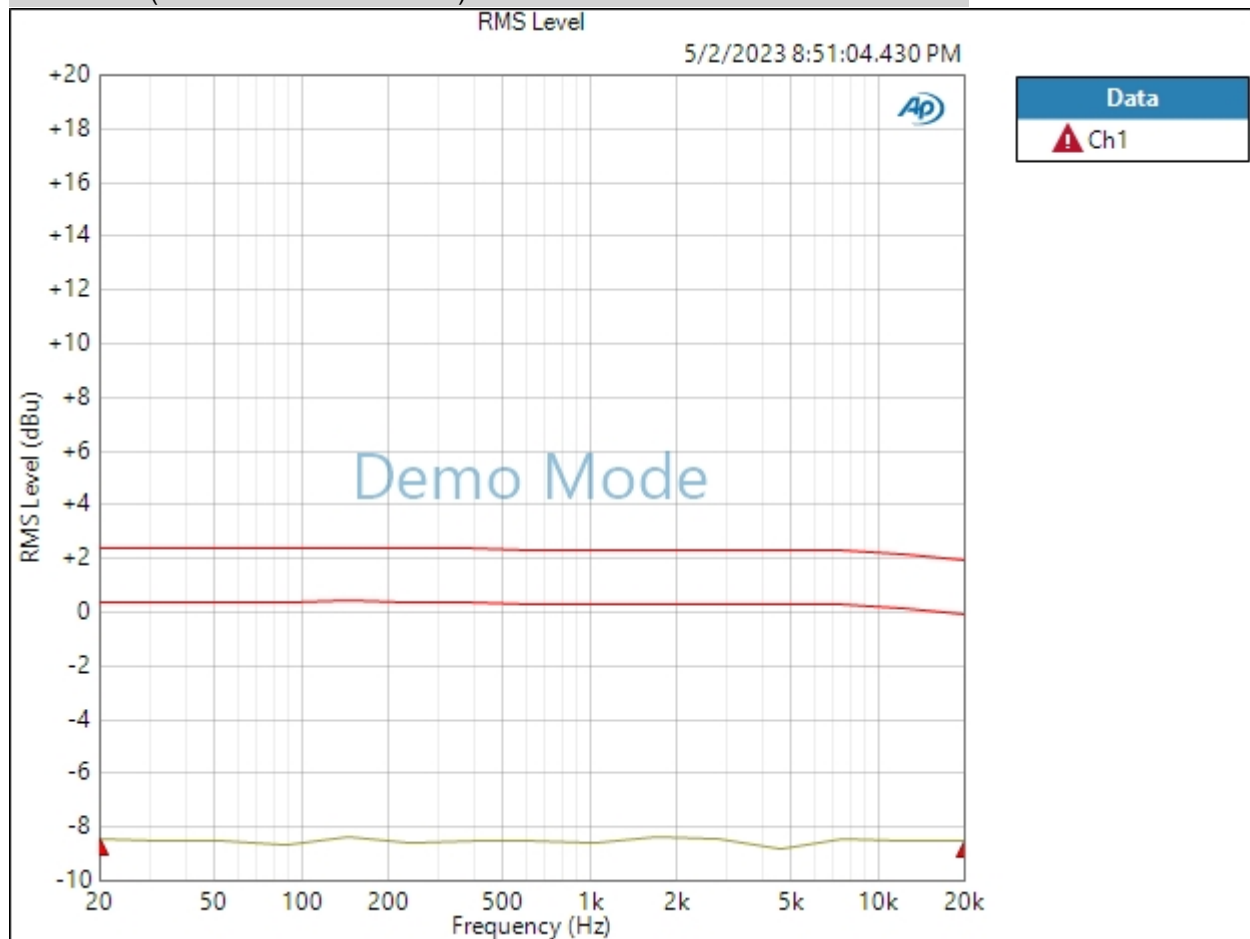

Ch1 Failed Lower Limit

5/2/2023 8:53 PM


Page 18 of 54

Sequence Report



Result: ▲ FAILED

THD+N Ratio (5/2/2023 8:51:04.430 PM)

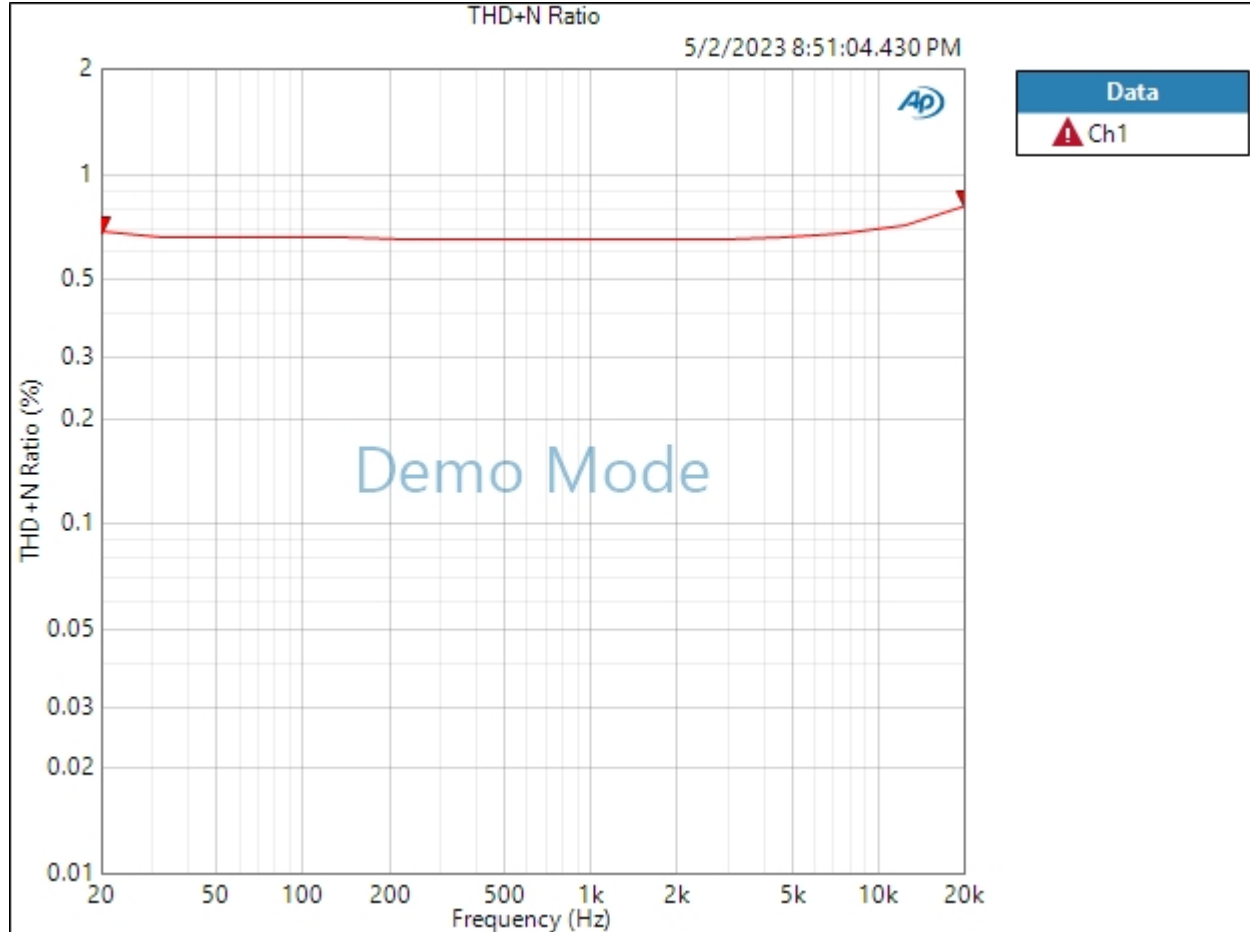

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain -10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:51:09.864 PM)

Ch1 286.5 mVrms

Gain (5/2/2023 8:51:09.864 PM)

Ch1 1.361 dB

THD+N Ratio (5/2/2023 8:51:09.864 PM)

Ch1 ---- %

Frequency (5/2/2023 8:51:09.864 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 600 Termination : Level and Gain -10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:51:12.624 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-8.695 dBu	-8.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +5 200kTermination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:51:17.820 PM)

Ch1 288.6 mVrms

Gain (5/2/2023 8:51:17.820 PM)

Ch1 -8.574 dB

THD+N Ratio (5/2/2023 8:51:17.820 PM)

Ch1 ---- %

Frequency (5/2/2023 8:51:17.820 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/2/2023 8:51:28 PM

RMS Level (5/2/2023 8:51:28.200 PM)

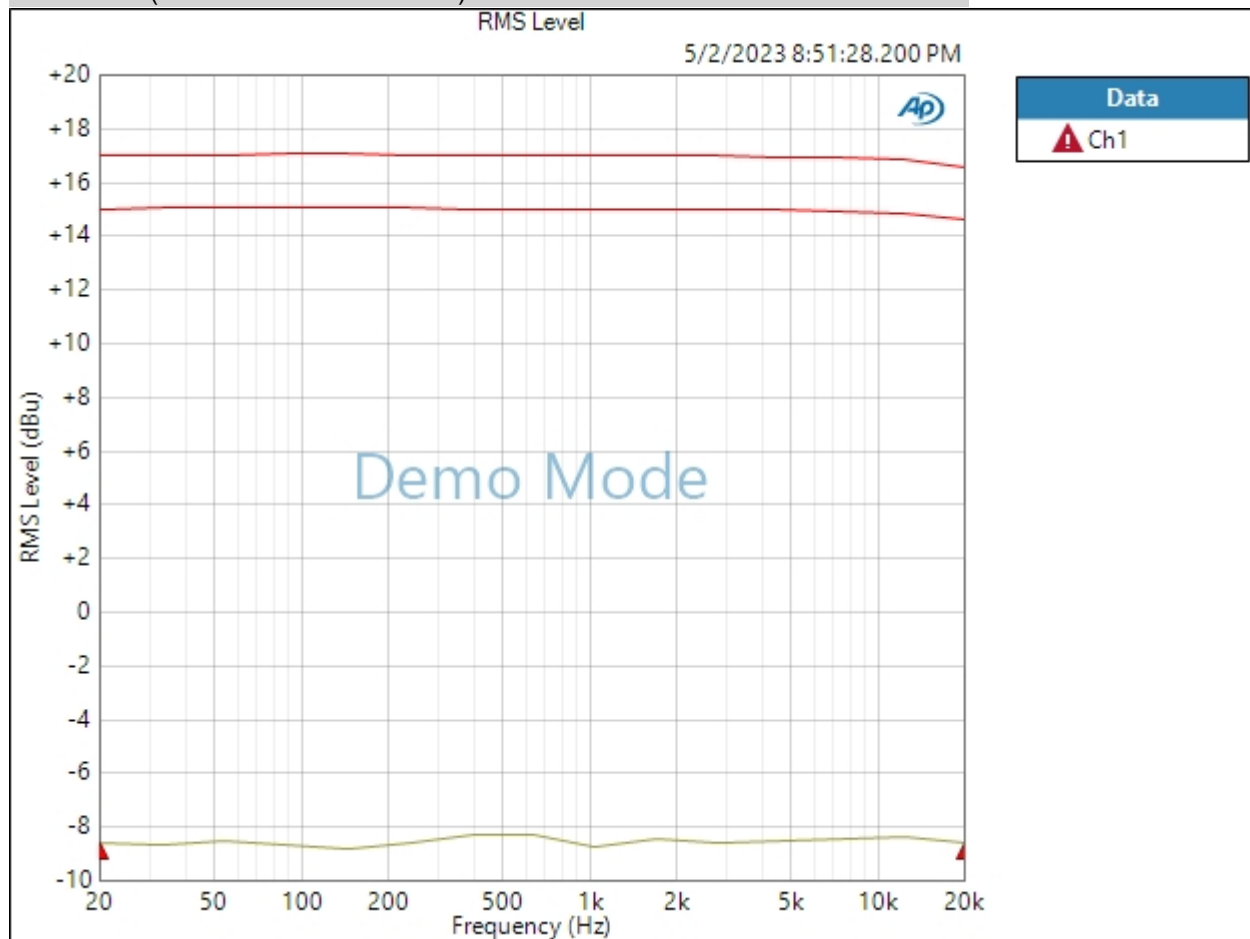

Ch1 Failed Lower Limit

5/2/2023 8:53 PM


Page 25 of 54

Sequence Report



Result: ▲ FAILED

THD+N Ratio (5/2/2023 8:51:28.200 PM)

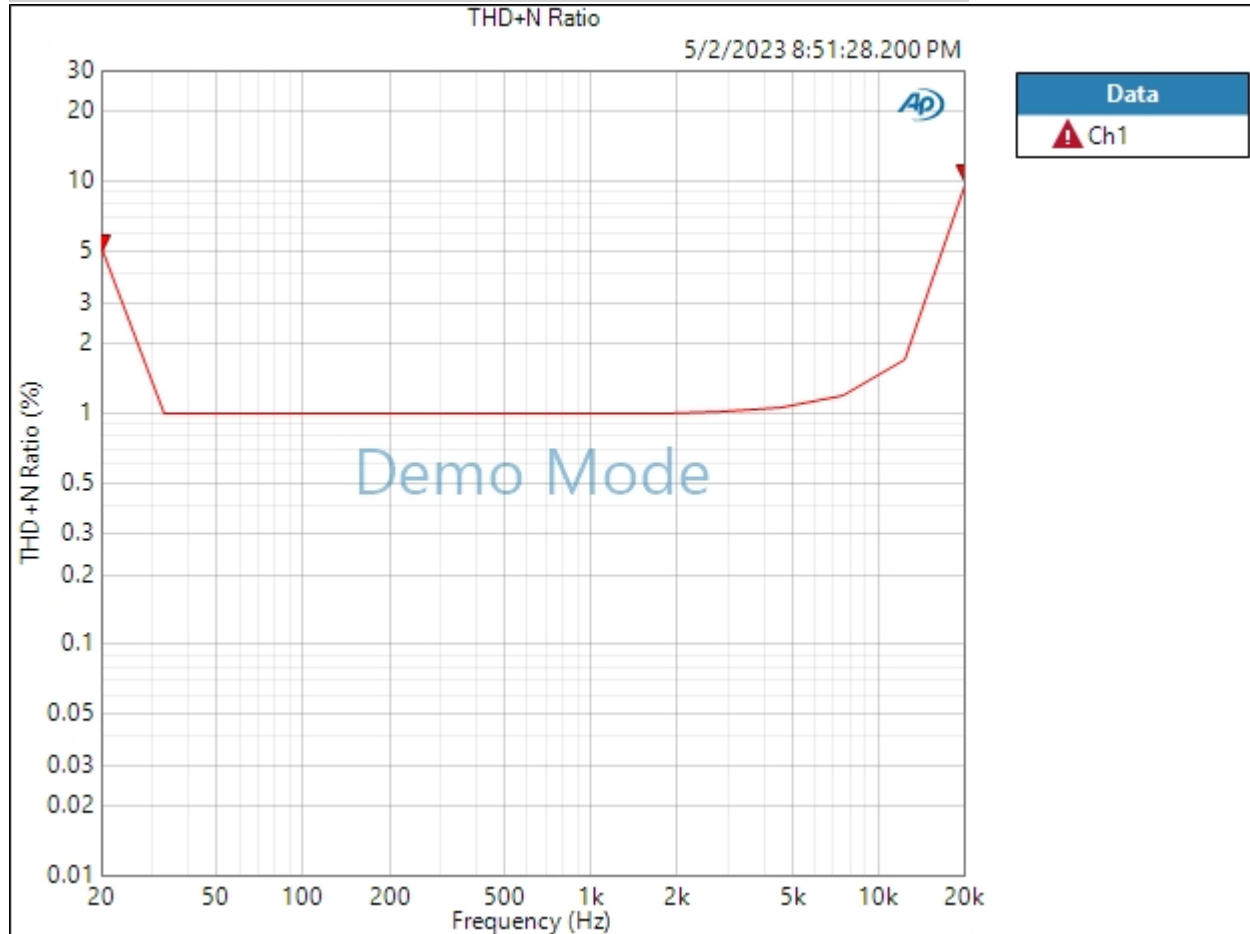

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:51:34.145 PM)

Ch1 294.8 mVrms

Gain (5/2/2023 8:51:34.145 PM)

Ch1 1.609 dB

THD+N Ratio (5/2/2023 8:51:34.145 PM)

Ch1 ---- %

Frequency (5/2/2023 8:51:34.145 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 600 Termination : Level and Gain +5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:51:38.228 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	-8.535 dBu	+6.500 dBu	

Result:  FAILED

Sequence Report



Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:51:44.140 PM)

Ch1 282.5 mVrms

Gain (5/2/2023 8:51:44.140 PM)

Ch1 1.238 dB

THD+N Ratio (5/2/2023 8:51:44.140 PM)

Ch1 ---- %

Frequency (5/2/2023 8:51:44.140 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -5 600 Termination : Level and Gain -5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:51:48.078 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-8.675 dBu	-3.500 dBu	

Result:  FAILED

Sequence Report



Line Gain 0 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:51:53.513 PM)

Ch1 289.0 mVrms

Gain (5/2/2023 8:51:53.513 PM)

Ch1 1.435 dB

THD+N Ratio (5/2/2023 8:51:53.513 PM)

Ch1 ---- %

Frequency (5/2/2023 8:51:53.513 PM)

Ch1 ---- Hz

Sequence Report



Line Gain 0 600 Termination : Level and Gain 0


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:51:57.684 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-8.612 dBu	+1.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:52:03.196 PM)

Ch1 297.0 mVrms

Gain (5/2/2023 8:52:03.196 PM)

Ch1 1.674 dB

THD+N Ratio (5/2/2023 8:52:03.196 PM)

Ch1 ---- %

Frequency (5/2/2023 8:52:03.196 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +10 600 Termination : Level and Gain +10


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:52:07.373 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	-8.644 dBu	+11.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:52:12.894 PM)

Ch1 284.7 mVrms

Gain (5/2/2023 8:52:12.894 PM)

Ch1 11.308 dB

THD+N Ratio (5/2/2023 8:52:12.894 PM)

Ch1 ---- %

Frequency (5/2/2023 8:52:12.894 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 5/2/2023 8:52:25 PM

RMS Level (5/2/2023 8:52:25.492 PM)

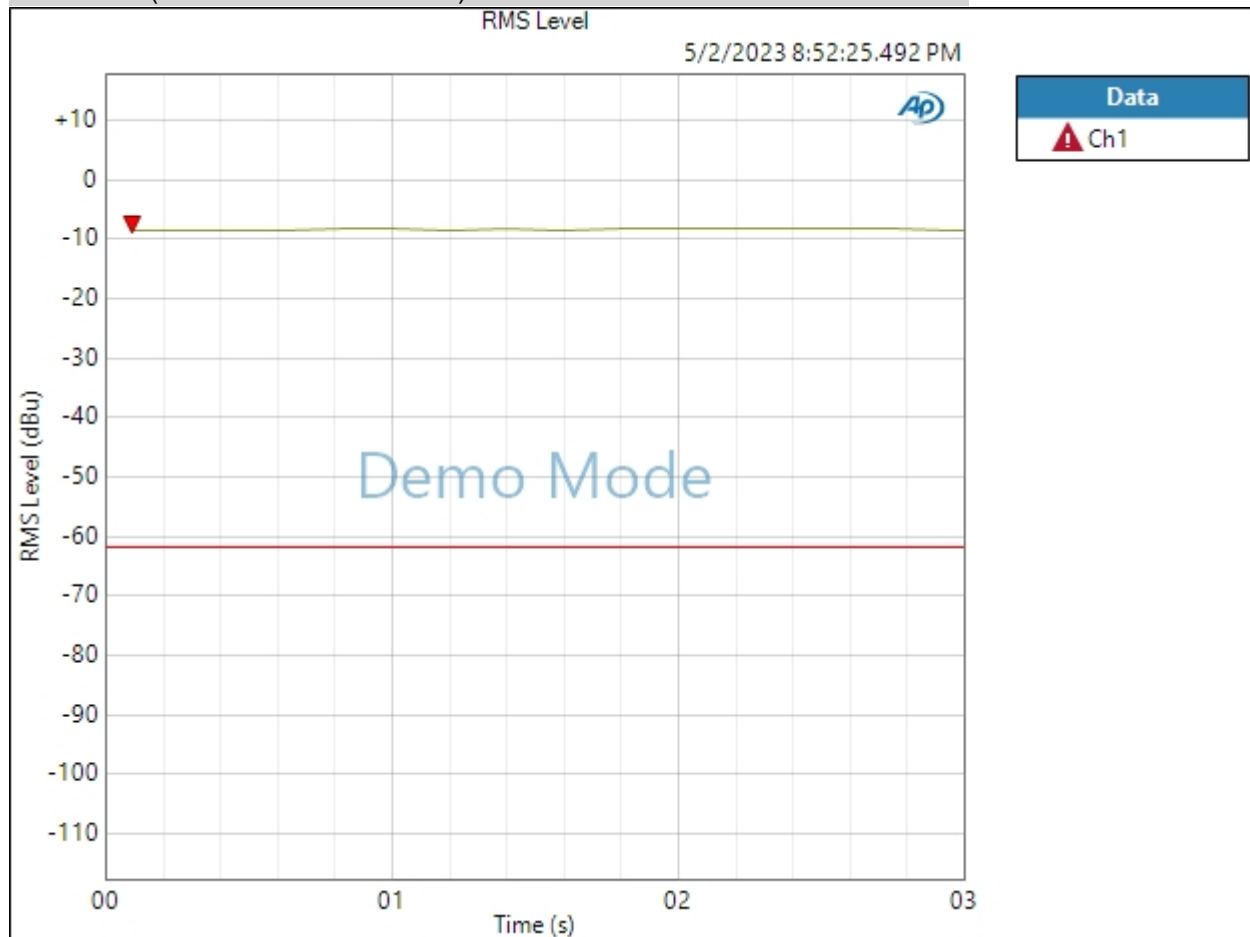

Ch1 Failed Upper Limit

Result: FAILED

5/2/2023 8:53 PM

Page 41 of 54

Sequence Report



Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSP1:	10.00 mVrms
dBSP2:	10.00 mVrms
dBSP1 Calibrator Level:	94.000 dBSP
dBSP2 Calibrator Level:	94.000 dBSP
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:52:30.834 PM)

Ch1 283.6 mVrms

Gain (5/2/2023 8:52:30.834 PM)

Ch1 11.273 dB

THD+N Ratio (5/2/2023 8:52:30.834 PM)

Ch1 ---- %

Frequency (5/2/2023 8:52:30.834 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 5/2/2023 8:52:45 PM

RMS Level (5/2/2023 8:52:45.139 PM)

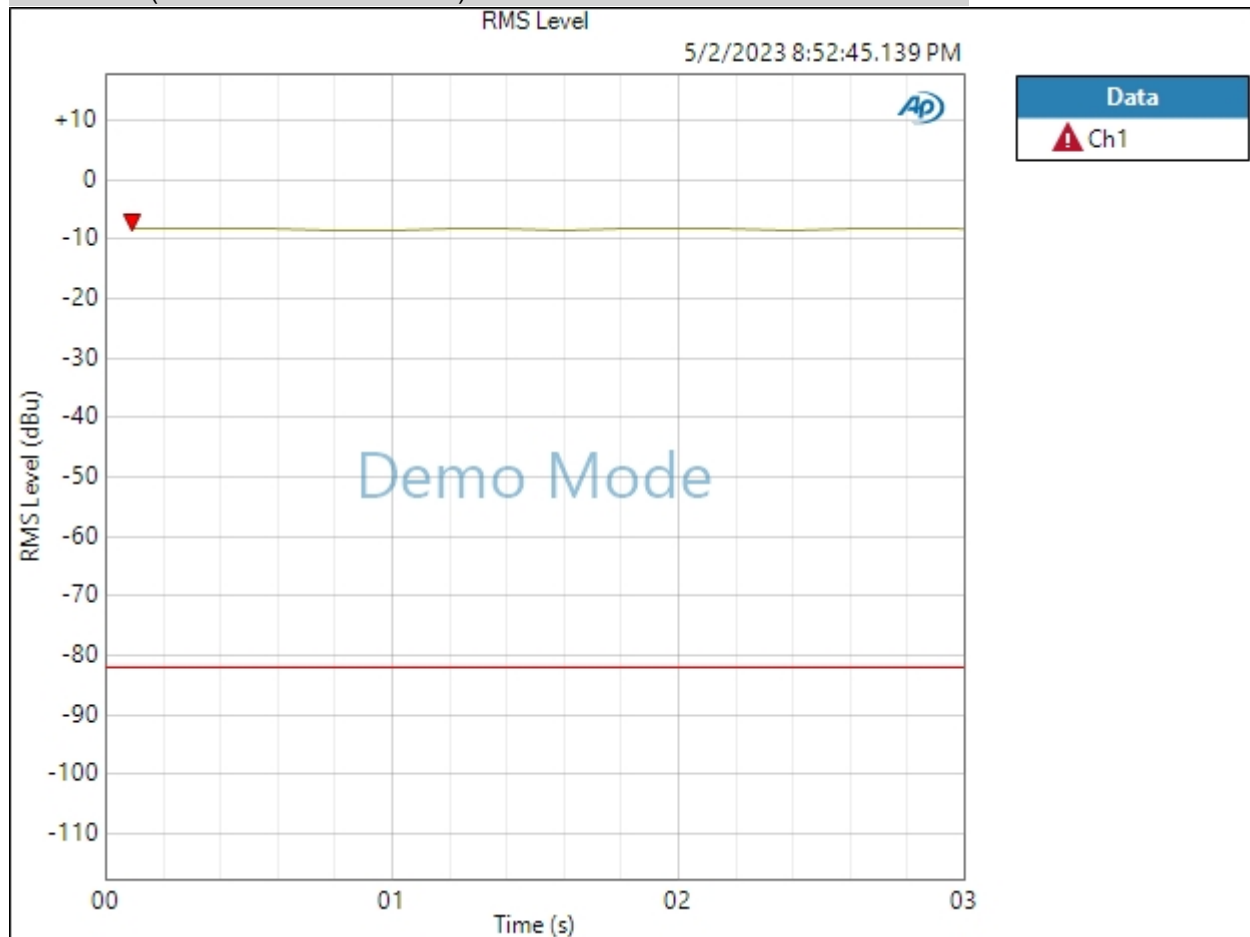

Ch1 Failed Upper Limit

Result: FAILED

5/2/2023 8:53 PM

Page 45 of 54

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:52:50.338 PM)

Ch1 280.9 mVrms

Gain (5/2/2023 8:52:50.338 PM)

Ch1 13.489 dB

THD+N Ratio (5/2/2023 8:52:50.338 PM)

Ch1 ---- %

Frequency (5/2/2023 8:52:50.338 PM)

Ch1 ---- Hz

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:52:55.858 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	-8.626 dBu	+2.000 dBu	

Result:  FAILED

Sequence Report



Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Unbalanced
Channels: 2
Source Impedance: 50 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/2/2023 8:53 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:53:01.415 PM)

Ch1 286.9 mVrms

Gain (5/2/2023 8:53:01.415 PM)

Ch1 13.672 dB

THD+N Ratio (5/2/2023 8:53:01.415 PM)

Ch1 ---- %

Frequency (5/2/2023 8:53:01.415 PM)

Ch1 ---- Hz

Sequence Report



Hi Z Gain -10 47k 200k Termination : Level and Gain 47K


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/2/2023 8:53:05.319 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-8.504 dBu	-4.000 dBu	

Result:  FAILED

Sequence Report



Dummy Signal Path For Report : Signal Path Setup

Output Connector: Analog Unbalanced
Channels: 2
Source Impedance: 50 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Unbalanced
Channels: 2
Termination: 100 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00
Port D (hex): 00

5/2/2023 8:53 PM

Sequence Report



- Clocks

Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled

- Triggers

Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising

Dummy Signal Path For Report : Verify Connections

Waveform:	Sine
Generator Level:	100.0 mVrms
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/2/2023 8:53:08.971 PM)

Ch1	286.7 mVrms
Ch2	278.0 mVrms