

Sequence Report



Summary

Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 FAILED

Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K FAILED

Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 FAILED

Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 PASSED

Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 FAILED

Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 FAILED

Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 FAILED

Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 FAILED

Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 FAILED

Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW FAILED

Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	⚠ FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	⚠ FAILED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

Sequence Report



Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00

Sequence Report



Port C (hex): 00
Port D (hex): 00
• Clocks
Output Rate: Track Output SR
Sync Out Level: 3.300 V
Sync Out Polarity: Normal
Timebase Reference: Internal
Jitter: Disabled
• Triggers
Source: Off
Input Logic Level: 3.300 V
Edge: Rising

Mic500 200k Termination : Verify Connections

Waveform: Sine
Generator Level: -42.300 dBu
DC Offset: 0.000 V
Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:19:39.889 PM)

Ch1 279.2 mVrms

Gain (5/15/2023 2:19:39.889 PM)

Ch1 33.438 dB

THD+N Ratio (5/15/2023 2:19:39.889 PM)

Ch1 ---- %

Frequency (5/15/2023 2:19:39.889 PM)

Ch1 ---- Hz

Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 2:19:42 PM

RMS Level (5/15/2023 2:19:42.994 PM)

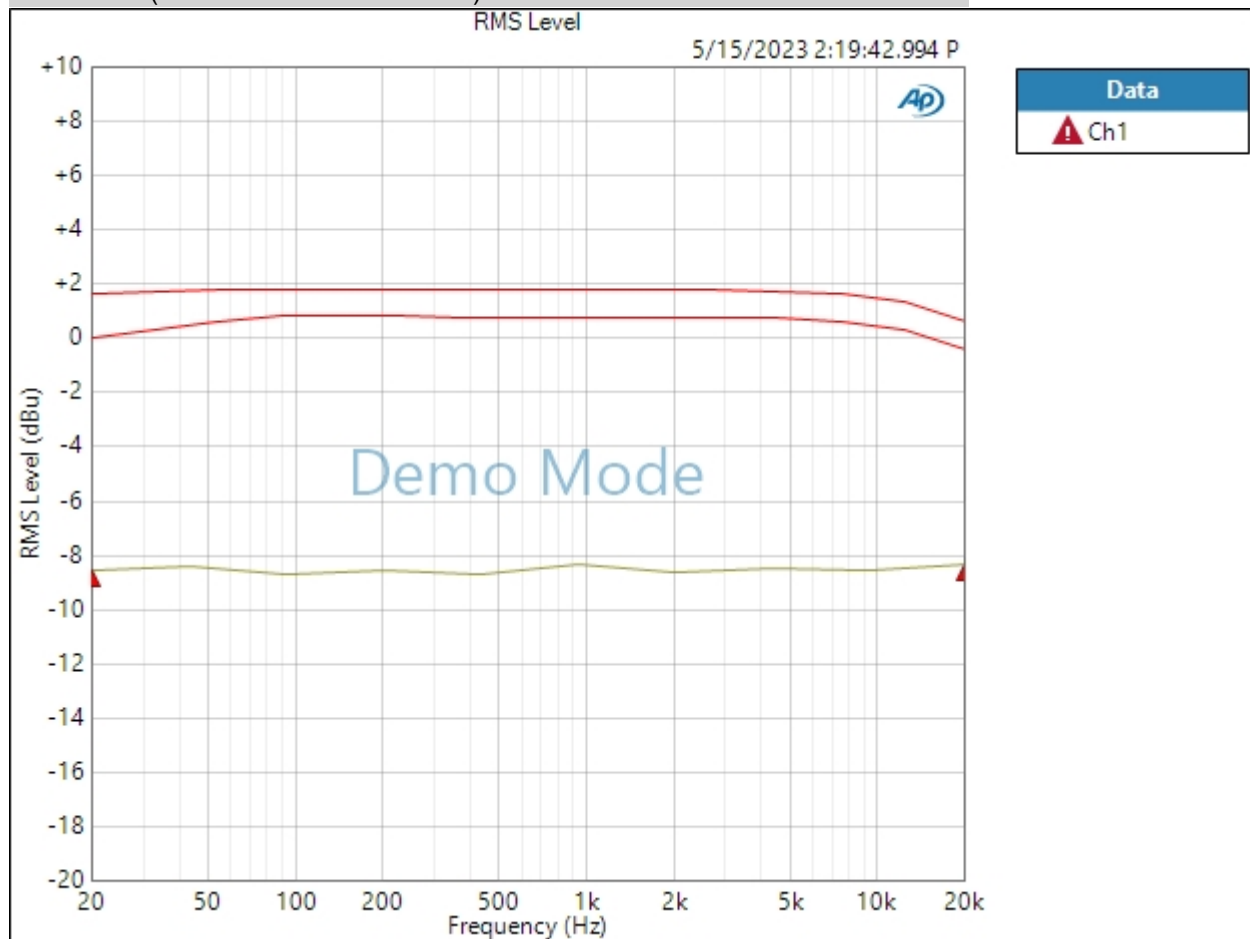


Ch1 Failed Lower Limit

Sequence Report



Result: ▲ FAILED


THD+N Ratio (5/15/2023 2:19:42.994 PM)

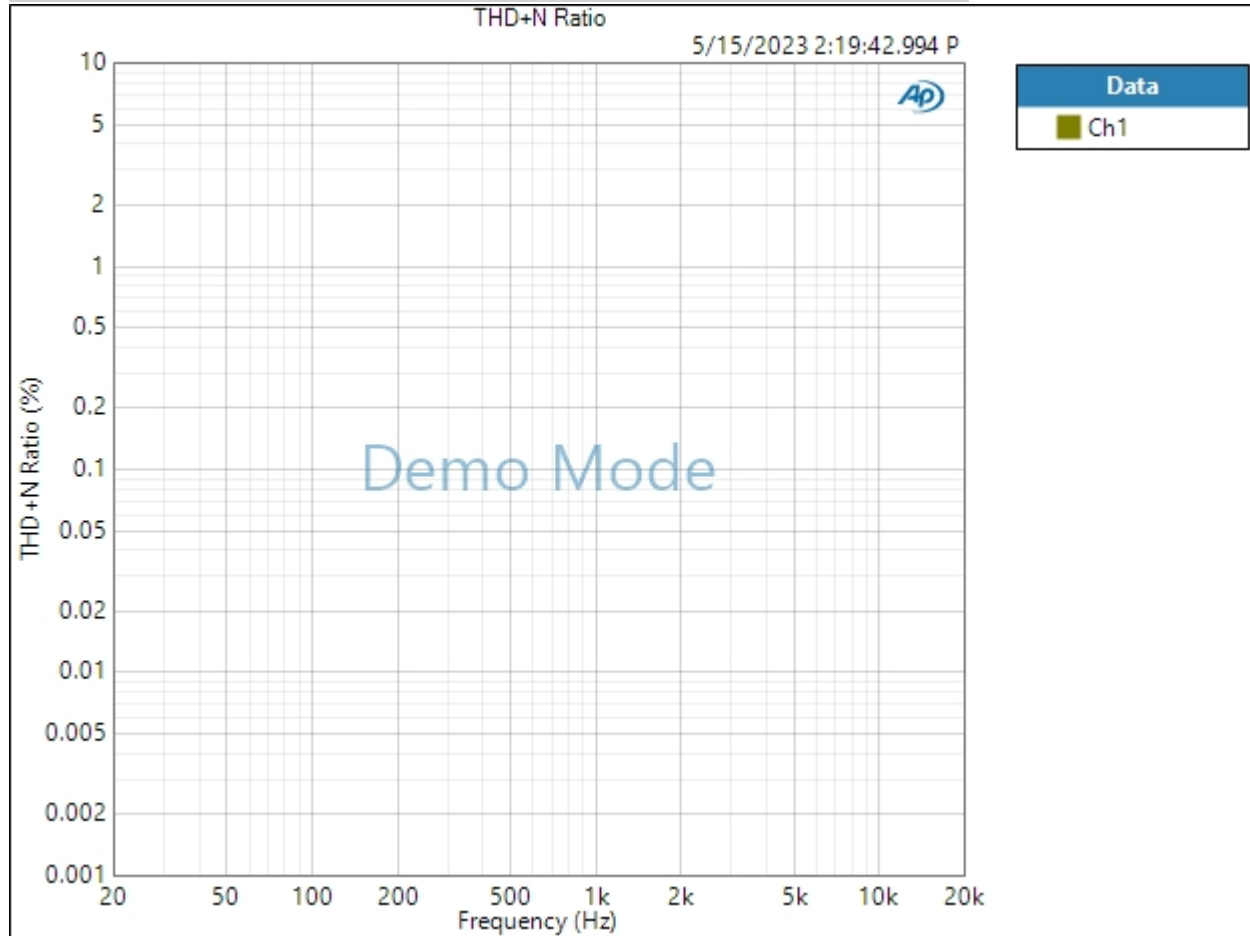

Result: ✔ PASSED

THD Ratio (5/15/2023 2:19:42.994 PM)

Sequence Report

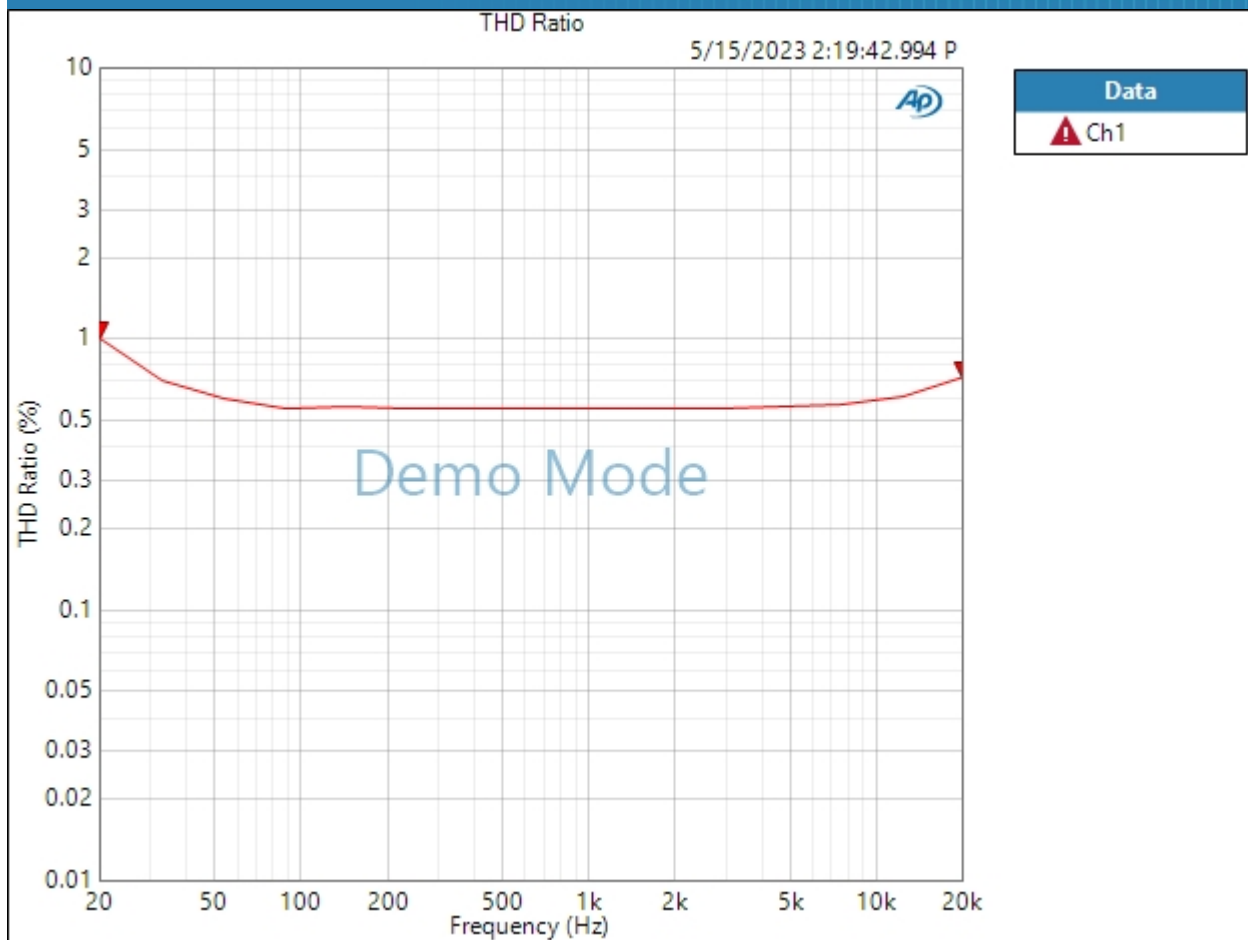

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:19:47.487 PM)

Ch1 285.6 mVrms

Gain (5/15/2023 2:19:47.487 PM)

Ch1 33.634 dB

THD+N Ratio (5/15/2023 2:19:47.487 PM)

Ch1 ---- %

Frequency (5/15/2023 2:19:47.487 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 2:19:50 PM

RMS Level (5/15/2023 2:19:50.554 PM)

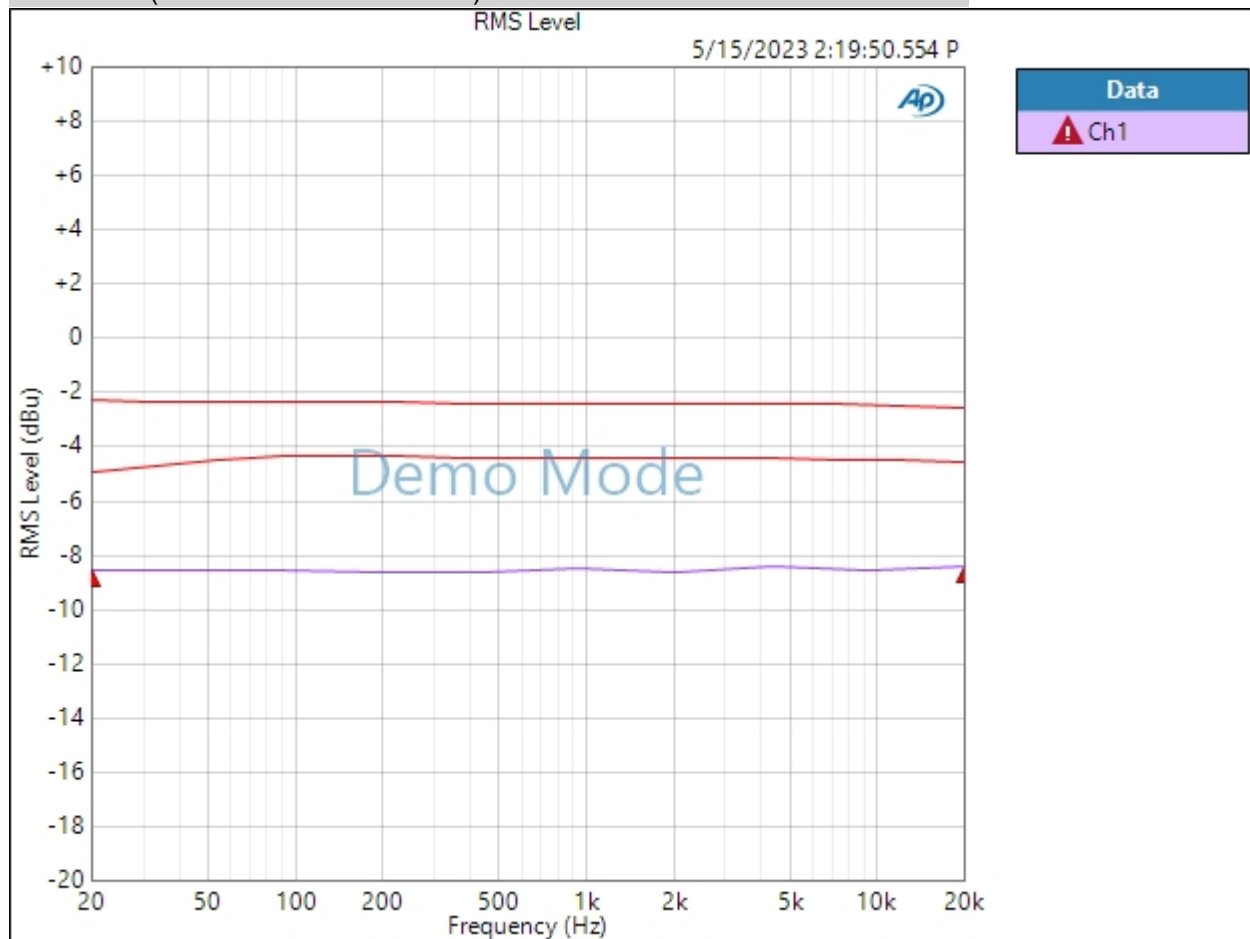


Ch1 Failed Lower Limit

Sequence Report



Result: ▲ FAILED

THD Ratio (5/15/2023 2:19:50.554 PM)

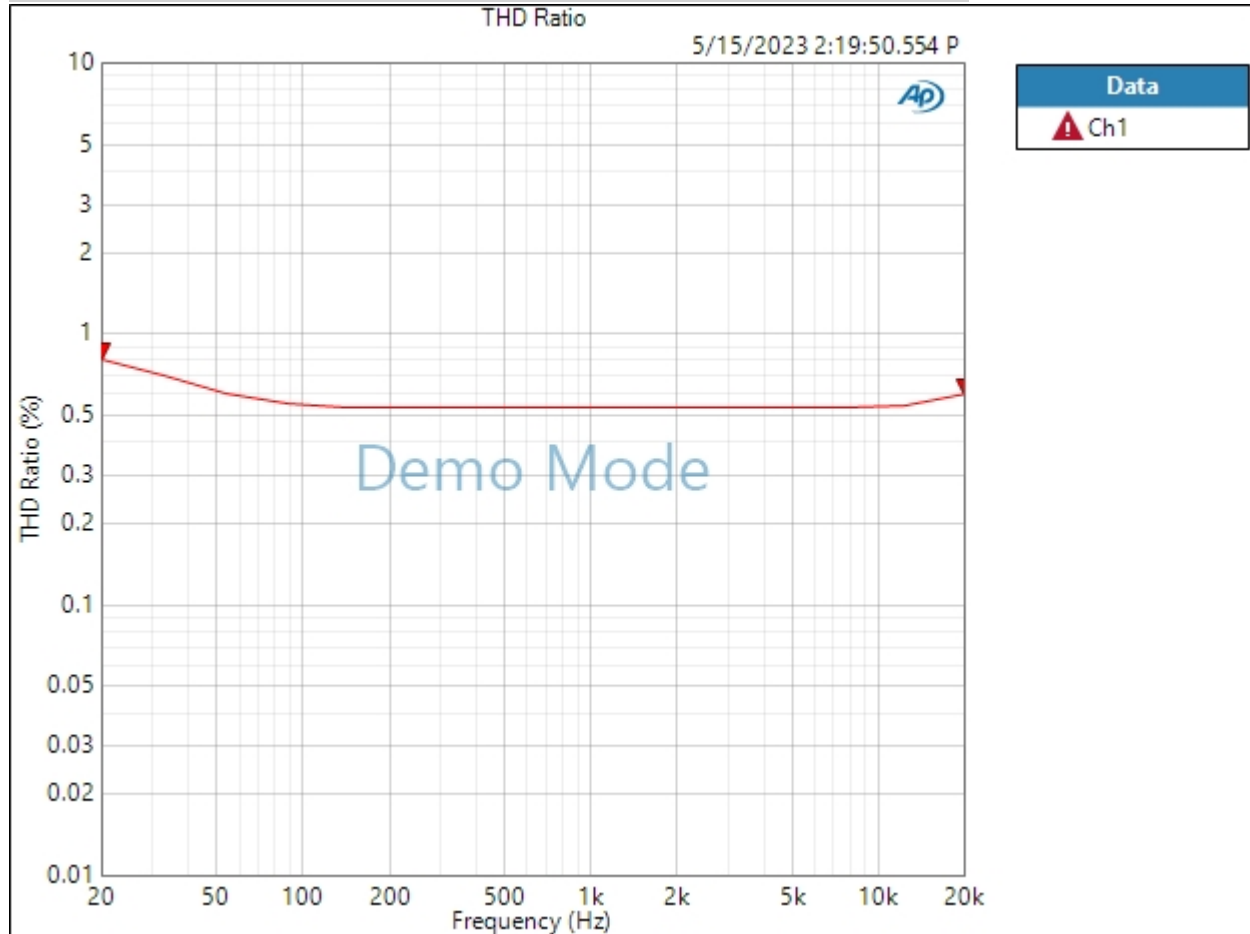

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:19:56.000 PM)

Ch1 280.0 mVrms

Gain (5/15/2023 2:19:56.000 PM)

Ch1 33.461 dB

THD+N Ratio (5/15/2023 2:19:56.000 PM)

Ch1 ---- %

Frequency (5/15/2023 2:19:56.000 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 2:19:59 PM

RMS Level (5/15/2023 2:19:59.672 PM)

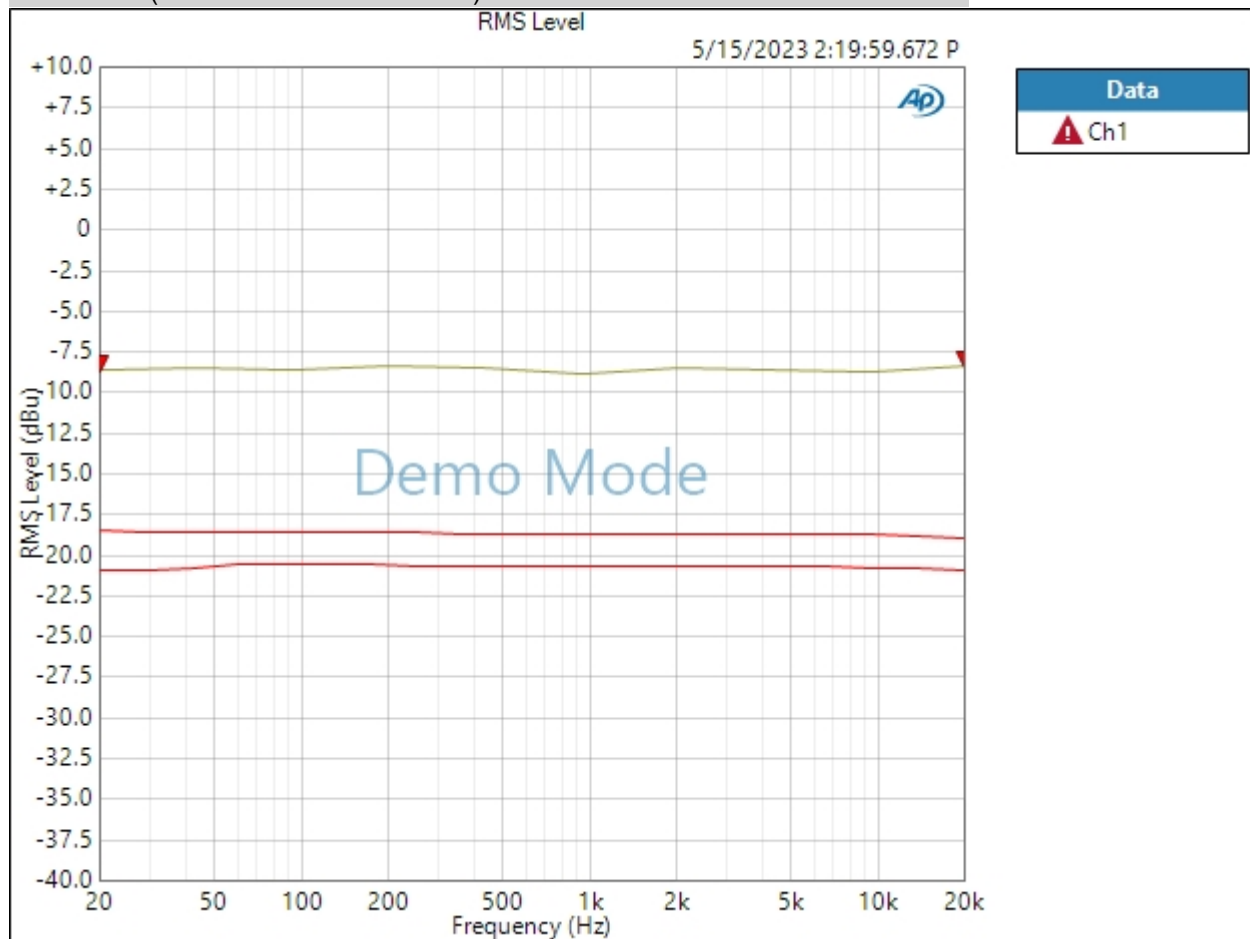


Sequence Report



Result: ▲ FAILED

THD Ratio (5/15/2023 2:19:59.672 PM)

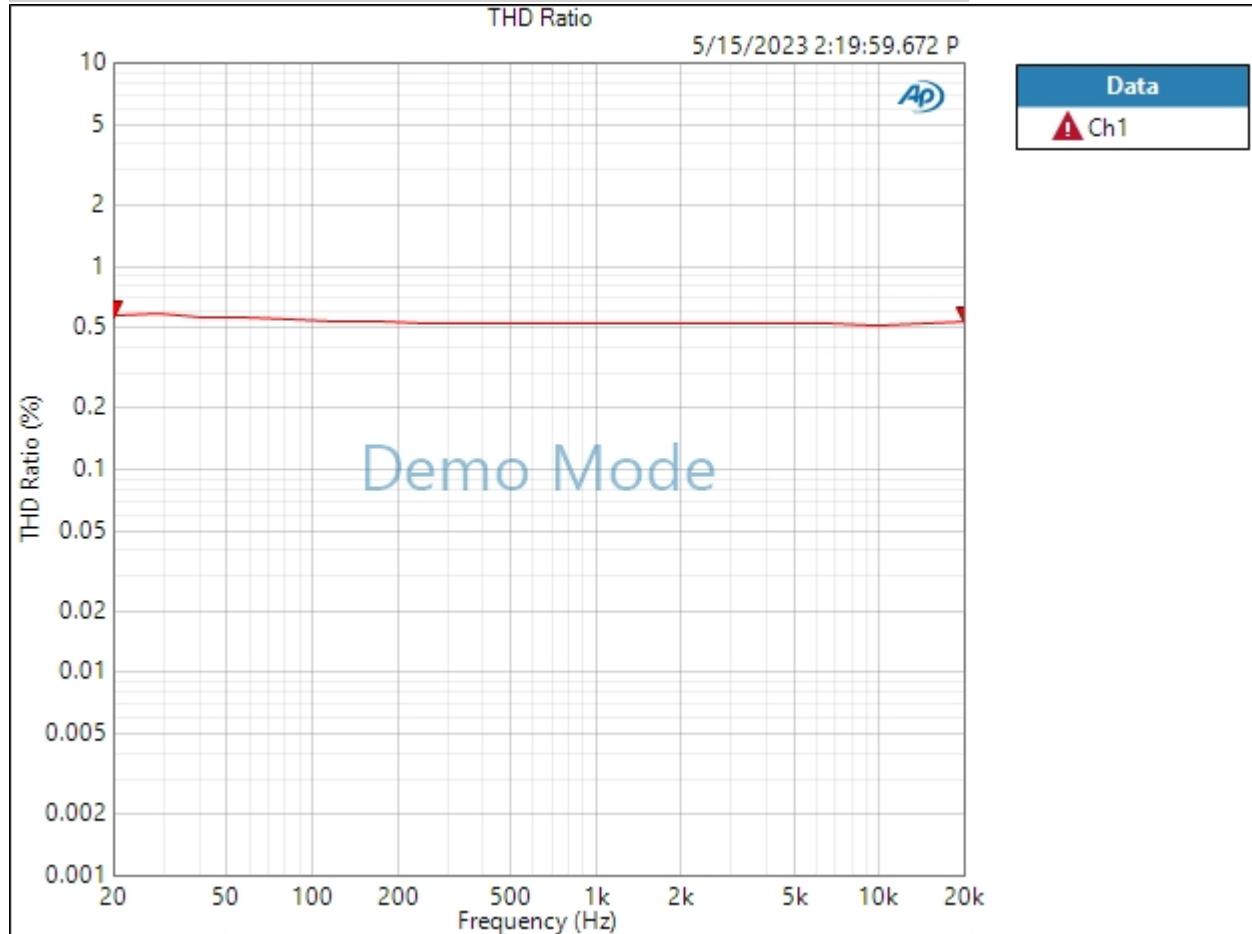

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain -10 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:04.493 PM)

Ch1 296.6 mVrms

Gain (5/15/2023 2:20:04.493 PM)

Ch1 -8.339 dB

THD+N Ratio (5/15/2023 2:20:04.493 PM)

Ch1 ---- %

Frequency (5/15/2023 2:20:04.493 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 2:20:08 PM

RMS Level (5/15/2023 2:20:08.497 PM)

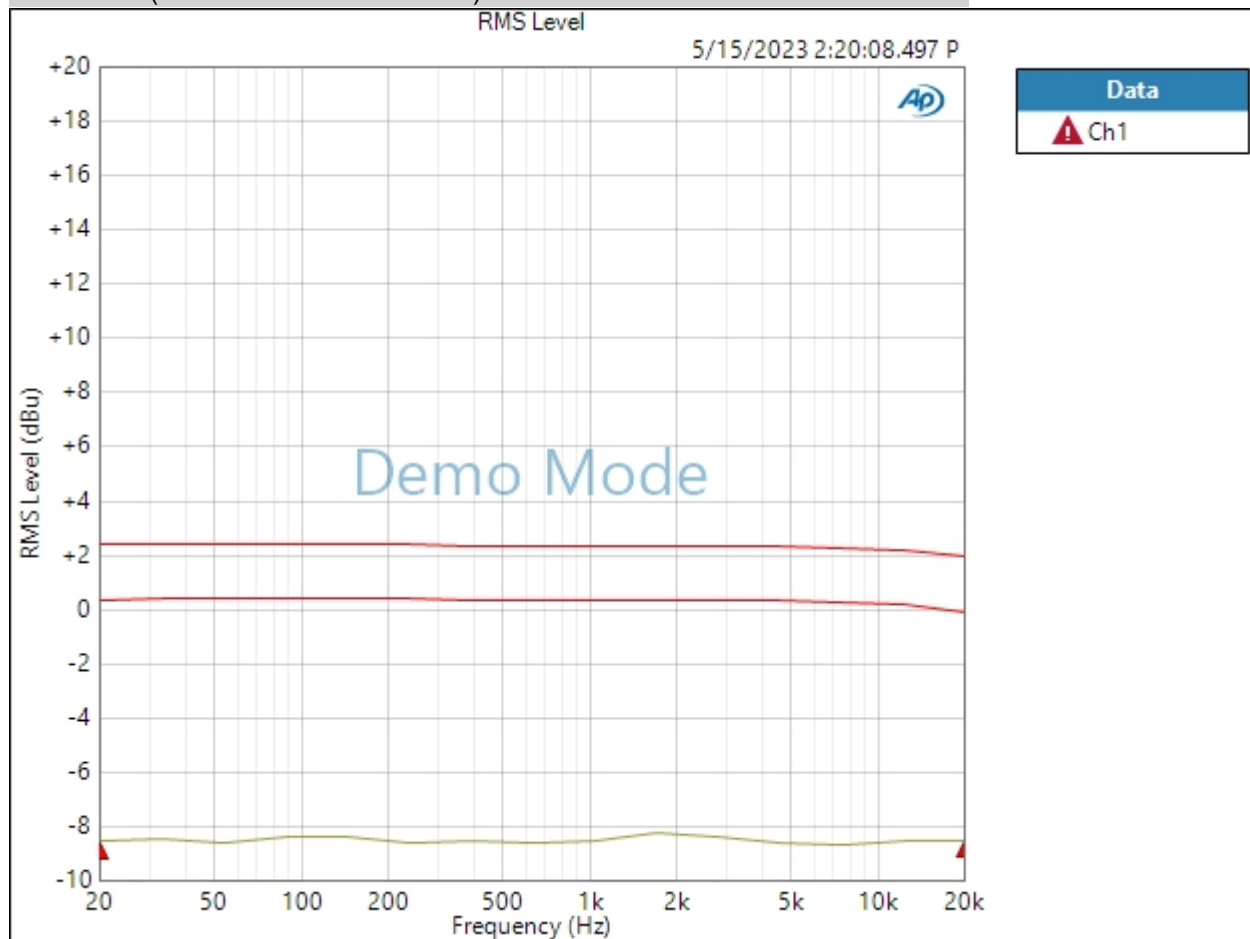


Ch1 ! Failed Lower Limit

Sequence Report



Result: ▲ FAILED

THD+N Ratio (5/15/2023 2:20:08.497 PM)

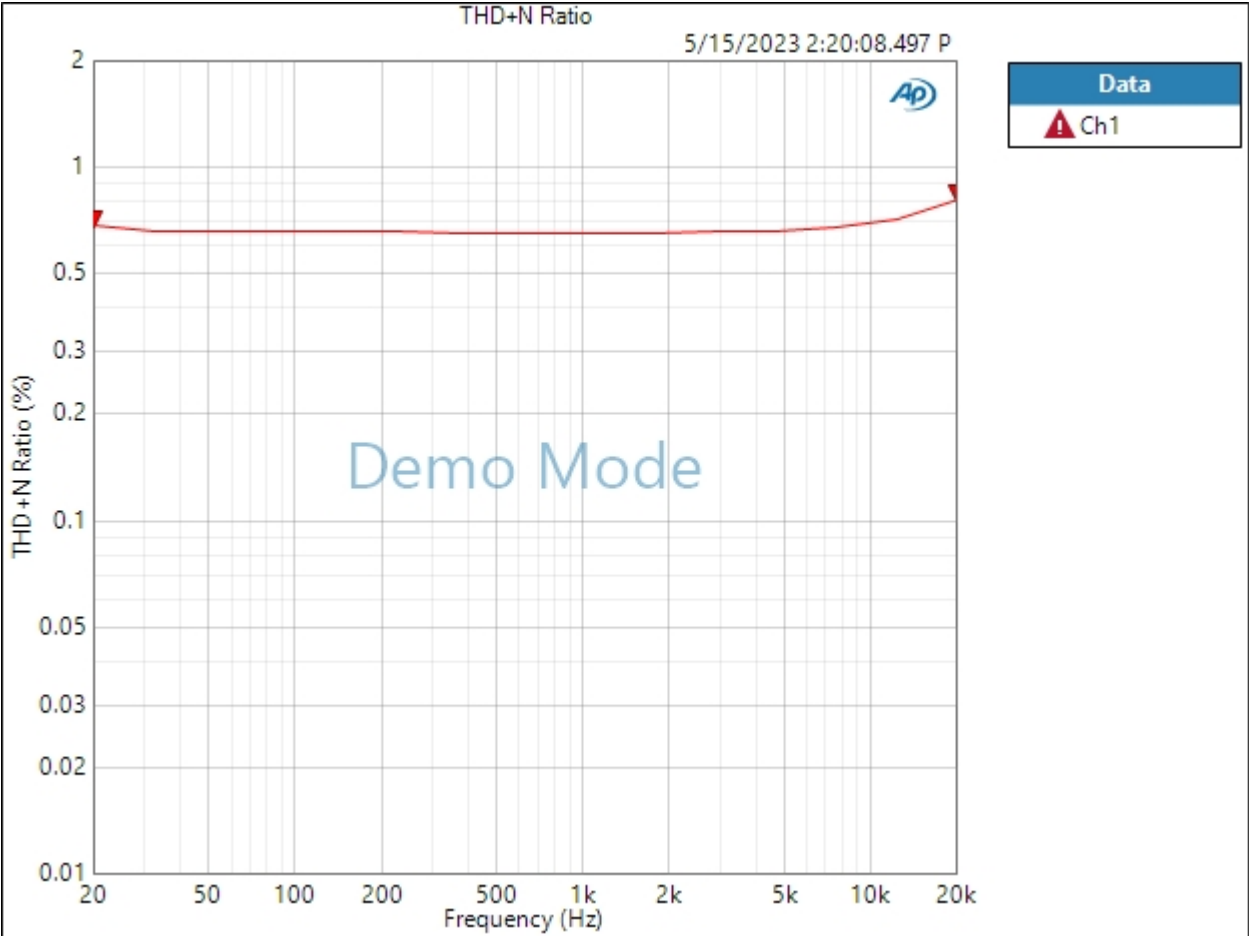

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain -10 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:13.148 PM)

Ch1 298.3 mVrms

Gain (5/15/2023 2:20:13.148 PM)

Ch1 1.711 dB

THD+N Ratio (5/15/2023 2:20:13.148 PM)

Ch1 ---- %

Frequency (5/15/2023 2:20:13.148 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 600 Termination : Level and Gain -10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:15.379 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-8.633 dBu	-8.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +5 200kTermination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:20.218 PM)

Ch1 291.7 mVrms

Gain (5/15/2023 2:20:20.218 PM)

Ch1 -8.482 dB

THD+N Ratio (5/15/2023 2:20:20.218 PM)

Ch1 ---- %

Frequency (5/15/2023 2:20:20.218 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 2:20:24 PM

RMS Level (5/15/2023 2:20:24.195 PM)

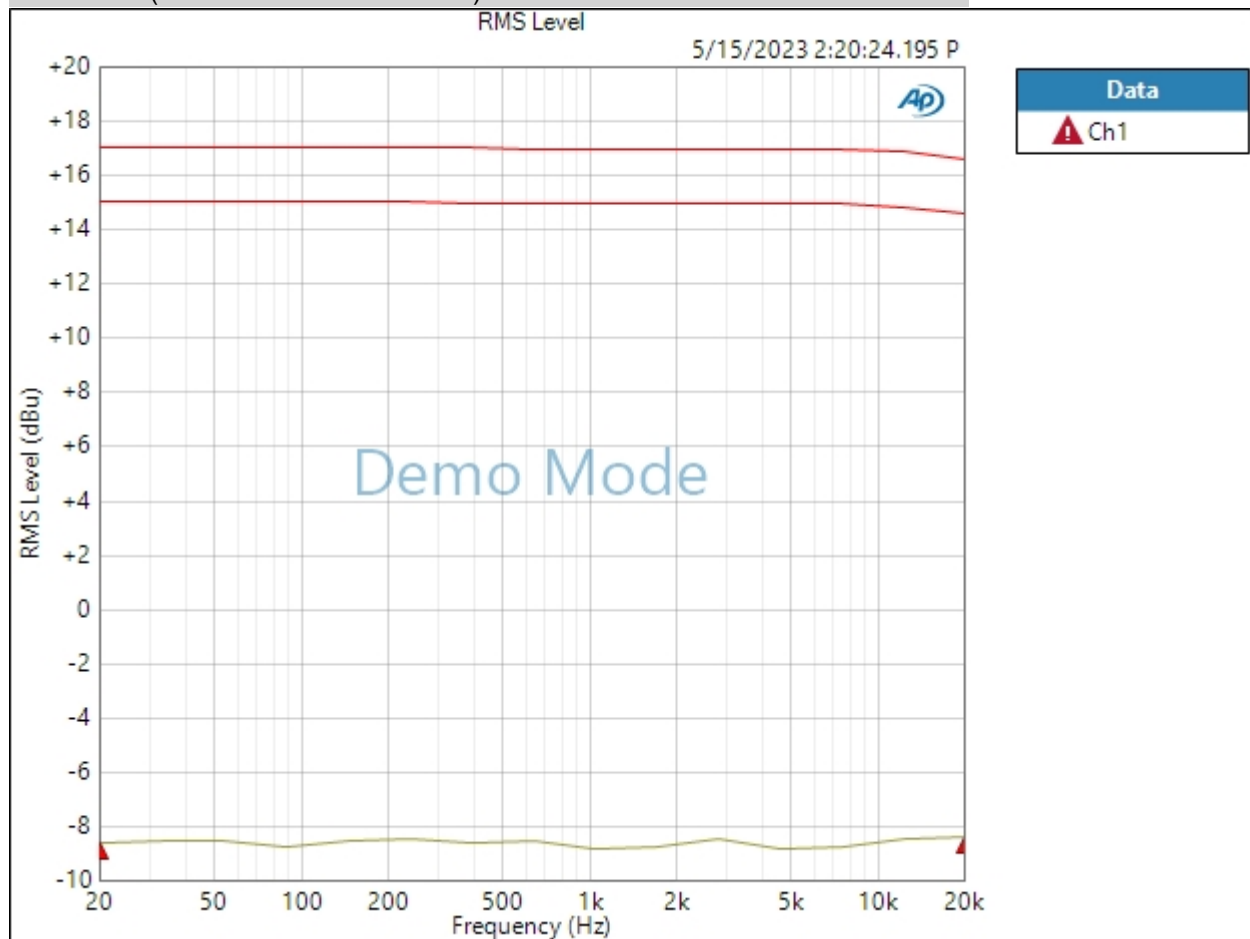


Ch1 ! Failed Lower Limit

Sequence Report



Result: ▲ FAILED

THD+N Ratio (5/15/2023 2:20:24.195 PM)

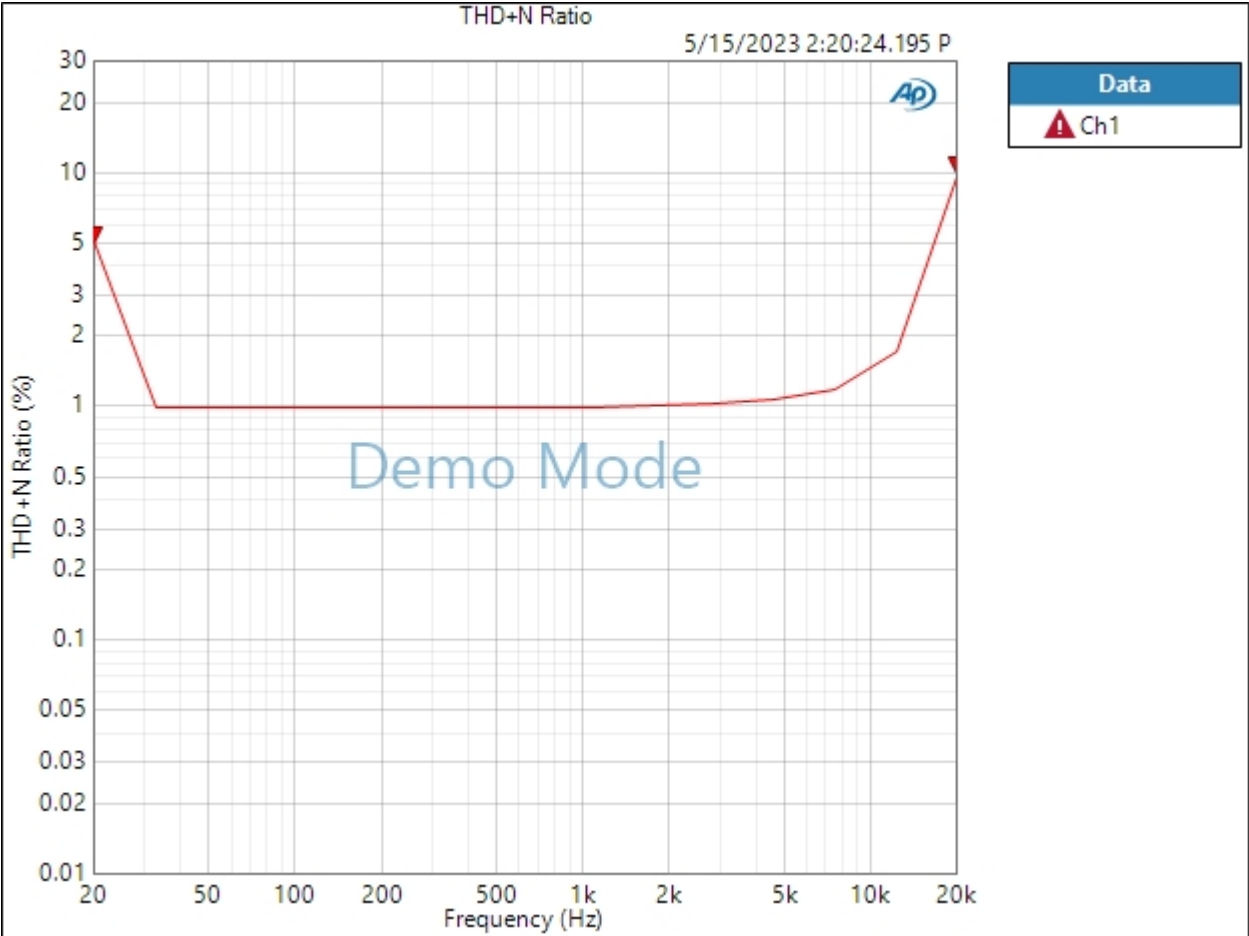

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:28.954 PM)

Ch1 287.4 mVrms

Gain (5/15/2023 2:20:28.954 PM)

Ch1 1.389 dB

THD+N Ratio (5/15/2023 2:20:28.954 PM)

Ch1 ---- %

Frequency (5/15/2023 2:20:28.954 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 600 Termination : Level and Gain +5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:31.439 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	-8.535 dBu	+6.500 dBu	

Result:  FAILED

Sequence Report



Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:36.307 PM)

Ch1 282.3 mVrms

Gain (5/15/2023 2:20:36.307 PM)

Ch1 1.233 dB

THD+N Ratio (5/15/2023 2:20:36.307 PM)

Ch1 ---- %

Frequency (5/15/2023 2:20:36.307 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -5 600 Termination : Level and Gain -5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:38.787 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-8.603 dBu	-3.500 dBu	

Result:  FAILED

Sequence Report



Line Gain 0 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:43.619 PM)

Ch1 286.4 mVrms

Gain (5/15/2023 2:20:43.619 PM)

Ch1 1.357 dB

THD+N Ratio (5/15/2023 2:20:43.619 PM)

Ch1 ---- %

Frequency (5/15/2023 2:20:43.619 PM)

Ch1 ---- Hz

Sequence Report



Line Gain 0 600 Termination : Level and Gain 0


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:46.097 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-8.445 dBu	+1.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:51.236 PM)

Ch1 291.7 mVrms

Gain (5/15/2023 2:20:51.236 PM)

Ch1 1.517 dB

THD+N Ratio (5/15/2023 2:20:51.236 PM)

Ch1 ---- %

Frequency (5/15/2023 2:20:51.236 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +10 600 Termination : Level and Gain +10


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:53.712 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	-8.636 dBu	+11.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:20:58.882 PM)

Ch1 283.8 mVrms

Gain (5/15/2023 2:20:58.882 PM)

Ch1 11.279 dB

THD+N Ratio (5/15/2023 2:20:58.882 PM)

Ch1 ---- %

Frequency (5/15/2023 2:20:58.882 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 5/15/2023 2:21:03 PM

RMS Level (5/15/2023 2:21:03.833 PM)

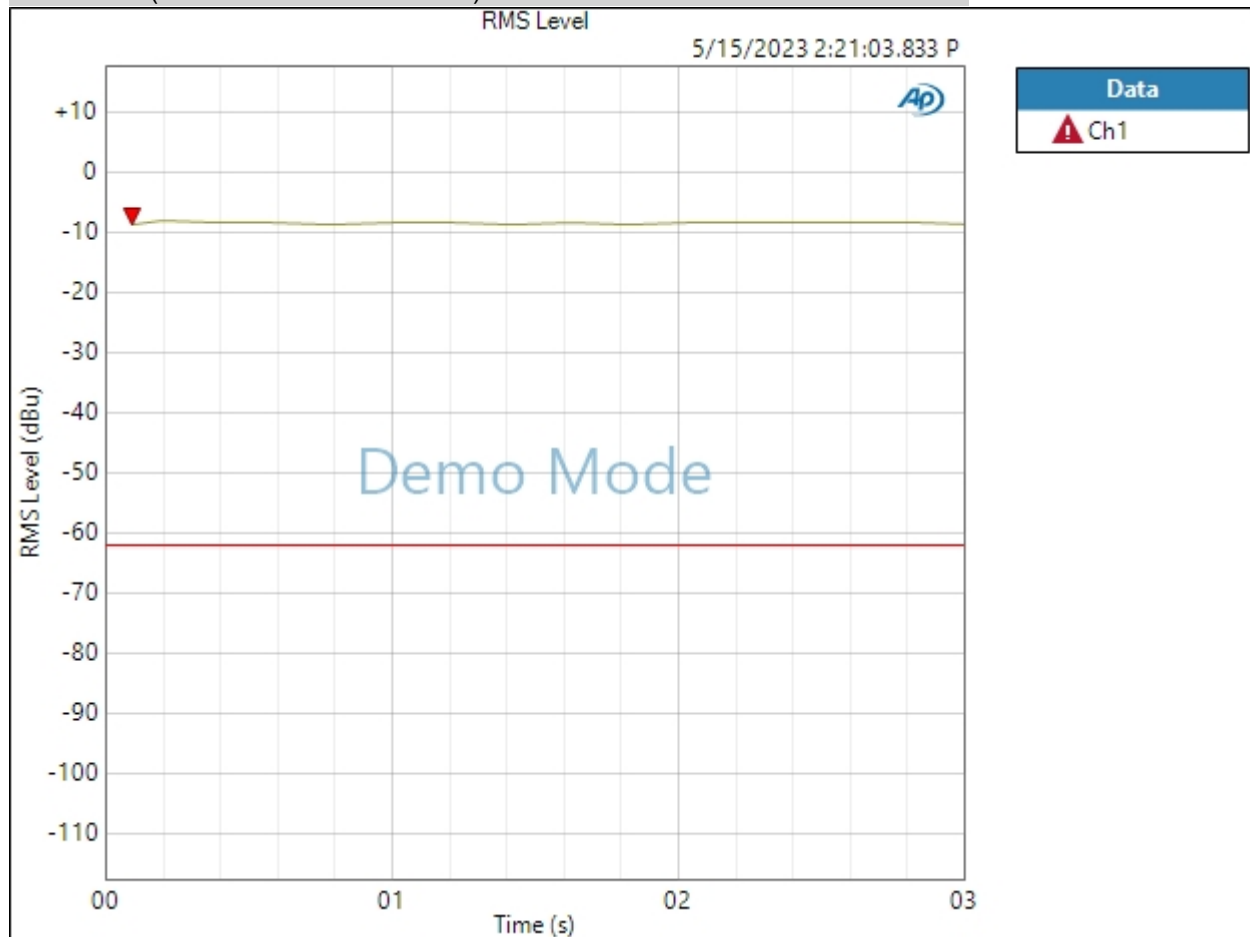

Ch1 Failed Upper Limit

Result: FAILED

5/15/2023 2:21 PM

Page 41 of 54

Sequence Report



Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:21:08.671 PM)

Ch1 282.5 mVrms

Gain (5/15/2023 2:21:08.671 PM)

Ch1 11.239 dB

THD+N Ratio (5/15/2023 2:21:08.671 PM)

Ch1 ---- %

Frequency (5/15/2023 2:21:08.671 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 5/15/2023 2:21:14 PM

RMS Level (5/15/2023 2:21:14.365 PM)

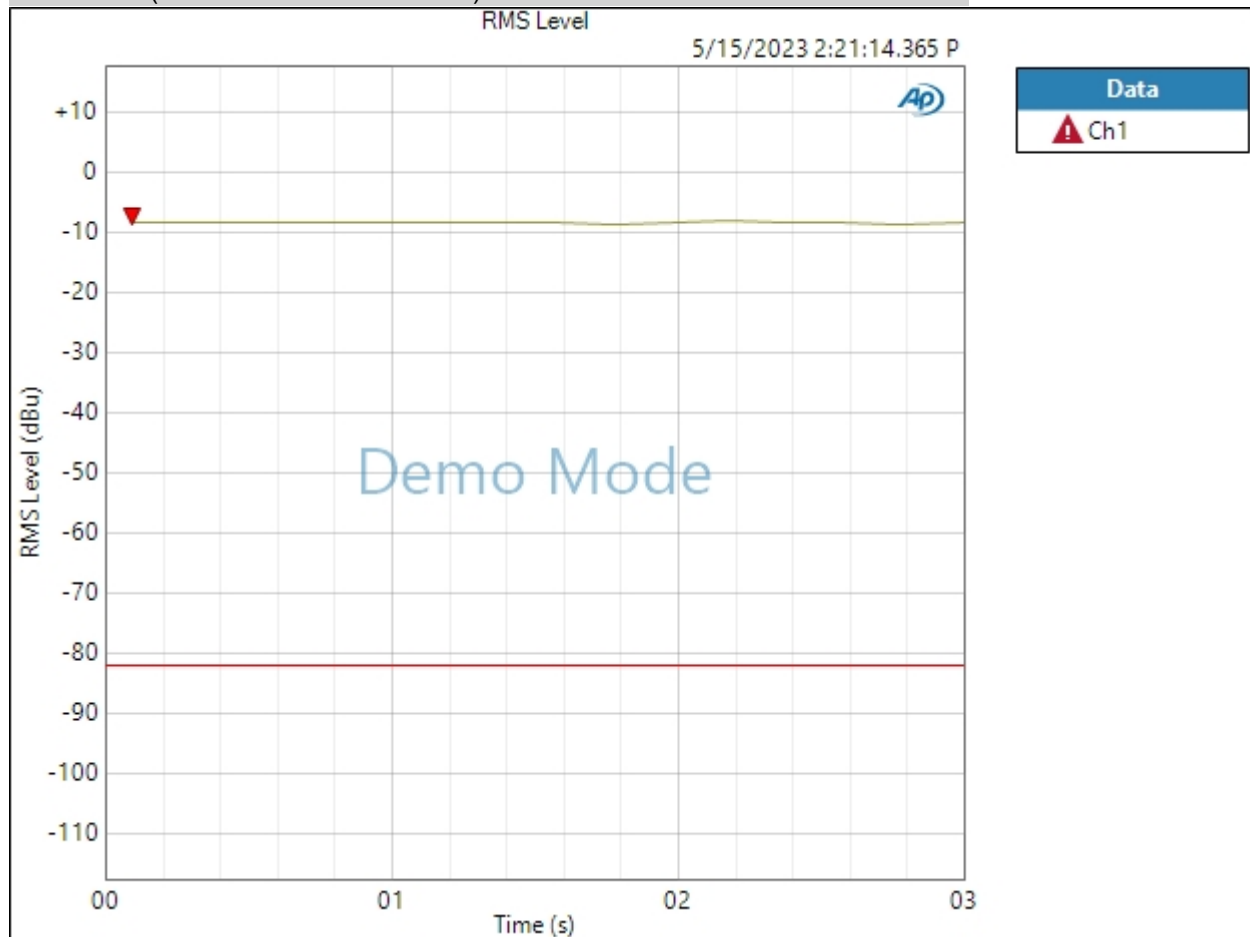

Ch1 Failed Upper Limit

Result: FAILED

5/15/2023 2:21 PM

Page 45 of 54

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:21:19.087 PM)

Ch1 282.9 mVrms

Gain (5/15/2023 2:21:19.087 PM)

Ch1 13.550 dB

THD+N Ratio (5/15/2023 2:21:19.087 PM)

Ch1 ---- %

Frequency (5/15/2023 2:21:19.087 PM)

Ch1 ---- Hz

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:21:22.014 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	-8.463 dBu	+2.000 dBu	

Result:  FAILED

Sequence Report



Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 2
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 2:21 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:21:26.874 PM)

Ch1 277.9 mVrms

Gain (5/15/2023 2:21:26.874 PM)

Ch1 13.396 dB

THD+N Ratio (5/15/2023 2:21:26.874 PM)

Ch1 ---- %

Frequency (5/15/2023 2:21:26.874 PM)

Ch1 ---- Hz

Sequence Report



Hi Z Gain -10 47k 200k Termination : Level and Gain 47K


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 2:21:29.202 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-8.532 dBu	-4.000 dBu	

Result:  FAILED

Sequence Report



Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00
Port D (hex):	00

5/15/2023 2:21 PM

Sequence Report



- Clocks

Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled

- Triggers

Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising

Dummy Signal Path For Report : Verify Connections

Waveform:	Sine
Generator Level:	100.0 mVrms
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/15/2023 2:21:32.350 PM)

Ch1	288.7 mVrms
Ch2	289.6 mVrms