Sequence Report

Audio precision

Summary

Mic500 200k Termination	
Signal Path Setup	PASSED
Stepped Frequency Sweep MIC 500	PASSED
Mic 2k 200k termination	
Signal Path Setup	PASSED
Stepped Frequency Sweep MIC 2K	PASSED
Mic 2k 15dB PAD 200k termination	
Signal Path Setup	PASSED
Stepped Frequency Sweep 15dB PAD	PASSED
Line Gain -10 200kTermination	
Signal Path Setup	PASSED
Stepped Frequency Sweep -10	PASSED
Line Gain -10 600 Termination	
Signal Path Setup	PASSED
Level and Gain -10	PASSED
Line Gain +5 200kTermination	
Signal Path Setup	PASSED
Stepped Frequency Sweep +5	PASSED
Line Gain +5 600 Termination	
Signal Path Setup	PASSED
Level and Gain +5	PASSED
Line Gain -5 600 Termination	
Signal Path Setup	PASSED
Level and Gain -5	PASSED
Line Gain 0 600 Termination	
Signal Path Setup	PASSED
Level and Gain 0	PASSED
Line Gain +10 600 Termination	
Signal Path Setup	PASSED
Level and Gain +10	PASSED
Line Gain +10 200k Termination Level Hi	
Signal Path Setup	PASSED
Noise Recorder (RMS) CW	FAILED
Line Gain +10 200k Termination Level Low	
Signal Path Setup	PASSED
Noise Recorder (RMS) CCW	PASSED
Hi Z Gain -10 2.2M 200k Termination	

Signal Path Setup	PASSED
Level and Gain 2.2M	FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	PASSED
Level and Gain 47K	FAILED
Dummy Signal Path For Report	
Signal Path Setup	PASSED

Sequence Result:

Sequence Result:	FAILED

Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Mic500 200k Termination : Verify Connections

Waveform:	Sine
Generator Level:	-42.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:12:00.707 PM)

Ch1 882.7 mVrms

Gain (5/14/2023 4:12:00.707 PM)

Ch1 43.435 dB

THD+N Ratio (5/14/2023 4:12:00.707 PM)

Ch1 0.135701 %

Frequency (5/14/2023 4:12:00.707 PM)

Ch1 1.00000 kHz

Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level:	-42.300 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	10
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/14/2023 4:12:07 PM

RMS Level (5/14/2023 4:12:07.483 PM)

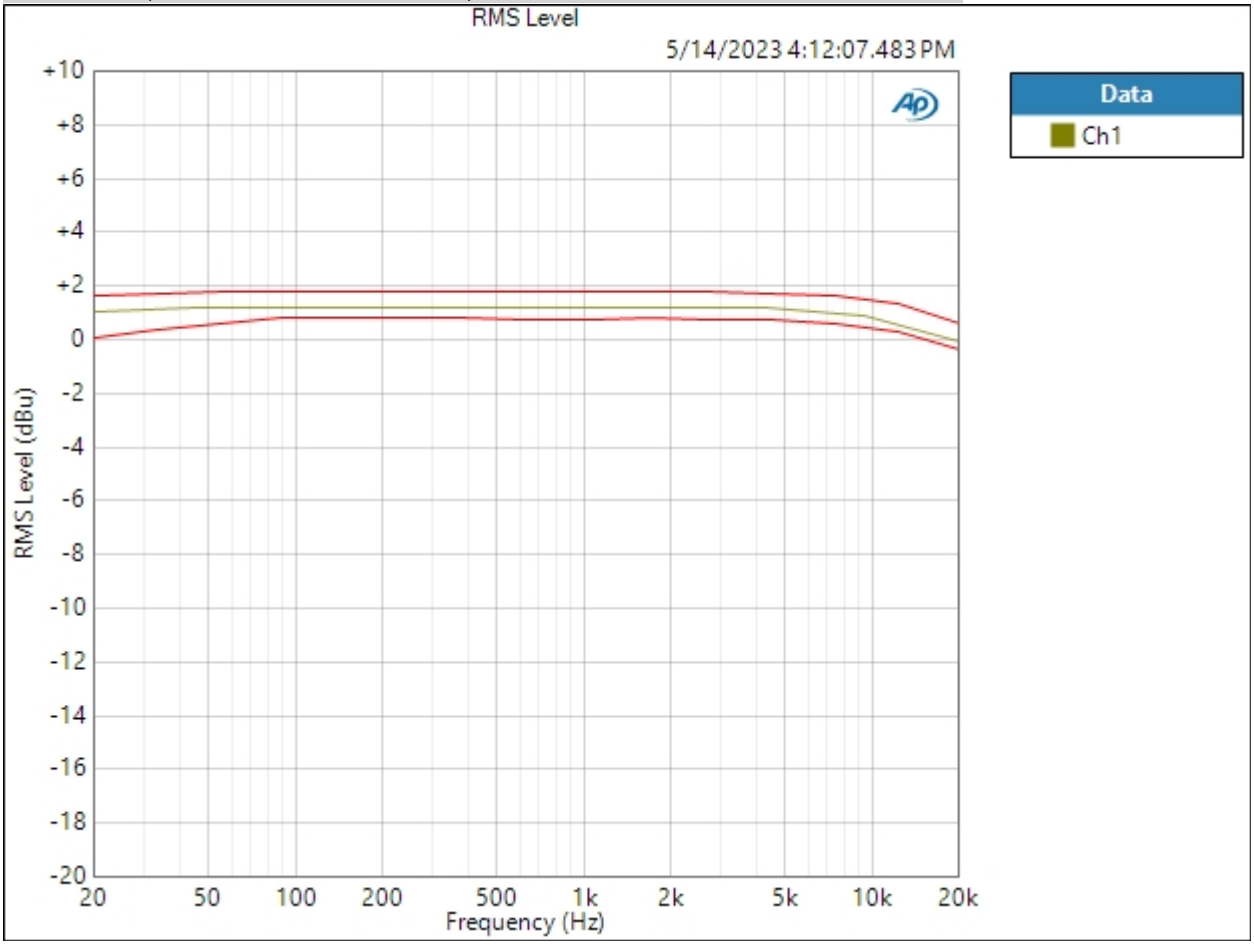

Ch1 PASSED

Result: PASSED

THD+N Ratio (5/14/2023 4:12:07.483 PM)

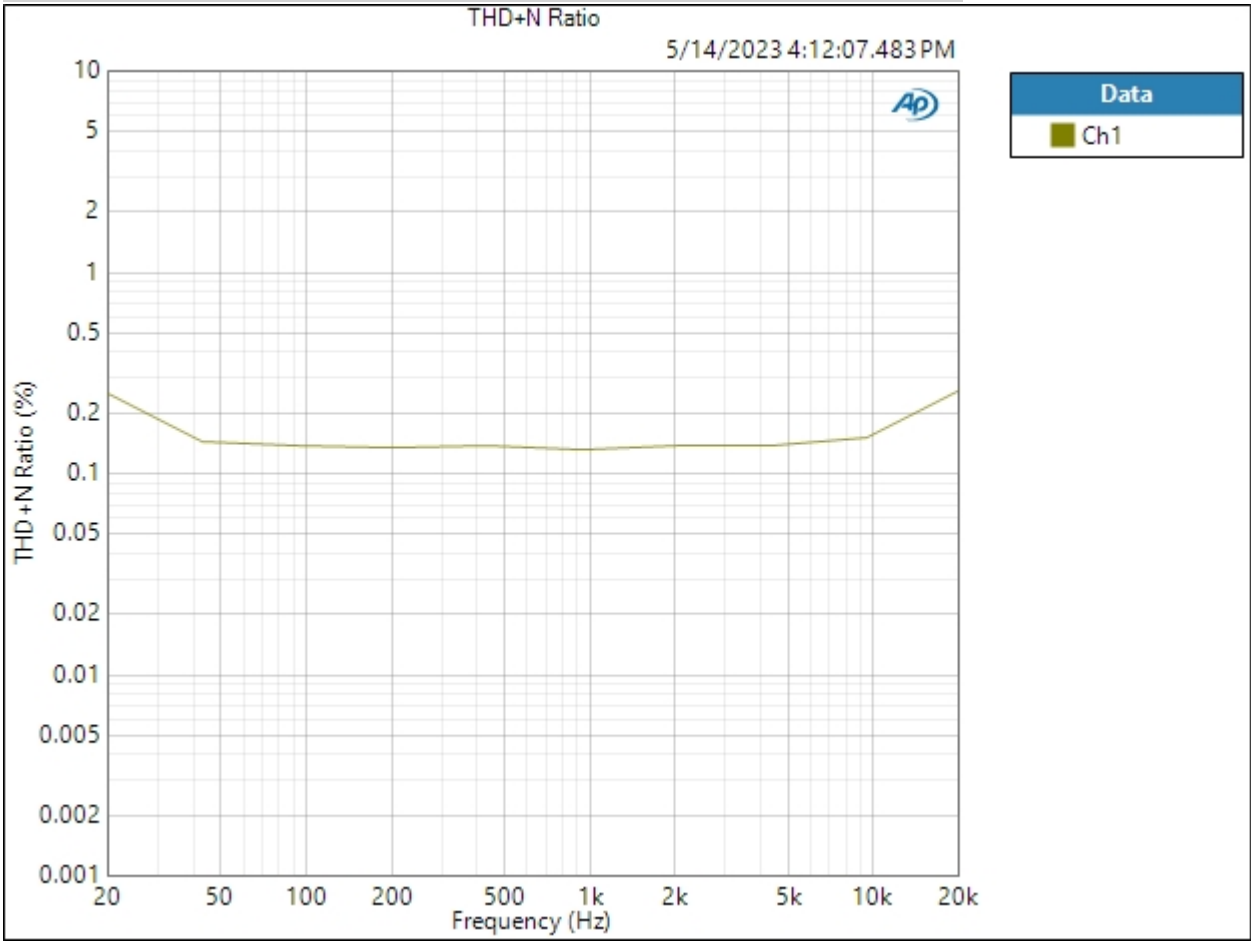

Result: PASSED

THD Ratio (5/14/2023 4:12:07.483 PM)

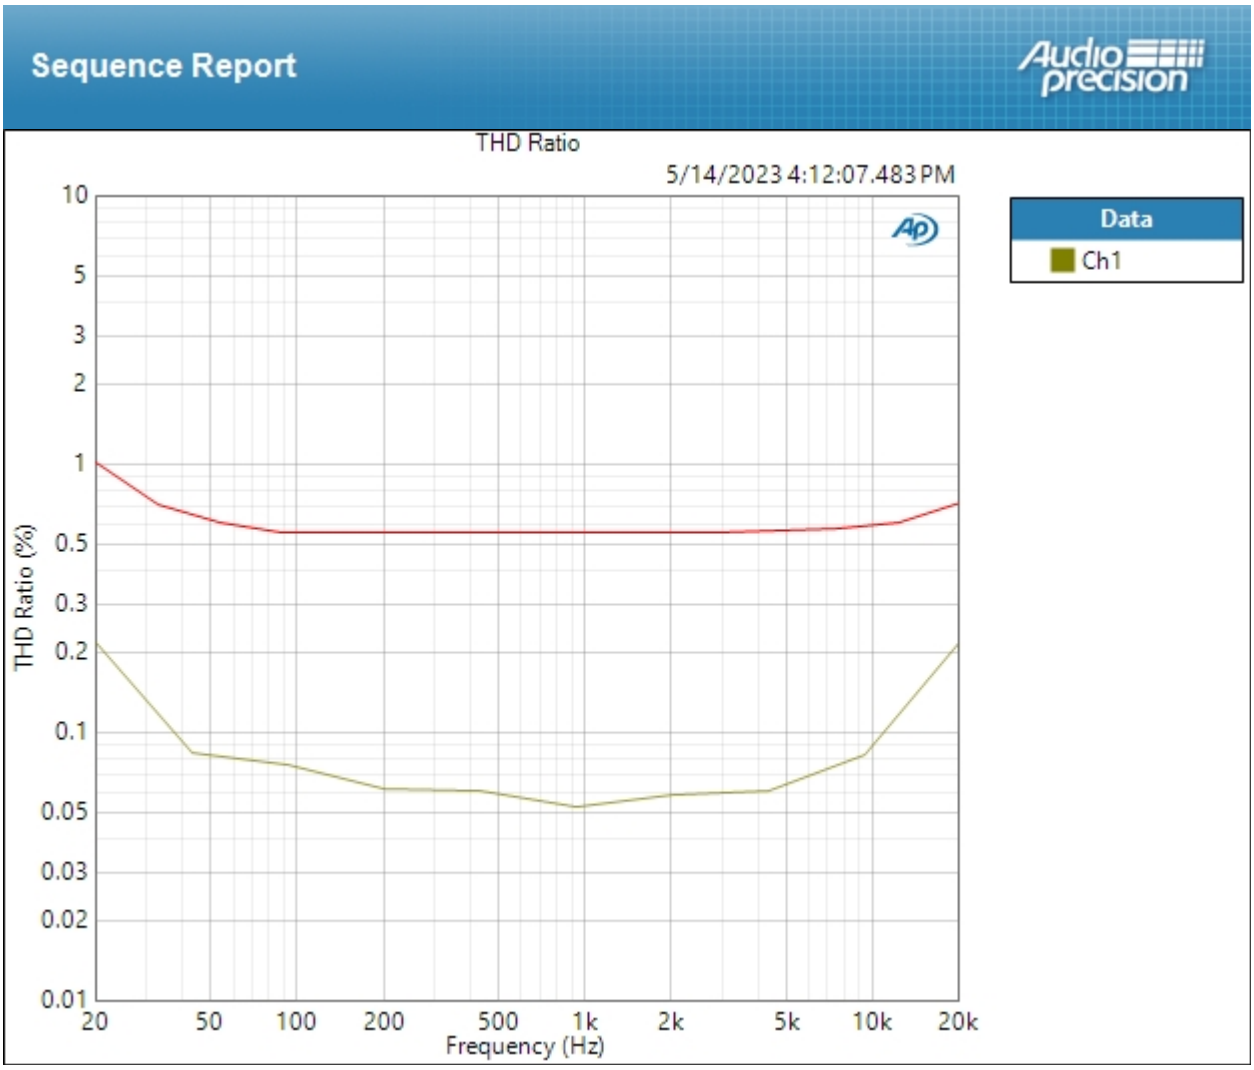

Ch1 PASSED

Result: PASSED

Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Mic 2k 200k termination : Verify Connections

Waveform:	Sine
Generator Level:	-42.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:12:13.129 PM)

Ch1 513.9 mVrms

Gain (5/14/2023 4:12:13.129 PM)

Ch1 38.737 dB

THD+N Ratio (5/14/2023 4:12:13.129 PM)

Ch1 0.191935 %

Frequency (5/14/2023 4:12:13.129 PM)

Ch1 1.00000 kHz

Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level:	-42.300 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	10
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/14/2023 4:12:19 PM

RMS Level (5/14/2023 4:12:19.518 PM)

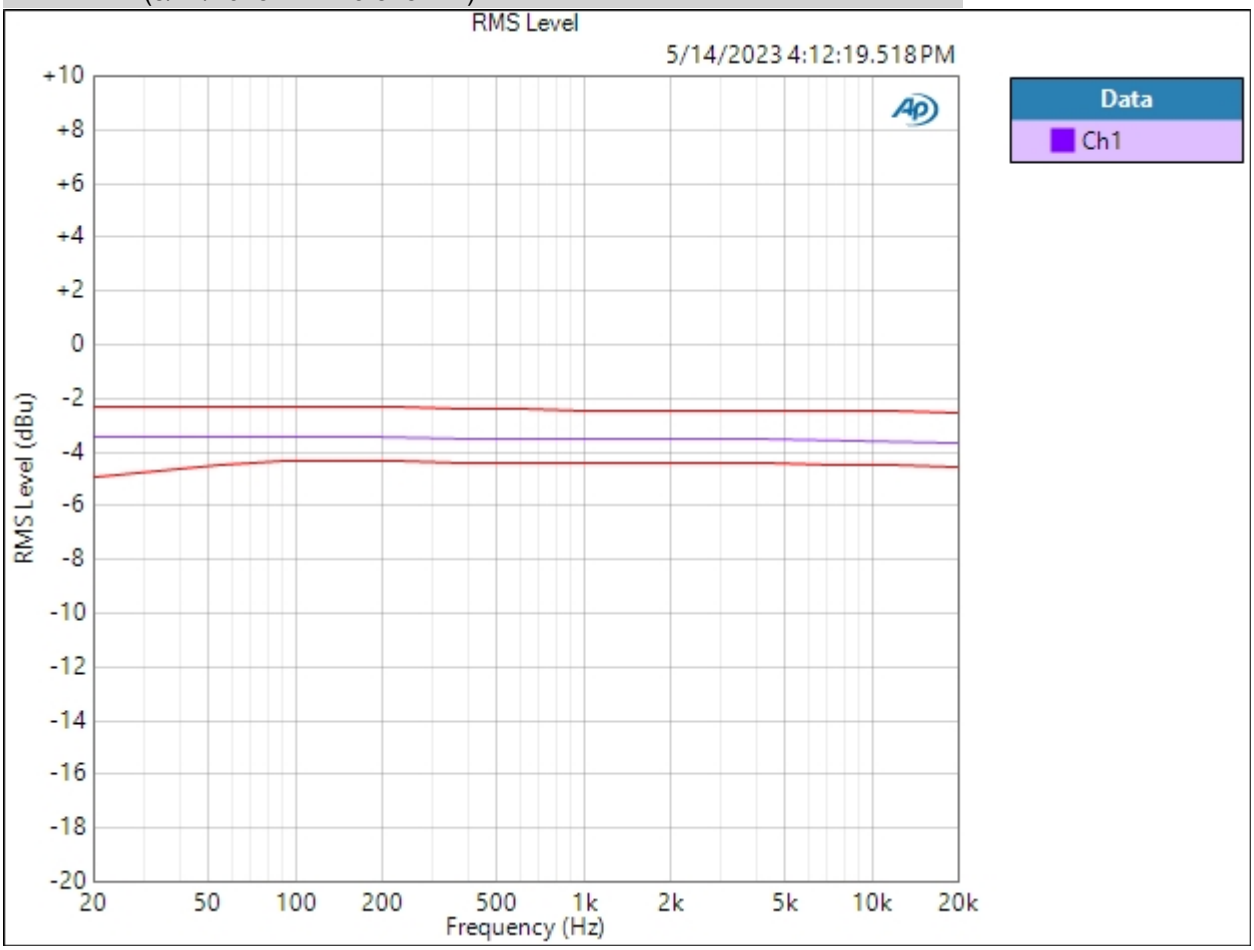

Ch1 PASSED

Result: PASSED

THD Ratio (5/14/2023 4:12:19.518 PM)

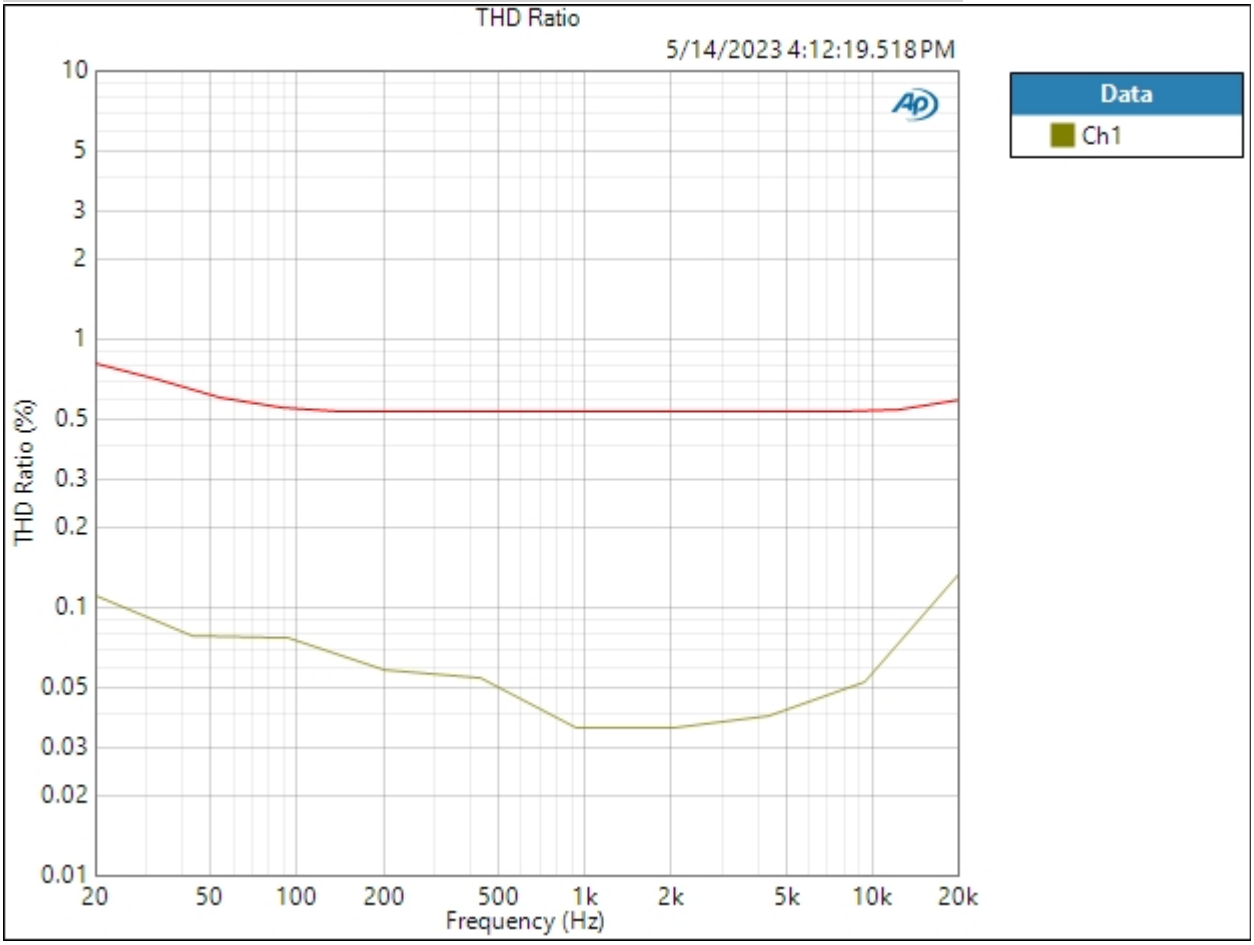

Ch1 PASSED

Result: PASSED

Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform:	Sine
Generator Level:	-42.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:12:25.249 PM)

Ch1 76.78 mVrms

Gain (5/14/2023 4:12:25.249 PM)

Ch1 22.222 dB

THD+N Ratio (5/14/2023 4:12:25.249 PM)

Ch1 1.414228 %

Frequency (5/14/2023 4:12:25.249 PM)

Ch1 1.00000 kHz

Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level:	-42.000 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	10
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/14/2023 4:12:31 PM

RMS Level (5/14/2023 4:12:31.874 PM)

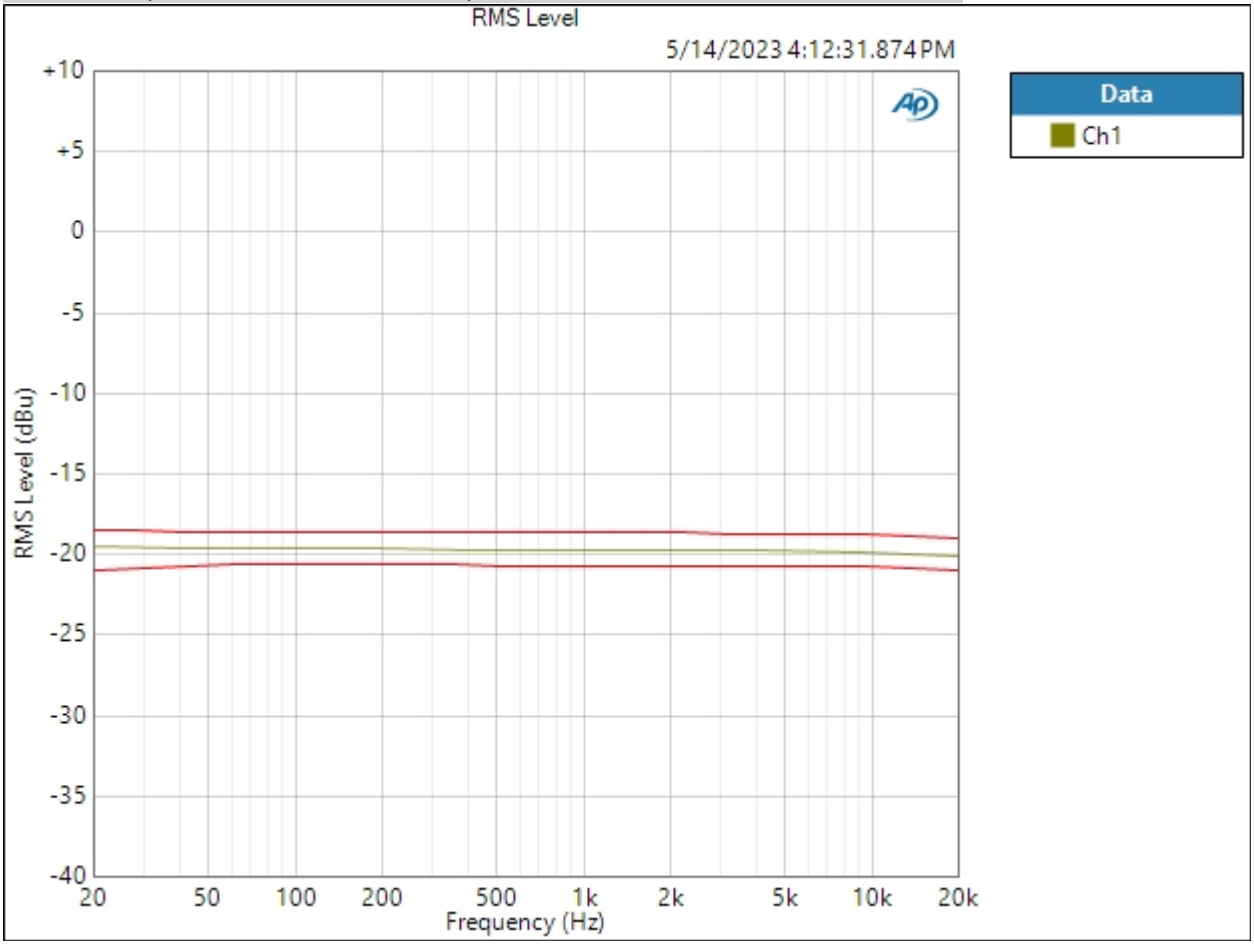

Ch1 PASSED

Result: PASSED

THD Ratio (5/14/2023 4:12:31.874 PM)

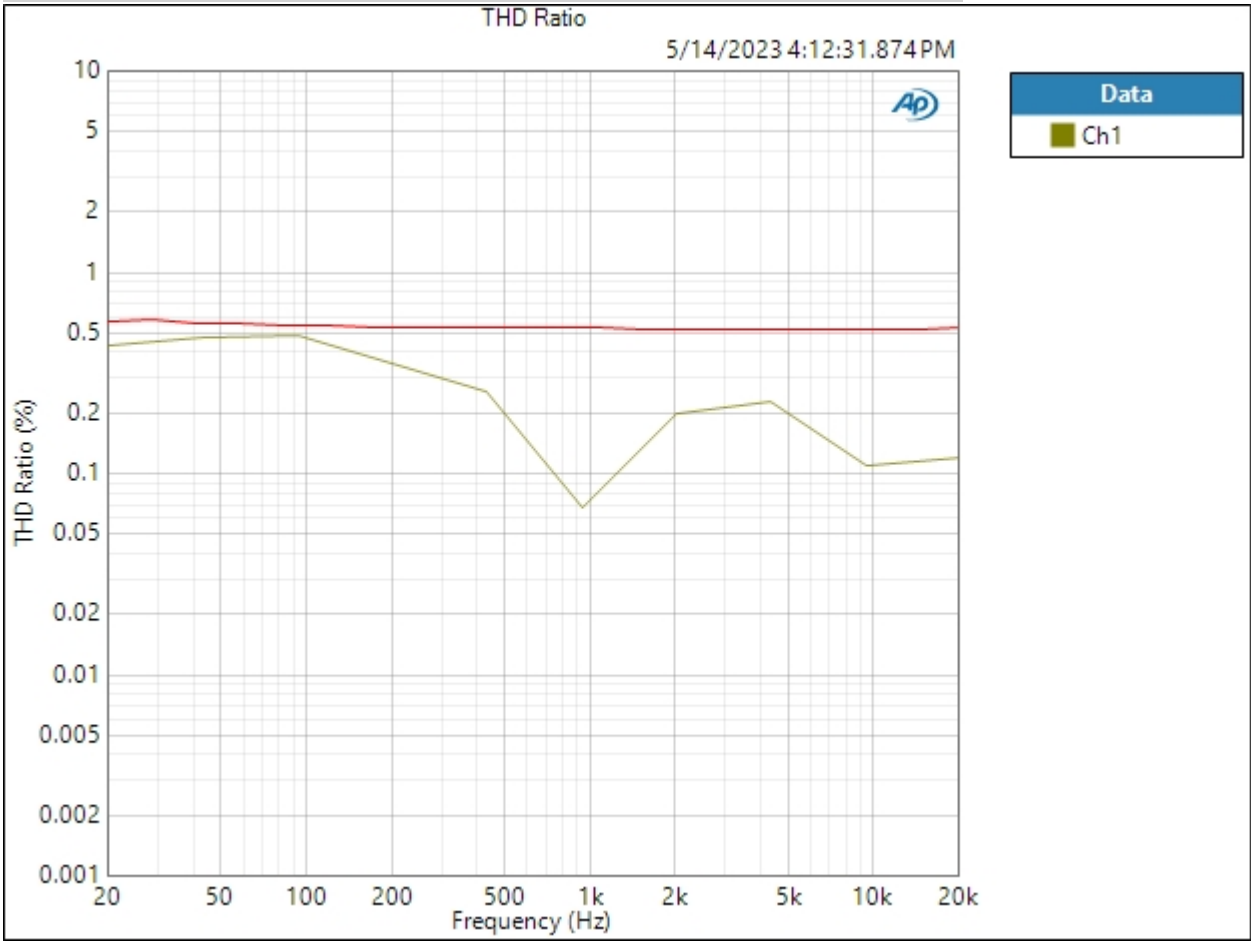

Ch1 PASSED

Result: PASSED

Line Gain -10 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain -10 200kTermination : Verify Connections

Waveform:	Sine
Generator Level:	0.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:12:37.871 PM)

Ch1 0.904 Vrms

Gain (5/14/2023 4:12:37.871 PM)

Ch1 1.339 dB

THD+N Ratio (5/14/2023 4:12:37.871 PM)

Ch1 0.144654 %

Frequency (5/14/2023 4:12:37.871 PM)

Ch1 1.00000 kHz

Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level:	0.000 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	15
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/14/2023 4:12:46 PM

RMS Level (5/14/2023 4:12:46.549 PM)

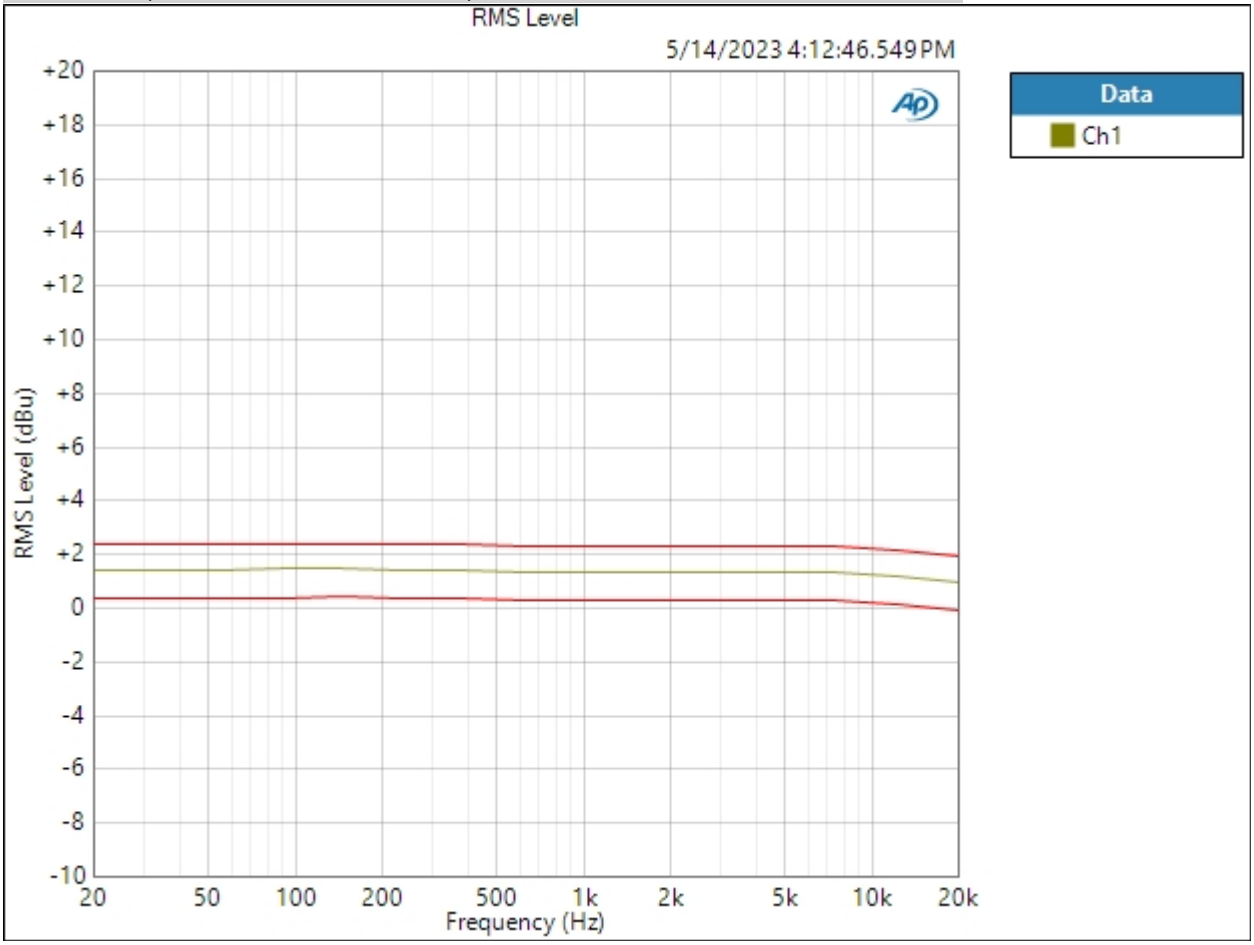

Ch1 PASSED

Result: PASSED

THD+N Ratio (5/14/2023 4:12:46.549 PM)

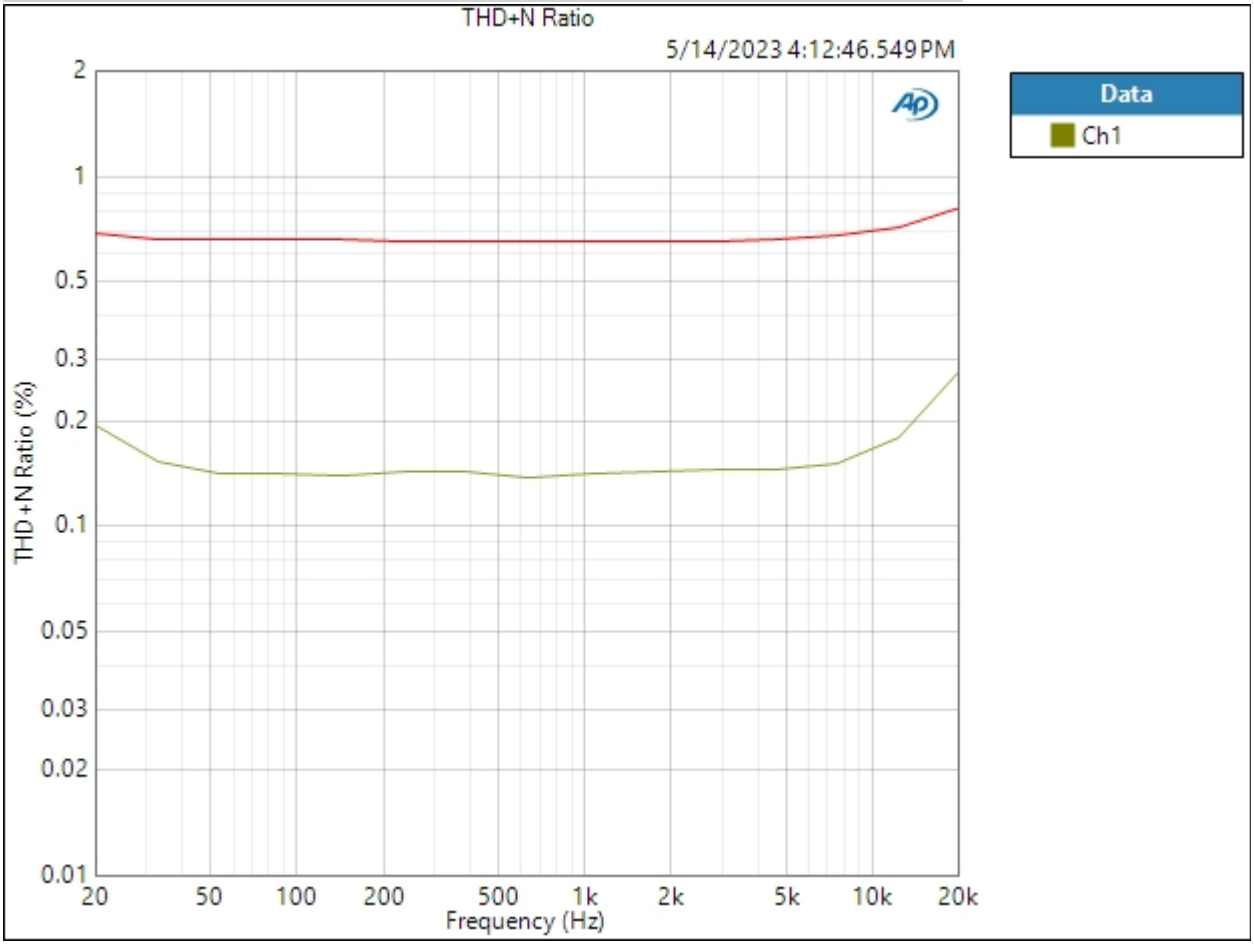

Ch1 PASSED

Result: PASSED

Line Gain -10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain -10 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:12:52.259 PM)

Ch1 251.1 mVrms

Gain (5/14/2023 4:12:52.259 PM)

Ch1 0.216 dB

THD+N Ratio (5/14/2023 4:12:52.259 PM)

Ch1 0.426346 %

Frequency (5/14/2023 4:12:52.259 PM)

Ch1 1.00000 kHz

Line Gain -10 600 Termination : Level and Gain -10

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:12:55.371 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-9.784 dBu	-8.500 dBu	✓

Result: ✓ PASSED

Line Gain +5 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +5 200kTermination : Verify Connections

Waveform:	Sine
Generator Level:	0.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:13:01.186 PM)

Ch1 4.878 Vrms

Gain (5/14/2023 4:13:01.186 PM)

Ch1 15.984 dB

THD+N Ratio (5/14/2023 4:13:01.186 PM)

Ch1 0.262332 %

Frequency (5/14/2023 4:13:01.186 PM)

Ch1 1.00000 kHz

Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level:	0.000 dBu
DC Offset:	0.000 V
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	15
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Phase Ref Channel:	Ch1
Measured 1	5/14/2023 4:13:10 PM

RMS Level (5/14/2023 4:13:10.926 PM)

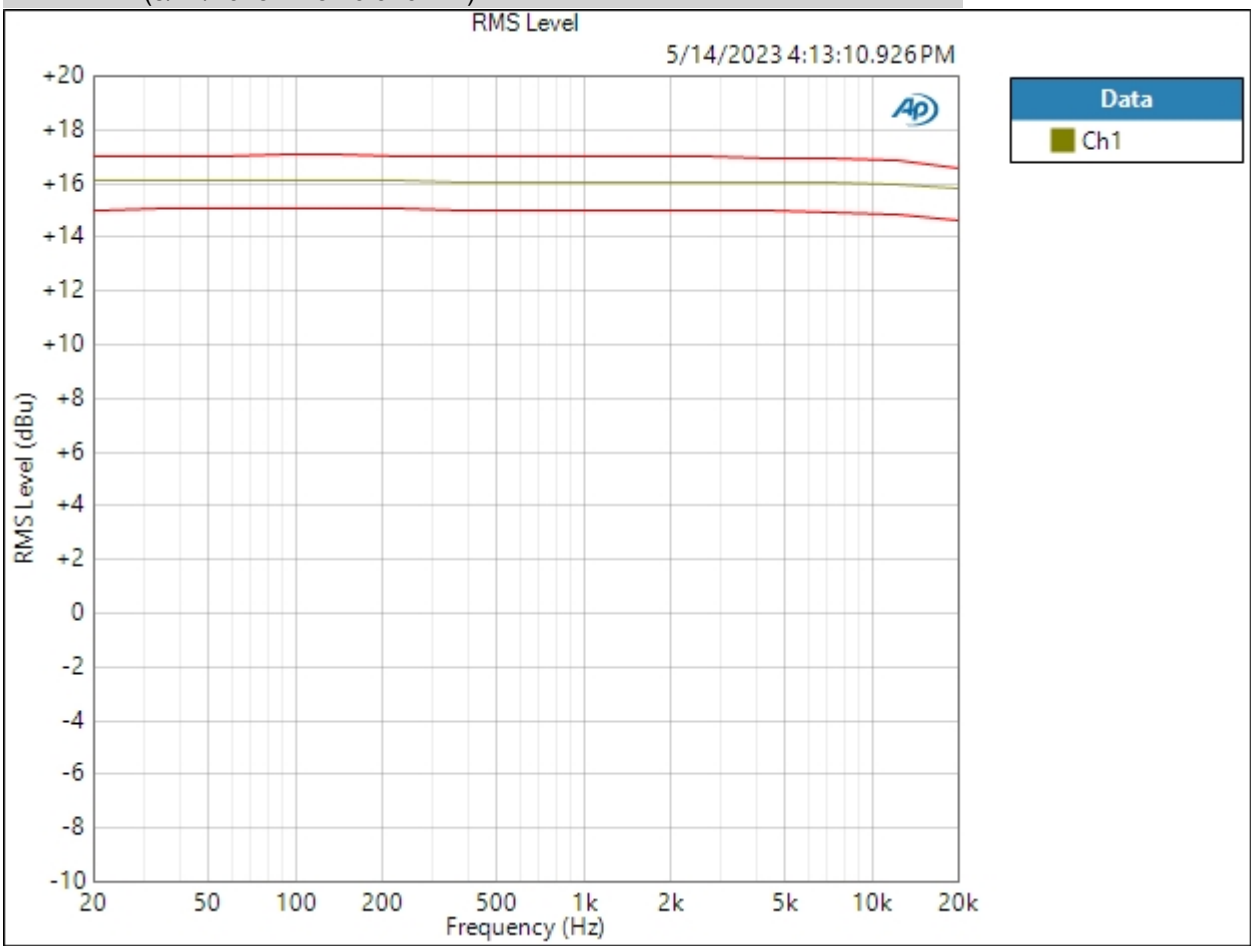

Ch1 PASSED

Result: PASSED

THD+N Ratio (5/14/2023 4:13:10.926 PM)

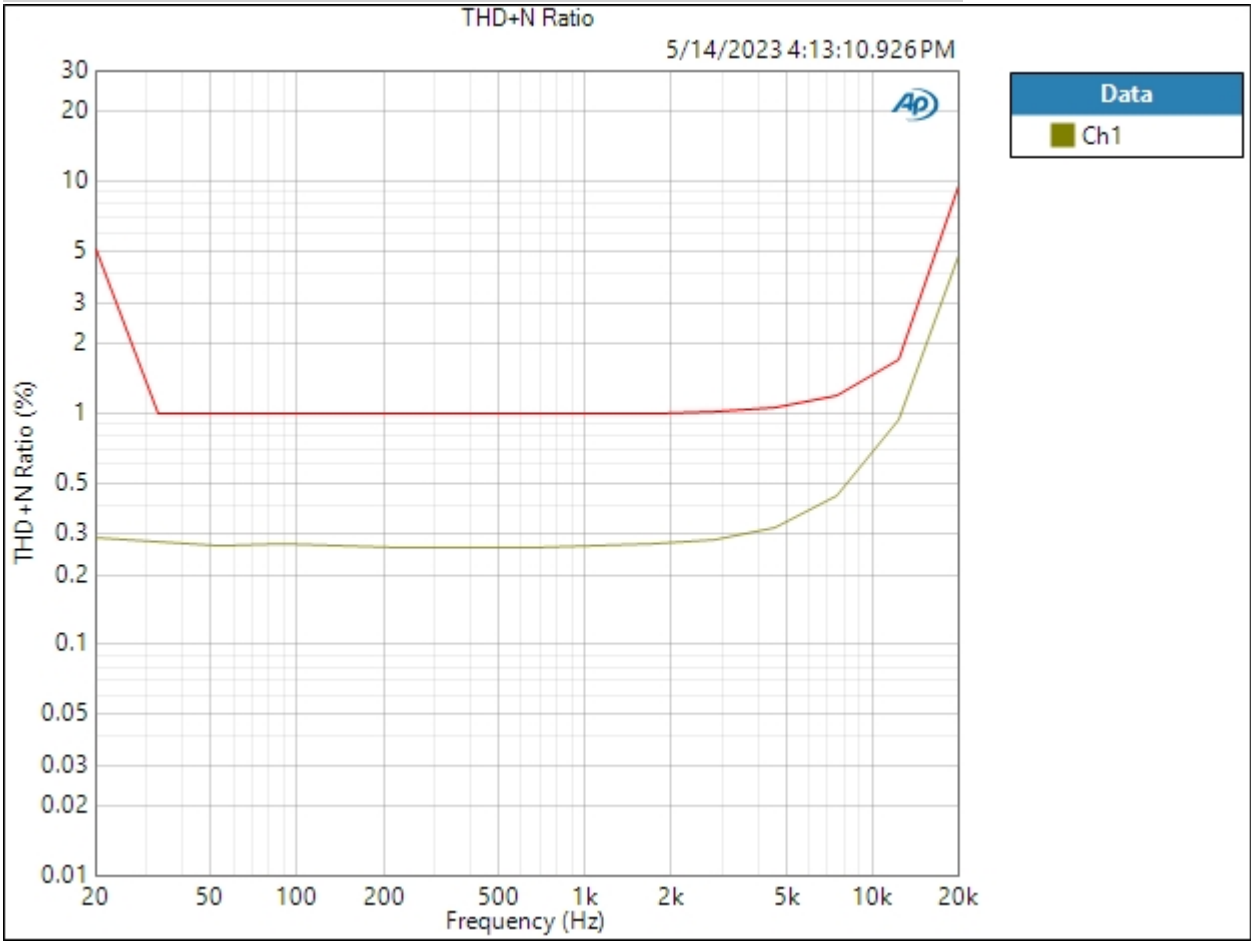

Ch1 PASSED

Result: PASSED

Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +5 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:13:16.993 PM)

Ch1 1.358 Vrms

Gain (5/14/2023 4:13:16.993 PM)

Ch1 14.879 dB

THD+N Ratio (5/14/2023 4:13:16.993 PM)

Ch1 0.448595 %

Frequency (5/14/2023 4:13:16.993 PM)

Ch1 1.00000 kHz

Line Gain +5 600 Termination : Level and Gain +5

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:13:20.217 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	+4.904 dBu	+6.500 dBu	✓

Result: ✓ PASSED

Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain -5 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:13:26.077 PM)

Ch1 420.8 mVrms

Gain (5/14/2023 4:13:26.077 PM)

Ch1 4.700 dB

THD+N Ratio (5/14/2023 4:13:26.077 PM)

Ch1 0.395789 %

Frequency (5/14/2023 4:13:26.077 PM)

Ch1 1.00000 kHz

Line Gain -5 600 Termination : Level and Gain -5

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:13:29.433 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-5.301 dBu	-3.500 dBu	✓

Result: ✓ PASSED

Line Gain 0 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain 0 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:13:35.273 PM)

Ch1 734.1 mVrms

Gain (5/14/2023 4:13:35.273 PM)

Ch1 9.533 dB

THD+N Ratio (5/14/2023 4:13:35.273 PM)

Ch1 0.363457 %

Frequency (5/14/2023 4:13:35.273 PM)

Ch1 1.00000 kHz

Line Gain 0 600 Termination : Level and Gain 0

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:13:38.575 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-0.467 dBu	+1.500 dBu	✓

Result: ✓ PASSED

Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +10 600 Termination : Verify Connections

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:13:44.534 PM)

Ch1 2.399 Vrms

Gain (5/14/2023 4:13:44.534 PM)

Ch1 19.820 dB

THD+N Ratio (5/14/2023 4:13:44.534 PM)

Ch1 0.467612 %

Frequency (5/14/2023 4:13:44.534 PM)

Ch1 1.00000 kHz

Line Gain +10 600 Termination : Level and Gain +10

Waveform:	Sine
Generator Level:	-10.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:13:48.003 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	+9.819 dBu	+11.500 dBu	✓

Result: ✓ PASSED

Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform:	Sine
Generator Level:	-20.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:13:53.986 PM)

Ch1 863.0 mVrms

Gain (5/14/2023 4:13:53.986 PM)

Ch1 20.941 dB

THD+N Ratio (5/14/2023 4:13:53.986 PM)

Ch1 0.834180 %

Frequency (5/14/2023 4:13:53.986 PM)

Ch1 1.00000 kHz

Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform:	None
Low-pass Filter:	20 kHz
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Sweep Time:	0.00:00:03.000
Reading Rate:	10/sec
Input Bandwidth:	Use Signal Path
Record Acquisition:	False
Measured 1	5/14/2023 4:13:59 PM

RMS Level (5/14/2023 4:13:59.067 PM)

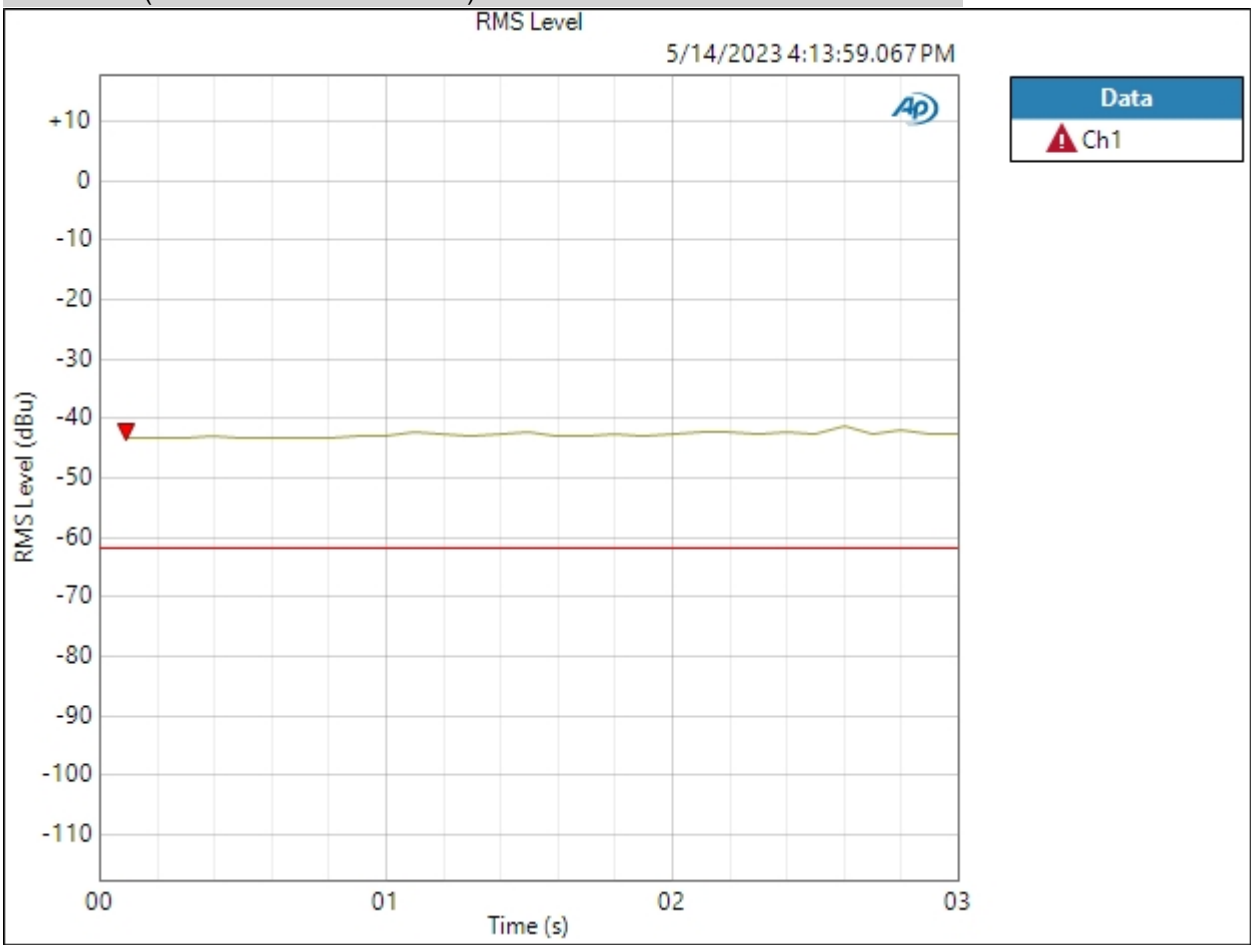

Ch1 ⚠ Failed Upper Limit

Result: ⚠ FAILED

Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Line Gain +10 200k Termination Level Low : Verify Connections

Waveform:	Sine
Generator Level:	-20.000 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:14:09.670 PM)

Ch1 61.60 uVrms

Gain (5/14/2023 4:14:09.670 PM)

Ch1 -61.995 dB

THD+N Ratio (5/14/2023 4:14:09.670 PM)

Ch1 ---- %

Frequency (5/14/2023 4:14:09.670 PM)

Ch1 ---- Hz

Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform:	None
Low-pass Filter:	20 kHz
Weighting Filter:	Signal Path
High-pass Filter:	20 Hz
Sweep Time:	0.00:00:03.000
Reading Rate:	10/sec
Input Bandwidth:	Use Signal Path
Record Acquisition:	False
Measured 1	5/14/2023 4:14:15 PM

RMS Level (5/14/2023 4:14:15.403 PM)

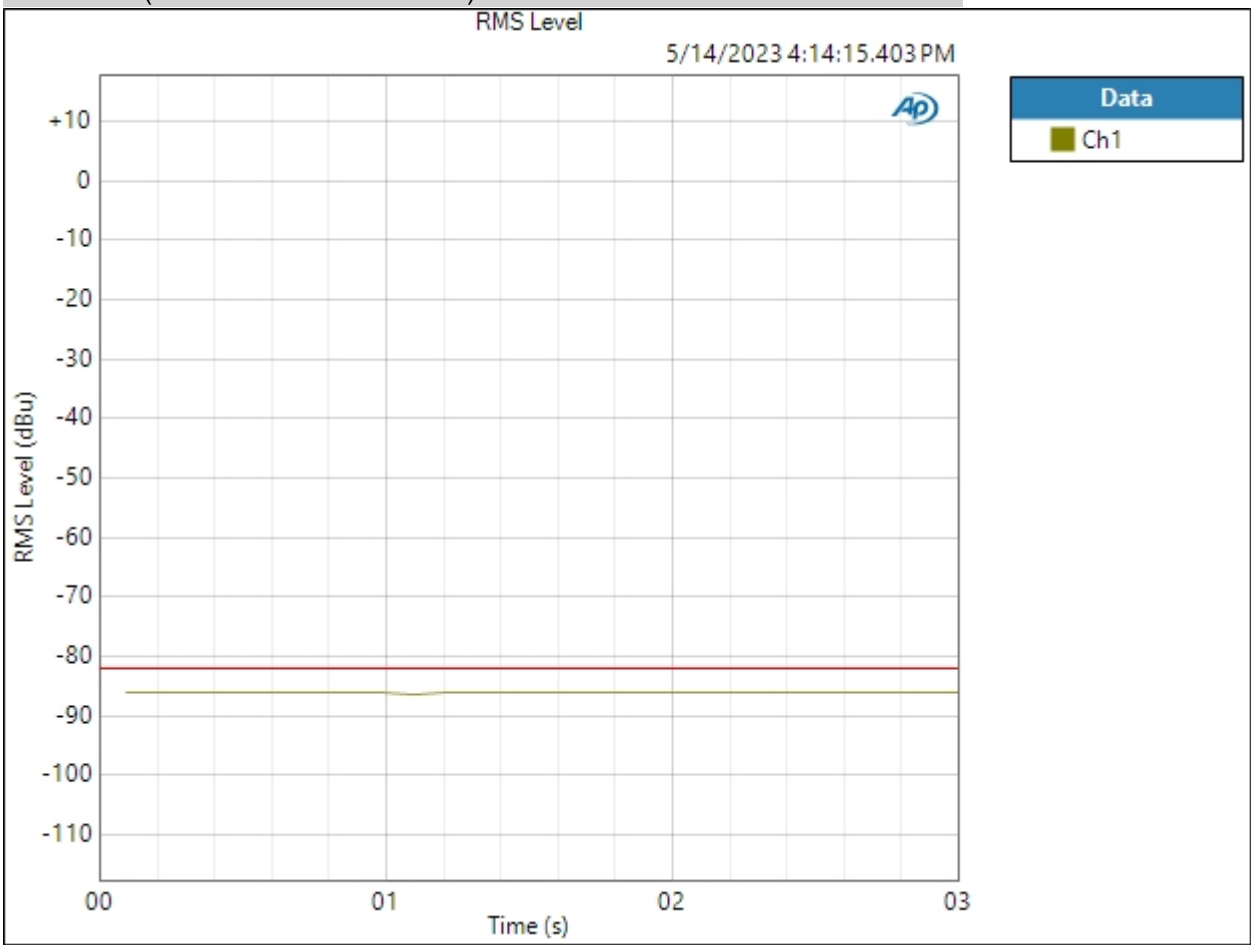

Ch1 PASSED

Result: PASSED

Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:14:21.291 PM)

Ch1 62.80 uVrms

Gain (5/14/2023 4:14:21.291 PM)

Ch1 -59.526 dB

THD+N Ratio (5/14/2023 4:14:21.291 PM)

Ch1 ---- %

Frequency (5/14/2023 4:14:21.291 PM)

Ch1 ---- Hz

Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:14:25.248 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	-81.885 dBu	+2.000 dBu	⚠

Result: ⚠ FAILED

Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:14:31.165 PM)

Ch1 67.31 uVrms

Gain (5/14/2023 4:14:31.165 PM)

Ch1 -58.990 dB

THD+N Ratio (5/14/2023 4:14:31.165 PM)

Ch1 ---- %

Frequency (5/14/2023 4:14:31.165 PM)

Ch1 ---- Hz

Hi Z Gain -10 47k 200k Termination : Level and Gain 47K

Waveform:	Sine
Generator Level:	-22.300 dBu
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:14:34.384 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-81.132 dBu	-4.000 dBu	⚠

Result: ⚠ FAILED

Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dBSPL1:	10.00 mVrms
dBSPL2:	10.00 mVrms
dBSPL1 Calibrator Level:	94.000 dBSPL
dBSPL2 Calibrator Level:	94.000 dBSPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Dummy Signal Path For Report : Verify Connections

Waveform:	Sine
Generator Level:	100.0 mVrms
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/14/2023 4:14:38.526 PM)

Ch1 7.279 uVrms

Ch2 7.380 uVrms