

## Sequence Report



### Summary

#### Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 PASSED

#### Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K PASSED

#### Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

#### Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 PASSED

#### Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 PASSED

#### Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 PASSED

#### Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 PASSED

#### Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 PASSED

#### Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 PASSED

#### Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 PASSED

#### Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

#### Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW PASSED

#### Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	⚠ FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	⚠ FAILED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

## Sequence Report



### Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



Mic500 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:25:09.770 PM)

Ch1 880.6 mVrms

Gain (5/25/2023 4:25:09.770 PM)

Ch1 43.414 dB

THD+N Ratio (5/25/2023 4:25:09.770 PM)

Ch1 0.162438 %

Frequency (5/25/2023 4:25:09.770 PM)

Ch1 1.00000 kHz

## Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/25/2023 4:25:16 PM

RMS Level (5/25/2023 4:25:16.358 PM)

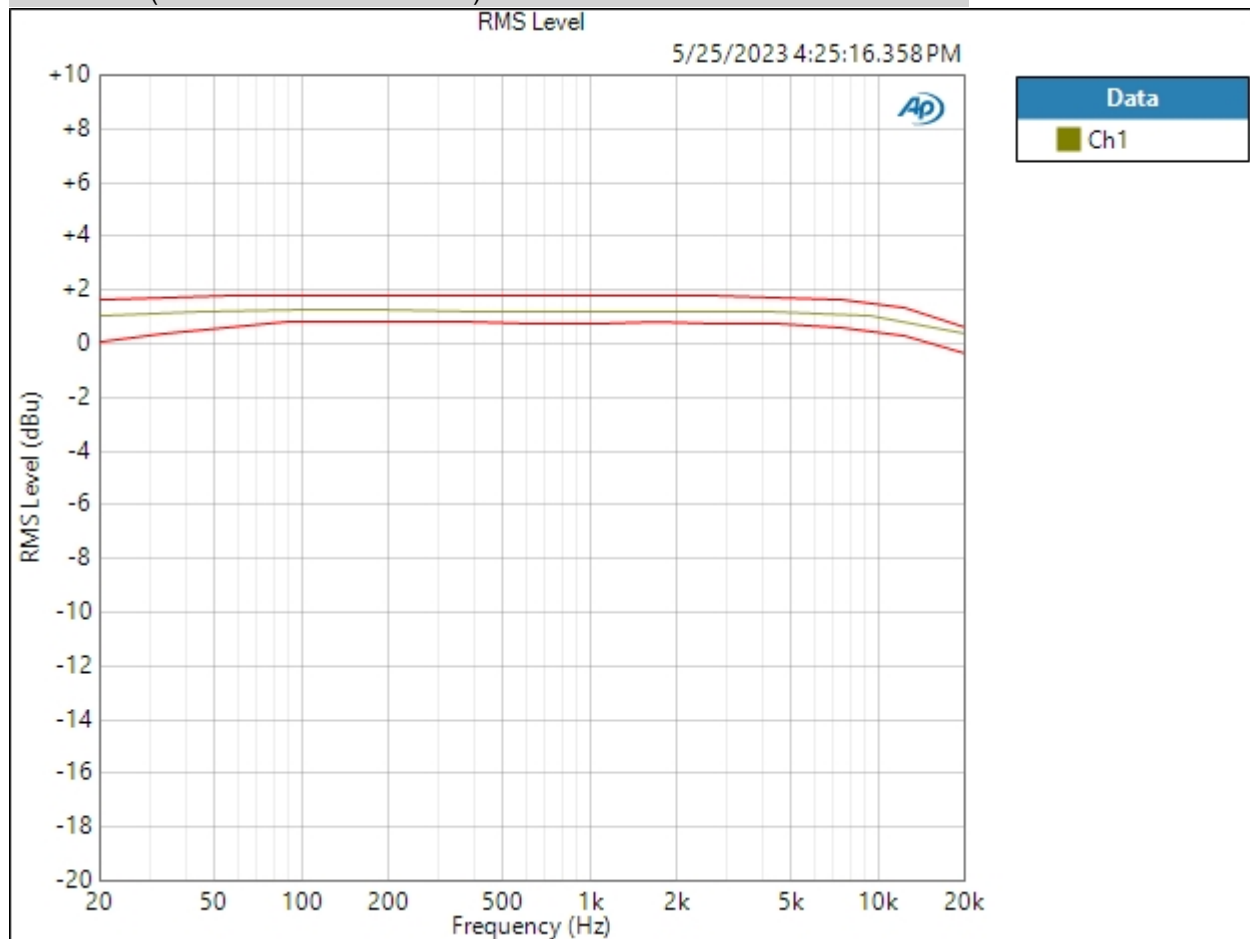

Ch1 PASSED

5/25/2023 4:27 PM


Page 5 of 45

## Sequence Report



Result: PASSED


THD+N Ratio (5/25/2023 4:25:16.358 PM)

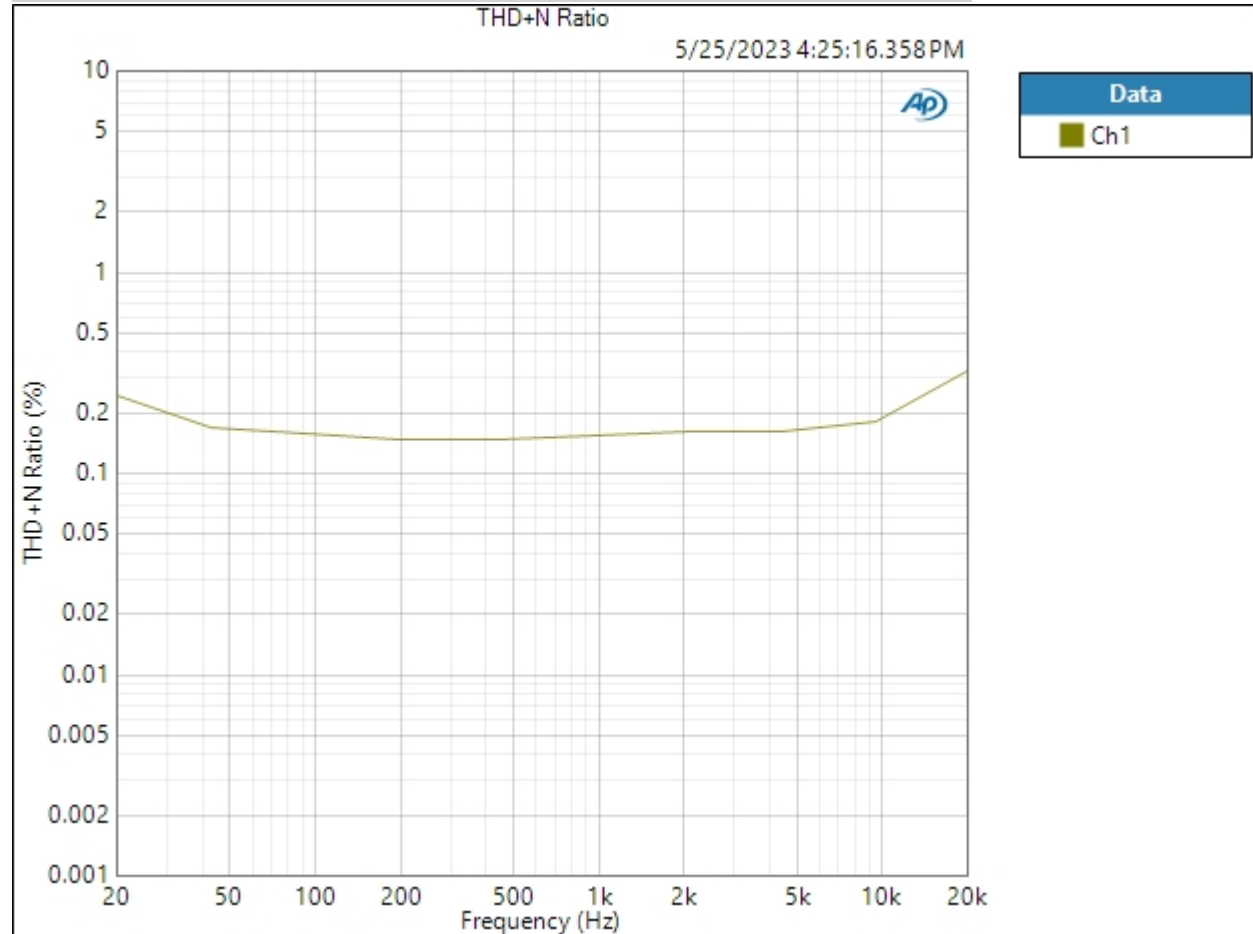

Result: PASSED

THD Ratio (5/25/2023 4:25:16.358 PM)

## Sequence Report

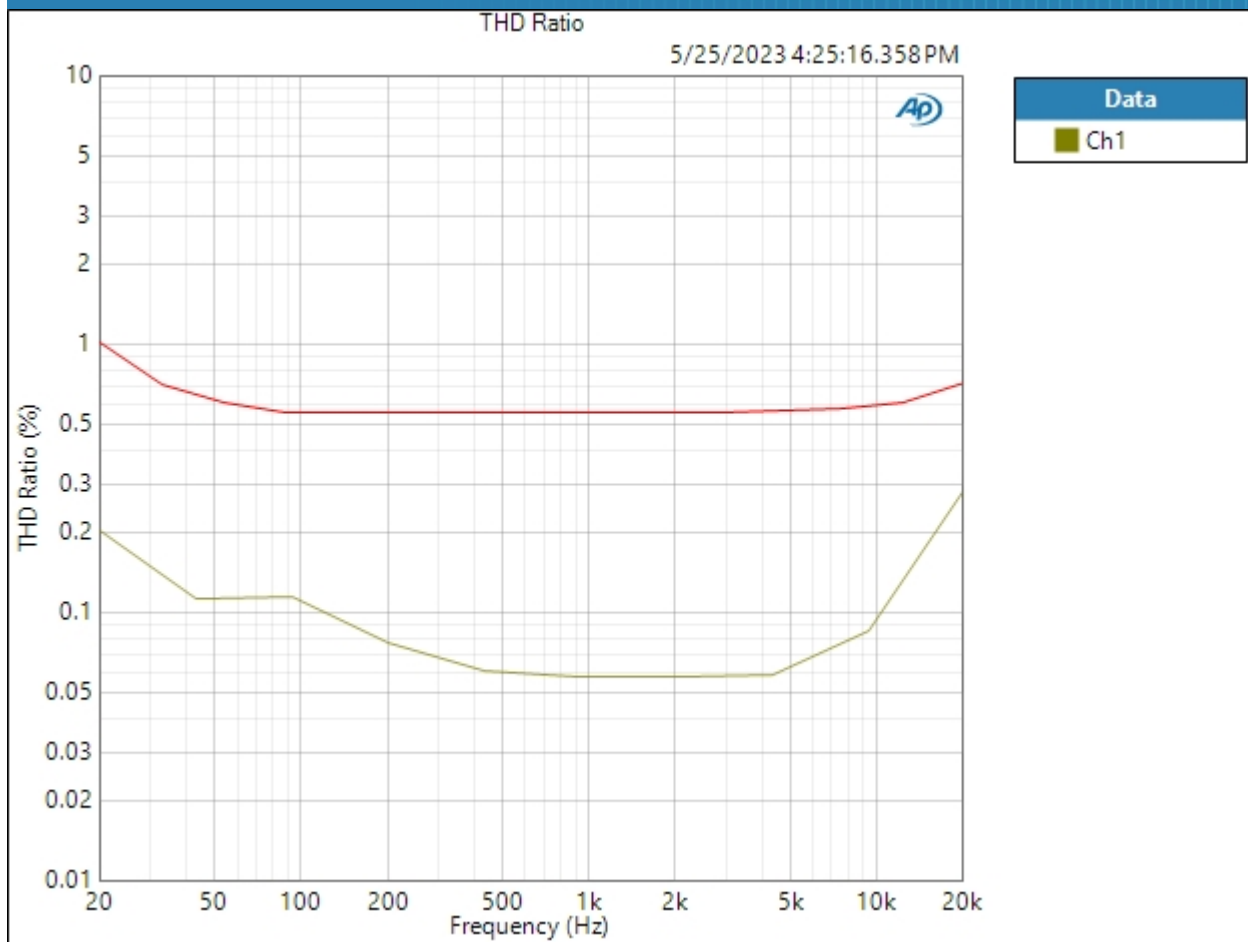

Ch1 PASSED

Result: PASSED

## Sequence Report



### Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.



## Sequence Report



Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:25:22.295 PM)

Ch1 512.4 mVrms

Gain (5/25/2023 4:25:22.295 PM)

Ch1 38.710 dB

THD+N Ratio (5/25/2023 4:25:22.295 PM)

Ch1 0.208510 %

Frequency (5/25/2023 4:25:22.295 PM)

Ch1 1.00000 kHz

## Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/25/2023 4:25:28 PM

RMS Level (5/25/2023 4:25:28.897 PM)

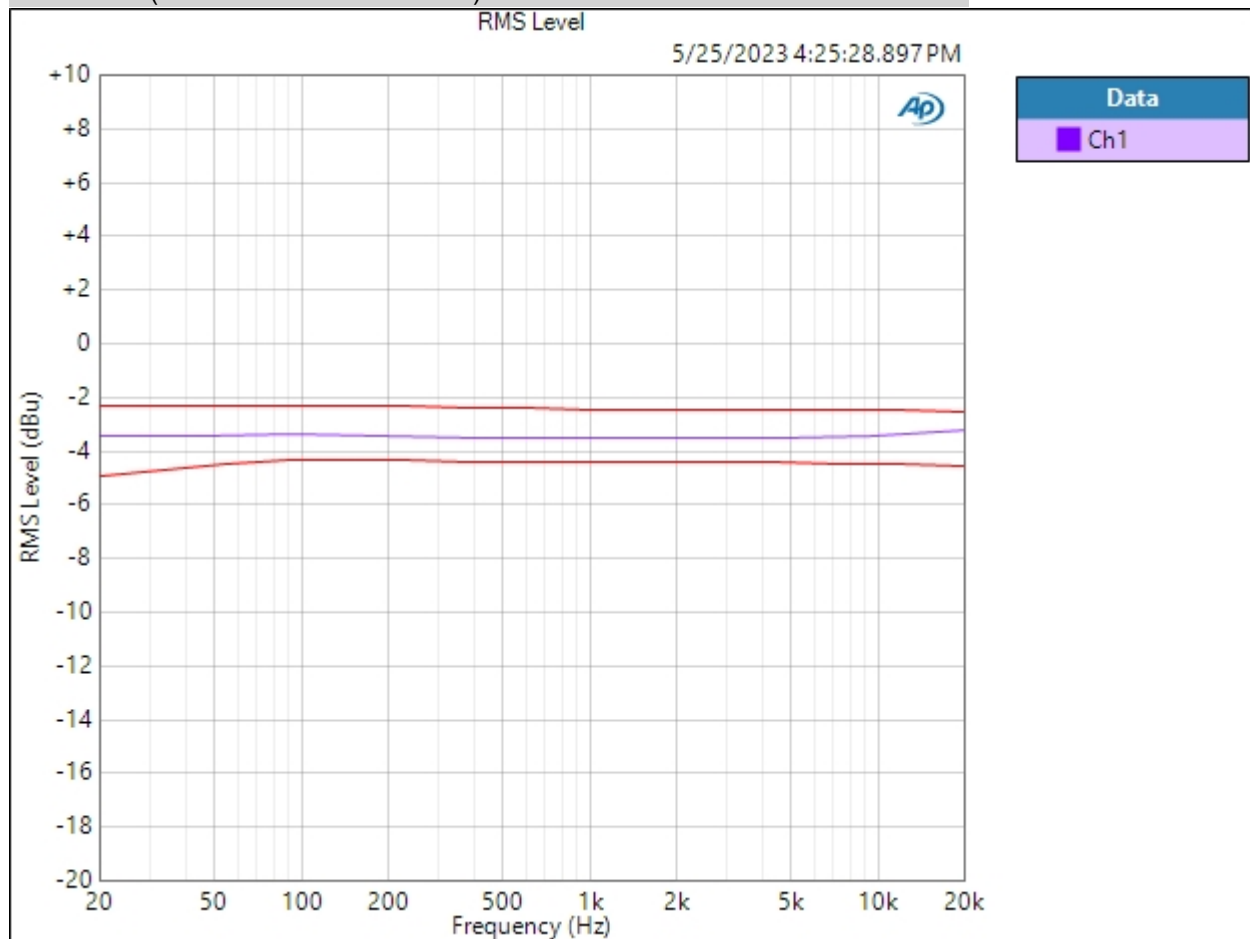

Ch1 PASSED

5/25/2023 4:27 PM


Page 10 of 45

## Sequence Report



Result: ✔ PASSED

THD Ratio (5/25/2023 4:25:28.897 PM)

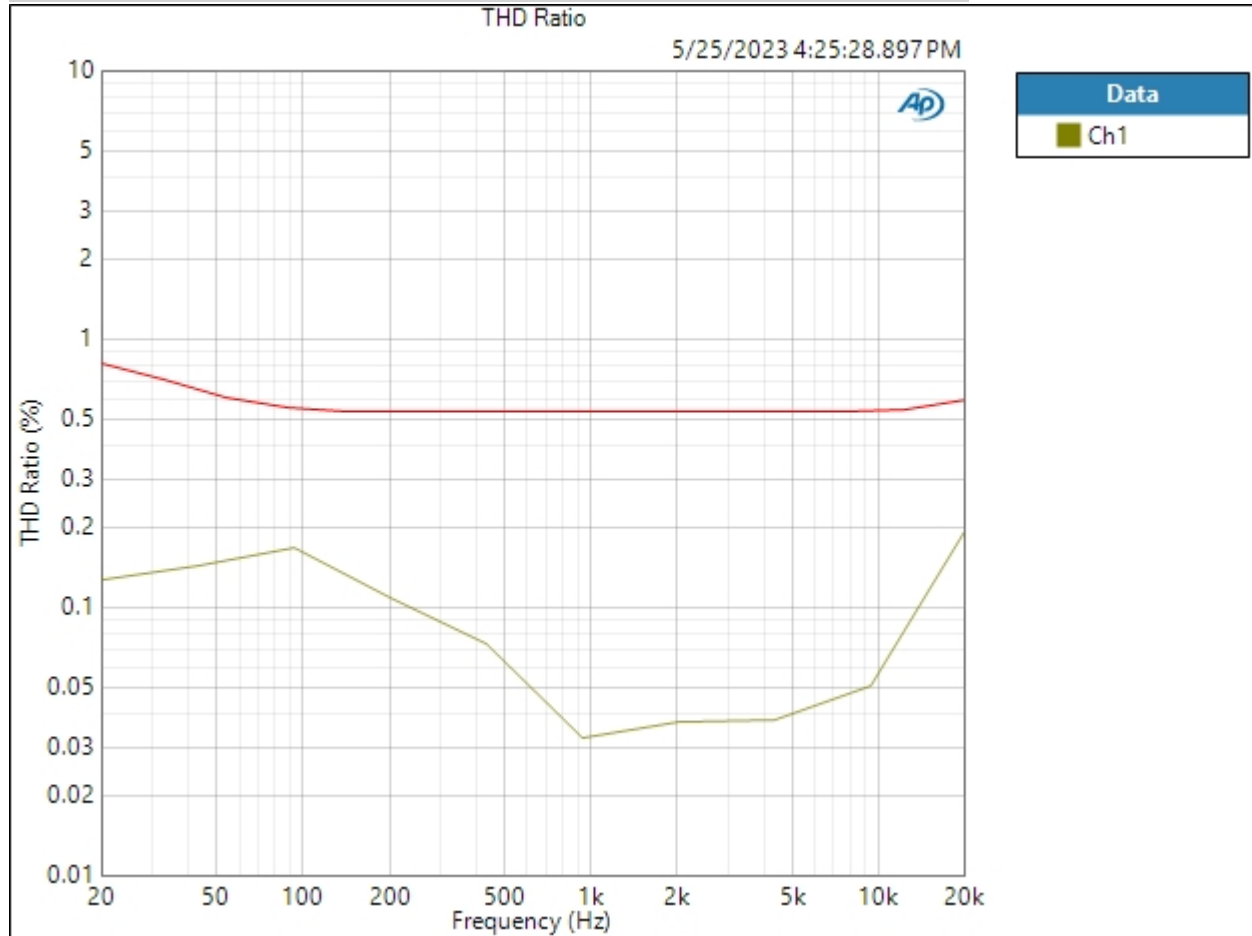

Ch1 ✔ PASSED

Result: ✔ PASSED

## Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

### • DCX

DCX is not detected.

## Sequence Report



Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:25:34.528 PM)

Ch1 75.76 mVrms

Gain (5/25/2023 4:25:34.528 PM)

Ch1 22.107 dB

THD+N Ratio (5/25/2023 4:25:34.528 PM)

Ch1 1.634623 %

Frequency (5/25/2023 4:25:34.528 PM)

Ch1 1.00000 kHz

## Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/25/2023 4:25:41 PM

RMS Level (5/25/2023 4:25:41.219 PM)

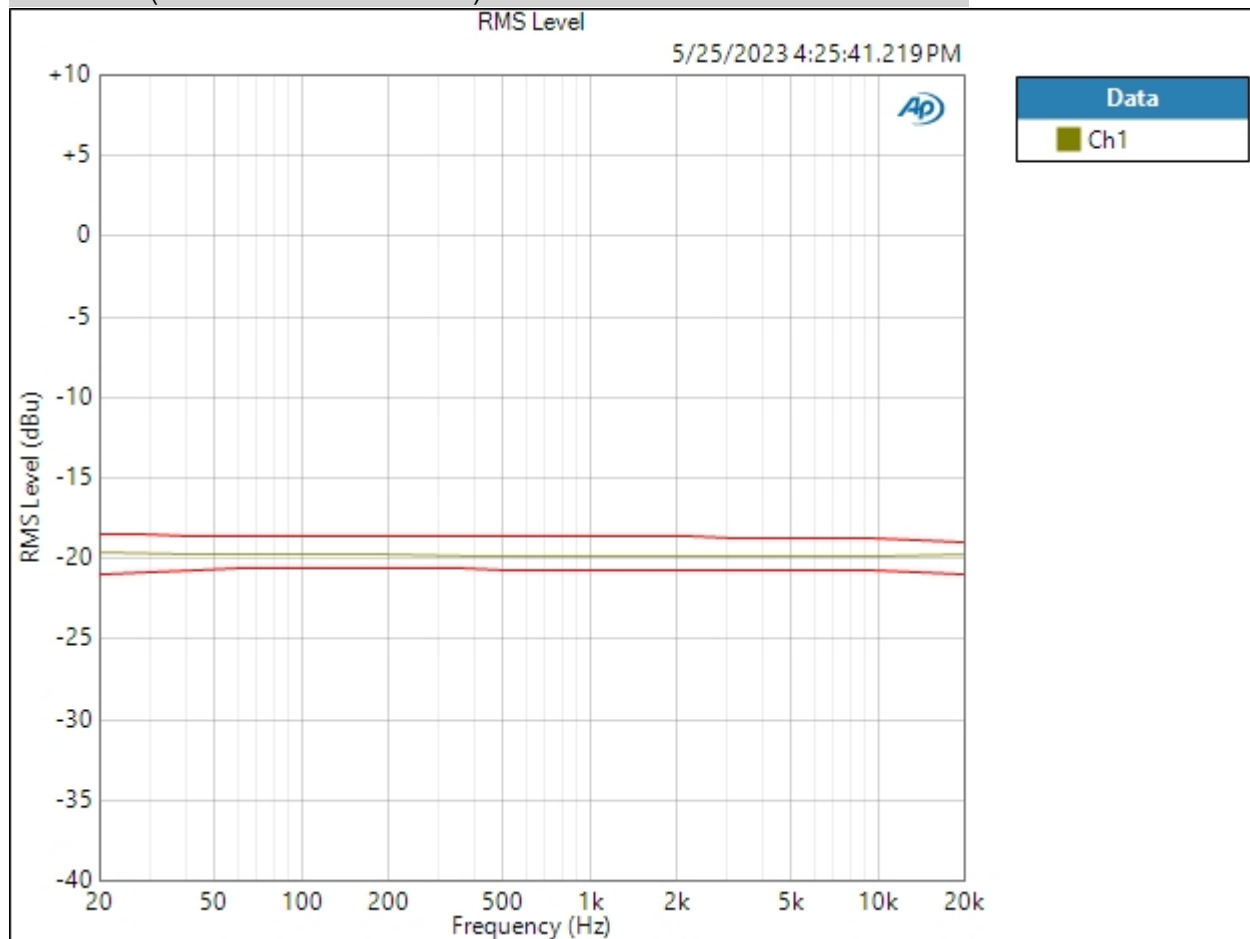

Ch1 PASSED

5/25/2023 4:27 PM


Page 14 of 45

## Sequence Report



Result: ✔ PASSED

THD Ratio (5/25/2023 4:25:41.219 PM)

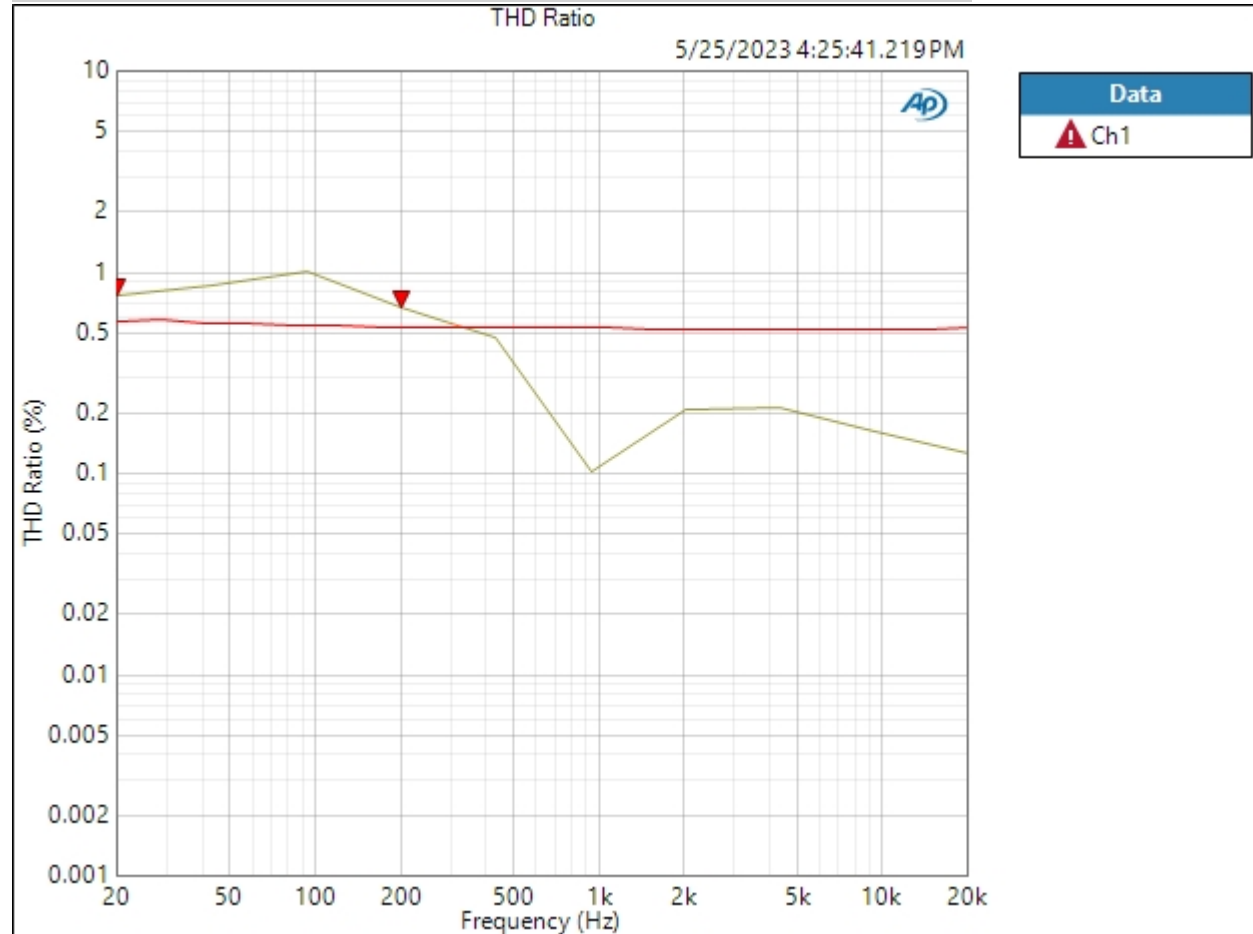

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

## Sequence Report



### Line Gain -10 200kTermination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.



## Sequence Report



Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:25:47.018 PM)

Ch1 0.903 Vrms

Gain (5/25/2023 4:25:47.018 PM)

Ch1 1.329 dB

THD+N Ratio (5/25/2023 4:25:47.018 PM)

Ch1 0.157065 %

Frequency (5/25/2023 4:25:47.018 PM)

Ch1 1.00000 kHz

## Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/25/2023 4:25:56 PM

RMS Level (5/25/2023 4:25:56.590 PM)

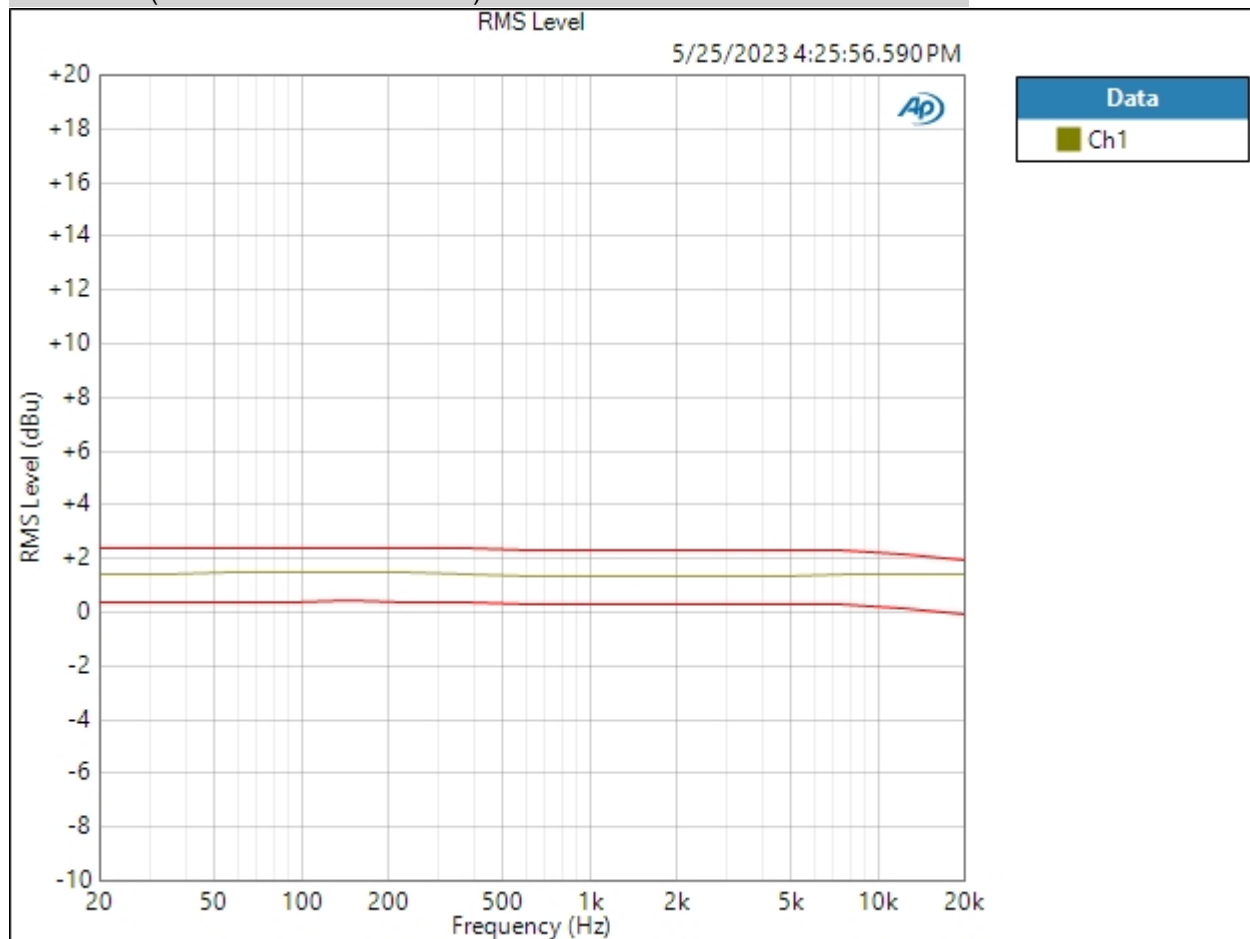

Ch1 PASSED

5/25/2023 4:27 PM


Page 18 of 45

# Sequence Report



Result: ✔ PASSED

THD+N Ratio (5/25/2023 4:25:56.590 PM)

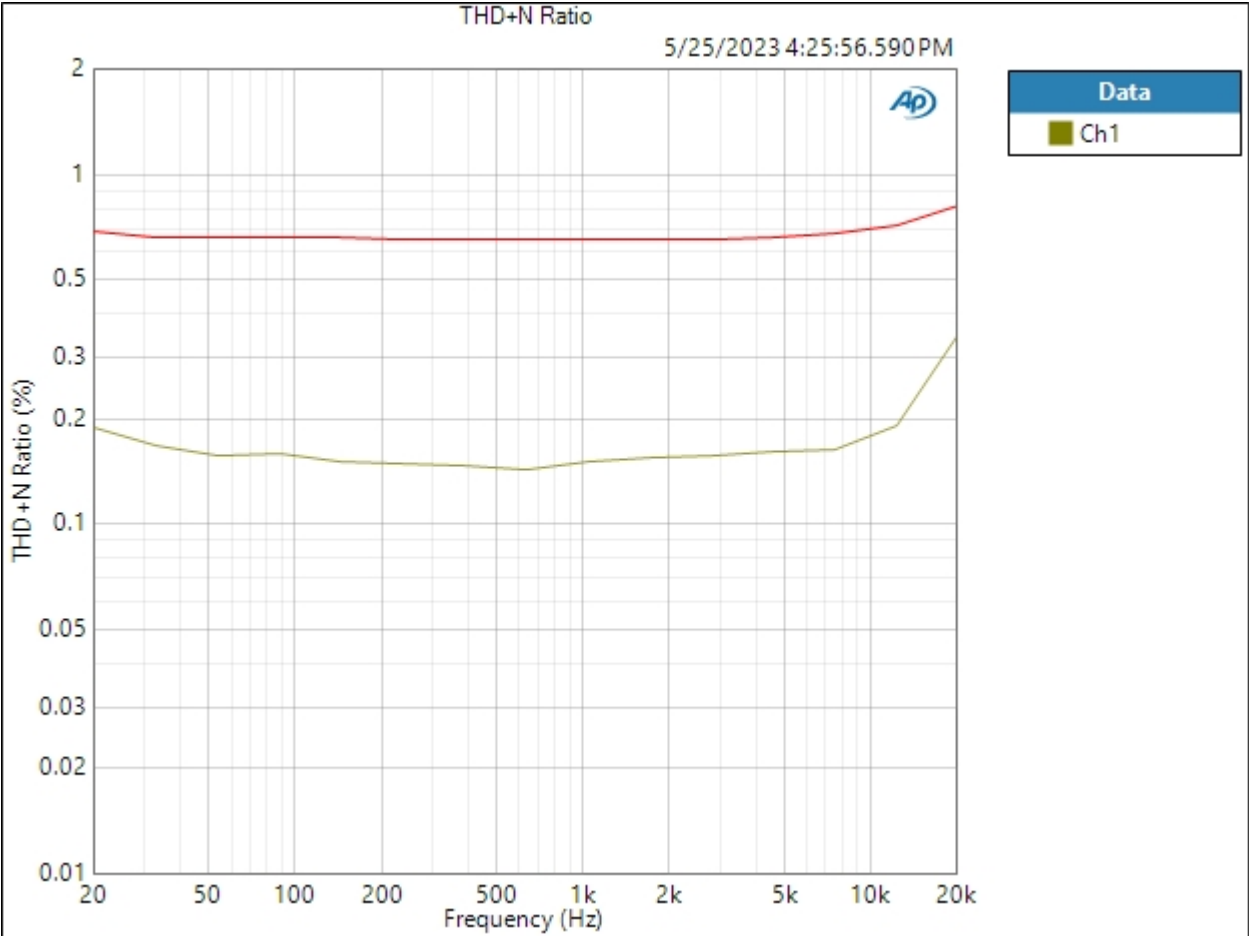

Ch1 ✔ PASSED

Result: ✔ PASSED

## Sequence Report



### Line Gain -10 600 Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 600 ohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:02.441 PM)

Ch1 251.0 mVrms

Gain (5/25/2023 4:26:02.441 PM)

Ch1 0.211 dB

THD+N Ratio (5/25/2023 4:26:02.441 PM)

Ch1 0.402943 %

Frequency (5/25/2023 4:26:02.441 PM)

Ch1 1.00000 kHz

### Line Gain -10 600 Termination : Level and Gain -10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:05.683 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-9.789 dBu	-8.500 dBu	✓

Result: ✓ PASSED

## Sequence Report



### Line Gain +5 200kTermination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:11.456 PM)

Ch1 4.860 Vrms

Gain (5/25/2023 4:26:11.456 PM)

Ch1 15.952 dB

THD+N Ratio (5/25/2023 4:26:11.456 PM)

Ch1 0.270551 %

Frequency (5/25/2023 4:26:11.456 PM)

Ch1 1.00000 kHz

## Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/25/2023 4:26:21 PM

RMS Level (5/25/2023 4:26:21.655 PM)

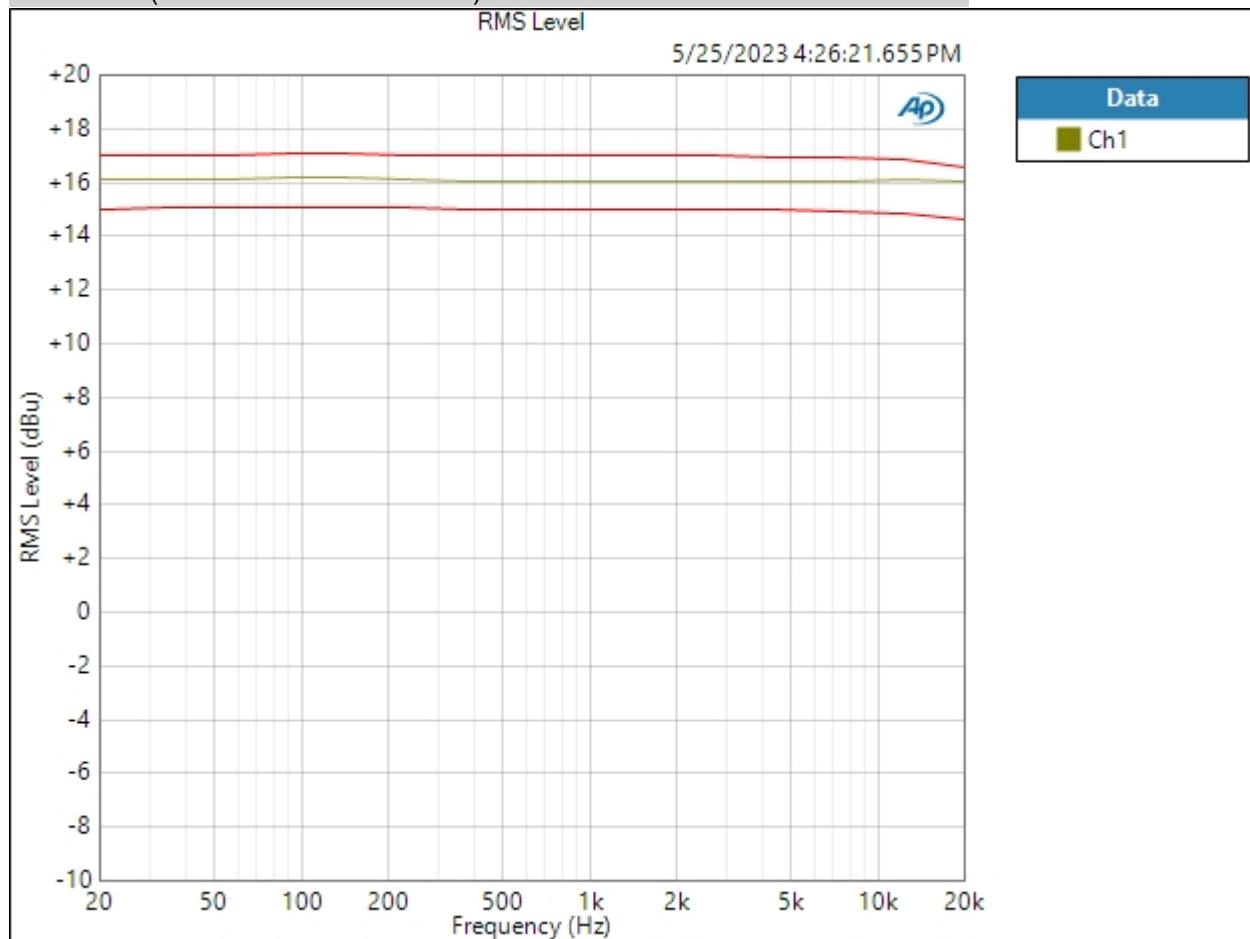

Ch1 PASSED

5/25/2023 4:27 PM

Page 24 of 45




## Sequence Report



Result: ✔ PASSED

THD+N Ratio (5/25/2023 4:26:21.655 PM)

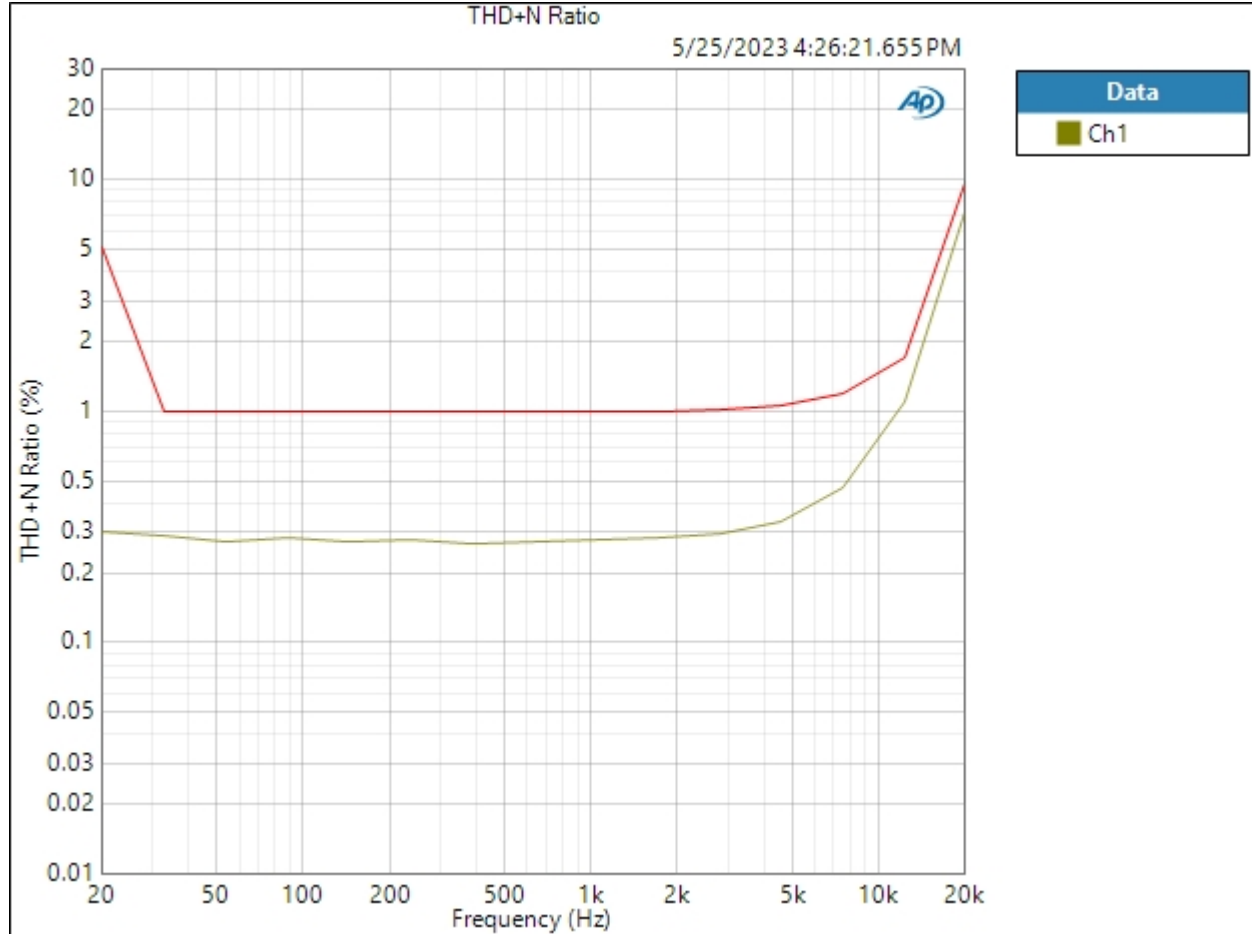

Ch1 ✔ PASSED

Result: ✔ PASSED

## Sequence Report



### Line Gain +5 600 Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 600 ohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:27.636 PM)

Ch1 1.353 Vrms

Gain (5/25/2023 4:26:27.636 PM)

Ch1 14.845 dB

THD+N Ratio (5/25/2023 4:26:27.636 PM)

Ch1 0.367849 %

Frequency (5/25/2023 4:26:27.636 PM)

Ch1 1.00000 kHz

### Line Gain +5 600 Termination : Level and Gain +5

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:30.794 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	+4.845 dBu	+6.500 dBu	✓

Result: ✓ PASSED

## Sequence Report



### Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:36.659 PM)

Ch1 419.6 mVrms

Gain (5/25/2023 4:26:36.659 PM)

Ch1 4.675 dB

THD+N Ratio (5/25/2023 4:26:36.659 PM)

Ch1 0.378604 %

Frequency (5/25/2023 4:26:36.659 PM)

Ch1 1.00000 kHz

### Line Gain -5 600 Termination : Level and Gain -5

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:39.944 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-5.324 dBu	-3.500 dBu	✓

Result: ✓ PASSED

## Sequence Report



### Line Gain 0 600 Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 600 ohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:45.855 PM)

Ch1 731.7 mVrms

Gain (5/25/2023 4:26:45.855 PM)

Ch1 9.505 dB

THD+N Ratio (5/25/2023 4:26:45.855 PM)

Ch1 0.323022 %

Frequency (5/25/2023 4:26:45.855 PM)

Ch1 1.00000 kHz

### Line Gain 0 600 Termination : Level and Gain 0

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:49.095 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-0.495 dBu	+1.500 dBu	✓

Result: ✓ PASSED

## Sequence Report



### Line Gain +10 600 Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 600 ohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dB SPL1: 10.00 mVrms  
dB SPL2: 10.00 mVrms  
dB SPL1 Calibrator Level: 94.000 dB SPL  
dB SPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.



## Sequence Report



### Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:55.138 PM)

Ch1 2.385 Vrms

Gain (5/25/2023 4:26:55.138 PM)

Ch1 19.768 dB

THD+N Ratio (5/25/2023 4:26:55.138 PM)

Ch1 0.487518 %

Frequency (5/25/2023 4:26:55.138 PM)

Ch1 1.00000 kHz

### Line Gain +10 600 Termination : Level and Gain +10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:26:58.449 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	+9.767 dBu	+11.500 dBu	✓

Result: ✓ PASSED

## Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

### • DCX

DCX is not detected.

## Sequence Report



Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:27:04.357 PM)

Ch1 858.4 mVrms

Gain (5/25/2023 4:27:04.357 PM)

Ch1 20.892 dB

THD+N Ratio (5/25/2023 4:27:04.357 PM)

Ch1 0.927987 %

Frequency (5/25/2023 4:27:04.357 PM)

Ch1 1.00000 kHz


## Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None  
Low-pass Filter: 20 kHz  
Weighting Filter: Signal Path  
High-pass Filter: 20 Hz  
Sweep Time: 0.00:00:03.000  
Reading Rate: 10/sec  
Input Bandwidth: Use Signal Path  
Record Acquisition: False  
Measured 1 5/25/2023 4:27:09 PM

RMS Level (5/25/2023 4:27:09.431 PM)

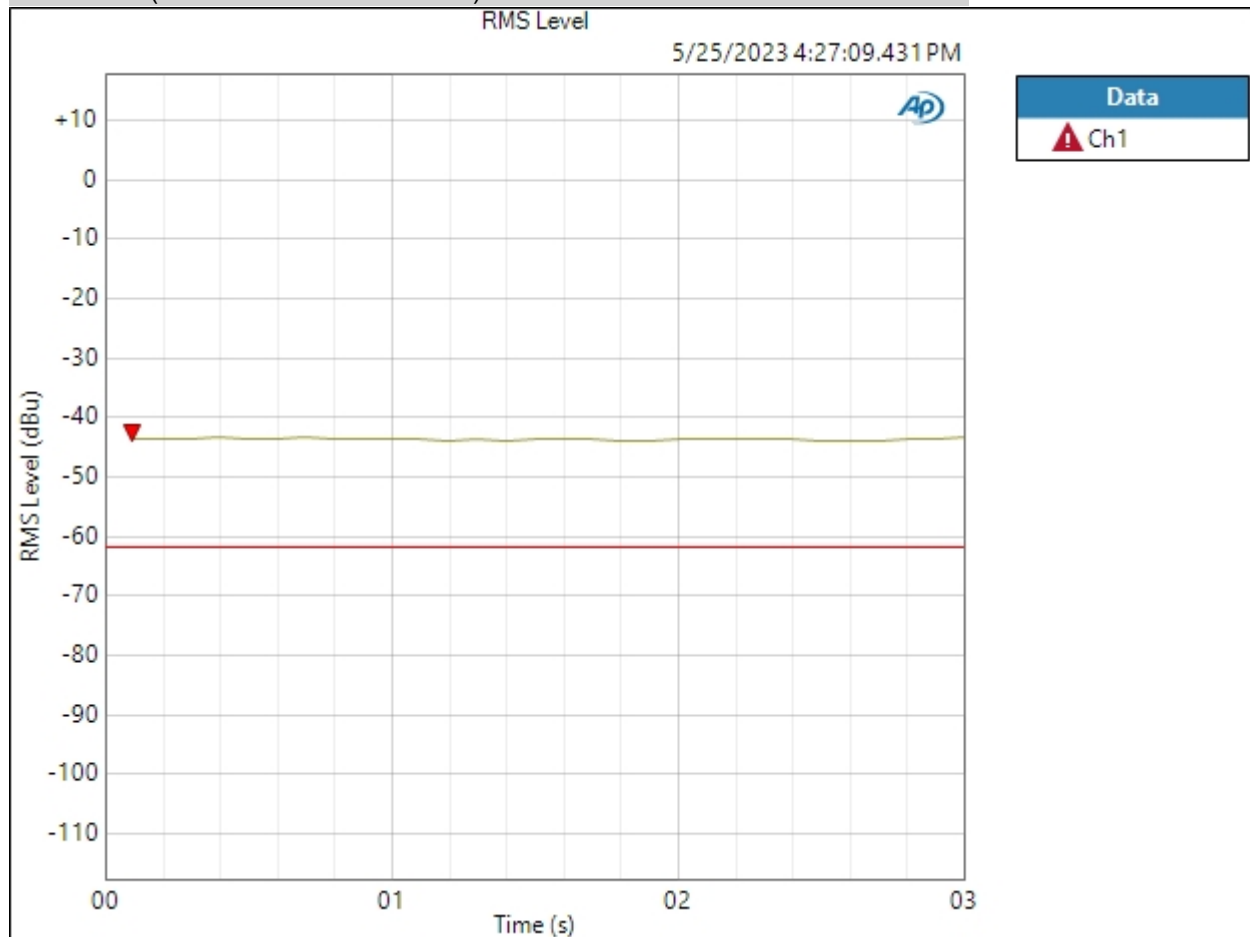

Ch1 Failed Upper Limit

Result: FAILED

5/25/2023 4:27 PM

Page 36 of 45

## Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

## • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

## • DCX

DCX is not detected.

## Sequence Report



Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:27:15.423 PM)

Ch1 81.09 uVrms

Gain (5/25/2023 4:27:15.423 PM)

Ch1 -59.576 dB

THD+N Ratio (5/25/2023 4:27:15.423 PM)

Ch1 ---- %

Frequency (5/25/2023 4:27:15.423 PM)

Ch1 ---- Hz


## Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None  
Low-pass Filter: 20 kHz  
Weighting Filter: Signal Path  
High-pass Filter: 20 Hz  
Sweep Time: 0.00:00:03.000  
Reading Rate: 10/sec  
Input Bandwidth: Use Signal Path  
Record Acquisition: False  
Measured 1 5/25/2023 4:27:21 PM

RMS Level (5/25/2023 4:27:21.102 PM)

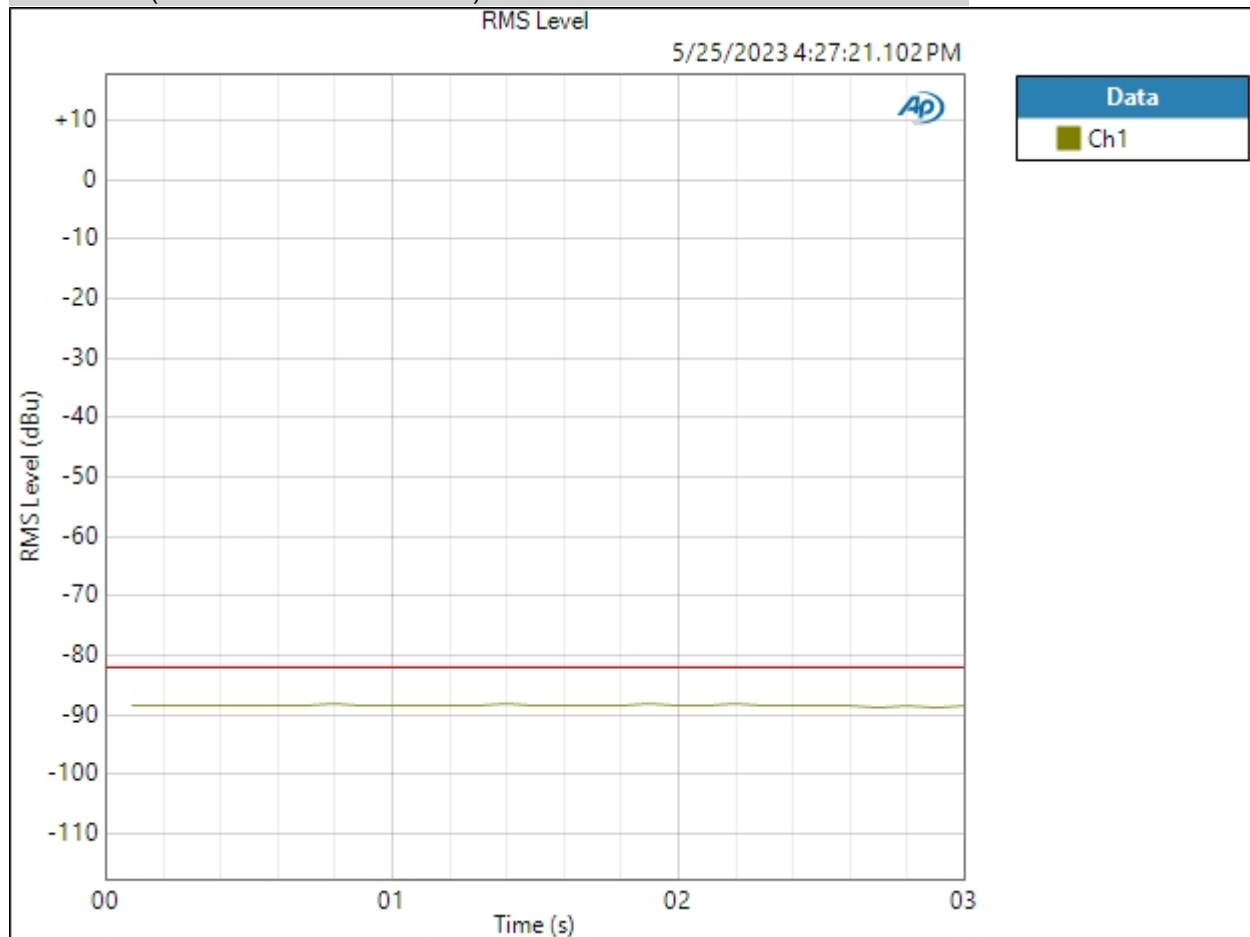

Ch1 PASSED

Result: PASSED

5/25/2023 4:27 PM

## Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

## • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

## • DCX

DCX is not detected.



## Sequence Report



### Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:27:27.009 PM)

Ch1 5.542 mVrms

Gain (5/25/2023 4:27:27.009 PM)

Ch1 -20.598 dB

THD+N Ratio (5/25/2023 4:27:27.009 PM)

Ch1 ---- %

Frequency (5/25/2023 4:27:27.009 PM)

Ch1 ---- Hz

### Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:27:30.846 PM)

Channel	Lower Limit	Value	Upper Limit
Ch1	-2.000 dBu	-38.691 dBu	+2.000 dBu



Result: FAILED

## Sequence Report



### Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 2  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:27:36.466 PM)

Ch1 2.847 mVrms

Gain (5/25/2023 4:27:36.466 PM)

Ch1 -26.398 dB

THD+N Ratio (5/25/2023 4:27:36.466 PM)

Ch1 ---- %

Frequency (5/25/2023 4:27:36.466 PM)

Ch1 ---- Hz

### Hi Z Gain -10 47k 200k Termination : Level and Gain 47K

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:27:39.943 PM)

Channel	Lower Limit	Value	Upper Limit
Ch1	-8.000 dBu	-48.676 dBu	-4.000 dBu



Result: FAILED

## Sequence Report



### Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



Dummy Signal Path For Report : Verify Connections

Waveform: Sine

Generator Level: 100.0 mVrms

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 4:27:44.165 PM)

Ch1 70.98 uVrms

Ch2 7.265 uVrms