

Sequence Report



Summary

Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 FAILED

Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K FAILED

Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 FAILED

Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 PASSED

Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 FAILED

Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 FAILED

Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 FAILED

Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 FAILED

Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 FAILED

Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW FAILED

Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	⚠ FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	⚠ FAILED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

Sequence Report



Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

Sequence Report



Port D (hex): 00

Mic500 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:55:00.848 PM)

Ch1 284.5 mVrms

Gain (4/29/2023 11:55:00.848 PM)

Ch1 33.599 dB

THD+N Ratio (4/29/2023 11:55:00.848 PM)

Ch1 ---- %

Frequency (4/29/2023 11:55:00.848 PM)

Ch1 ---- Hz

Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 4/29/2023 11:55:08 PM

RMS Level (4/29/2023 11:55:08.290 PM)

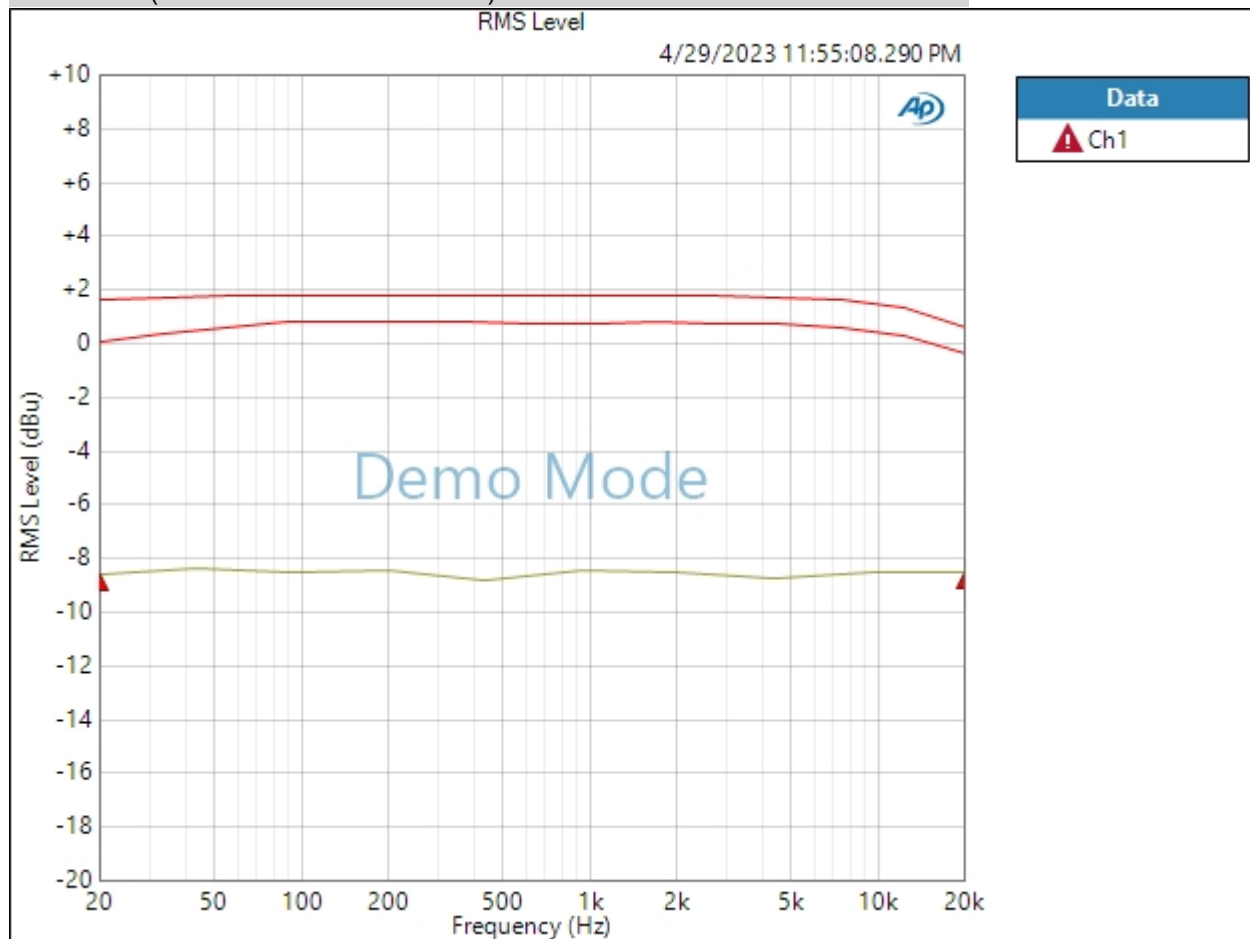


Ch1 Failed Lower Limit

Sequence Report



Result: ▲ FAILED


THD+N Ratio (4/29/2023 11:55:08.290 PM)

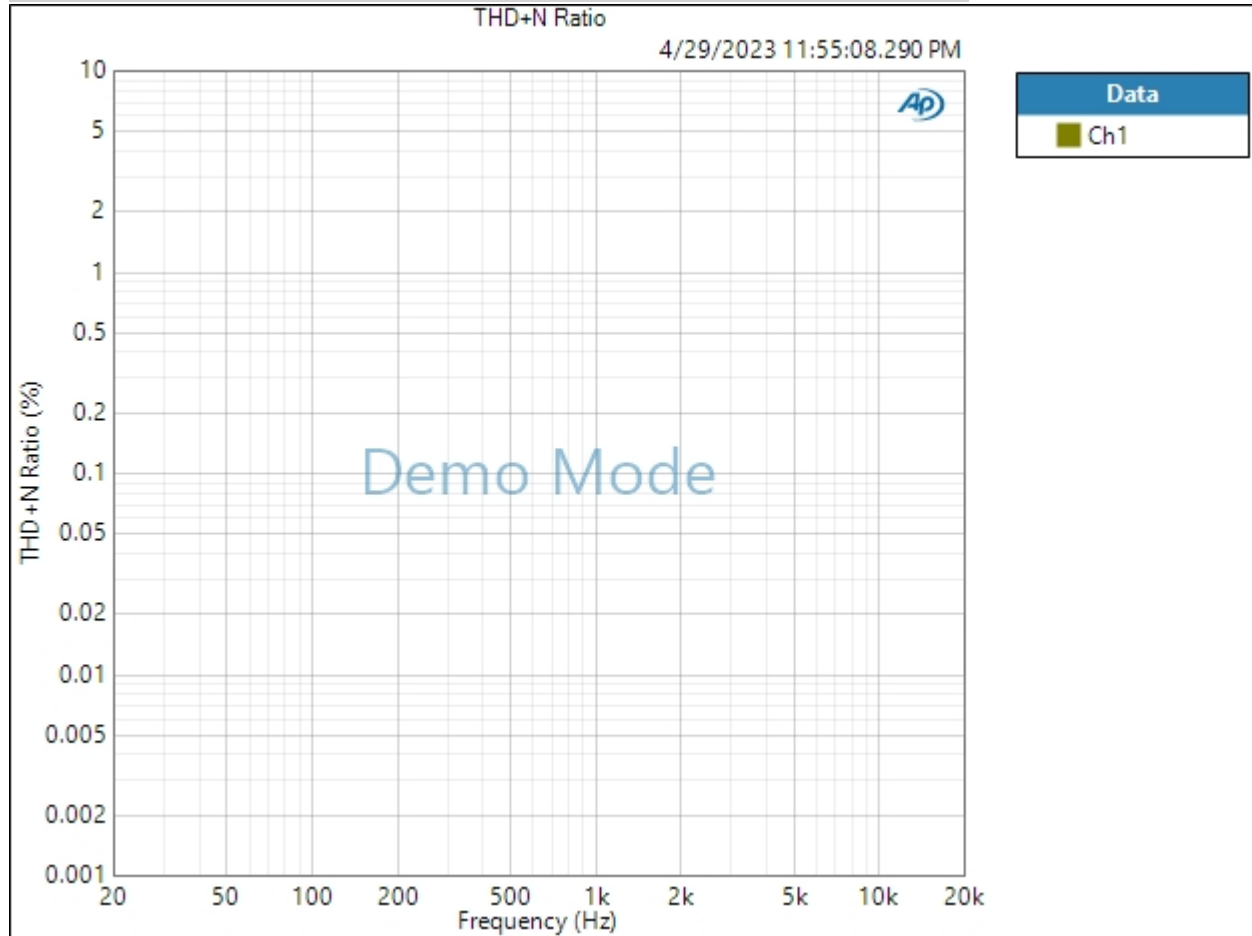

Result: ✔ PASSED

THD Ratio (4/29/2023 11:55:08.290 PM)

Sequence Report

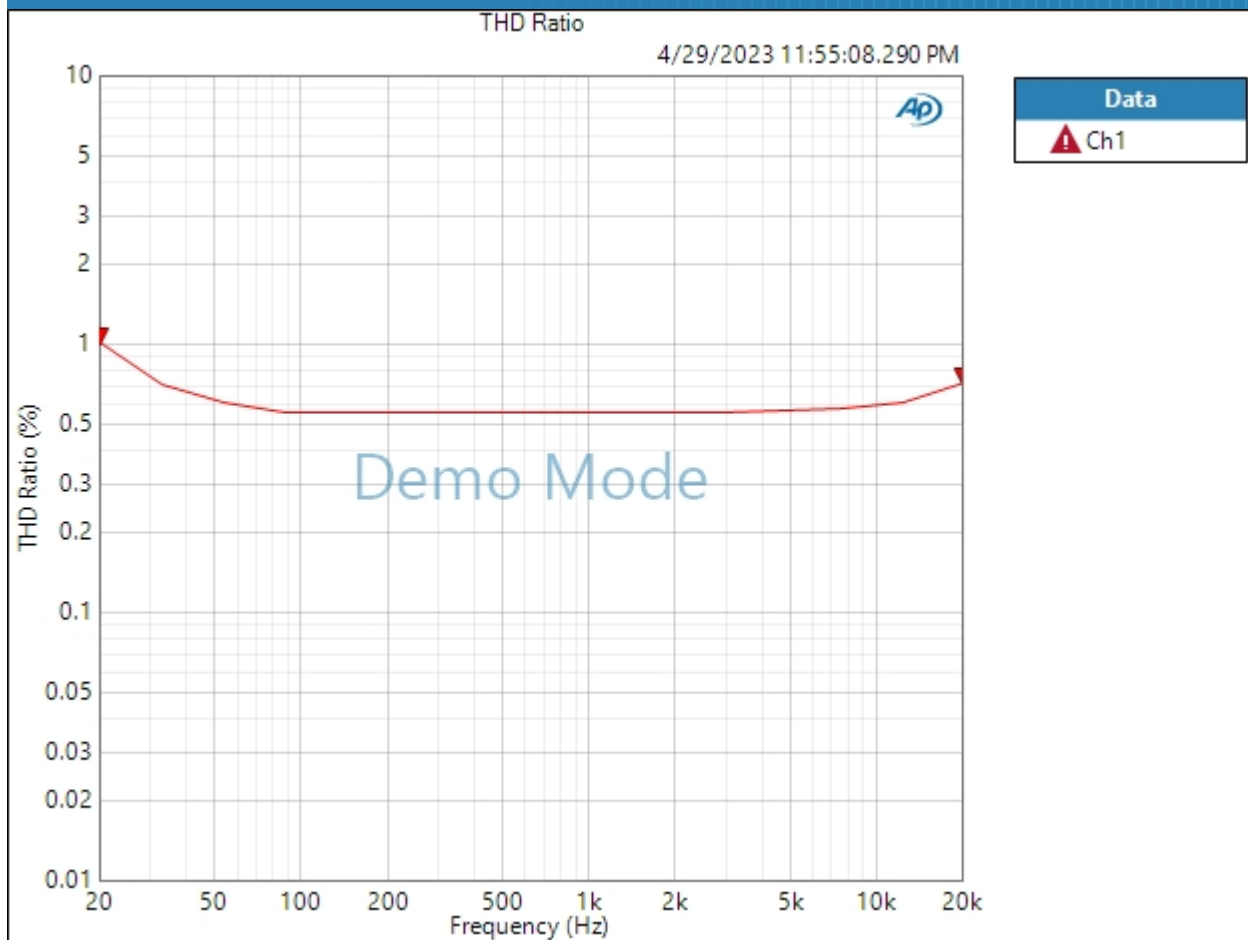

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

Sequence Report



Port D (hex): 00

Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:55:13.266 PM)

Ch1 278.6 mVrms

Gain (4/29/2023 11:55:13.266 PM)

Ch1 33.418 dB

THD+N Ratio (4/29/2023 11:55:13.266 PM)

Ch1 ---- %

Frequency (4/29/2023 11:55:13.266 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 4/29/2023 11:55:21 PM

RMS Level (4/29/2023 11:55:21.026 PM)

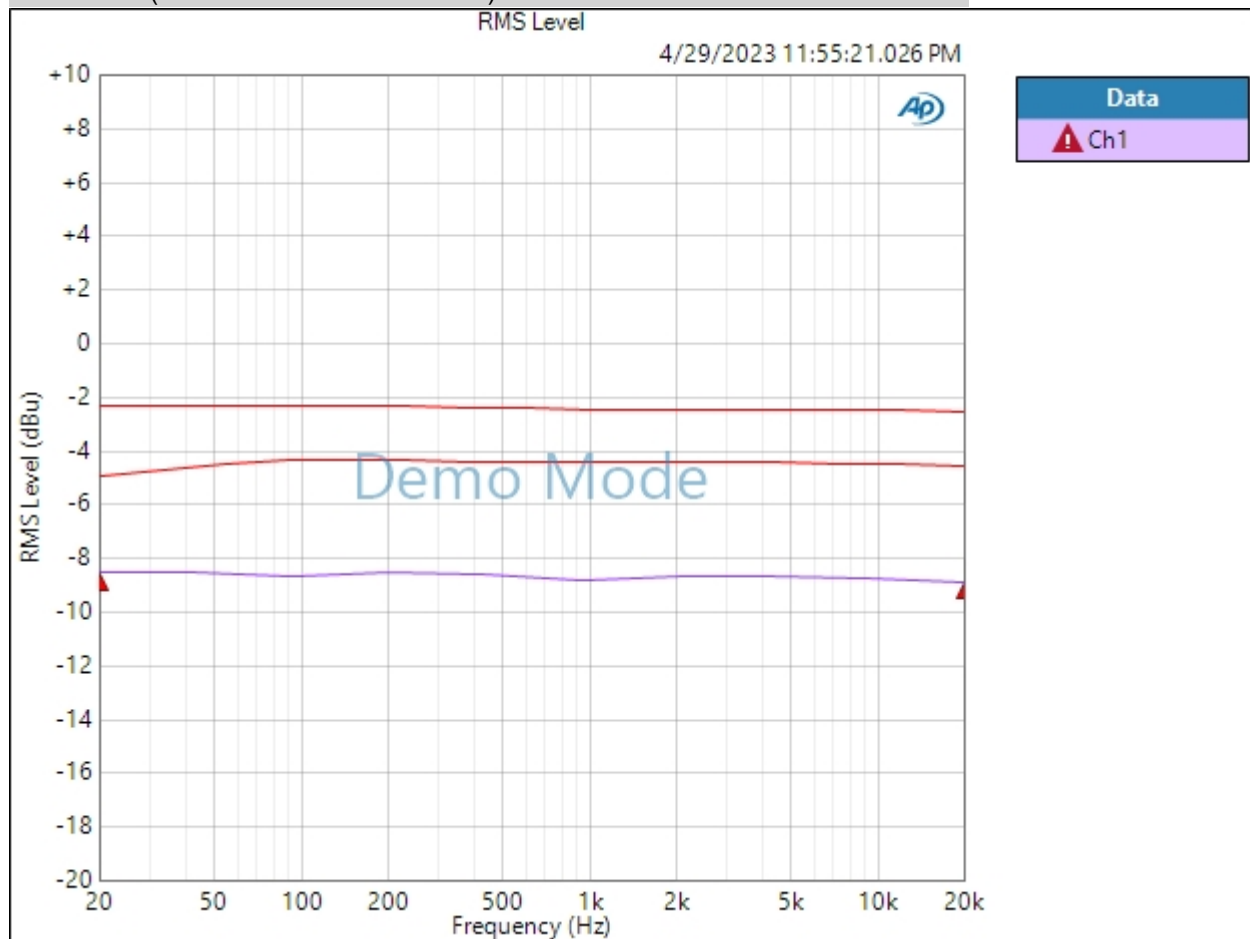


Sequence Report



Result: ▲ FAILED

THD Ratio (4/29/2023 11:55:21.026 PM)

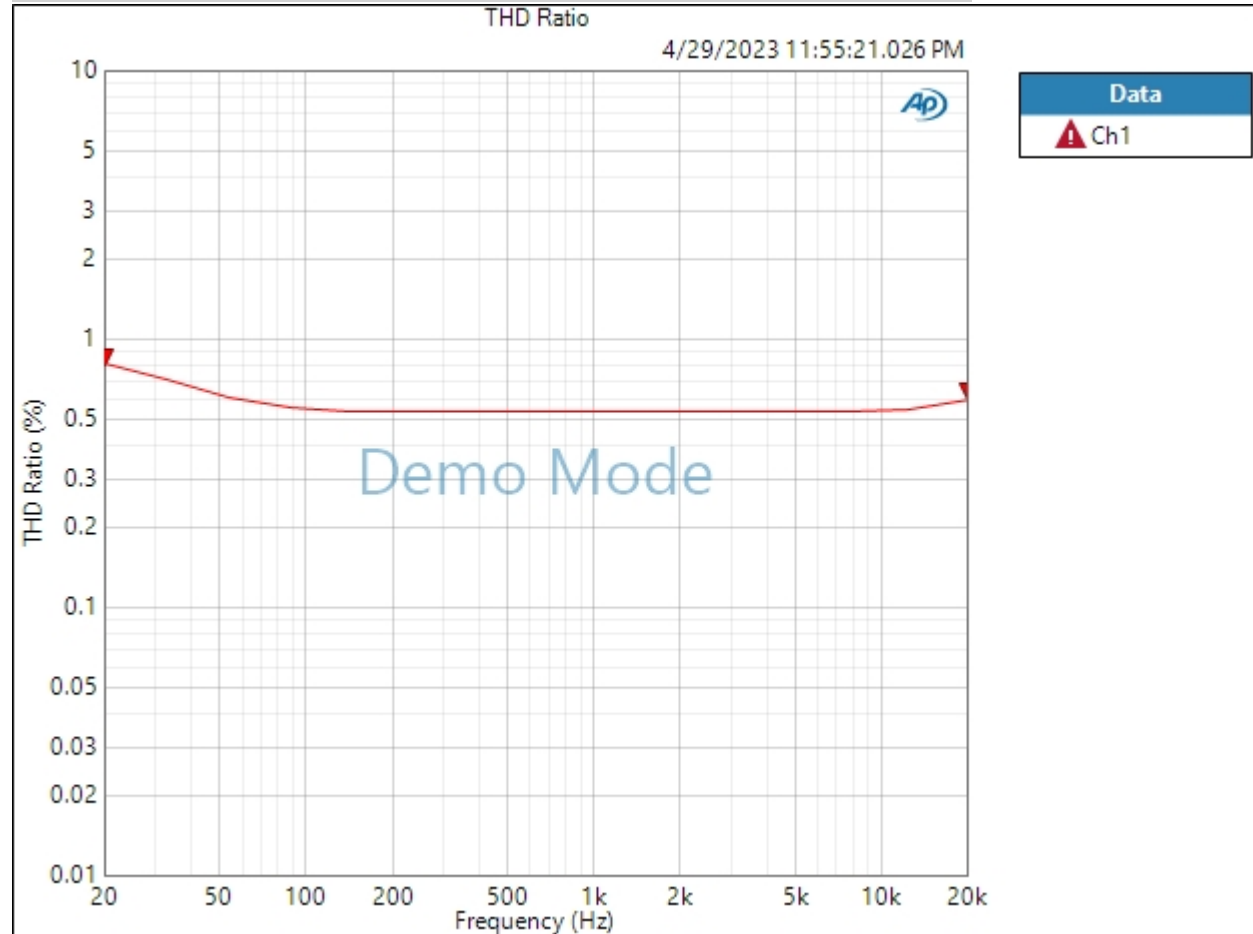

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

4/29/2023 11:57 PM

Page 12 of 47

Sequence Report



Port D (hex): 00

Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:55:26.099 PM)

Ch1 289.5 mVrms

Gain (4/29/2023 11:55:26.099 PM)

Ch1 33.751 dB

THD+N Ratio (4/29/2023 11:55:26.099 PM)

Ch1 ---- %

Frequency (4/29/2023 11:55:26.099 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 4/29/2023 11:55:35 PM

RMS Level (4/29/2023 11:55:35.057 PM)

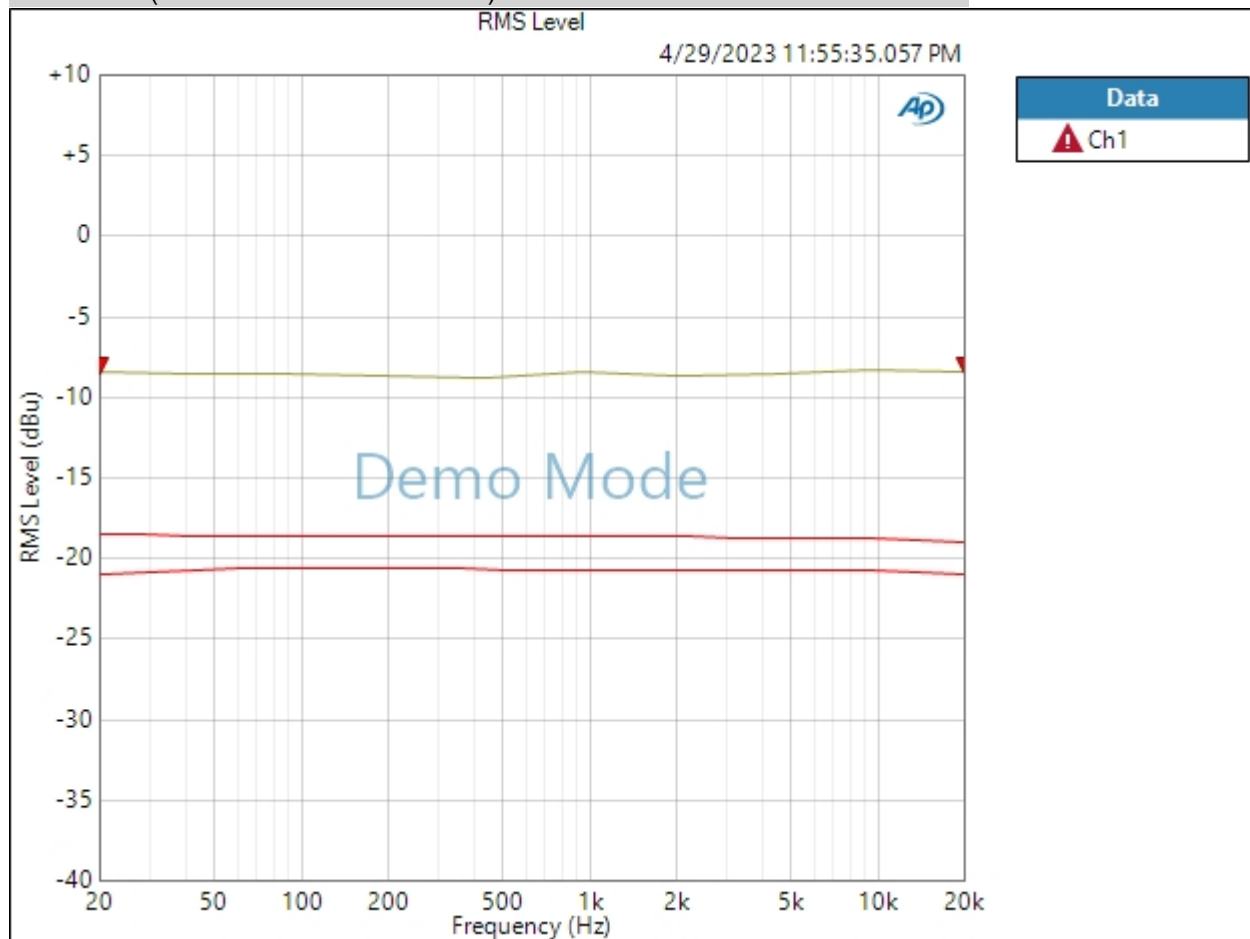


Ch1 Failed Upper Limit

Sequence Report



Result: ▲ FAILED

THD Ratio (4/29/2023 11:55:35.057 PM)

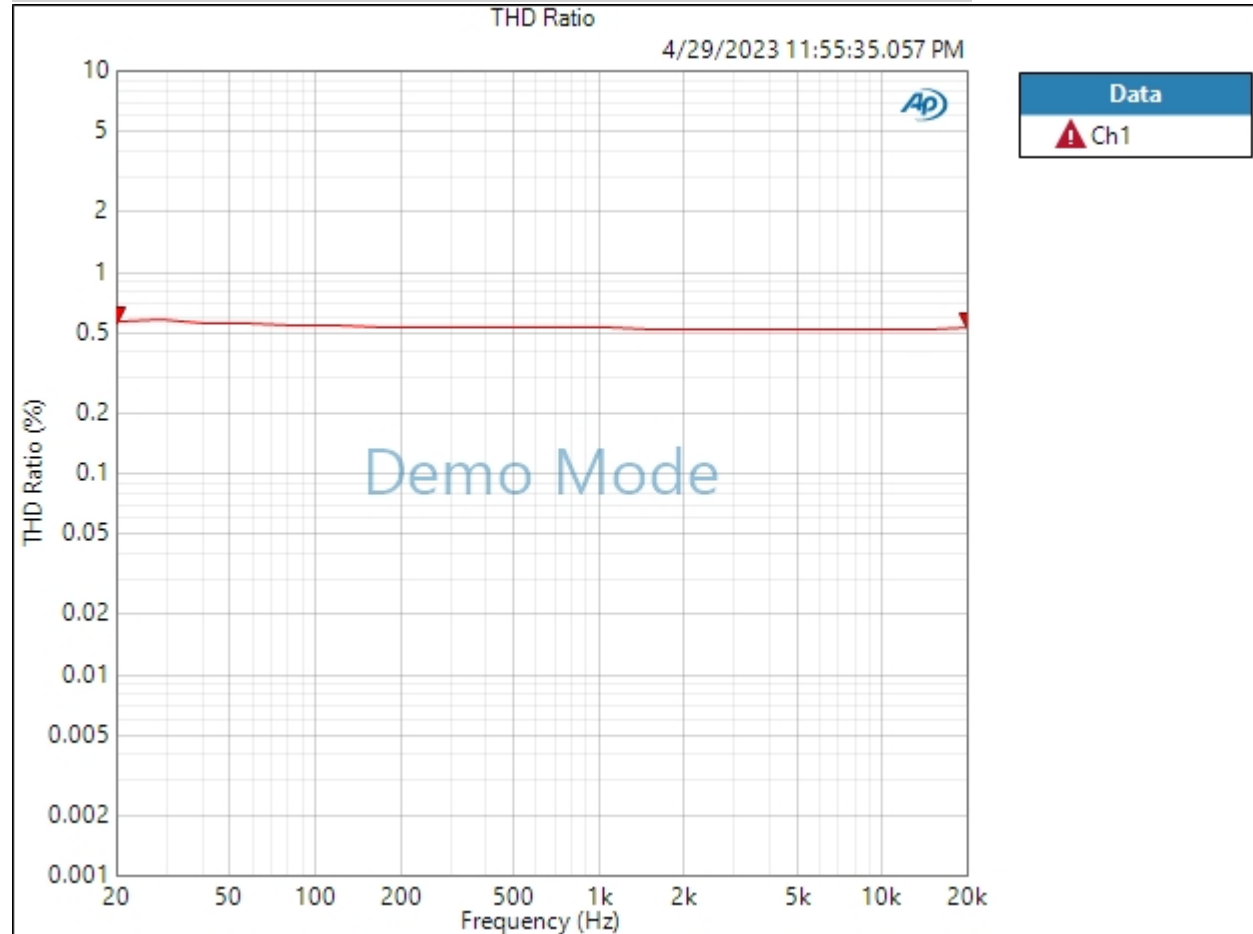

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain -10 200kTermination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

Sequence Report



Port D (hex): 00

Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:55:40.325 PM)

Ch1 284.7 mVrms

Gain (4/29/2023 11:55:40.325 PM)

Ch1 -8.694 dB

THD+N Ratio (4/29/2023 11:55:40.325 PM)

Ch1 ---- %

Frequency (4/29/2023 11:55:40.325 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 4/29/2023 11:55:50 PM

RMS Level (4/29/2023 11:55:50.607 PM)

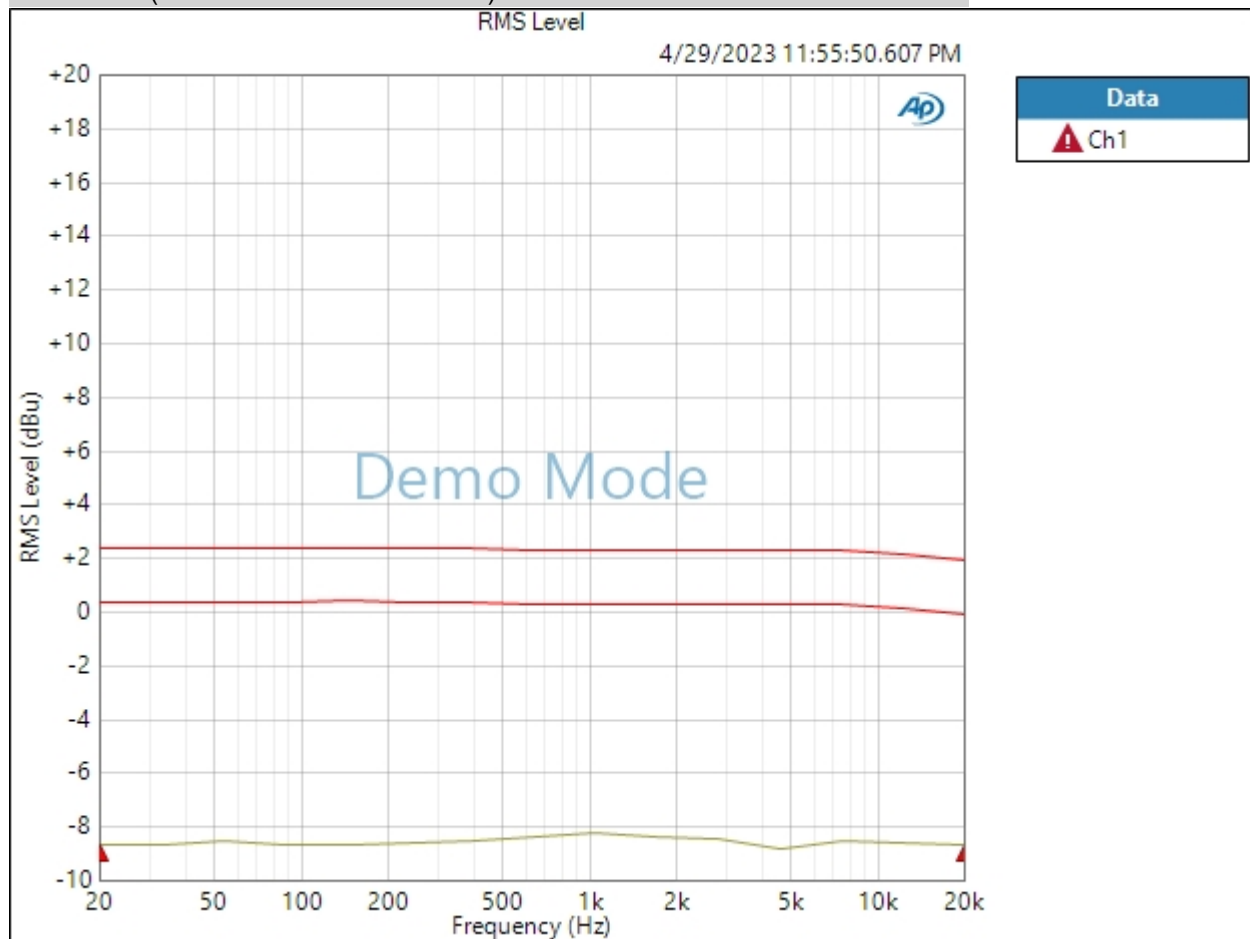


Ch1 Failed Lower Limit

Sequence Report



Result: ▲ FAILED

THD+N Ratio (4/29/2023 11:55:50.607 PM)

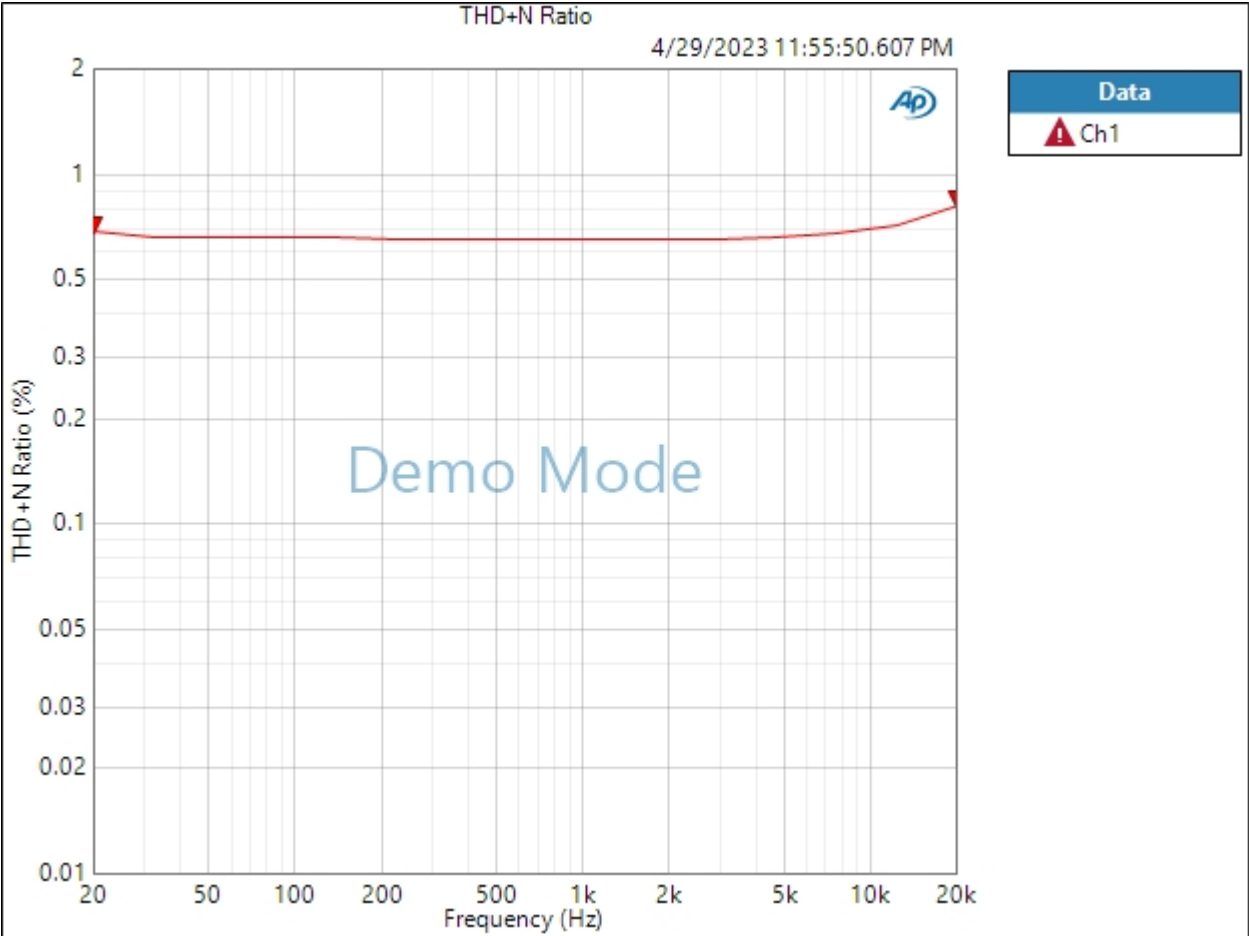

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain -10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

Sequence Report



Port D (hex): 00

Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:55:55.923 PM)

Ch1 276.2 mVrms

Gain (4/29/2023 11:55:55.923 PM)

Ch1 1.042 dB

THD+N Ratio (4/29/2023 11:55:55.923 PM)

Ch1 ---- %

Frequency (4/29/2023 11:55:55.923 PM)

Ch1 ---- Hz

Line Gain -10 600 Termination : Level and Gain -10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:55:58.654 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-8.529 dBu	-8.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +5 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

Sequence Report



Port D (hex): 00

Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:56:04.159 PM)

Ch1 295.5 mVrms

Gain (4/29/2023 11:56:04.159 PM)

Ch1 -8.372 dB

THD+N Ratio (4/29/2023 11:56:04.159 PM)

Ch1 ---- %

Frequency (4/29/2023 11:56:04.159 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 4/29/2023 11:56:14 PM

RMS Level (4/29/2023 11:56:14.493 PM)

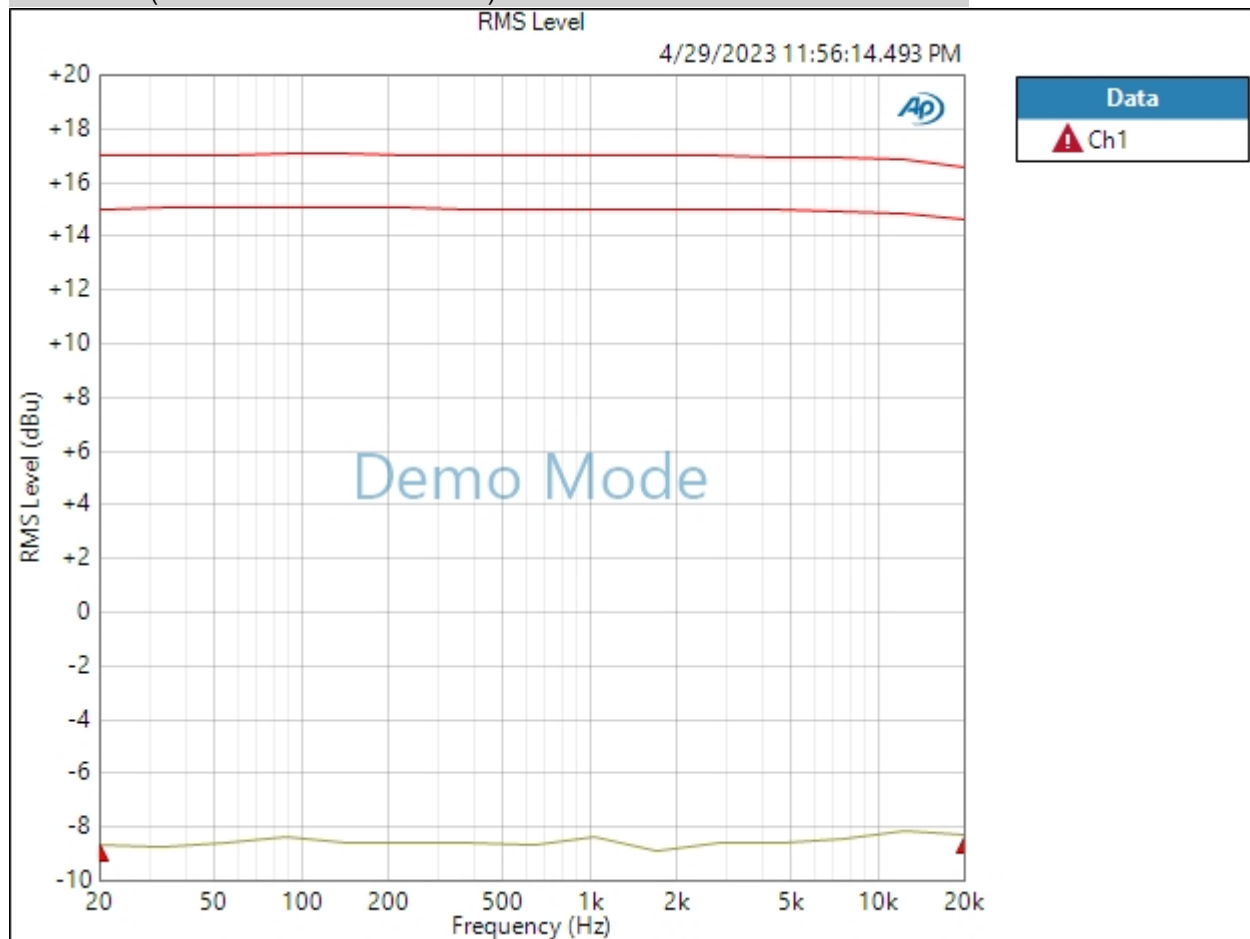


Ch1 Failed Lower Limit

Sequence Report



Result: ▲ FAILED

THD+N Ratio (4/29/2023 11:56:14.493 PM)

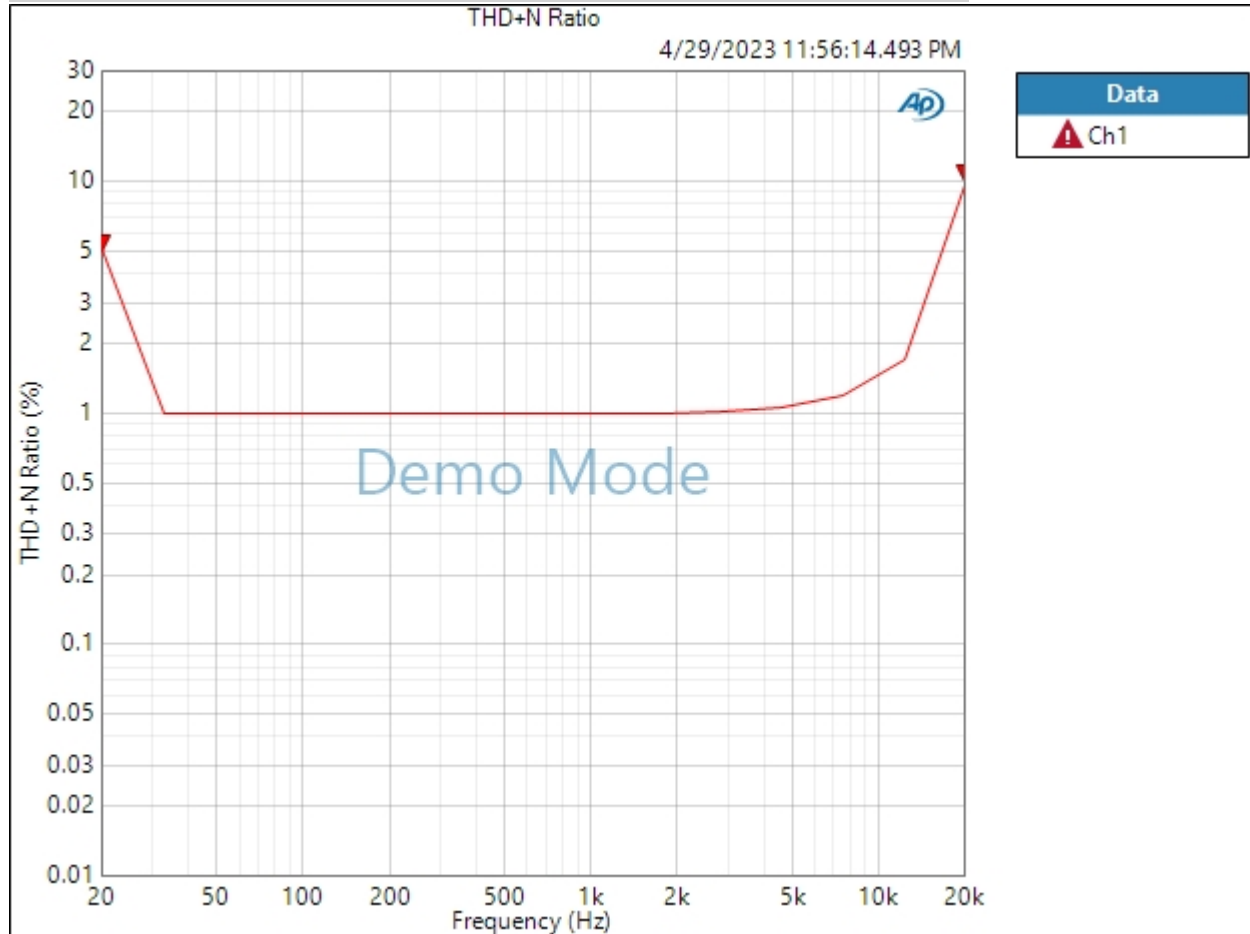

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

Sequence Report



Port D (hex): 00

Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:56:19.922 PM)

Ch1 276.4 mVrms

Gain (4/29/2023 11:56:19.922 PM)

Ch1 1.050 dB

THD+N Ratio (4/29/2023 11:56:19.922 PM)

Ch1 ---- %

Frequency (4/29/2023 11:56:19.922 PM)

Ch1 ---- Hz

Line Gain +5 600 Termination : Level and Gain +5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:56:23.720 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	-8.560 dBu	+6.500 dBu	

Result:  FAILED

Sequence Report



Line Gain -5 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

Sequence Report



Port D (hex): 00

Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:56:29.083 PM)

Ch1 295.9 mVrms

Gain (4/29/2023 11:56:29.083 PM)

Ch1 1.642 dB

THD+N Ratio (4/29/2023 11:56:29.083 PM)

Ch1 ---- %

Frequency (4/29/2023 11:56:29.083 PM)

Ch1 ---- Hz

Line Gain -5 600 Termination : Level and Gain -5

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:56:33.172 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-8.571 dBu	-3.500 dBu	

Result:  FAILED

Sequence Report



Line Gain 0 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

Sequence Report



Port D (hex): 00

Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:56:38.524 PM)

Ch1 292.3 mVrms

Gain (4/29/2023 11:56:38.524 PM)

Ch1 1.534 dB

THD+N Ratio (4/29/2023 11:56:38.524 PM)

Ch1 ---- %

Frequency (4/29/2023 11:56:38.524 PM)

Ch1 ---- Hz

Line Gain 0 600 Termination : Level and Gain 0

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:56:42.593 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-8.634 dBu	+1.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

Sequence Report



Port D (hex): 00

Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:56:48.001 PM)

Ch1 280.4 mVrms

Gain (4/29/2023 11:56:48.001 PM)

Ch1 1.174 dB

THD+N Ratio (4/29/2023 11:56:48.001 PM)

Ch1 ---- %

Frequency (4/29/2023 11:56:48.001 PM)

Ch1 ---- Hz

Line Gain +10 600 Termination : Level and Gain +10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:56:51.800 PM)

Channel	Lower Limit	Value	Upper Limit
Ch1	+8.500 dBu	-8.560 dBu	+11.500 dBu



Result: FAILED

Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

4/29/2023 11:57 PM

Page 34 of 47

Sequence Report



Port D (hex): 00

Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:56:57.195 PM)

Ch1 289.0 mVrms

Gain (4/29/2023 11:56:57.195 PM)

Ch1 11.436 dB

THD+N Ratio (4/29/2023 11:56:57.195 PM)

Ch1 ---- %

Frequency (4/29/2023 11:56:57.195 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 4/29/2023 11:57:09 PM

RMS Level (4/29/2023 11:57:09.602 PM)

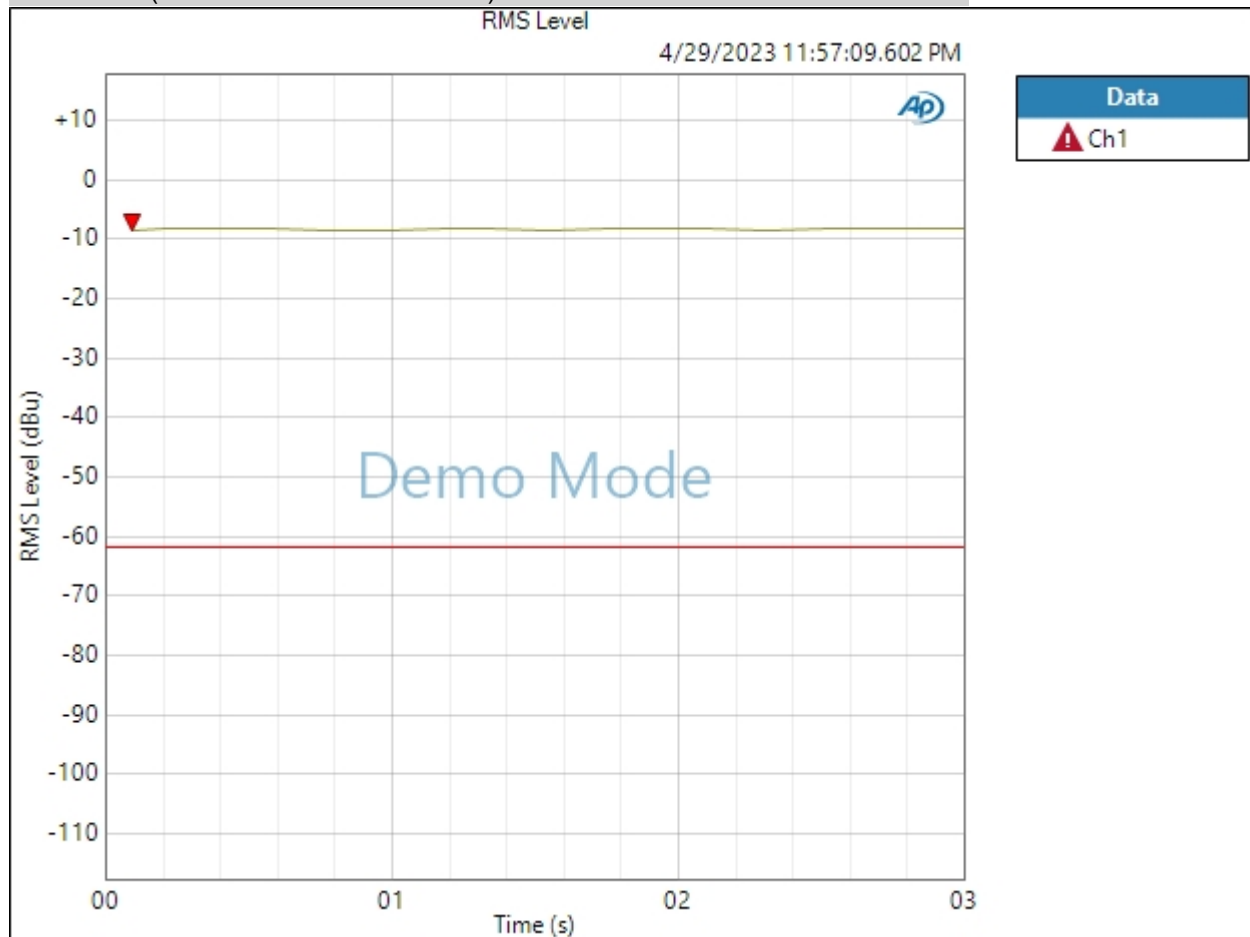

Ch1 Failed Upper Limit

Result: FAILED

4/29/2023 11:57 PM

Page 36 of 47

Sequence Report



Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

Sequence Report



Port D (hex): 00

Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:57:15.199 PM)

Ch1 284.4 mVrms

Gain (4/29/2023 11:57:15.199 PM)

Ch1 11.298 dB

THD+N Ratio (4/29/2023 11:57:15.199 PM)

Ch1 ---- %

Frequency (4/29/2023 11:57:15.199 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 4/29/2023 11:57:29 PM

RMS Level (4/29/2023 11:57:29.371 PM)

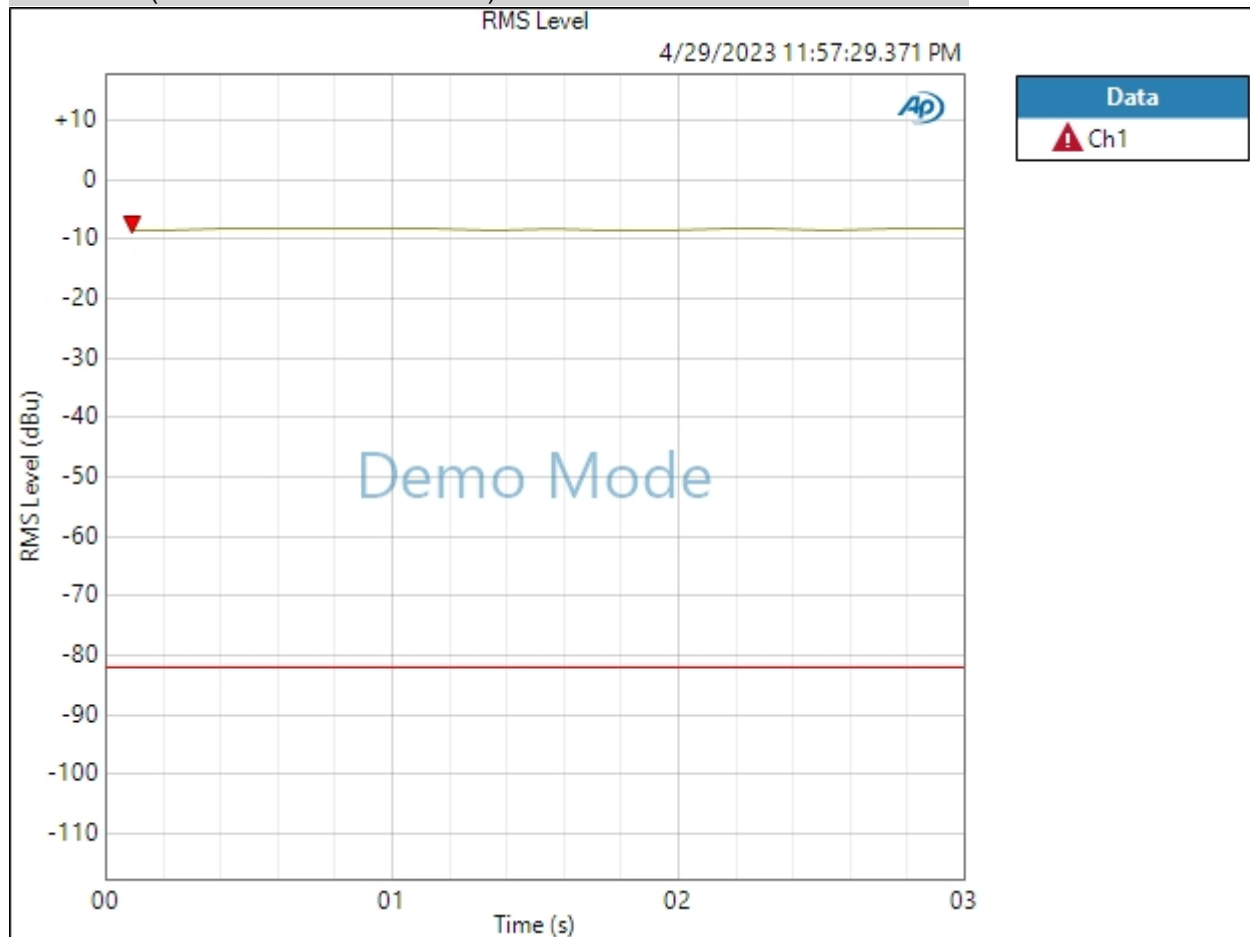

Ch1 Failed Upper Limit

Result: FAILED

4/29/2023 11:57 PM

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 2
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

Sequence Report



Port D (hex): 00

Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:57:34.930 PM)

Ch1 291.0 mVrms

Gain (4/29/2023 11:57:34.930 PM)

Ch1 13.797 dB

THD+N Ratio (4/29/2023 11:57:34.930 PM)

Ch1 ---- %

Frequency (4/29/2023 11:57:34.930 PM)

Ch1 ---- Hz

Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:57:40.322 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	-8.716 dBu	+2.000 dBu	

Result:  FAILED

Sequence Report



Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Unbalanced
Channels: 2
Source Impedance: 50 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

4/29/2023 11:57 PM

Page 44 of 47

Sequence Report



Port D (hex): 00

Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:57:45.786 PM)

Ch1 290.8 mVrms

Gain (4/29/2023 11:57:45.786 PM)

Ch1 13.792 dB

THD+N Ratio (4/29/2023 11:57:45.786 PM)

Ch1 ---- %

Frequency (4/29/2023 11:57:45.786 PM)

Ch1 ---- Hz

Hi Z Gain -10 47k 200k Termination : Level and Gain 47K


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:57:49.686 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-8.570 dBu	-4.000 dBu	

Result:  FAILED

Sequence Report



Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00
Port D (hex):	00

Sequence Report



Dummy Signal Path For Report : Verify Connections

Waveform: Sine

Generator Level: 100.0 mVrms

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (4/29/2023 11:57:53.365 PM)

Ch1 282.3 mVrms

Ch2 289.3 mVrms