

Sequence Report



Summary

Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 PASSED

Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K PASSED

Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 PASSED

Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 PASSED

Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 PASSED

Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 PASSED

Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 PASSED

Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 PASSED

Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 PASSED

Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW PASSED

Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	✓ PASSED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	✓ PASSED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

Sequence Report



Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Mic500 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:07:29.059 AM)

Ch1 896.8 mVrms

Gain (6/1/2023 11:07:29.059 AM)

Ch1 43.572 dB

THD+N Ratio (6/1/2023 11:07:29.059 AM)

Ch1 0.140275 %

Frequency (6/1/2023 11:07:29.059 AM)

Ch1 1.00000 kHz

Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/1/2023 11:07:40 AM

RMS Level (6/1/2023 11:07:40.434 AM)

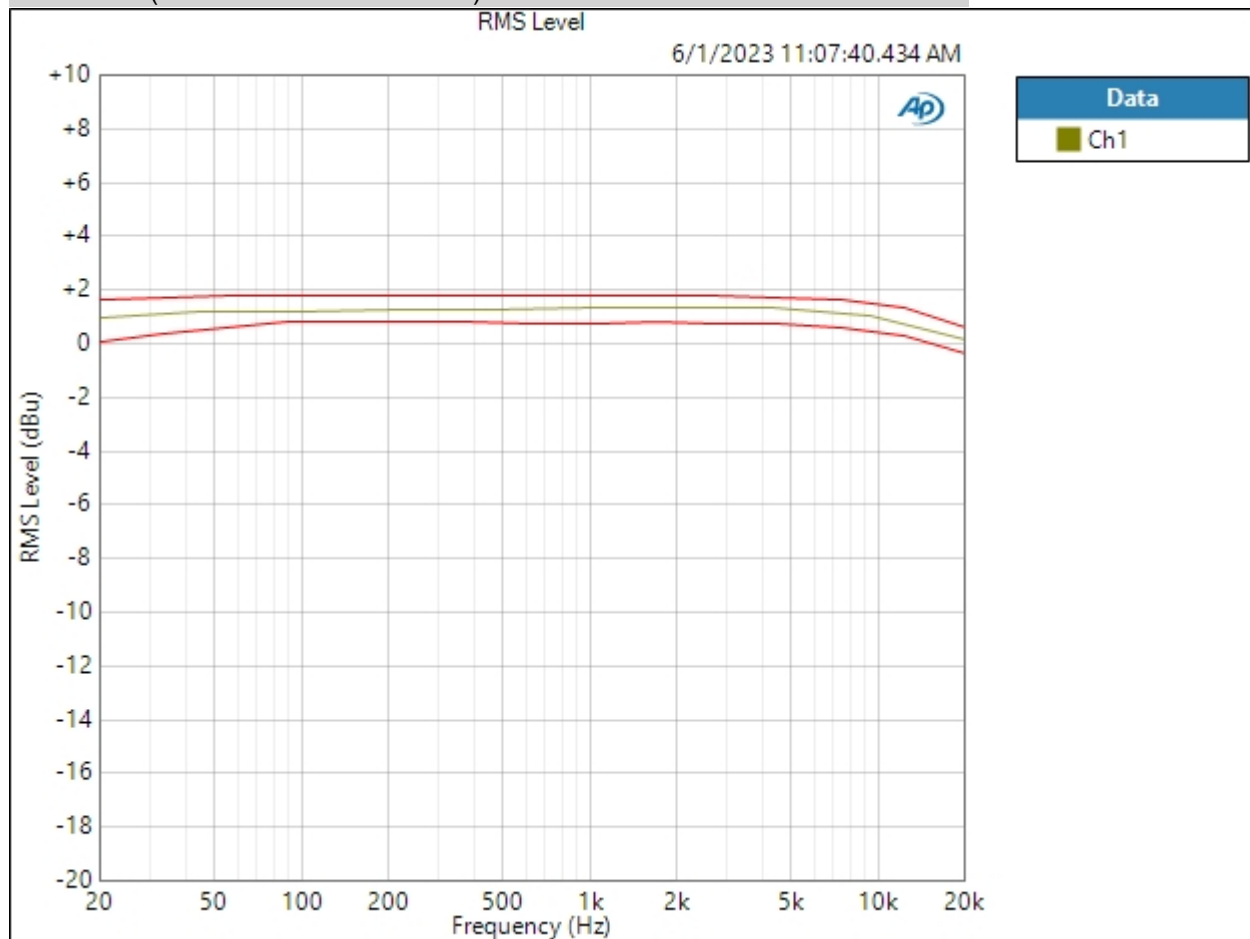

Ch1 PASSED

6/1/2023 11:10 AM


Page 5 of 45

Sequence Report



Result: PASSED


THD+N Ratio (6/1/2023 11:07:40.434 AM)

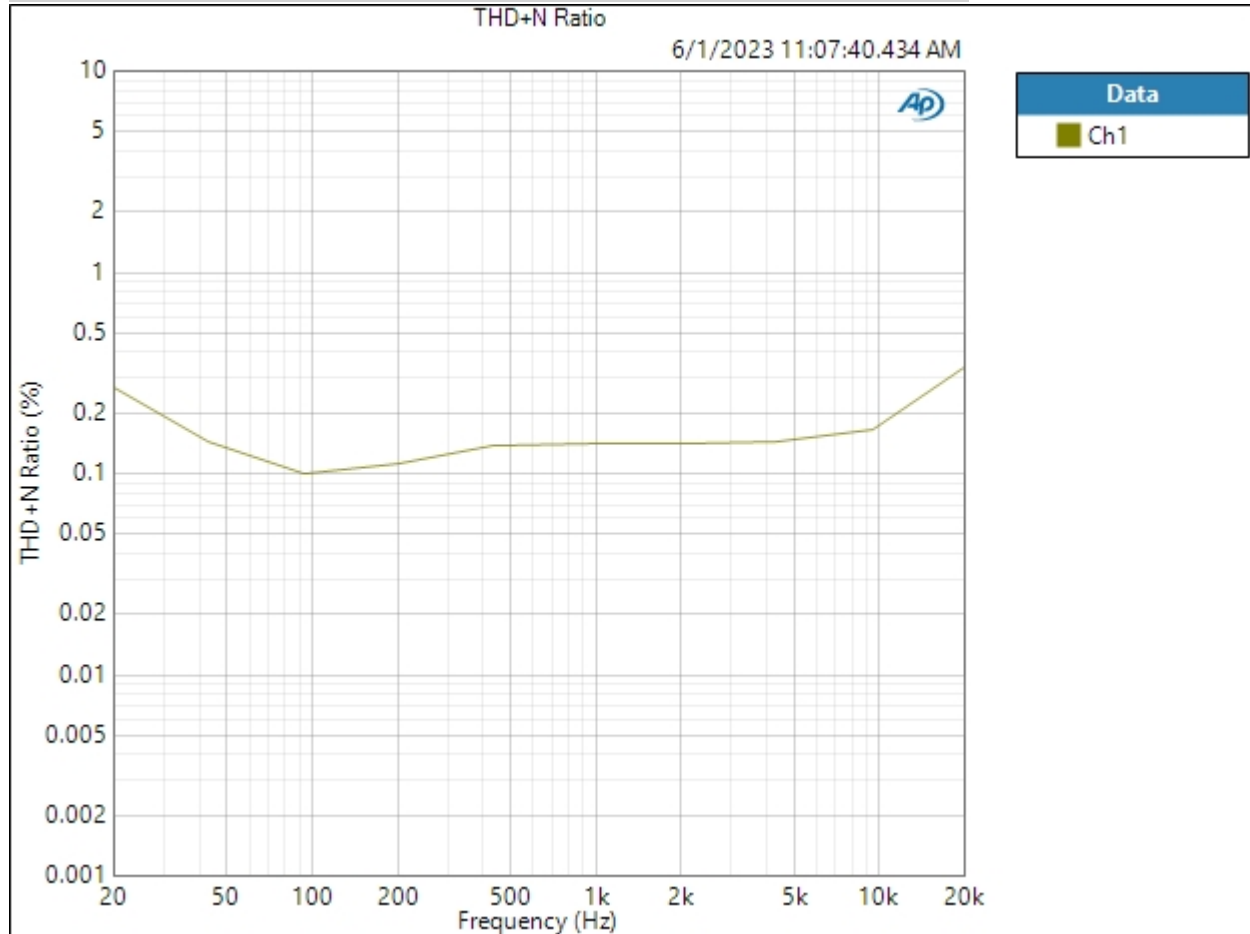

Result: PASSED

THD Ratio (6/1/2023 11:07:40.434 AM)

Sequence Report

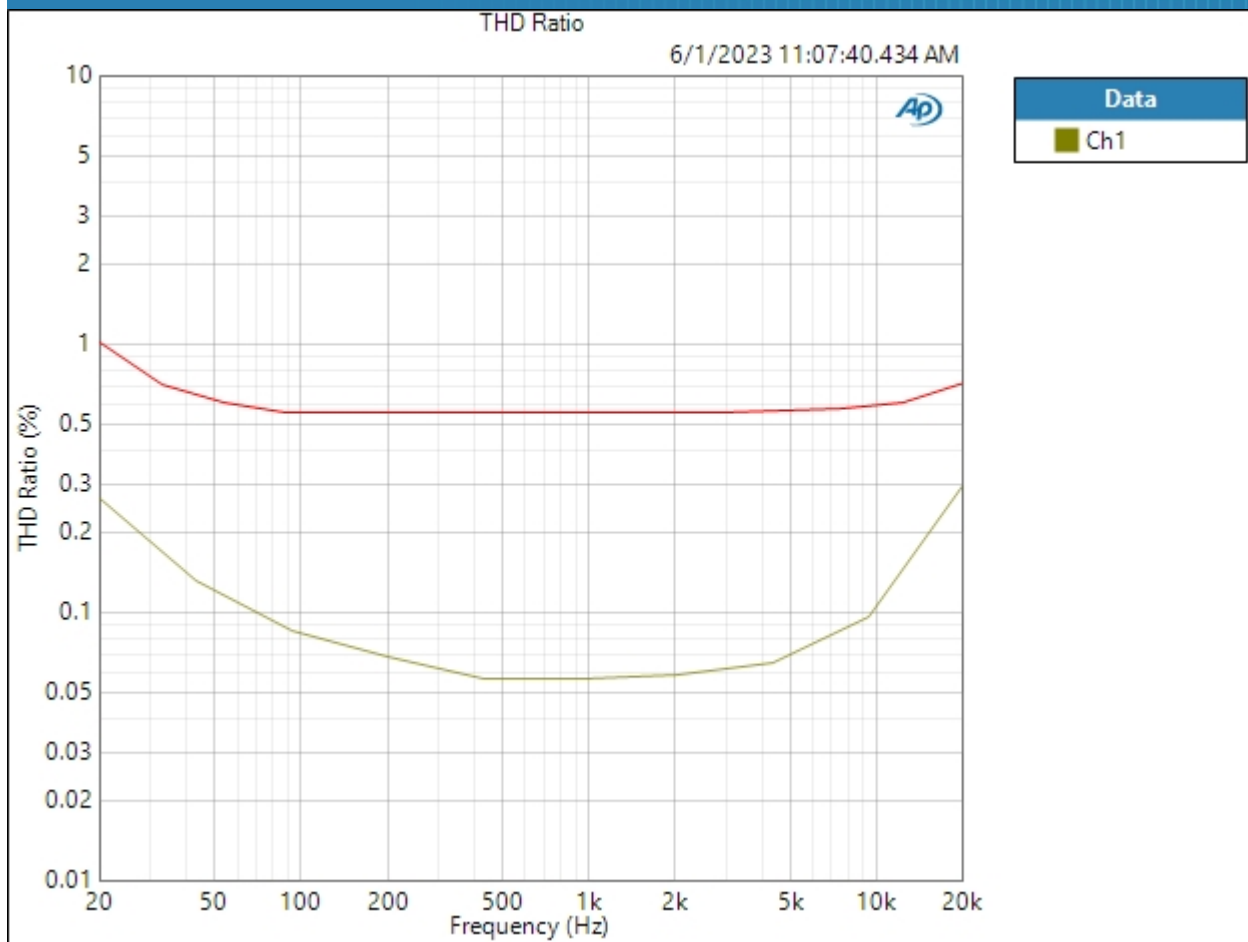

Ch1 PASSED

Result: PASSED

Sequence Report



Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:07:46.111 AM)

Ch1 522.1 mVrms

Gain (6/1/2023 11:07:46.111 AM)

Ch1 38.874 dB

THD+N Ratio (6/1/2023 11:07:46.111 AM)

Ch1 0.214769 %

Frequency (6/1/2023 11:07:46.111 AM)

Ch1 1.00000 kHz

Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/1/2023 11:07:52 AM

RMS Level (6/1/2023 11:07:52.112 AM)

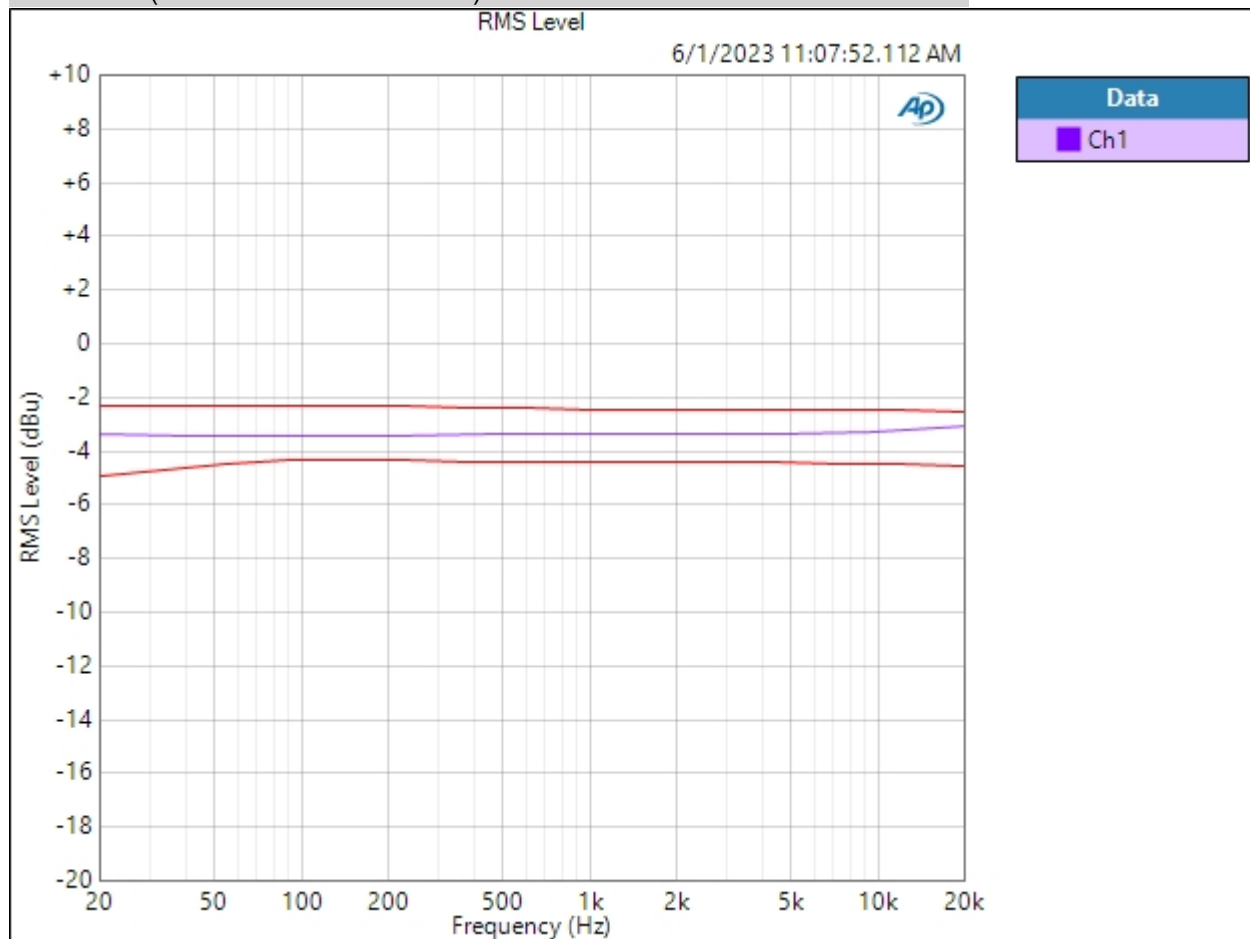

Ch1 PASSED

6/1/2023 11:10 AM


Page 10 of 45

Sequence Report



Result: PASSED

THD Ratio (6/1/2023 11:07:52.112 AM)

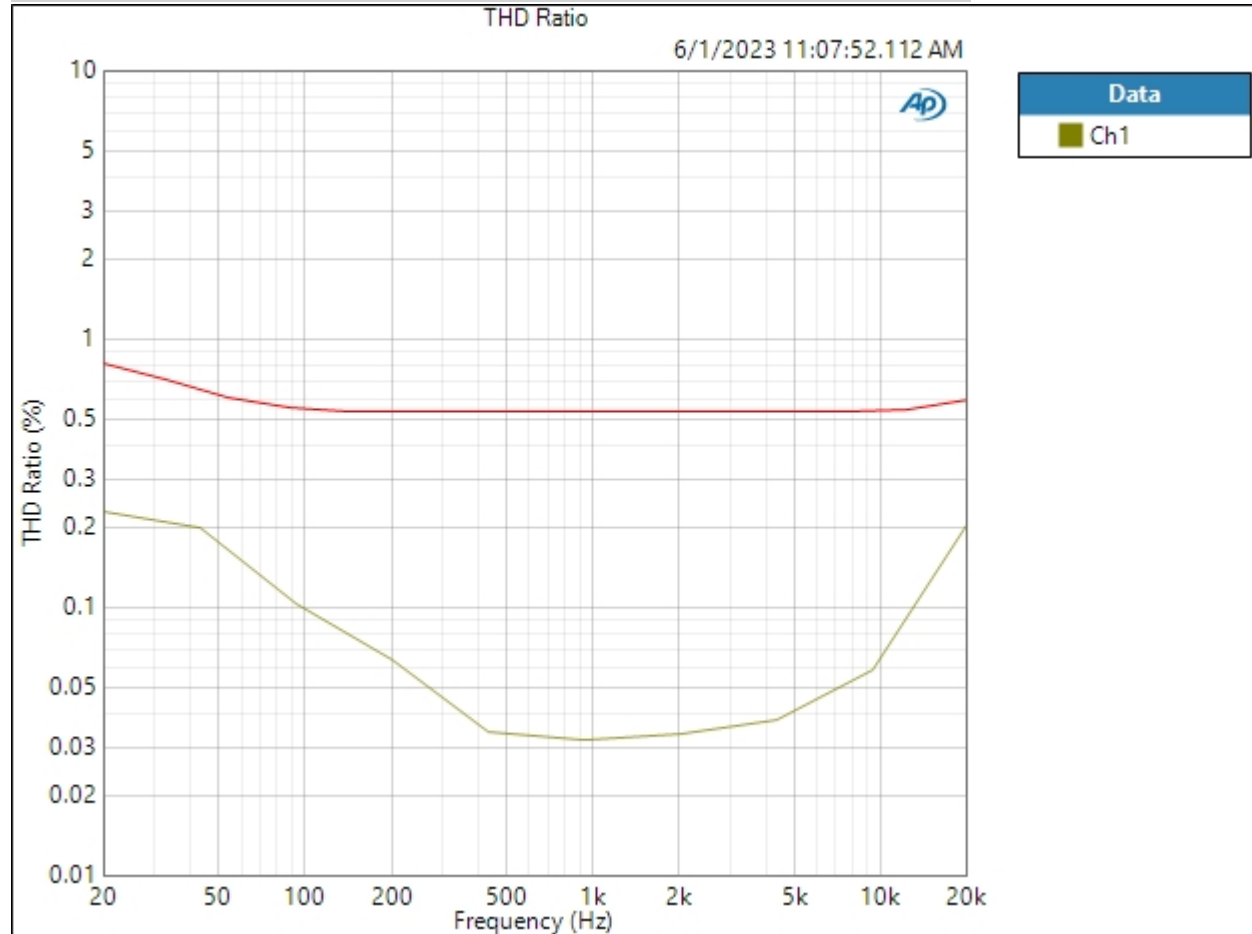

Ch1 PASSED

Result: PASSED

Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:07:57.853 AM)

Ch1 77.14 mVrms

Gain (6/1/2023 11:07:57.853 AM)

Ch1 22.265 dB

THD+N Ratio (6/1/2023 11:07:57.853 AM)

Ch1 1.470529 %

Frequency (6/1/2023 11:07:57.853 AM)

Ch1 1.00000 kHz

Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/1/2023 11:08:04 AM

RMS Level (6/1/2023 11:08:04.344 AM)

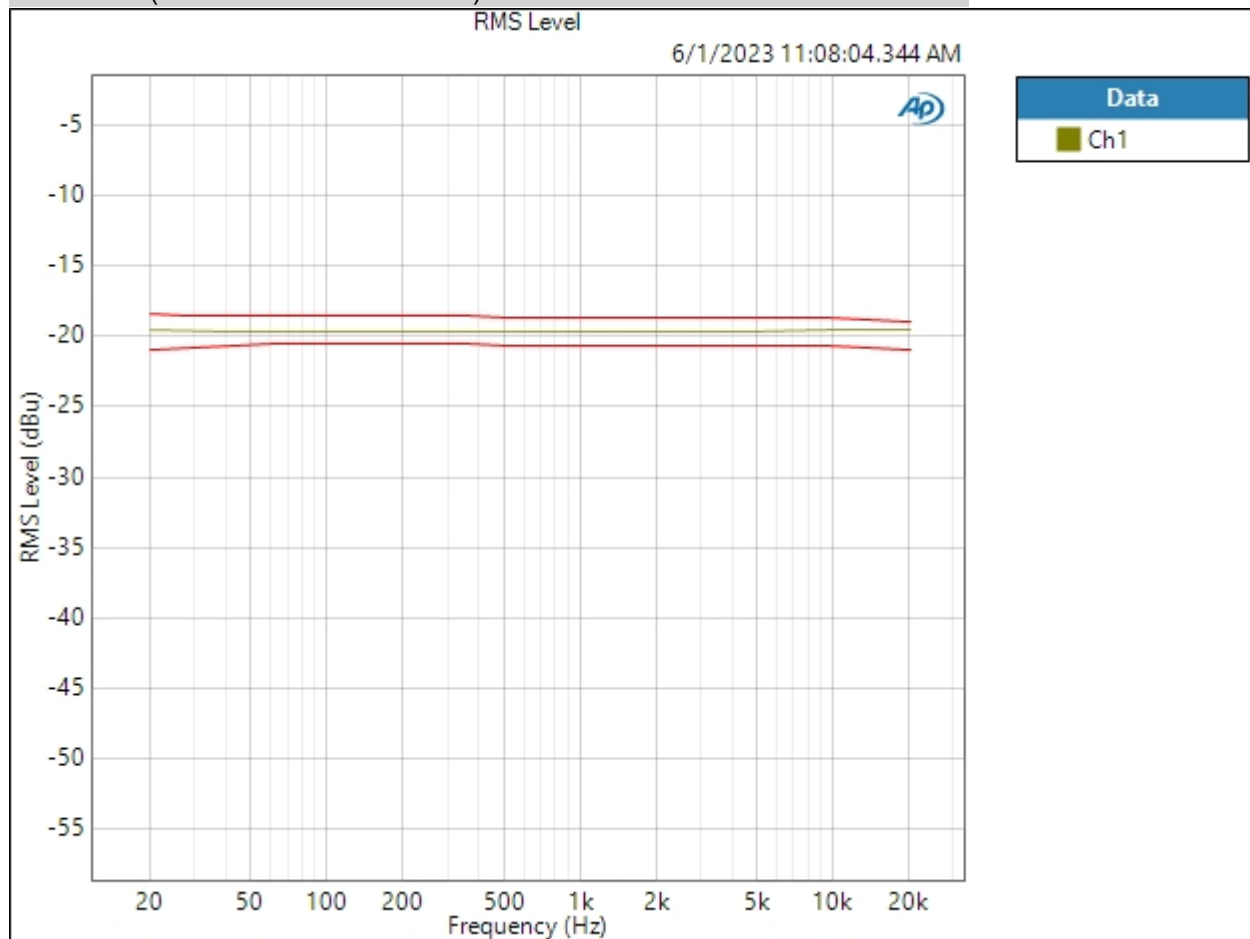

Ch1 PASSED

6/1/2023 11:10 AM


Page 14 of 45

Sequence Report



Result: ✔ PASSED

THD Ratio (6/1/2023 11:08:04.344 AM)

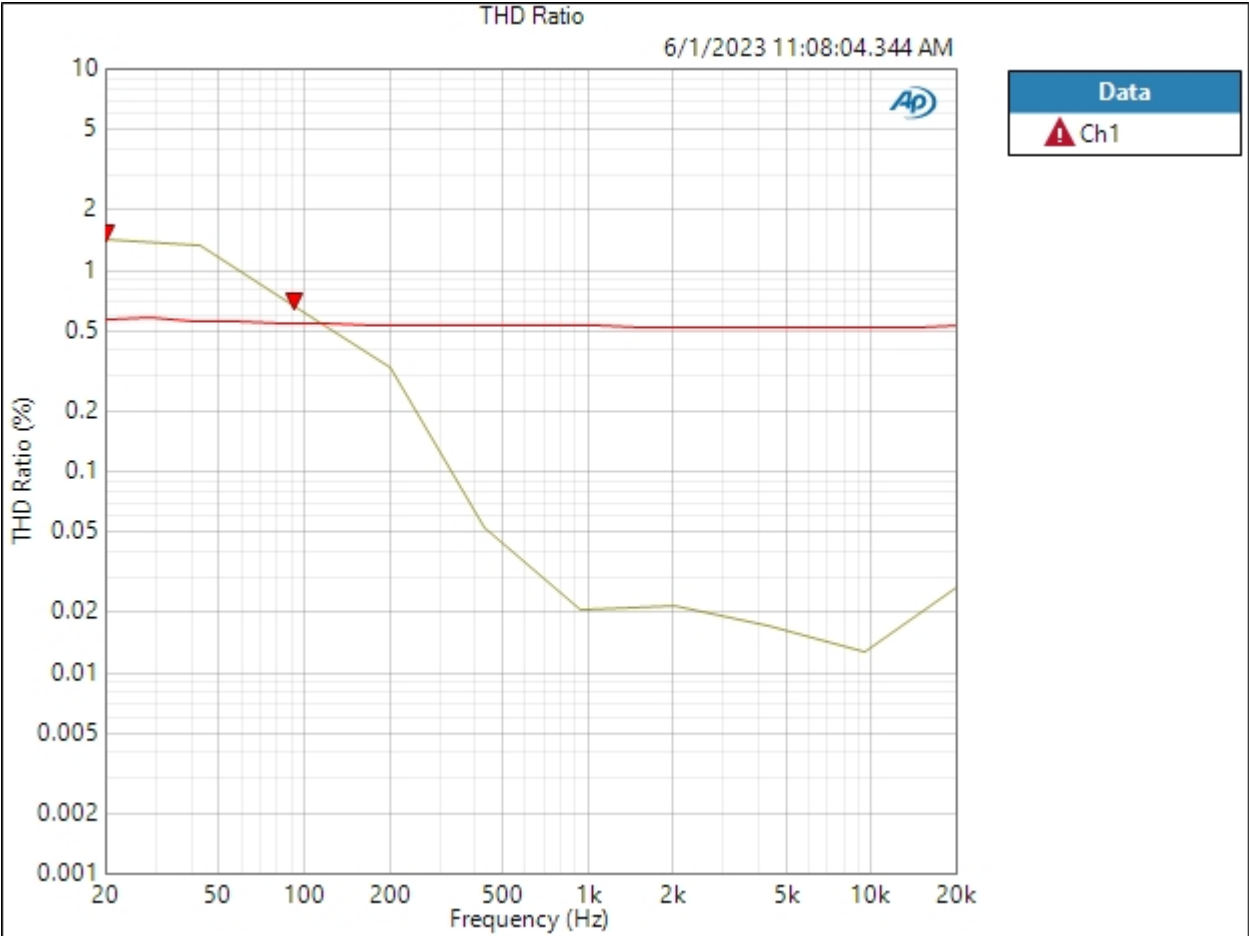

Result: ▲ FAILED

Sequence Report



Line Gain -10 200kTermination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:08:10.088 AM)

Ch1 0.921 Vrms

Gain (6/1/2023 11:08:10.088 AM)

Ch1 1.499 dB

THD+N Ratio (6/1/2023 11:08:10.088 AM)

Ch1 0.147445 %

Frequency (6/1/2023 11:08:10.088 AM)

Ch1 1.00000 kHz

Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/1/2023 11:08:19 AM

RMS Level (6/1/2023 11:08:19.342 AM)

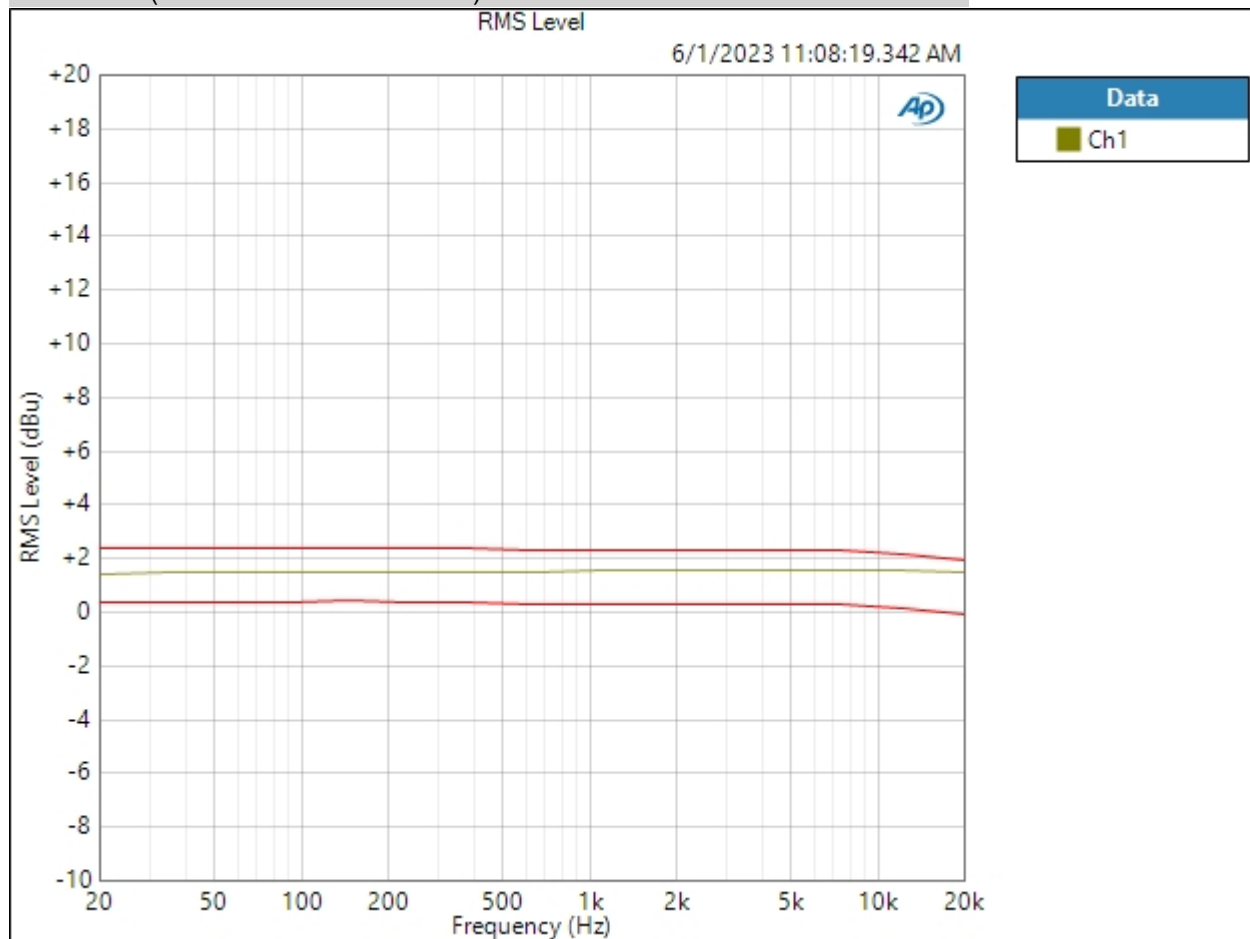

Ch1 PASSED

6/1/2023 11:10 AM


Page 18 of 45

Sequence Report



Result: ✔ PASSED

THD+N Ratio (6/1/2023 11:08:19.342 AM)

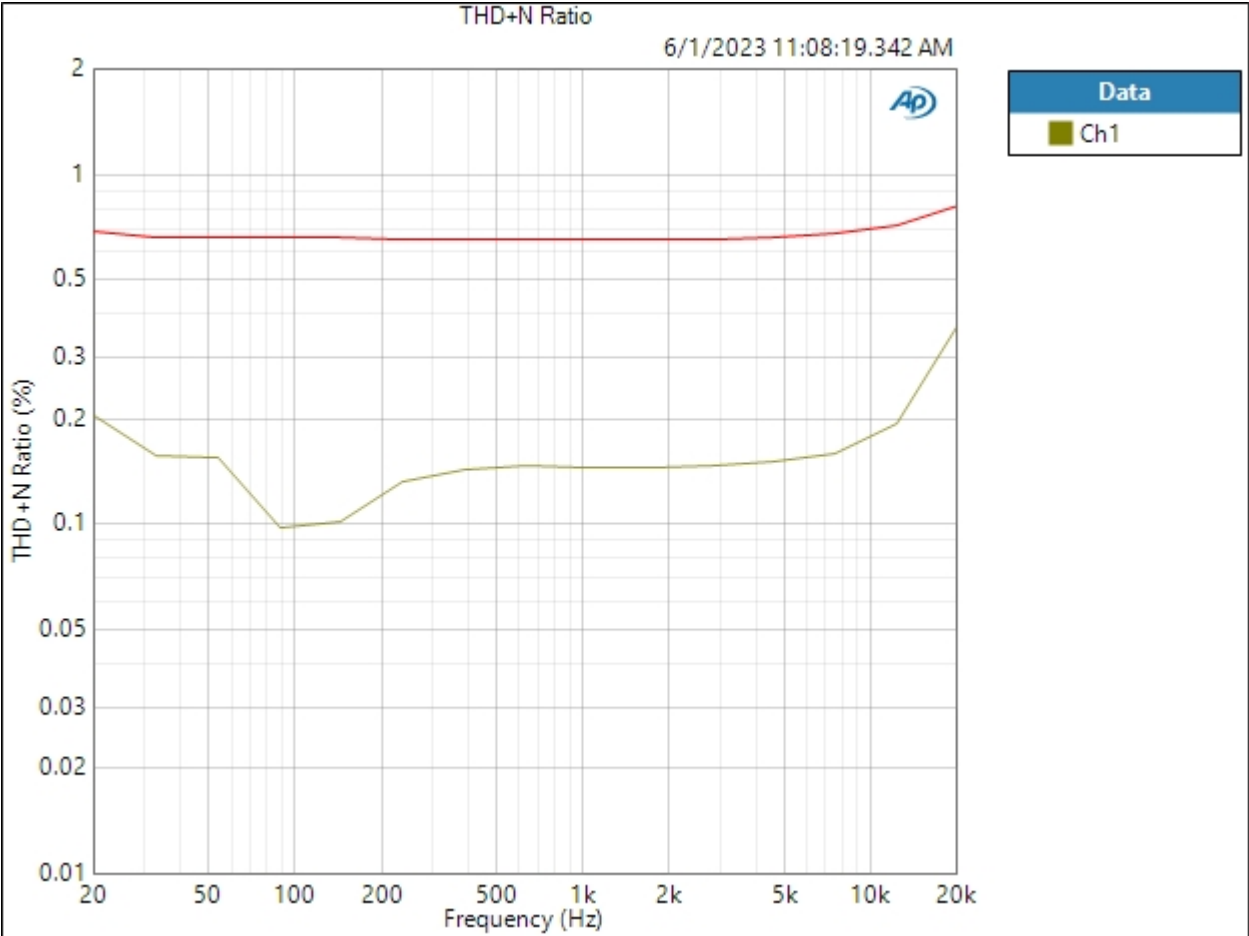

Ch1 ✔ PASSED

Result: ✔ PASSED

Sequence Report



Line Gain -10 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dB SPL1: 10.00 mVrms
dB SPL2: 10.00 mVrms
dB SPL1 Calibrator Level: 94.000 dB SPL
dB SPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:08:25.562 AM)

Ch1 255.9 mVrms

Gain (6/1/2023 11:08:25.562 AM)

Ch1 0.379 dB

THD+N Ratio (6/1/2023 11:08:25.562 AM)

Ch1 0.430156 %

Frequency (6/1/2023 11:08:25.562 AM)

Ch1 1.00000 kHz

Line Gain -10 600 Termination : Level and Gain -10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:08:28.892 AM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-9.621 dBu	-8.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +5 200kTermination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:08:34.713 AM)

Ch1 4.962 Vrms

Gain (6/1/2023 11:08:34.713 AM)

Ch1 16.133 dB

THD+N Ratio (6/1/2023 11:08:34.713 AM)

Ch1 0.296332 %

Frequency (6/1/2023 11:08:34.713 AM)

Ch1 1.00000 kHz

Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 6/1/2023 11:08:44 AM

RMS Level (6/1/2023 11:08:44.554 AM)

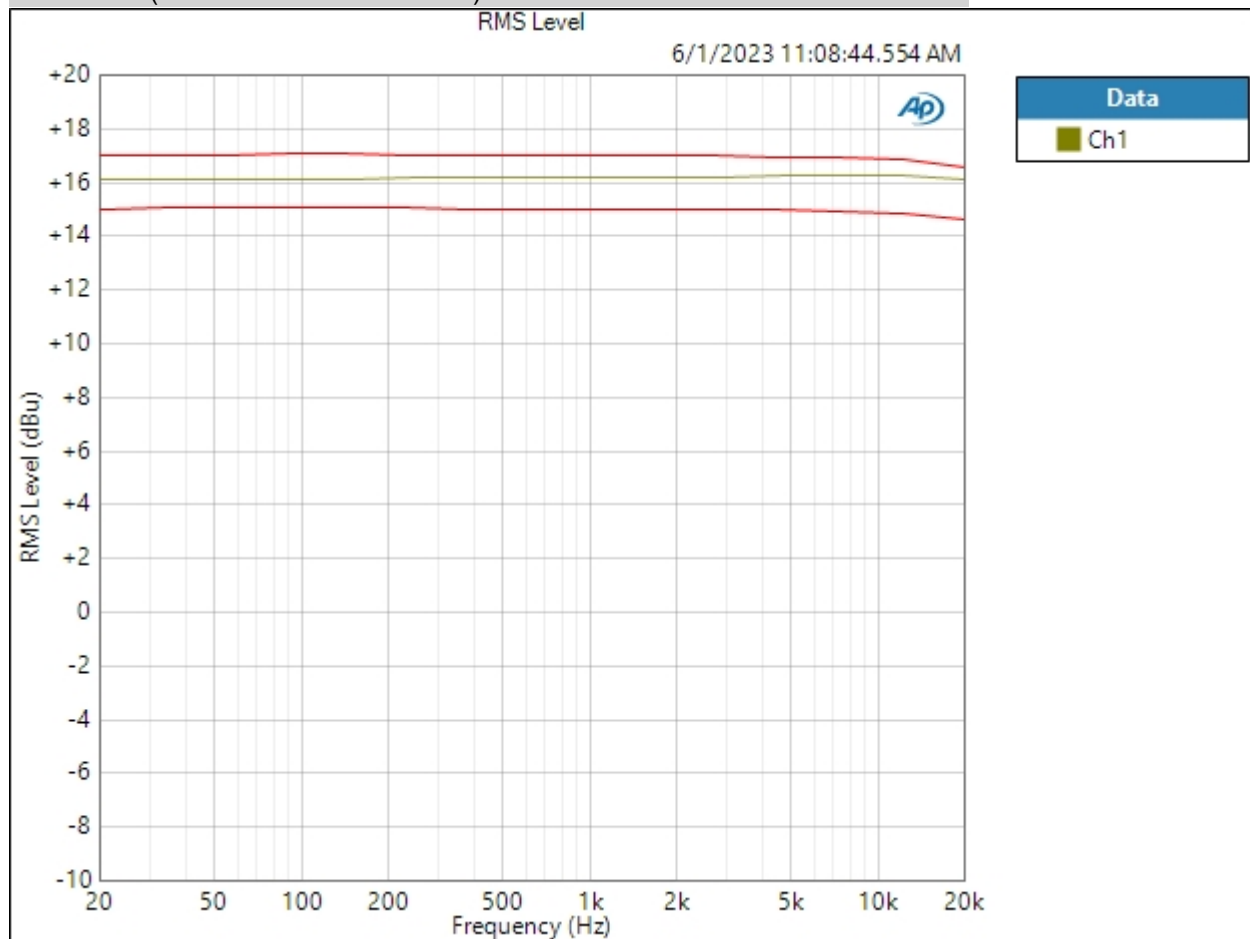

Ch1 PASSED

6/1/2023 11:10 AM


Page 24 of 45

Sequence Report



Result: ✔ PASSED

THD+N Ratio (6/1/2023 11:08:44.554 AM)

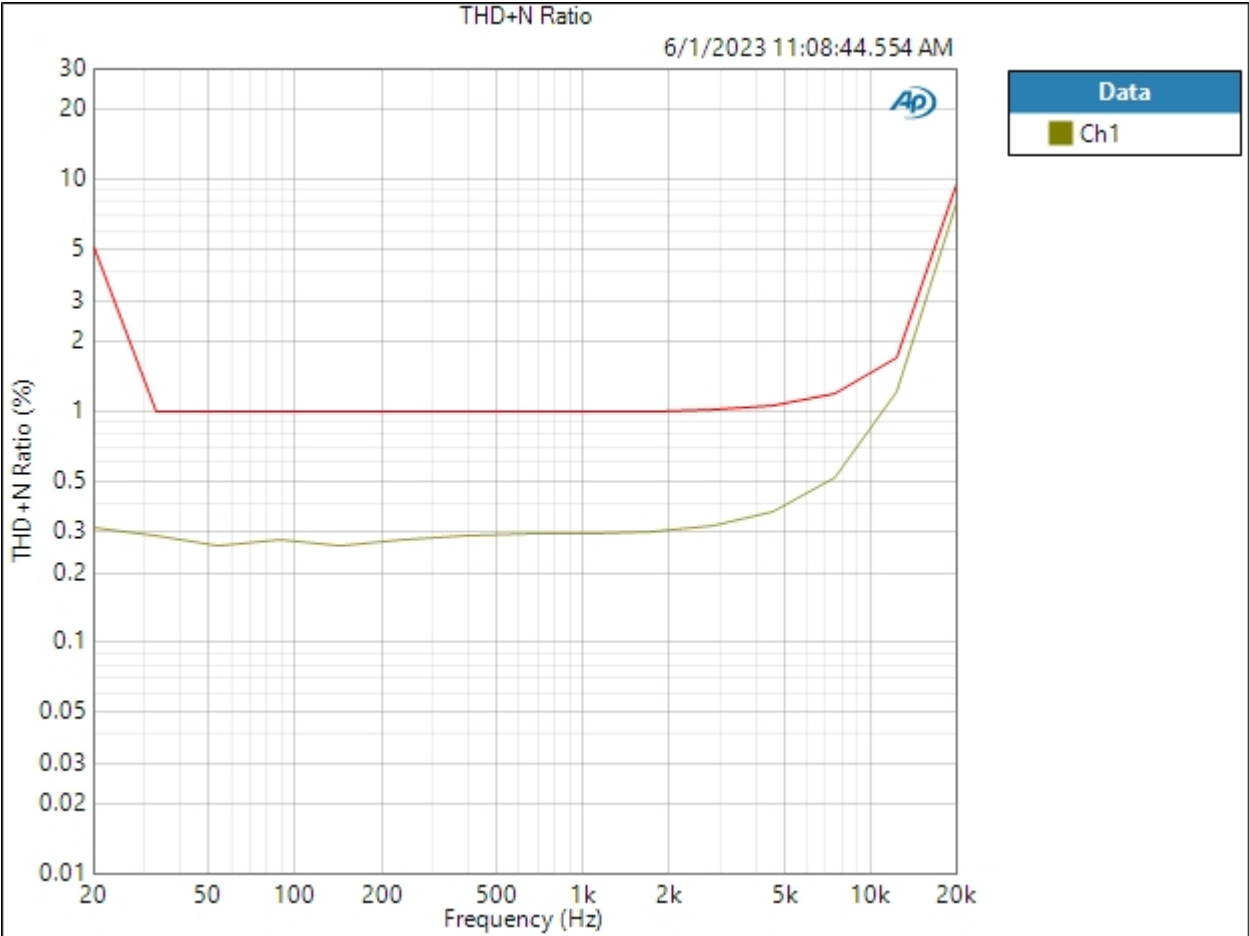

Ch1 ✔ PASSED

Result: ✔ PASSED

Sequence Report



Line Gain +5 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dB SPL1: 10.00 mVrms
dB SPL2: 10.00 mVrms
dB SPL1 Calibrator Level: 94.000 dB SPL
dB SPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:08:50.818 AM)

Ch1 1.383 Vrms

Gain (6/1/2023 11:08:50.818 AM)

Ch1 15.033 dB

THD+N Ratio (6/1/2023 11:08:50.818 AM)

Ch1 0.508646 %

Frequency (6/1/2023 11:08:50.818 AM)

Ch1 1.00000 kHz

Line Gain +5 600 Termination : Level and Gain +5

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:08:54.151 AM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	+5.033 dBu	+6.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain -5 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:09:00.178 AM)

Ch1 428.3 mVrms

Gain (6/1/2023 11:09:00.178 AM)

Ch1 4.854 dB

THD+N Ratio (6/1/2023 11:09:00.178 AM)

Ch1 0.443556 %

Frequency (6/1/2023 11:09:00.178 AM)

Ch1 1.00000 kHz

Line Gain -5 600 Termination : Level and Gain -5

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:09:03.518 AM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-5.146 dBu	-3.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain 0 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:09:09.609 AM)

Ch1 747.4 mVrms

Gain (6/1/2023 11:09:09.609 AM)

Ch1 9.690 dB

THD+N Ratio (6/1/2023 11:09:09.609 AM)

Ch1 0.453853 %

Frequency (6/1/2023 11:09:09.609 AM)

Ch1 1.00000 kHz

Line Gain 0 600 Termination : Level and Gain 0

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:09:12.843 AM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-0.311 dBu	+1.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:09:18.952 AM)

Ch1 2.438 Vrms

Gain (6/1/2023 11:09:18.952 AM)

Ch1 19.959 dB

THD+N Ratio (6/1/2023 11:09:18.952 AM)

Ch1 0.608059 %

Frequency (6/1/2023 11:09:18.952 AM)

Ch1 1.00000 kHz

Line Gain +10 600 Termination : Level and Gain +10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:09:22.449 AM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	+9.957 dBu	+11.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:09:28.641 AM)

Ch1 877.3 mVrms

Gain (6/1/2023 11:09:28.641 AM)

Ch1 21.081 dB

THD+N Ratio (6/1/2023 11:09:28.641 AM)

Ch1 1.338867 %

Frequency (6/1/2023 11:09:28.641 AM)

Ch1 1.00000 kHz


Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 6/1/2023 11:09:33 AM

RMS Level (6/1/2023 11:09:33.876 AM)

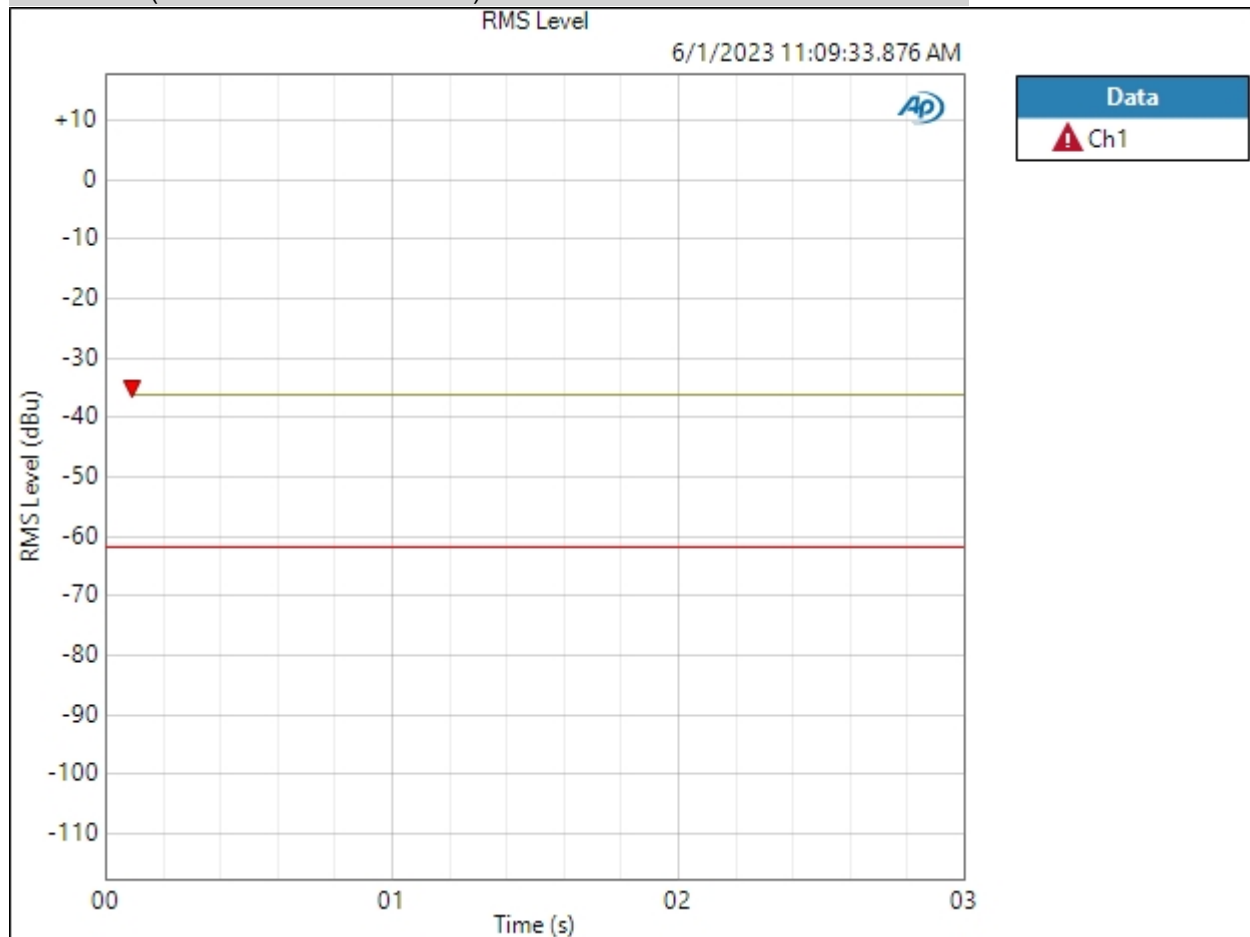

Ch1 Failed Upper Limit

Result: FAILED

6/1/2023 11:10 AM

Page 36 of 45

Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:09:40.389 AM)

Ch1 23.50 uVrms

Gain (6/1/2023 11:09:40.389 AM)

Ch1 -70.355 dB

THD+N Ratio (6/1/2023 11:09:40.389 AM)

Ch1 ---- %

Frequency (6/1/2023 11:09:40.389 AM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 6/1/2023 11:09:46 AM

RMS Level (6/1/2023 11:09:46.127 AM)

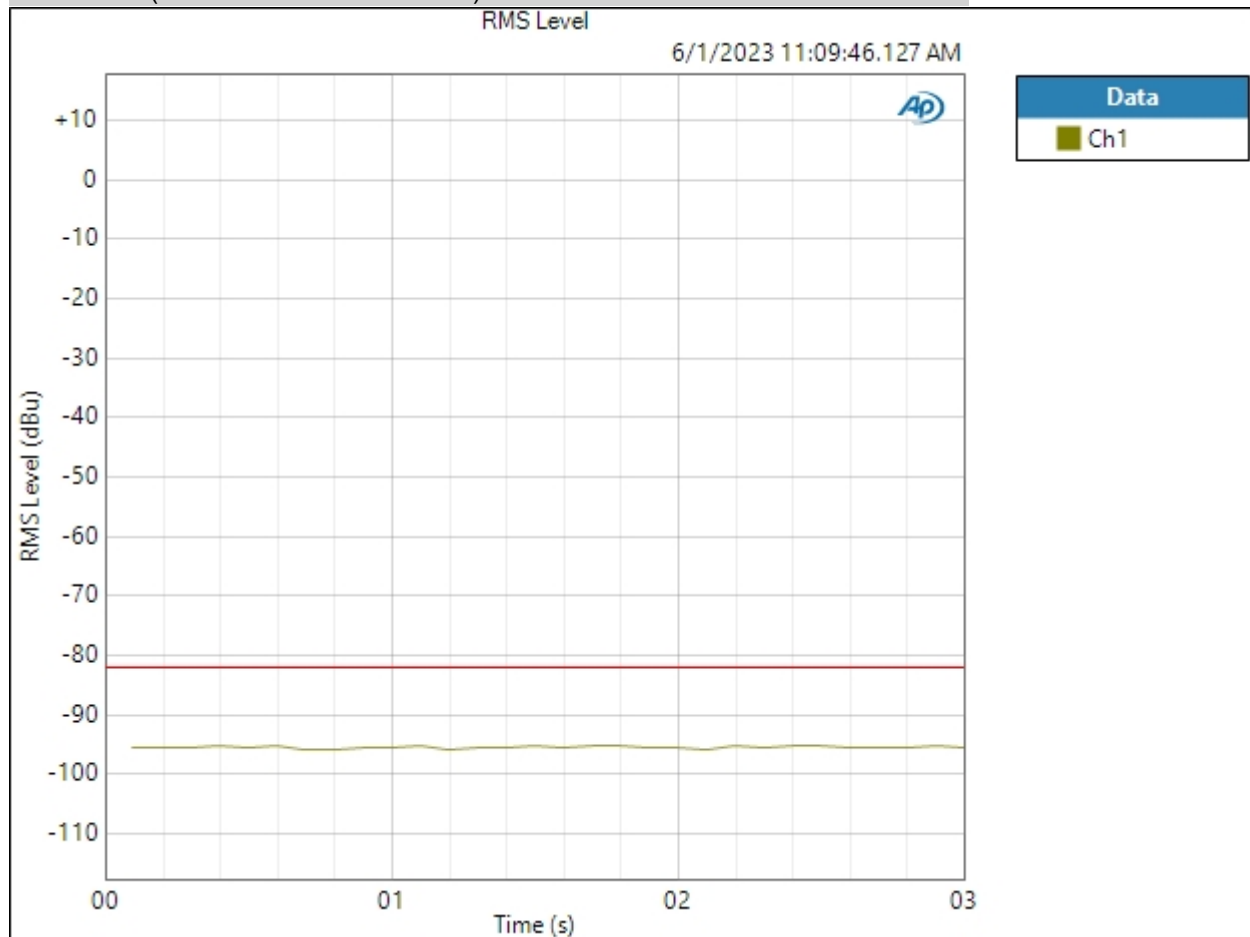

Ch1 PASSED

Result: PASSED

6/1/2023 11:10 AM

Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:09:52.289 AM)

Ch1 3.712 mVrms

Gain (6/1/2023 11:09:52.289 AM)

Ch1 -24.082 dB

THD+N Ratio (6/1/2023 11:09:52.289 AM)

Ch1 73.167189 %

Frequency (6/1/2023 11:09:52.289 AM)

Ch1 60.0177 Hz

Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:09:56.137 AM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	+0.208 dBu	+2.000 dBu	✓

Result: ✓ PASSED

Sequence Report



Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Unbalanced

Channels: 2

Source Impedance: 50 ohm

Output EQ: None

Input Connector: Analog Balanced

Channels: 1

Channel: Ch1

Termination: 200 kohm

Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)

Device Delay: 0.000 s

Input EQ: None

• References

dBr G: 100.0 mVrms

dBm (Output Power): 600.0 ohm

W(watts) (Output Power): 8.000 ohm

Shared Frequency Reference: 1.00000 kHz

dBrA: 1.000 Vrms

dBrB: 1.000 Vrms

dBrA Offset: 0.000 dB

dBrB Offset: 0.000 dB

dB SPL1: 10.00 mVrms

dB SPL2: 10.00 mVrms

dB SPL1 Calibrator Level: 94.000 dB SPL

dB SPL2 Calibrator Level: 94.000 dB SPL

dBm (Input Power): 600.0 ohm

W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:10:02.376 AM)

Ch1 405.8 mVrms

Gain (6/1/2023 11:10:02.376 AM)

Ch1 16.684 dB

THD+N Ratio (6/1/2023 11:10:02.376 AM)

Ch1 0.588213 %

Frequency (6/1/2023 11:10:02.376 AM)

Ch1 1.00000 kHz

Hi Z Gain -10 47k 200k Termination : Level and Gain 47K

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:10:05.893 AM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-5.615 dBu	-4.000 dBu	✓

Result: ✓ PASSED

Sequence Report



Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Dummy Signal Path For Report : Verify Connections

Waveform: Sine

Generator Level: 100.0 mVrms

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (6/1/2023 11:10:10.262 AM)

Ch1 78.15 uVrms

Ch2 7.469 uVrms