


TOP VIEW 3:1

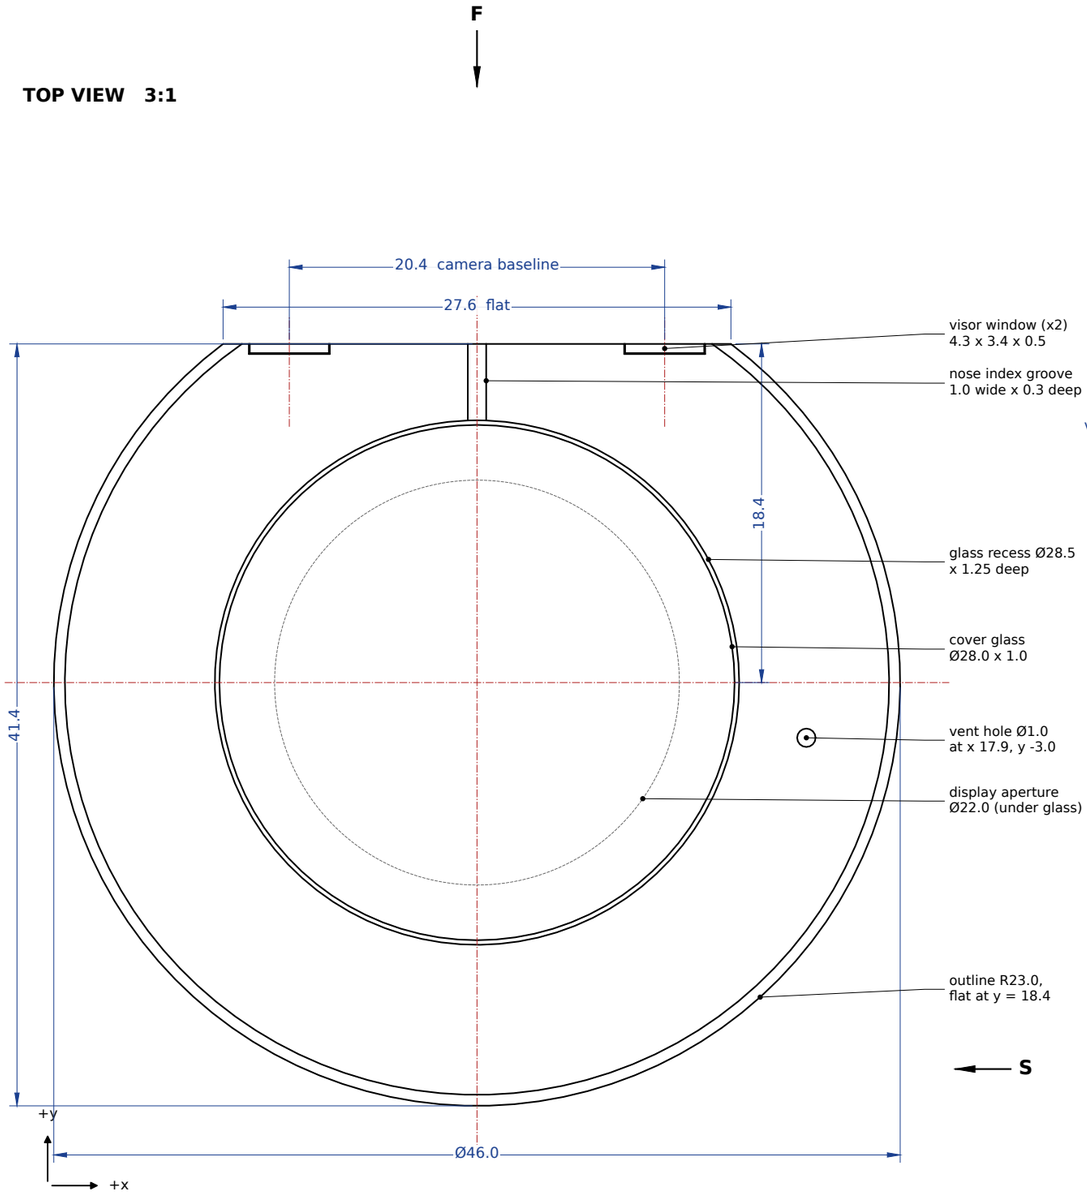

VIEW F - on the visor face, from +y 4:1 (+x is to the LEFT in this view)

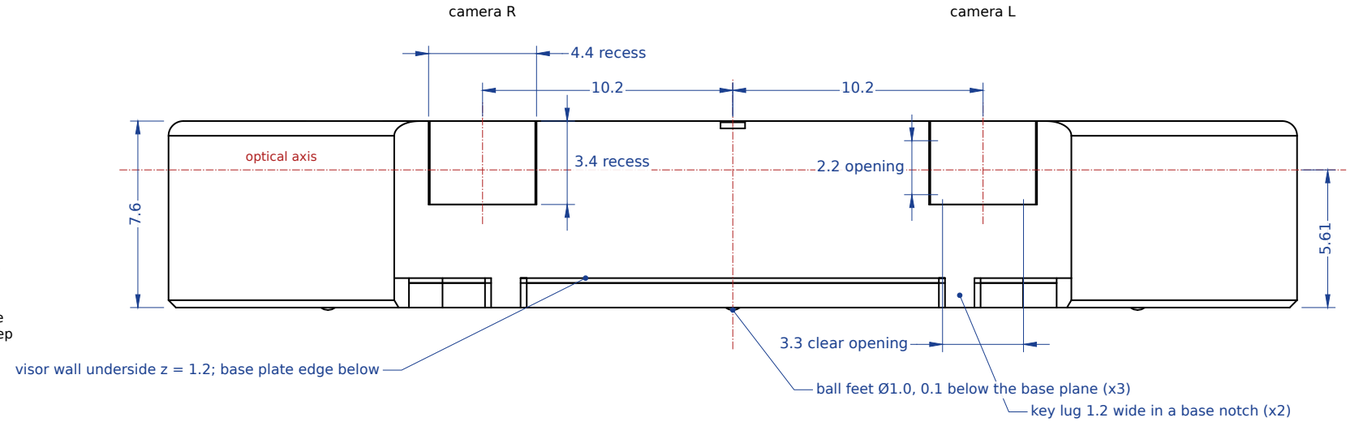

VIEW S - from +x 4:1

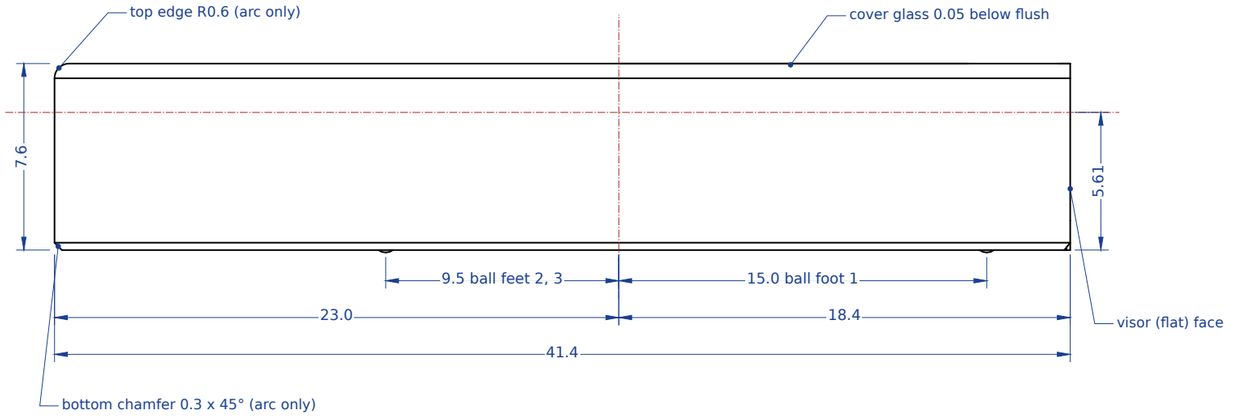

Item	Value	Source
Envelope	Ø46.0 x 7.6	YAML envelope
Visor flat	y = 18.4, 27.6 wide	YAML / derived
Camera baseline	20.4 (x = +-10.2)	YAML cameras
Optical axis height	5.61 (5.74 with the PSA)	YAML prisms / D10
Field of view (spec)	+-26.0° h, +17.6° / -15.0° v	task statement
Ball feet	Ø1.0, 0.1 proud, at (0, 15.0), (+-16.5, -9.5)	YAML feet

NOTES

1. Outline of the assembled marker. Datum: the base plane z = 0 (the plane that rests on the turf); the three ball feet protrude 0.1 mm below it. Visor (flat) face at y = 18.4; the two camera windows look along +y.
2. Nominal envelope Ø46.0 x 7.6 mm. With the real 0.13 mm PSA sheet between PCB and base the base plate sits 0.13 mm lower relative to the tub: overall height 7.73, optical axis 5.74 above the base plane (deviation D10).
3. Camera windows 4.3 x 3.4 x 0.5 mm, centred on x = +-10.2, in recesses 4.4 wide x 0.55 deep from z = 4.2 to the top face. Clear opening 3.3 wide, z = 4.6 to 6.8. Optical axis z = 5.61.
4. Sections A-A and B-B: drawing GL1-002. Parts: GL1-010 tub, GL1-011 base plate, GL1-020 cradle.
5. Nothing has been built. All purchased-part envelopes are provisional until checked against manufacturer drawings.

Generated from the CAD model by cad/drawings.py - dimensions are nominal model values, computed, not typed. Frame: origin at puck centre on the base plane, +x right, +y toward the visor, +z up.

TITLE
GL1-001 Marker assembly - outline

PROJECT / PART
GreenLine GL-1 electronic ball marker - marker assembly

MATERIAL / FINISH	PROCESS	
see parts list in README.md	assembly (bonded)	
GENERAL TOLERANCE	SCALE (A3) / UNITS	
nominal CAD dimensions, reference only	3:1 / 4:1 mm	
STATUS	DWG REV / PARAMS	SHEET / DATE
PROVISIONAL - not released	A-EVT1 / B-EVT1	1 of 1 2026-11-11