## TOP VIEW (PCB side)  4:1

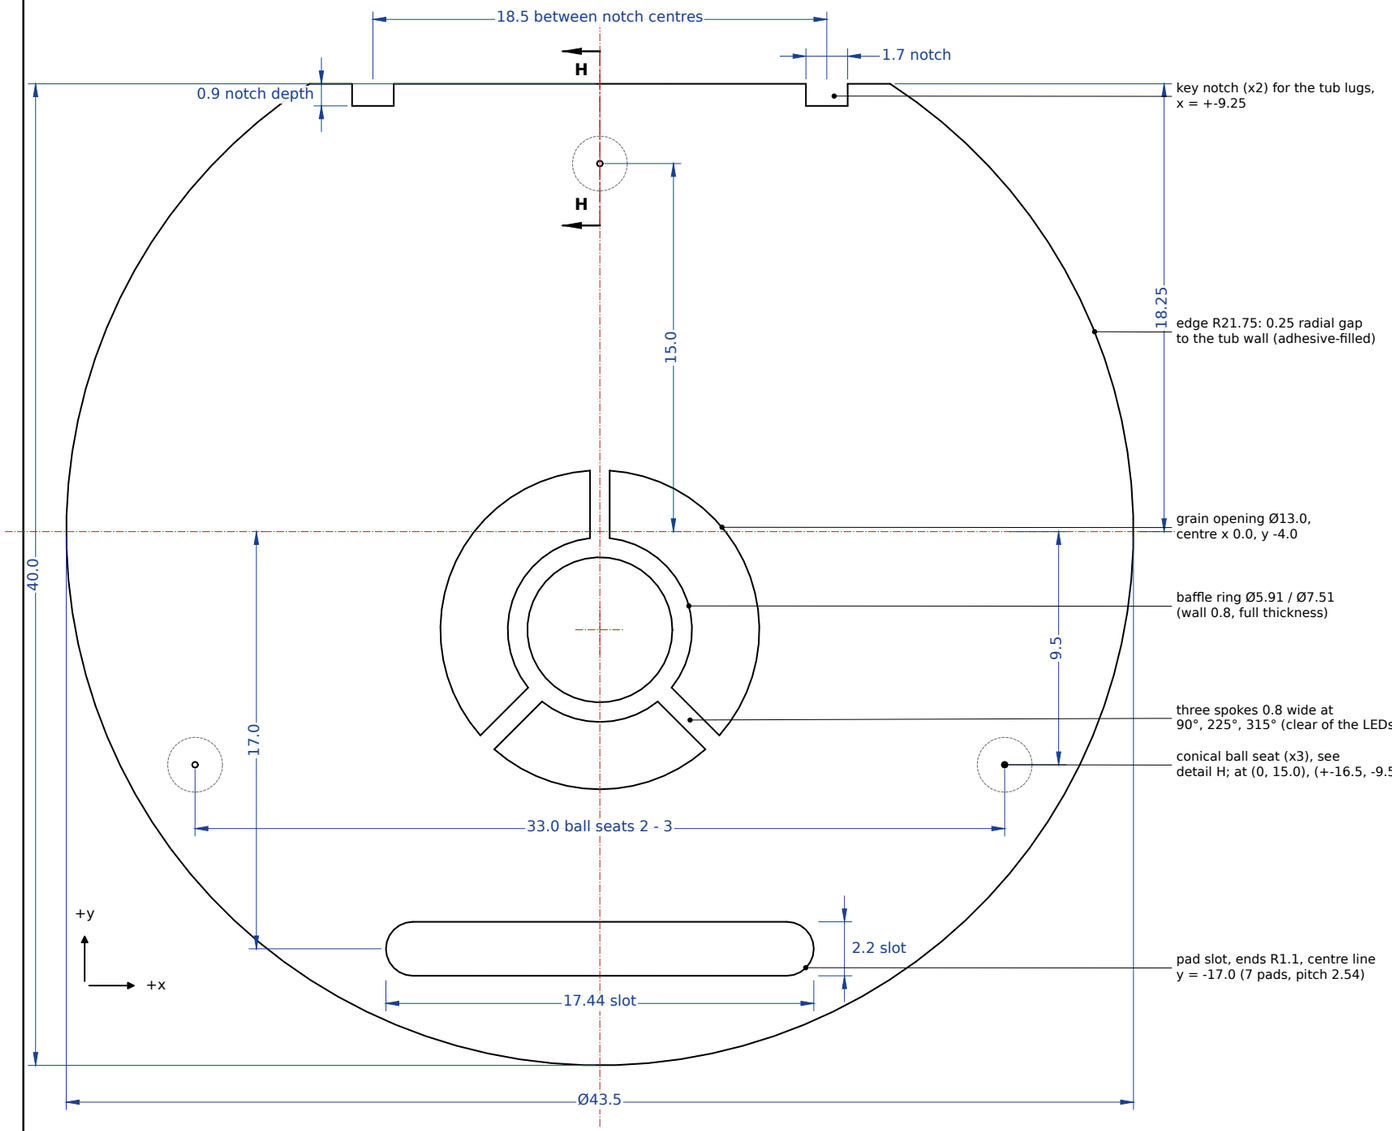


## DETAIL H - ball seat 1, section on x = 0  30:1  (seats 2 and 3 identical)

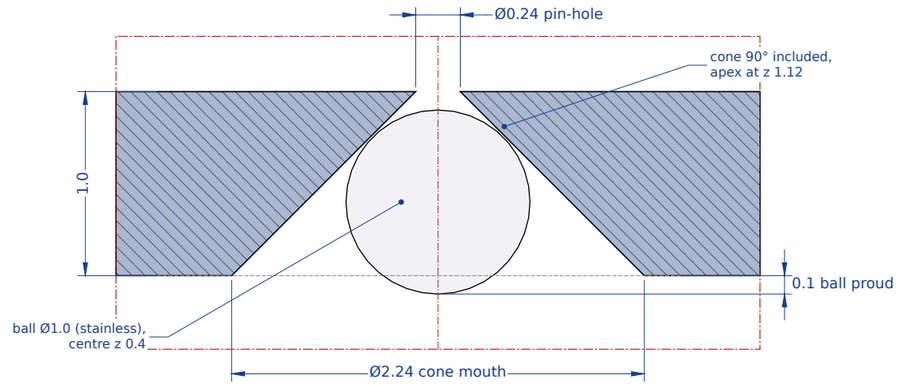


| Feature | Qty | Size | Position (x, y) |
|---|---|---|---|
| Outline | 1 | R21.75, flat y 18.25 | centre (0, 0) |
| Grain opening | 1 | Ø13.0 through | (0.0, -4.0) |
| Baffle ring | 1 | Ø5.91 / Ø7.51 | concentric with the opening |
| Spokes | 3 | 0.8 wide | 90°, 225°, 315° from +x |
| Pad slot | 1 | 17.44 x 2.2 | centre (0, -17.0) |
| Ball seats | 3 | 90° cone, mouth Ø2.24 | (0, 15.0), (+-16.5, -9.5) |
| Key notches | 2 | 1.7 x 0.9 | (+-9.25, front edge) |
| Thickness | - | 1.0 | z 0 to 1.0 |

### NOTES

1. D01: the seven Ø2.2 pad holes are merged into one slot (webs would be 0.34 mm).
2. D02: a blind seat is impossible (ball top at z 0.9 in a 1.0 mm plate). The printed cone is a pilot only: finish each seat with a 90° spot drill to depth, or set the balls on a gauge plate (0.1 proud) and pot them. The pin-hole is closed by the PCB adhesive sheet.
3. D03: baffle ring enlarged for the photodiode diagonal; spokes unequally spaced.
4. The top face is the PCB bonding face and the seal land (r 21.35 to 21.75): keep flat, no vapor-smoothing sink marks. Thin-skin regions at the seats: check 5 (D02).
5. Hidden lines (dashed) show the cone mouths on the underside.

Generated from the CAD model by cad/drawings.py - dimensions are nominal model values, computed, not typed. Frame: origin at puck centre on the base plane, +x right, +y toward the visor, +z up.

TITLE
**GL1-011  Base plate**

PROJECT / PART
GreenLine GL-1 electronic ball marker  -  base plate

| MATERIAL / FINISH | PROCESS | |
|---|---|---|
| PA12 (HP 3D HR PA 12), dyed black | HP Multi Jet Fusion + vapor smoothing | |
| GENERAL TOLERANCE | SCALE (A3) / UNITS | |
| printed: +-0.3 or +-0.3 % (bureau MJF), as printed | 4:1 / 30:1  mm | |
| STATUS | DWG REV / PARAMS | SHEET / DATE |
| **PROVISIONAL - not released** | A-EVT1 / B-EVT1 | 1 of 1  2026-11-11 |